

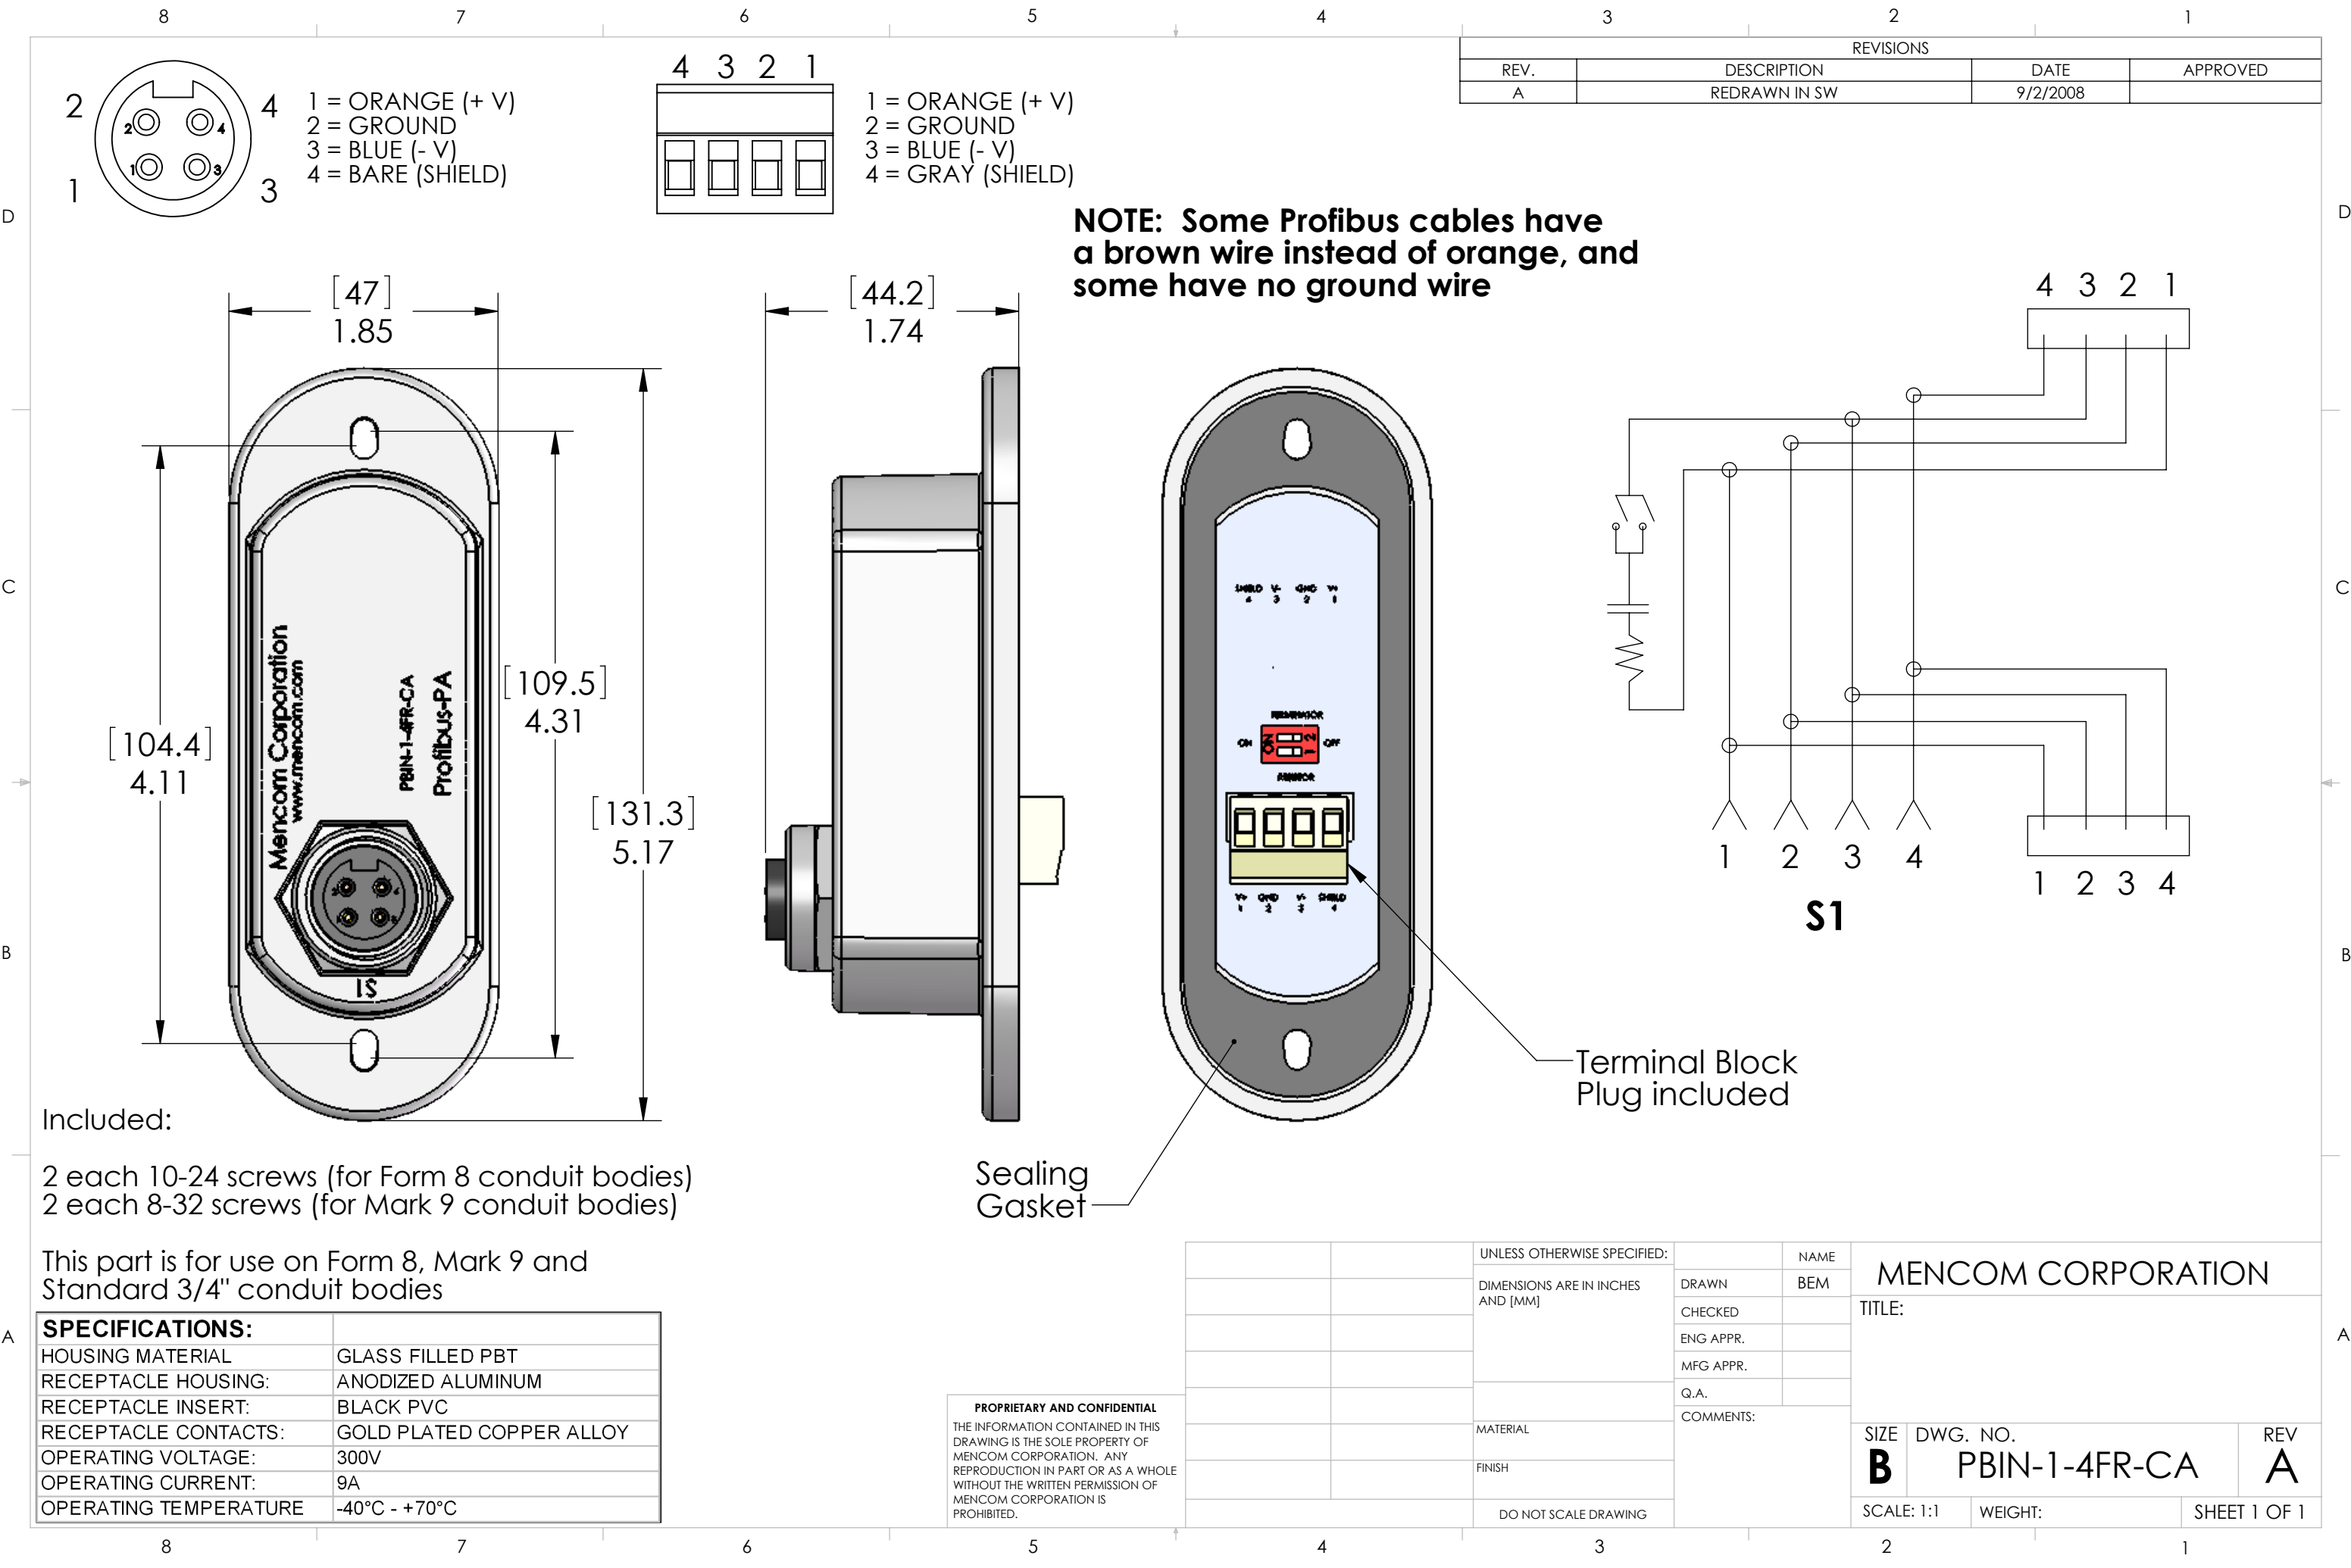
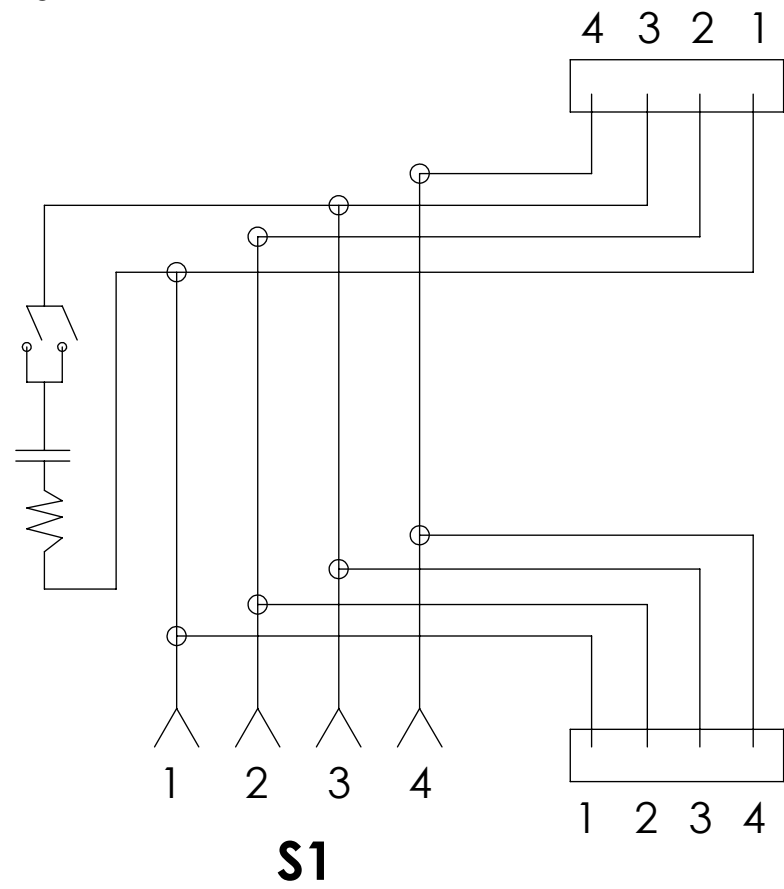


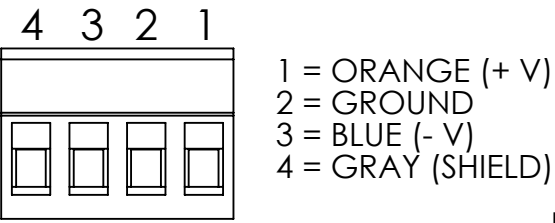

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	9/2/2008	

NOTE: Some Profibus cables have a brown wire instead of orange, and some have no ground wire

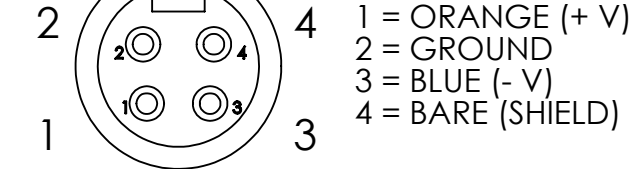

Included:
2 each 10-24 screws (for Form 8 conduit bodies)
2 each 8-32 screws (for Mark 9 conduit bodies)

This part is for use on Form 8, Mark 9 and Standard 3/4" conduit bodies

SPECIFICATIONS:	
HOUSING MATERIAL	GLASS FILLED PBT
RECEPTACLE HOUSING:	ANODIZED ALUMINUM
RECEPTACLE INSERT:	BLACK PVC
RECEPTACLE CONTACTS:	GOLD PLATED COPPER ALLOY
OPERATING VOLTAGE:	300V
OPERATING CURRENT:	9A
OPERATING TEMPERATURE	-40°C - +70°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION					
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM				TITLE:		
			CHECKED							
			ENG APPR.							
			MFG APPR.							
			Q.A.							
			COMMENTS:		SIZE B			DWG. NO.		REV
		MATERIAL						PBIN-1-4FR-CA		A
		FINISH								
		DO NOT SCALE DRAWING				SCALE: 1:1		WEIGHT:	SHEET 1 OF 1	