




HPS REACTORS

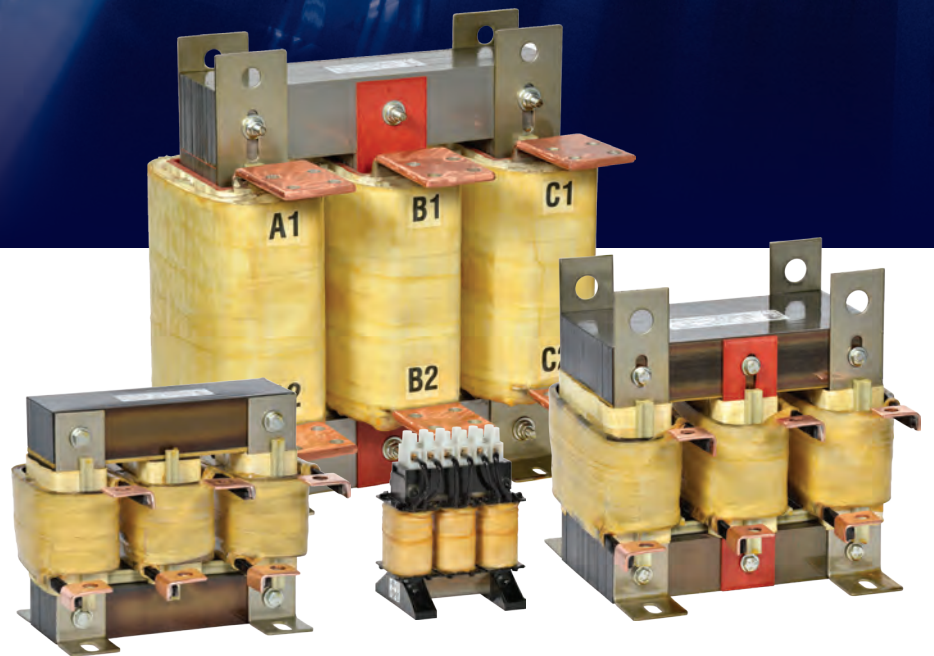

HPS Reactors


HPS reactor provides a unique blend of improved performance and reliability while reducing the product footprint. HPS reactors deliver protection for your motors and AC drives, while minimizing power system harmonics.

The efficient and cost effective HPS reactors are built to satisfy the power quality needs of demanding AC drive applications. HPS reactors are designed to address line-side issues associated with variable frequency drives.



Elevate Your Power with AC Reactors!

HPS reactors are designed to address line-side issues associated with variable frequency drives. They attenuate voltage and current transients that can cause nuisance tripping of a drive. Reactors also minimize harmonic current levels within the drive supply circuit. When used on the output side of IGBT-based, PWM-type AC drives, HPS reactors reduce the motor operating temperature and audible noise by moderating line transients seen by the motor. The use of HPS reactors enhances the overall system performance, life expectancy, and efficiency of the motor.

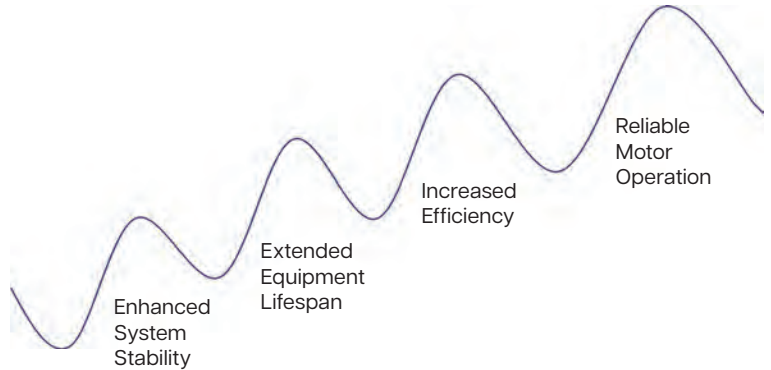

Application



Oil & Gas



Irrigation Fields



Wastewater



Food Processing



HVAC



Pharmaceutical



Steel



Pulp & Paper



Automation

Maximize Efficiency and Stability with Our Advance AC Reactor!

Unlock the Full Potential of Your Electrical Systems

Refined Construction

- **Optimal Performance:** Precision-controlled impedance for reliable operation.
- **Durable Build:** Enhanced mechanical strength for extended reliability.
- **Noise Reduction:** Vacuum impregnation process ensures quiet operation.


User-Friendly Installation

- **Secure Connections:** Finger-proof and brazed terminals for safety and durability.
- **Flexible Mounting:** Multiple mounting options for easy installation.

Specialized Solutions

- **Custom Configurations:** Available for unique application requirements upon request.

Connection Diagram

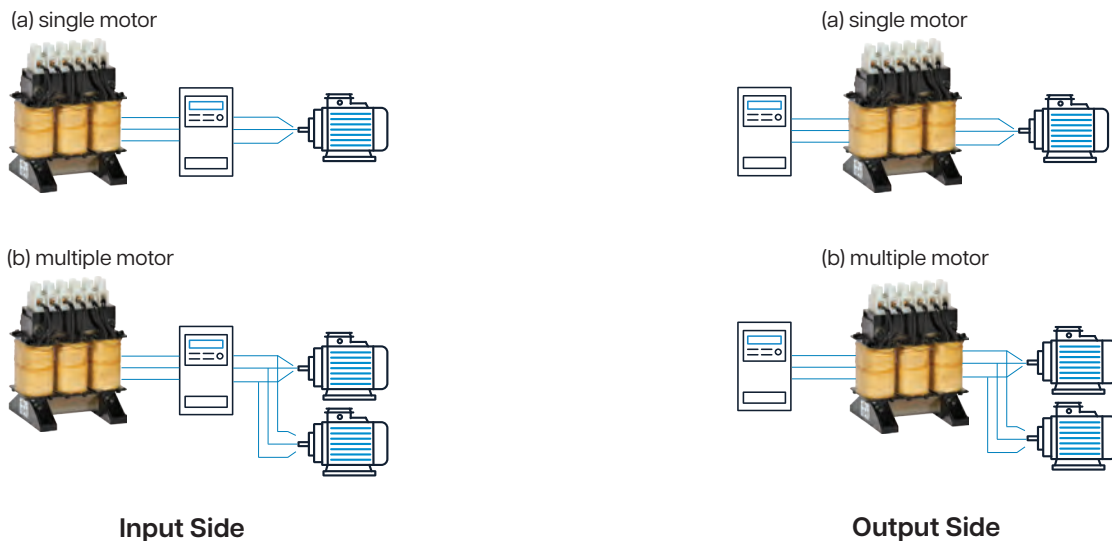

Input (Line) Side Key Benefits

- **Improved Power Quality:** AC reactors help smooth incoming power, reducing voltage fluctuations and spikes that can harm sensitive equipment.
- **Enhanced Harmonic Reduction:** By mitigating harmonic distortions from the power grid, AC reactors prevent these unwanted frequencies from affecting the overall system performance.
- **Extended Equipment Life:** Protects upstream equipment like transformers and conductors from damage due to high inrush currents and electrical noise, prolonging their operational lifespan.
- **Reduced Electromagnetic Interference (EMI):** Minimizes the impact of EMI on the system, which helps in maintaining the integrity of electronic communications and controls.

Output (Load) Side Key Benefits

- **Stable Motor Operation:** Ensures that motors and other downstream devices receive a cleaner, more stable power supply, which is crucial for applications requiring precise motor speed and torque control.
- **Thermal and Mechanical Stress Reduction:** Decreases the thermal and mechanical stresses on electrical components in the load, leading to fewer failures and reduced maintenance needs.
- **Noise Reduction in Motor Drives:** Lowers audible noise produced by motor drives, creating a quieter operational environment.
- **Enhanced System Efficiency:** By smoothing the current waveform, AC reactors allow devices to operate more efficiently, potentially lowering energy consumption and operational costs.

HPS Reactors

Specification

Power Rating:	0.5 to 1250 HP (0.37 - 932 kW)	
Impedance Rating:	1.5%, 3% and 5%	
System Frequency:	50/60 Hertz*	
System Voltage Ratings:	120 V, 208 V, 240 V, 480 V, 600 V and 690 V (de-rated) at 60 Hz 380 V, 525 V and 690 V at 50 Hz	
Altitude (de-rating):	Comply with NEMA ST20	
Inductance Tolerance:	+15/-10%	
Inductance Curve:	% Nominal Inductance	% Rated Current
	100	100
	95	110
	80	150
	50	200
Dielectric strength to ground:	4000 volts for 1 minute or equivalent	
Cooling Method:	Natural convection	
Insulation System:	<ul style="list-style-type: none"> 70°C rise over average 50°C ambient for 130°C Temperature Class with Temperature Insulation Class up to 40A 115°C rise over average 50°C ambient for 180°C and 220°C Temperature Classes with Temperature Insulation Classes on units larger than 40A 	
Warranty:	10 year limited warranty	

*Impedance levels are for 60 Hz operation

Specification subject to change

Compliance & Approvals

HPS reactor is certified to the following standards:



- UL 508
- CSA C9
- CSA C22.2 No. 47 standards
- CE Mark (IEC 61558-2-20:2000)
- UL Listed (up to 600 V), file No. E61431
- UL Recognized (open style reactor 50A to 62A)
- CSA Certified file No. LR3902
- IEC 61558-2-20

HPS Reactor Part Number Guide

Example

Family		Model	Rated Current				Relative Impedance	Enclosure
C	R	X	0	0	4	5	A	H

Family	Model	Current Rating (Amps)	Options	Enclosure
CR - Reactor	X - Current Model	3A to 1200A	A	C - Open Frame
		3A 0003	B - Relative Impedance	E - Type 1
		7.6A 07D6*	C - 60Hz at operation	R - Type 3R
		180A 0180	D	
			N - Relative Impedance	
			P - 50Hz at operation	

*D represents a decimal i.e. 02D4 is 2.4A



SELECTION TABLES

For all part numbers listed below, the asterix (*) in the base part number must be replaced with corresponding letter based on required configuration:

- C - Open Frame
- E - Type 1
- R - Type 3R

208 Volt - 60Hz			
HP Rating	Amps	3% Impedance	5% Impedance*
		Base Part Number	Base Part Number
0.5	2.4	CRX02D4B*	CRX02D4D*
0.75	3.5	CRX03D5A*	CRX03D5D*
1	4.6	CRX04D6B*	CRX04D6C*
1.5	6.6	CRX06D6B*	CRX06D6C*
2	7.5	CRX07D5A*	CRX07D5D*
3	10.7	CRX10D7B*	CRX10D7D*
5	16.7	CRX16D7B*	CRX16D7D*
7.5	24	CRX0024A*	CRX0024C*
10	31	CRX0031B*	CRX0031C*
15	46	CRX0046B*	CRX0046C*
20	59	CRX0059A*	CRX0059C*
25	75	CRX0075A*	CRX0075C*
30	88	CRX0088B*	CRX0088C*
40	114	CRX0114A*	CRX0114C*
50	143	CRX0143A*	CRX0143D*
60	170	CRX0170B*	CRX0170D*
75	211	CRX0211B*	CRX0211C*
100	273	CRX0273B*	CRX0273C*
125	343	CRX0343B*	CRX0343C*
150	396	CRX0396B*	CRX0396D*
200	528	CRX0528B*	CRX0528C*

480 Volt - 60Hz			
HP Rating	Amps	3% Impedance	5% Impedance*
		Base Part Number	Base Part Number
0.5	1.1	CRX01D1A*	CRX01D1B*
0.75	1.6	CRX01D6A*	CRX01D6B*
1	2.1	CRX02D1A*	CRX02D1B*
1.5	3	CRX0003A*	CRX0003B*
2	3.4	CRX03D4A*	CRX03D4B*
3	4.8	CRX04D8A*	CRX04D8B*
5	7.6	CRX07D6A*	CRX07D6B*
7.5	11	CRX0011B*	CRX0011C*
10	14	CRX0014A*	CRX0014B*
15	21	CRX0021A*	CRX0021B*
20	27	CRX0027B*	CRX0027C*
25	34	CRX0034A*	CRX0034B*
30	40	CRX0040A*	CRX0040B*
40	52	CRX0052B*	CRX0052D*
50	65	CRX0065A*	CRX0065B*
60	77	CRX0077A*	CRX0077D*
75	96	CRX0096A*	CRX0096B*
100	124	CRX0124A*	CRX0124B*
125	156	CRX0156A*	CRX0156B*
150	180	CRX0180A*	CRX0180B*
200	240	CRX0240A*	CRX0240B*
250	302	CRX0302A*	CRX0302B*
300	361	CRX0361A*	CRX0361B*
350	414	CRX0414A*	CRX0414B*
400	477	CRX0477A*	CRX0477B*
450	515	CRX0515A*	CRX0515B*
500	590	CRX0590A*	CRX0590B*
600	720	CRX0720A*	CRX0750D*
700	840	CRX0840A*	CRX0900D*
800	960	CRX0960A*	CRX1000D*
900	1080	CRX1080A*	Consult
1000	1200	CRX1200A*	CRX1200D*

*Impedance levels are for 60 Hz operation Refer to page 31 - 33 for drawings
 De-rated for 690V

240 Volt - 60Hz			
HP Rating	Amps	3% Impedance	5% Impedance*
		Base Part Number	Base Part Number
0.5	2.4	CRX02D4A*	CRX02D4C*
0.75	3.5	CRX03D5B*	CRX03D5C*
1	4.6	CRX04D6A*	CRX04D6D*
1.5	6.6	CRX06D6A*	CRX06D6D*
2	7.5	CRX07D5B*	CRX07D5C*
3	10.7	CRX10D7A*	CRX10D7C*
5	16.7	CRX16D7A*	CRX16D7C*
7.5	24	CRX0024B*	CRX0024D*
10	31	CRX0031A*	CRX0031D*
15	46	CRX0046A*	CRX0046D*
20	59	CRX0059B*	CRX0059D*
25	75	CRX0075B*	CRX0075D*
30	88	CRX0088A*	CRX0088D*
40	114	CRX0114B*	CRX0114D*
50	143	CRX0143B*	CRX0143C*
60	170	CRX0170A*	CRX0170C*
75	211	CRX0211A*	CRX0211D*
100	273	CRX0273A*	CRX0273D*
125	343	CRX0343A*	CRX0343D*
150	396	CRX0396A*	CRX0396C*
200	528	CRX0528A*	CRX0528D*

600 Volt - 60Hz			
HP Rating	Amps	3% Impedance	5% Impedance*
		Base Part Number	Base Part Number
0.5	1	CRX0001A*	CRX0001B*
0.75	1.4	CRX01D4A*	CRX01D4B*
1	1.8	CRX01D8A*	CRX01D8B*
1.5	2.6	CRX02D6A*	CRX02D6B*
2	2.7	CRX02D7A*	CRX02D7B*
3	3.9	CRX03D9A*	CRX03D9B*
5	6.1	CRX06D1A*	CRX06D1B*
7.5	9	CRX0009A*	CRX0009B*
10	11	CRX0011A*	CRX0011D*
15	17	CRX0017A*	CRX0017B*
20	22	CRX0022A*	CRX0022B*
25	27	CRX0027A*	CRX0027D*
30	32	CRX0032A*	CRX0032B*
40	41	CRX0041A*	CRX0041B*
50	52	CRX0052A*	CRX0052C*
60	62	CRX0062A*	CRX0062B*
75	77	CRX0077B*	CRX0077C*
100	99	CRX0099A*	CRX0099B*
125	125	CRX0125A*	CRX0125B*
150	144	CRX0144A*	CRX0144B*
200	192	CRX0192A*	CRX0192B*
250	242	CRX0242A*	CRX0242B*
300	289	CRX0289A*	CRX0289B*
350	336	CRX0336A*	CRX0336B*
400	382	CRX0382A*	CRX0382B*
450	412	CRX0412A*	CRX0412B*
500	472	CRX0472A*	CRX0472B*
600	600	CRX0600C*	CRX0600E*
700	700	CRX0700C*	CRX0700E*
800	750	CRX0750C*	CRX0750E*
900	900	CRX0900C*	CRX0900E*
1000	1000	CRX1000C*	CRX1000E*
1250	1200	CRX1200C*	CRX1200E*

SELECTION TABLES

For all part numbers listed below, the asterix (*) in the base part number must be replaced with corresponding letter based on required configuration:

- C - Open Frame
- E - Type 1

380 Volt - 50Hz			
HP Rating [kW]	Amps	3% Impedance	5% Impedance*
		Base Part Number	Base Part Number
1 [0.75]	2.1	CRX02D1N*	CRX02D1P*
1.5 [1.1]	3	CRX0003N*	CRX0003P*
2 [1.5]	3.7	Consult	Consult
3 [2.3]	4.8	CRX04D8N*	CRX04D8P*
5 [3.8]	8	CRX0008N*	CRX0008P*
7.5 [5.6]	11.8	CRX11D8N*	CRX11D8P*
10 [7.5]	15.6	CRX15D6N*	CRX15D6P*
15 [12]	23	CRX0023N*	CRX0023P*
20 [15]	30.5	CRX30D5N*	CRX30D5P*
25 [19]	37.8	CRX37D8N*	CRX37D8P*
30 [23]	45.2	CRX45D2N*	CRX45D2P*
40 [30]	59.8	CRX59D8N*	CRX59D8P*
50 [38]	74.4	CRX74D4N*	CRX74D4P*
60 [45]	89	CRX0089N*	CRX0089P*
75 [56]	110.7	Consult	CRX0111P*
100 [75]	147	CRX0147N*	CRX0147P*
125 [94]	183	CRX0183N*	CRX0183P*
150 [112]	219	CRX0219N*	CRX0219P*
200 [150]	291	CRX0291N*	CRX0291P*

525 Volt - 50Hz		
HP Rating [kW]	Amps	3% Impedance
		Base Part Number
1.5 [1.1]	2	Consult
3 [2.3]	4	Consult
5 [3.8]	8	Consult
10 [7.5]	12	Consult
15 [12]	18	Consult
20 [15]	25	Consult
30 [23]	35	Consult
40 [30]	45	Consult
50 [38]	55	Consult
75 [56]	80	Consult
100 [75]	110	Consult
125 [94]	130	Consult
150 [112]	160	Consult
200 [150]	200	Consult

690 Volt - 50Hz			
HP Rating [kW]	Amps	3% Impedance	5% Impedance*
		Base Part Number	Base Part Number
1 [0.75]	1.2	CRX01D2N*	Consult
1.5 [1.1]	1.7	CRX01D6N*	Consult
2 [1.5]	2.1	CRX0002N*	Consult
3 [2.3]	3.4	CRX03D4N*	Consult
5 [3.8]	4.5	Consult	Consult
7.5 [5.6]	7.5	CRX07D5N*	Consult
10 [7.5]	11	CRX0011N*	Consult
15 [12]	14	CRX0014N*	Consult
20 [15]	18	CRX0018N*	Consult
25 [19]	21	CRX0021N*	Consult
30 [23]	25	CRX0025N*	Consult
40 [30]	33	CRX0033N*	Consult
50 [38]	45	CRX0045N*	Consult
60 [45]	55	CRX0055N*	Consult
75 [56]	65	CRX0065N*	Consult
100 [75]	80	CRX0080N*	Consult
125 [94]	100	CRX0096N*	Consult
150 [112]	130	CRX0130N*	Consult
200 [150]	160	CRX0160N*	Consult

*CF = Consult Factory
 *All Dimensions in Inches
 Refer to page 31-33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
1	CRX0001AC	27.2	21	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX0001AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX0001AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX0001BC	47.09	12	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX0001BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX0001BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
1.1	CRX01D1AC	20.36	12	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D1AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D1AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX01D1BC	33.94	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D1BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D1BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
1.4	CRX01D4AC	20.36	12	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D4AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D4AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX01D4BC	33.94	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D4BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D4BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
1.6	CRX01D6AC	14.91	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D6AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D6AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX01D6BC	23.55	12	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D6BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D6BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
1.8	CRX01D8AC	14.91	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D8AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D8AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX01D8BC	27.20	21	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D8BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D8BE			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
2	CRX0002CC	20.00	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0002CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0002CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
2.1	CRX02D1AC	10.61	19	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX02D1AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX02D1AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX02D1BC	17.83	21	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D1BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D1BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
2.4	CRX02D4AC	4.67	29	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D4AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D4AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX02D4BC	4.08	9	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX02D4BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX02D4BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX02D4CC	7.06	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D4CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D4CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX02D4DC	7.06	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D4DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D4DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
2.6	CRX02D6AC	10.61	35	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D6AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D6AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX02D6BC	17.83	21	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D6BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D6BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
2.7	CRX02D7AC	10.61	19	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX02D7AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX02D7AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX02D7BC	17.83	21	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D7BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D7BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
3	CRX0003AC	7.06	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0003AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0003AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX0003BC	10.61	35	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0003BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0003BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
3.4	CRX03D4AC	7.06	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX03D4AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX03D4AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX03D4BC	10.61	35	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX03D4BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX03D4BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
3.5	CRX03D5AC	2.80	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX03D5AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX03D5AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX03D5BC	3.55	18	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX03D5BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX03D5BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.0]
	CRX03D5CC	5.09	40	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX03D5CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX03D5CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.2]
	CRX03D5DC	4.67	29	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX03D5DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX03D5DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
3.9	CRX03D9AC	7.06	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX03D9AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX03D9AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX03D9BC	10.61	35	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX03D9BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX03D9BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
4	CRX0004CC	9.10	26	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0004CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0004CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
4.6	CRX04D6AC	2.13	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX04D6AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX04D6AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX04D6BC	2.13	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX04D6BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX04D6BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]	
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot		
4.6	CRX04D6CC	3.55	18	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]	
	CRX04D6CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]	
	CRX04D6CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]	
	CRX04D6DC	4.67	29	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]	
	CRX04D6DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]	
	CRX04D6DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]	
4.8	CRX04D8AC	4.7	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]	
	CRX04D8AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]	
	CRX04D8AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]	
	CRX04D8BC	7.78	35	Open	1	4.13 [105]	3.51 [89]	5.13 [130]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]	
	CRX04D8BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]	
	CRX04D8BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]	
6.1	CRX06D1AC	4.67	29	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]	
	CRX06D1AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]	
	CRX06D1AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]	
	CRX06D1BC	7.78	35	Open	1	4.13 [105]	3.51 [89]	5.13 [130]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]	
	CRX06D1BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]	
	CRX06D1BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]	
6.6	CRX06D6AC	1.48	18	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]	
	CRX06D6AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]	
	CRX06D6AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]	
	CRX06D6BC	2.33	24	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]	
	CRX06D6BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]	
	CRX06D6BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]	
	CRX06D6CC	3.06	31	Open	1	4.13 [105]	3.51 [89]	5.13 [130]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]	
	CRX06D6CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]	
	CRX06D6DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.5 [13.4]	
	7.5	CRX07D5AC	1.31	18	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
		CRX07D5AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
		CRX07D5AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
CRX07D5BC		1.53	25	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]	
CRX07D5BE				Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]	
CRX07D5BR				Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]	

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
7.5	CRX07D5CC	2.33	24	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX07D5CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX07D5CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX07D5DC			Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX07D5DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX07D5DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
7.6	CRX07D6AC	3.06	31	Open	1	4.13 [105]	3.51 [89]	5.13 [130]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX07D6AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX07D6AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX07D6BC			Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX07D6BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX07D6BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
8	CRX0008CC	7.5	39	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0008CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0008CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
9	CRX0009AC	3.06	31	Open	1	4.13 [105]	3.51 [89]	5.13 [130]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX0009AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX0009AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX0009BC			Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0009BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0009BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
10.7	CRX10D7AC	0.95	30	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX10D7AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX10D7AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX10D7BC			Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX10D7BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX10D7BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX10D7CC			Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX10D7CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX10D7CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX10D7DC			Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX10D7DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX10D7DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
11	CRX0011AC	2.57	36	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	5.00 [2.30]
	CRX0011AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	10.0 [4.50]
	CRX0011AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	30.0 [13.6]
	CRX0011BC	2.1	31	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX0011BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX0011BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX0011CC	3.4	39	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0011CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0011CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
	CRX0011DC	4.28	45	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0011DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0011DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
12	CRX0012CC	4.2	52	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0012CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0012CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
14	CRX0014AC	1.64	37	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX0014AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX0014AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX0014BC	2.73	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0014BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0014BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
16.7	CRX16D7AC	0.59	30	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX16D7AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.188 [4.58 x 4.78]	9.50 [4.30]
	CRX16D7AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX16D7BC	1.06	57	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX16D7BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX16D7BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX16D7CC	0.95	30	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX16D7CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX16D7CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
	CRX16D7DC	0.95	30	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX16D7DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX16D7DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
17	CRX0017AC	1.66	51	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	10.5 [4.80]
	CRX0017AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	15.5 [7.00]
	CRX0017AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	35.5 [16.1]
	CRX0017BC	2.73	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0017BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0017BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
21	CRX0021AC	1.06	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0021AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0021AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
	CRX0021BC	1.80	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0021BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0021BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
22	CRX0022AC	1.28	51	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0022AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0022AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
	CRX0022BC	2.14	77	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0022BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0022BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
24	CRX0024AC	0.41	35	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX0024AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX0024AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.4]
	CRX0024BC	0.55	68	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0024BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0024BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
	CRX0024CC	0.68	47	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0024CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0024CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
	CRX0024DC	0.86	60	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	10.5 [4.80]
CRX0024DE	Type 1			N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	15.5 [7.00]	
CRX0024DR	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	35.5 [16.1]	

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
27	CRX0027AC	1.06	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0027AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0027AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
	CRX0027BC	0.86	60	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	10.5 [4.80]
	CRX0027BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	15.5 [7.00]
	CRX0027BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	35.5 [16.1]
	CRX0027CC	1.40	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.5 [5.70]
	CRX0027CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.5 [7.90]
	CRX0027CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.5 [17.0]
	CRX0027DC	1.77	93	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	11.5 [5.20]
	CRX0027DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	21.50 [9.70]
	CRX0027DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	32.5 [14.8]
31	CRX0031AC	0.32	31	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	10.5 [4.80]
	CRX0031AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	15.5 [7.00]
	CRX0031AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [13.0]
	CRX0031BC	0.55	68	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	10.5 [4.80]
	CRX0031BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	15.5 [7.00]
	CRX0031BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	35.5 [16.1]
	CRX0031CC	0.68	80	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0031CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0031CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
	CRX0031DC	0.88	68	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0031DE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0031DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
32	CRX0032AC	0.88	68	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0032AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0032AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
	CRX0032BC	1.43	80	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	12.5 [5.70]
	CRX0032BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.5 [10.1]
	CRX0032BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.5 [15.2]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
34	CRX0034AC	0.68	80	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.5 [5.70]
	CRX0034AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.5 [7.90]
	CRX0034AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.5 [17.0]
	CRX0034BC	1.13	115	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	12.0 [5.40]
	CRX0034BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.0 [9.90]
	CRX0034BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.0 [15.0]
35	CRX0035CC	1.7	93	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]
	CRX0035CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [15.3]
	CRX0035CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	35.0 [15.9]
40	CRX0040AC	0.55	68	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0040AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0040AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
	CRX0040BC	0.94	105	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	12.5 [5.70]
	CRX0040BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.5 [10.1]
	CRX0040BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.5 [15.2]
41	CRX0041AC	0.68	80	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.5 [5.70]
	CRX0041AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.5 [7.90]
	CRX0041AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.5 [17.0]
	CRX0041BC	1.13	115	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	12.0 [5.40]
	CRX0041BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.0 [9.90]
	CRX0041BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.0 [15.0]
45	CRX0045CC	1.20	140	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]
	CRX0045CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [15.3]
	CRX0045CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	35.0 [15.9]
46	CRX0046AC	0.21	40	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0046AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0046AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
	CRX0046BC			Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0046BE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0046BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
	CRX0046CC	0.36	60	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0046CE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0046CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
	CRX0046DC			Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	19.0 [8.60]
	CRX0046DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	29.0 [13.1]
	CRX0046DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	40.0 [18.2]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
52	CRX0052AC	0.50	70	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	15.0 [6.80]
	CRX0052AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	25.0 [11.3]
	CRX0052AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.3]
	CRX0052BC	0.43	85	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	17.0 [7.70]
	CRX0052BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	27.0 [12.2]
	CRX0052BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	38.0 [17.3]
	CRX0052CC	0.91	130	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0052CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0052CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.9]
	CRX0052DC	0.74	170	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0052DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0052DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.9]
59	CRX0059AC	0.17	55	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0059AE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0059AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.6]
	CRX0059BC	0.22	85	Open	3	7.25 [184]	5.88 [149.36]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	18.0 [8.10]
	CRX0059BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	28.0 [12.6]
	CRX0059BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	39.0 [17.7]
	CRX0059CC	0.30	75	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	16.0 [7.20]
	CRX0059CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	26.0 [11.7]
	CRX0059CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.8]
	CRX0059DC	0.36	110	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
CRX0059DE	Type 1			N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]	
CRX0059DR	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.9]	
62	CRX0062AC	0.45	130	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	19.0 [8.60]
	CRX0062AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	29.0 [13.1]
	CRX0062AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	40.0 [18.2]
	CRX0062BC	0.74	170	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0062BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0062BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.9]
65	CRX0065AC	0.34	110	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0065AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0065AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.9]
	CRX0065BC	0.57	120	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0065BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0065BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.9]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
75	CRX0075AC	0.12	70	Open	3	7.25 [184]	5.88 [149.36]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	17.0 [7.70]
	CRX0075AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	27 [12.20]
	CRX0075AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	38.0 [17.3]
	CRX0075BC	0.19	95	Open	3	7.25 [184]	5.88 [149.36]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	18.0 [8.10]
	CRX0075BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	28.0 [12.6]
	CRX0075BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	39.0 [17.7]
	CRX0075CC	0.22	85	Open	3	7.25 [184]	5.88 [149.36]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	18.0 [8.10]
	CRX0075CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	28.0 [12.6]
	CRX0075CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	39.0 [17.7]
	CRX0075DC	0.29	105	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	21.0 [9.50]
	CRX0075DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	31.0 [14.0]
	CRX0075DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	39.0 [17.7]
77	CRX0077AC	0.29	105	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	21.0 [9.50]
	CRX0077AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	31.0 [14.0]
	CRX0077AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	39.0 [17.7]
	CRX0077BC	0.36	110	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0077BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0077BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.9]
	CRX0077CC	0.60	216	Open	3	9.25 [235]	6.25 [158.75]	7.00 [178]	6.00 [153]	3.70 [93.98]	0.44 x 1.0 [11 x 26]	30.0 [13.5]
	CRX0077CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	40.0 [18.0]
	CRX0077CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	51.0 [23.2]
	CRX0077DC	0.49	160	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]
	CRX0077DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [15.3]
	CRX0077DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	45.0 [20.4]
88	CRX0088AC	0.12	70	Open	3	7.25 [184]	5.88 [149.36]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	17.0 [7.70]
	CRX0088AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	27 [12.20]
	CRX0088AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	38.0 [17.3]
	CRX0088BC	0.19	95	Open	3	7.25 [184]	5.88 [149.36]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	17.0 [7.70]
	CRX0088BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	27 [12.20]
	CRX0088BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	38.0 [17.3]
	CRX0088CC	0.24	120	Open	3	7.25 [184]	5.88 [149.36]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	18.0 [8.10]
	CRX0088CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	28.0 [12.6]
	CRX0088CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	39.0 [17.7]
	CRX0088DC	0.24	120	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]
	CRX0088DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [15.3]
	CRX0088DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	45.0 [20.4]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
96	CRX0096AC	0.24	120	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]
	CRX0096AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [15.3]
	CRX0096AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	45.0 [20.4]
	CRX0096BC	Open	3	9.25 [235]	8.25 [210]	7.00 [178]	6.00 [153]	5.70 [145]	0.44 x 1.0 [11 x 26]	49.0 [22.1]		
	CRX0096BE	Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	59.0 [26.2]		
	CRX0096BR	Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	70.0 [31.8]		
99	CRX0099AC	0.28	125	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	26.0 [11.7]
	CRX0099AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	36.0 [16.2]
	CRX0099AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	47.0 [21.3]
	CRX0099BC	Open	3	9.25 [235]	8.00 [203]	7.00 [178]	6.00 [153]	5.45 [139]	0.44 x 1.0 [11 x 26]	48.0 [21.6]		
	CRX0099BE	Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	58.0 [26.1]		
	CRX0099BR	Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [31.3]		
114	CRX0114AC	0.09	70	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	18.0 [8.10]
	CRX0114AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	28.0 [12.6]
	CRX0114AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	39.0 [17.7]
	CRX0114BC	Open	3	9.25 [235]	6.75 [171]	7.00 [178]	6.00 [153]	3.83 [97]	0.44 x 1.0 [11 x 26]	28.0 [12.6]		
	CRX0114BE	Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	38.0 [17.1]		
	CRX0114BR	Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	49.0 [22.2]		
	CRX0114CC	Open	3	9.25 [235]	7.25 [184]	7.00 [178]	6.00 [153]	4.33 [110]	0.44 x 1.0 [11 x 26]	33.0 [14.9]		
	CRX0114CE	Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	43.0 [19.4]		
	CRX0114CR	Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	54.0 [24.5]		
	CRX0114DC	Open	4	10.80 [275]	8.25 [210]	10.00 [254]	7.20 [183]	5.21 [132]	0.44 x 1.0 [11 x 26]	52.0 [23.4]		
124	CRX0124AC	0.19	190	Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	83.0 [37.4]
	CRX0124AE			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	90.0 [40.9]
	CRX0124AR			Open	4	10.80 [275]	8.25 [210]	10.00 [254]	7.20 [183]	5.21 [132]	0.44 x 1.0 [11 x 26]	52.0 [23.4]
	CRX0124BC	Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	58.0 [26.1]		
CRX0124BE	Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	54.0 [24.5]			
CRX0124BR	Open	3	9.25 [235]	8.63 [220]	7.00 [178]	6.00 [153]	5.20 [132]	0.44 x 1.0 [11 x 26]	48.0 [21.6]			
125	CRX0125AC	0.23	160	Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	51.0 [23.0]
	CRX0125AE			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	67.0 [30.2]
	CRX0125AR			Open	4	10.80 [275]	9.13 [231.91]	10.00 [254]	7.20 [183]	6.08 [154.44]	0.44 x 1.0 [11 x 26]	67.0 [30.2]
	CRX0125BC	Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	98.0 [44.5]		
	CRX0125BE	Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	90.0 [40.9]		
	CRX0125BR	Open	3	9.25 [235]	7.63 [194]	7.00 [178]	6.00 [153]	4.70 [119.38]	0.44 x 1.0 [11 x 26]	41.0 [18.5]		

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
143	CRX0143AC	0.07	88	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	20.0 [9.00]
	CRX0143AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	30.0 [13.5]
	CRX0143AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
	CRX0143BC	0.10	130	Open	3	9.25 [235]	7.00 [178]	7.00 [178]	6.00 [153]	3.95 [100.33]	0.44 x 1.0 [11 x 26]	34.0 [15.3]
	CRX0143BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	44.0 [19.8]
	CRX0143BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
	CRX0143CC	0.11	140	Open	3	9.25 [235]	6.75 [171]	7.00 [178]	6.00 [153]	3.83 [97]	0.44 x 1.0 [11 x 26]	28.0 [12.6]
	CRX0143CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	38.0 [17.1]
	CRX0143CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
	CRX0143DC			Open	3	9.25 [235]	6.75 [171]	7.00 [178]	6.00 [153]	3.83 [97]	0.44 x 1.0 [11 x 26]	28.0 [12.6]
	CRX0143DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	38.0 [17.1]
	CRX0143DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
144	CRX0144AC	0.19	190	Open	4	10.80 [275]	8.25 [210]	10.00 [254]	7.20 [183]	5.21 [132]	0.44 x 1.0 [11 x 26]	52.0 [23.4]
	CRX0144AE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	83.0 [37.4]
	CRX0144AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	90.0 [40.9]
	CRX0144BC	0.35	240	Open	4	10.80 [275]	9.50 [241]	10.00 [254]	7.20 [183]	6.33 [160.79]	0.44 x 1.0 [11 x 26]	74.0 [33.3]
	CRX0144BE			Type 1	CH4	26.1 [663]	20.5 [521]	25.9 [358]	25.0 [635]	6.5 [165]	0.56 [14.3]	114 [51.0]
	CRX0144BR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	124 [52.2]
156	CRX0156AC	0.15	210	Open	3	9.25 [235]	7.00 [178]	7.00 [178]	6.00 [153]	4.08 [103.64]	0.44 x 1.0 [11 x 26]	32.0 [14.4]
	CRX0156AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	42.0 [18.9]
	CRX0156AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
	CRX0156BC	0.24	260	Open	3	9.25 [235]	8.63 [220]	7.00 [178]	6.00 [153]	5.70 [145]	0.44 x 1.0 [11 x 26]	52.0 [23.4]
	CRX0156BE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	63.0 [28.4]
	CRX0156BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	70.0 [31.8]
170	CRX0170AC	0.06	100	Open	3	7.25 [184]	6.25 [158.75]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	23.0 [10.4]
	CRX0170AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	33.0 [14.9]
	CRX0170AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
	CRX0170BC			Open	3	7.25 [184]	6.25 [158.75]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	23.0 [10.4]
	CRX0170BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	33.0 [14.9]
	CRX0170BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
	CRX0170CC	0.1	130	Open	3	9.25 [235]	7.00 [178]	7.00 [178]	6.00 [153]	3.95 [100.33]	0.44 x 1.0 [11 x 26]	34.0 [15.3]
	CRX0170CE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	44.0 [19.8]
	CRX0170CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	
	CRX0170DC			Open	3	9.25 [235]	7.00 [178]	7.00 [178]	6.00 [153]	3.95 [100.33]	0.44 x 1.0 [11 x 26]	34.0 [15.3]
	CRX0170DE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	44.0 [19.8]
	CRX0170DR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]		
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot			
180	CRX0180AC	0.13	180	Open	3	9.25 [235]	8.88 [225.56]	7.00 [178]	6.00 [153]	5.95 [151.13]	0.44 x 1.0 [11 x 26]	54.0 [24.3]		
	CRX0180AE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	85.0 [38.3]		
	CRX0180AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	92.0 [41.8]		
	CRX0180BC	0.21	250	Open	4	10.80 [275]	8.38 [212.86]	10.00 [254]	7.20 [183]	5.33 [135.39]	0.44 x 1.0 [11 x 26]	63.0 [28.4]		
	CRX0180BE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	94.0 [42.3]		
	CRX0180BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	101 [45.9]		
192	CRX0192AC	0.15	200	Open	3	9.25 [235]	8.25 [210]	7.00 [178]	6.00 [153]	5.45 [139]	0.44 x 1.0 [11 x 26]	53.0 [23.9]		
	CRX0192AE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	84.0 [37.8]		
	CRX0192AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	91.0 [41.3]		
	CRX0192BC	0.25	325	Open	4	10.80 [275]	10.50 [267]	10.00 [254]	7.20 [183]	7.33 [186.19]	0.44 x 1.0 [11 x 26]	90.0 [40.5]		
	CRX0192BE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	121 [54.0]		
	CRX0192BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	128 [58.1]		
200	CRX0200CC	0.11	195	Open	3	9.25 [235]	7.63 [194]	7.00 [178]	6.00 [153]	4.70 [119.38]	0.44 x 1.0 [11 x 26]	44.0 [19.8]		
	CRX0200CE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	75.0 [33.8]		
	CRX0200CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	82.0 [37.2]		
211	CRX0211AC	0.05	125	Open	3	7.25 [184]	6.25 [158.75]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]		
	CRX0211AE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [16.2]		
	CRX0211AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]			
	CRX0211BC			Open	3	7.25 [184]	6.25 [158.75]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]		
	CRX0211BE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [16.2]		
	CRX0211BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]			
	CRX0211CC	0.08	180	Open	3	9.25 [235]	7.63 [194]	7.00 [178]	6.00 [153]	4.70 [119.38]	0.44 x 1.0 [11 x 26]	39.0 [17.6]		
	CRX0211CE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	70.0 [31.5]		
	CRX0211CR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	77.0 [35.0]		
	CRX0211DC			0.1	225	Open	4	11.05 [281]	8.25 [210]	10.00 [254]	7.20 [183]	5.21 [132]	0.44 x 1.0 [11 x 26]	58.0 [26.1]
	CRX0211DE					Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	89.0 [40.1]
	CRX0211DR					Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	96.0 [43.6]
CRX0240AC	0.1	225	Open			4	11.05 [281]	8.25 [210]	10.00 [254]	7.20 [183]	5.21 [132]	0.44 x 1.0 [11 x 26]	58.0 [26.1]	
CRX0240AE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	89.0 [40.1]			
CRX0240AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	96.0 [43.6]			
CRX0240BC			0.16	435	Open	4	13.75 [350]	11.63 [296]	12.50 [318]	9.00 [229]	8.70 [221]	0.44 x 1.0 [11 x 26]	155 [70.0]	
CRX0240BE					Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [658]	25.00 [635]	6.50 [165]	0.56 [14.3]	195 [88.0]	
CRX0240BR					Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	205 [93.1]	

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
242	CRX0242AC	0.12	275	Open	4	11.05 [281]	8.25 [210]	10.00 [254]	7.20 [183]	5.08 [129]	0.44 x 1.0 [11 x 26]	59.0 [26.6]
	CRX0242AE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	90.0 [40.5]
	CRX0242AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	97.0 [44.0]
	CRX0242BC	0.2	360	Open	4	11.05 [281]	9.50 [241]	10.00 [254]	7.20 [183]	6.46 [164]	0.44 x 1.0 [11 x 26]	87.0 [39.2]
	CRX0242BE			Type 1	CH4	26.1 [663]	20.5 [521]	25.9 [358]	25.0 [635]	6.5 [165]	0.56 [14.3]	127 [57.0]
	CRX0242BR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	137 [62.2]
273	CRX0273AC	0.04	130	Open	3	9.25 [235]	8.13 [207]	7.00 [178]	6.00 [153]	5.20 [132]	0.44 x 1.0 [11 x 26]	43.0 [19.4]
	CRX0273AE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	74.0 [33.3]
	CRX0273AR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	81.0 [36.8]
	CRX0273BC			Open	3	9.25 [235]	8.13 [207]	7.00 [178]	6.00 [153]	5.20 [132]	0.44 x 1.0 [11 x 26]	43.0 [19.4]
	CRX0273BE			Type 1	CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	74.0 [33.3]
	CRX0273BR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	81.0 [36.8]
	CRX0273CC	0.06	200	Open	4	11.05 [281]	9.13 [231.91]	10.00 [254]	7.20 [183]	6.08 [154.44]	0.44 x 1.0 [11 x 26]	67.0 [30.2]
	CRX0273CE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	107 [48.0]
	CRX0273CR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	117 [53.1]
	CRX0273DC			Open	4	13.75 [350]	9.00 [229]	12.50 [318]	9.00 [229]	6.05 [153.67]	0.44 x 1.0 [11 x 26]	84.0 [37.8]
	CRX0273DE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	124 [56.0]
	CRX0273DR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	134 [60.8]
289	CRX0289AC	0.1	290	Open	4	11.05 [281]	9.00 [229]	10.00 [254]	7.20 [183]	5.96 [151.39]	0.44 x 1.0 [11 x 26]	75.0 [33.8]
	CRX0289AE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	115 [52.0]
	CRX0289AR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	125 [56.8]
	CRX0289BC	0.16	435	Open	4	13.75 [350]	11.63 [296]	12.50 [318]	9.00 [229]	8.70 [221]	0.44 x 1.0 [11 x 26]	155 [70.0]
	CRX0289BE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	195 [88.0]
	CRX0289BR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	205 [93.1]
302	CRX0302AC	0.08	310	Open	4	13.75 [350]	9.00 [229]	12.50 [318]	9.00 [229]	6.05 [153.67]	0.44 x 1.0 [11 x 26]	84.0 [37.8]
	CRX0302AE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	124 [56.0]
	CRX0302AR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	134 [60.8]
	CRX0302BC	0.13	475	Open	4	13.75 [350]	11.38 [289]	14.50 [368]	9.00 [229]	8.42 [214]	0.44 x 1.0 [11 x 26]	171 [77.0]
	CRX0302BE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	211 [95.0]
	CRX0302BR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	221 [100]
336	CRX0336AC	0.08	360	Open	4	13.75 [350]	9.38 [236]	14.50 [368]	9.00 [229]	6.42 [163]	0.44 x 1.0 [11 x 26]	110 [50.0]
	CRX0336AE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	150 [68.0]
	CRX0336AR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	160 [72.6]
	CRX0336BC	0.13	475	Open	4	13.75 [350]	11.38 [289]	14.50 [368]	9.00 [229]	8.42 [214]	0.44 x 1.0 [11 x 26]	171 [77.0]
	CRX0336BE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	211 [95.0]
	CRX0336BR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	221 [100]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
343	CRX0343AC	0.03	200	Open	4	11.05 [281]	8.63 [220]	10.00 [254]	7.20 [183]	5.58 [142]	0.44 x 1.0 [11 x 26]	57.0 [25.7]
	CRX0343AE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	97.0 [43.7]
	CRX0343AR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	107 [48.6]
	CRX0343BC			Open	4	11.05 [281]	8.63 [220]	10.00 [254]	7.20 [183]	5.58 [142]	0.44 x 1.0 [11 x 26]	57.0 [25.7]
	CRX0343BE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	97.0 [43.7]
	CRX0343BR			Type 3R	DH2	25.80 [655]	23.8 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	107 [48.6]
	CRX0343CC	0.05	230	Open	4	11.05 [281]	8.88 [225.56]	10.00 [254]	7.20 [183]	5.83 [148.09]	0.44 x 1.0 [11 x 26]	66.0 [29.7]
	CRX0343CE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	106 [48.0]
	CRX0343CR			Type 3R	DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	126 [57.2]
	CRX0343DC	0.06	325	Open	4	13.75 [350]	9.38 [236]	12.50 [318]	9.00 [229]	6.42 [163]	0.44 x 1.0 [11 x 26]	95.0 [42.8]
	CRX0343DE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	135 [61.0]
	CRX0343DR			Type 3R	DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	145 [65.8]
361	CRX0361AC	0.06	325	Open	4	13.75 [350]	9.38 [236]	12.50 [318]	9.00 [229]	6.42 [163]	0.44 x 1.0 [11 x 26]	95.0 [42.8]
	CRX0361AE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	135 [61.0]
	CRX0361AR			Type 3R	DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	145 [65.8]
	CRX0361BC	0.1	445	Open	4	13.75 [350]	11.38 [289]	12.50 [318]	9.00 [229]	8.42 [214]	0.44 x 1.0 [11 x 26]	147 [66.0]
	CRX0361BE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	203 [91.0]
	CRX0361BR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	245 [112]
382	CRX0382AC	0.07	435	Open	4	13.75 [350]	10.38 [264]	12.50 [318]	9.00 [229]	7.30 [186]	0.44 x 1.0 [11 x 26]	116 [52.7]
	CRX0382AE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	172 [77.0]
	CRX0382AR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	214 [97.2]
	CRX0382BC	0.12	580	Open	4	13.75 [350]	11.50 [292]	14.50 [368]	9.00 [229]	8.67 [220]	0.44 x 1.0 [11 x 26]	180 [81.0]
	CRX0382BE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	236 [106]
	CRX0382BR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	278 [126]
396	CRX0396AC	0.03	200	Open	4	11.05 [281]	8.63 [220]	10.00 [254]	7.20 [183]	5.58 [142]	0.44 x 1.0 [11 x 26]	57.0 [25.7]
	CRX0396AE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	97.0 [43.7]
	CRX0396AR			Type 3R	DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	107 [48.60]
	CRX0396BC			Open	4	11.05 [281]	8.63 [220]	10.00 [254]	7.20 [183]	5.58 [142]	0.44 x 1.0 [11 x 26]	57.0 [25.7]
	CRX0396BE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	97.0 [43.7]
	CRX0396BR			Type 3R	DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	107 [48.60]
	CRX0396CC	0.04	300	Open	4	13.75 [350]	9.38 [236]	12.50 [318]	9.00 [229]	6.42 [163]	0.44 x 1.0 [11 x 26]	92.0 [41.4]
	CRX0396CE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	132 [59.0]
	CRX0396CR			Type 3R	DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	142 [64.5]
	CRX0396DC			Open	4	13.75 [350]	9.38 [236]	12.50 [318]	9.00 [229]	6.42 [163]	0.44 x 1.0 [11 x 26]	92.0 [41.4]
	CRX0396DE			Type 1	CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	132 [59.0]
	CRX0396DR			Type 3R	DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	142 [64.5]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
412	CRX0412AC	0.07	435	Open	4	13.75 [350]	10.38 [264]	12.50 [318]	9.00 [229]	7.30 [186]	0.44 x 1.0 [11 x 26]	116 [52.0]
	CRX0412AE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	172 [77.0]
	CRX0412AR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	214 [97.2]
	CRX0412BC	0.11	550	Open	4	13.75 [350]	10.88 [277]	12.50 [318]	9.00 [229]	7.92 [201]	0.44 x 1.0 [11 x 26]	146 [66.0]
	CRX0412BE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	202 [91.0]
	CRX0412BR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	244 [111]
414	CRX0414AC	0.06	400	Open	4	13.75 [350]	10.13 [258]	12.50 [318]	9.00 [229]	7.17 [182]	0.44 x 1.0 [11 x 26]	125 [56.0]
	CRX0414AE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	181 [81.0]
	CRX0414AR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	223 [101]
	CRX0414BC	0.08	505	Open	4	13.75 [350]	11.38 [289]	12.50 [318]	9.00 [229]	8.42 [214]	0.44 x 1.0 [11 x 26]	143 [64.0]
	CRX0414BE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	199 [90.0]
	CRX0414BR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	241 [110]
472	CRX0472AC	0.06	400	Open	4	13.75 [350]	10.13 [258]	12.50 [318]	9.00 [229]	7.17 [182]	0.44 x 1.0 [11 x 26]	125 [56.0]
	CRX0472AE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	181 [81.0]
	CRX0472AR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	223 [101]
	CRX0472BC	0.1	560	Open	4	13.75 [350]	11.63 [296]	12.50 [318]	9.00 [229]	8.70 [221]	0.44 x 1.0 [11 x 26]	171 [77.0]
	CRX0472BE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	227 [102]
	CRX0472BR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	269 [122]
477	CRX0477AC	0.05	420	Open	4	13.75 [350]	10.88 [277]	14.50 [368]	9.00 [229]	7.42 [189]	0.44 x 1.0 [11 x 26]	145 [65.0]
	CRX0477AE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	231 [104]
	CRX0477AR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	272 [124]
	CRX0477BC	0.08	600	Open	4	13.75 [350]	13.38 [340]	14.50 [368]	9.00 [229]	9.92 [252]	0.44 x 1.0 [11 x 26]	220 [99.0]
	CRX0477BE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	306 [138]
	CRX0477BR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	347 [158]
515	CRX0515AC	0.05	420	Open	4	13.75 [350]	10.88 [277]	14.50 [368]	9.00 [229]	7.42 [189]	0.44 x 1.0 [11 x 26]	145 [65.0]
	CRX0515AE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	231 [104]
	CRX0515AR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	272 [124]
	CRX0515BC	0.08	600	Open	4	13.75 [350]	13.38 [340]	14.50 [368]	9.00 [229]	9.92 [252]	0.44 x 1.0 [11 x 26]	220 [99]
	CRX0515BE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	306 [138]
	CRX0515BR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	347 [158]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
528	CRX0528AC	0.02	220	Open	4	13.75 [350]	9.38 [236]	12.50 [318]	9.00 [229]	5.70 [145]	0.44 x 1.0 [11 x 26]	74.0 [33.3]
	CRX0528AE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	130 [59.0]
	CRX0528AR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	172 [97.2]
	CRX0528BC			Open	4	13.75 [350]	9.38 [236]	12.50 [318]	9.00 [229]	5.70 [145]	0.44 x 1.0 [11 x 26]	74.0 [33.3]
	CRX0528BE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	130 [59.0]
	CRX0528BR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	172 [97.2]
	CRX0528CC	0.03	355	Open	4	13.75 [350]	9.63 [245]	14.50 [368]	9.00 [229]	6.17 [157]	0.44 x 1.0 [11 x 26]	102 [46.0]
	CRX0528CE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	158 [71.0]
	CRX0528CR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	200 [90.8]
	CRX0528DC			Open	4	13.75 [350]	10.63 [270]	14.50 [368]	9.00 [229]	7.17 [182]	0.44 x 1.0 [11 x 26]	133 [60.0]
	CRX0528DE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	189 [85.0]
	CRX0528DR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	231 [105]
590	CRX0590AC	0.04	495	Open	4	13.75 [350]	10.63 [270]	14.50 [368]	9.00 [229]	7.17 [182]	0.44 x 1.0 [11 x 26]	133 [60.0]
	CRX0590AE			Type 1	CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	189 [85.0]
	CRX0590AR			Type 3R	DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	231 [105]
	CRX0590BC	0.06	680	Open	4	13.75 [350]	13.38 [340]	14.50 [368]	9.00 [229]	9.92 [252]	0.44 x 1.0 [11 x 26]	220 [99.0]
	CRX0590BE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	306 [138]
	CRX0590BR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	347 [158]
600	CRX0600CC	0.046	525	Open	4	13.75 [350]	12.13 [308]	14.50 [368]	9.00 [229]	8.67 [220]	0.44 x 1.0 [11 x 26]	210 [95.0]
	CRX0600CE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	296 [133]
	CRX0600CR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	337 [153]
	CRX0600EC	0.077	675	Open	4	13.75 [350]	13.13 [334]	14.50 [368]	9.00 [229]	9.67 [246]	0.44 x 1.0 [11 x 26]	230 [104]
	CRX0600EE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	316 [142]
	CRX0600ER			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	357 [162]
700	CRX0700CC	0.039	615	Open	4	14.25 [362]	12.38 [314.46]	14.50 [368]	9.50 [241]	7.92 [201]	0.44 x 1.0 [11 x 26]	171 [77.0]
	CRX0700CE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	257 [116]
	CRX0700CR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	298 [134]
	CRX0700EC	0.066	860	Open	4	14.25 [362]	14.38 [365.26]	14.50 [368]	9.50 [241]	9.92 [252]	0.44 x 1.0 [11 x 26]	246 [111]
	CRX0700ER			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	332 [149]
	CRX0700EE			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	273 [124]
720	CRX0720AC	0.031	480	Open	5	13.75 [350]	11.63 [296]	14.50 [368]	9.00 [229]	7.17 [182]	0.44 x 1.0 [11 x 26]	145 [65.0]
	CRX0720AE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	231 [104]
	CRX0720AR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	272 [123]

Refer to page 31 - 33 for drawings

ENCLOSED SPECIFICATION CHARTS

60 HZ

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
750	CRX0750CC	0.037	600	Open	4	14.25 [362]	12.63 [320.81]	14.50 [368]	9.50 [241]	8.17 [208]	0.44 x 1.0 [11 x 26]	143 [64.0]
	CRX0750CE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	229 [103]
	CRX0750CR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	270 [122]
	CRX0750DC	0.049	770	Open	4	16.75 [425.45]	14.00 [356]	14.50 [368]	11.50 [292]	8.42 [214]	0.44 x 1.0 [11 x 26]	217 [98.0]
	CRX0750DE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	303 [136]
	CRX0750DR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	344 [155]
	CRX0750EC	0.061	940	Open	4	16.75 [425.45]	14.25 [362]	14.50 [368]	11.50 [292]	8.67 [220]	0.44 x 1.0 [11 x 26]	255 [115]
	CRX0750EE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	341 [153]
	CRX0750ER			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	382 [172]
840	CRX0840AC	0.027	570	Open	5	13.75 [350]	11.88 [301.76]	14.50 [368]	9.00 [229]	7.17 [182]	0.44 x 1.0 [11 x 26]	270 [122]
	CRX0840AE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	236 [106]
	CRX0840AR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	277 [125]
900	CRX0900CC	0.031	750	Open	5	14.25 [362]	14.63 [371.61]	14.50 [368]	9.50 [241]	8.17 [208]	0.44 x 1.0 [11 x 26]	200 [90.0]
	CRX0900CE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	286 [129]
	CRX0900CR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	327 [147]
	CRX0900DC	0.041	950	Open	5	17.00 [432]	14.88 [377.96]	14.50 [368]	11.50 [292]	8.42 [214]	0.44 x 1.0 [11 x 26]	245 [110]
	CRX0900DE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	331 [149]
	CRX0900DR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	372 [167]
	CRX0900EC	0.051	1075	Open	5	17.00 [432]	16.38 [416]	14.50 [368]	11.50 [292]	9.92 [252]	0.44 x 1.0 [11 x 26]	290 [131]
	CRX0900EE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	376 [169]
	CRX0900ER			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	417 [188]
960	CRX0960AC	0.022	675	Open	5	17.75 [451]	13.75 [350]	18.50 [470]	12.00 [305]	7.42 [189]	0.44 x 1.0 [11 x 26]	270 [122]
	CRX0960AE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	386 [174]
	CRX0960AR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	427 [192]
1000	CRX1000CC	0.028	785	Open	5	18.75 [476]	13.50 [343]	18.50 [470]	12.00 [305]	7.17 [182]	0.44 x 1.0 [11 x 26]	300 [135]
	CRX1000CE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	386 [174]
	CRX1000CR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	427 [192]
	CRX1000DC	0.037	820	Open	5	18.75 [476]	14.00 [356]	18.50 [470]	13.00 [330]	8.17 [208]	0.44 x 1.0 [11 x 26]	364 [164]
	CRX1000DE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	450 [203]
	CRX1000DR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	491 [221]
	CRX1000EC	0.046	970	Open	5	21.75 [553]	16.00 [407]	18.50 [470]	15.00 [381]	8.17 [208]	0.44 x 1.0 [11 x 26]	405 [182]
	CRX1000EE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	491 [221]
	CRX1000ER			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	532 [239]
1080	CRX1080AC	0.022	675	Open	5	17.75 [451]	13.75 [350]	18.50 [470]	12.00 [305]	7.42 [189]	0.44 x 1.0 [11 x 26]	270 [122]
	CRX1080AE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	356 [160]
	CRX1080AR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	397 [179]

Refer to page 31 - 33 for drawings

ENCLOSED SPECIFICATION CHARTS

60 HZ

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
1200	CRX1200AC	0.018	710	Open	5	17.75 [451]	13.25 [337]	18.50 [470]	12.00 [305]	6.92 [176]	0.44 x 1.0 [11 x 26]	250 [113]
	CRX1200AE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	336 [151]
	CRX1200AR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	377 [171]
	CRX1200CC	0.023	880	Open	5	18.75 [476]	13.25 [337]	18.50 [470]	13.00 [330]	6.67 [170]	0.44 x 1.0 [11 x 26]	418 [188]
	CRX1200CE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	350 [158]
	CRX1200CR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	391 [178]
	CRX1200DC	0.031	1100	Open	5	21.75 [553]	15.00 [381]	18.50 [470]	15.00 [381]	7.17 [182]	0.44 x 1.0 [11 x 26]	337 [152]
	CRX1200DE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	423 [190]
	CRX1200DR			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	464 [209]
	CRX1200EC	0.038	1100	Open	5	21.75 [553]	16.00 [407]	18.50 [470]	15.00 [381]	8.17 [208]	0.44 x 1.0 [11 x 26]	422 [190]
	CRX1200EE			Type 1	CH6	33.50 [851]	23.00 [584]	31.20 [793]	32.50 [826]	9.00 [229]	0.56 [14.3]	508 [229]
	CRX1200ER			Type 3R	DH4	31.50 [800]	29.50 [749]	44.50 [1130]	23.5 [597]	26.5 [673]	0.63 [16.2]	549 [247]

50 HZ

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
1.2	CRX01D2NC	33.94	15	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D2NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D2NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
1.6	CRX01D6NC	23.55	12	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX01D6NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX01D6NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
2	CRX0002NC	17.83	21	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0002NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0002NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [12.6]
2.1	CRX02D1NC	10.61	19	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	2.50 [1.20]
	CRX02D1NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	7.50 [3.40]
	CRX02D1NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	27.5 [12.5]
	CRX02D1PC	17.83	21	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX02D1PE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX02D1PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [12.6]
3	CRX0003NC	7.06	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0003NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0003NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [12.6]
	CRX0003PC	10.61	35	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0003PE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0003PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [12.6]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
3.4	CRX03D4NC	10.61	35	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX03D4NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX03D4NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [12.6]
3.7	Consult Factory											
4.5	Consult Factory											
4.8	CRX04D8NC	4.7	22	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX04D8NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX04D8NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [12.6]
	CRX04D8PC	7.78	35	Open	1	4.13 [105]	3.51 [89]	5.13 [130]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	4.50 [2.10]
	CRX04D8PE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	9.50 [4.30]
	CRX04D8PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	29.5 [13.3]
7.5	CRX07D5NC	5.09	40	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX07D5NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX07D5NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.2]
8	CRX0008NC	2.57	36	Open	1	4.13 [105]	3.51 [89]	5.38 [137]	2.87 [73]	2.63 [67]	0.28 x 0.38 [7 x 10]	5.00 [2.30]
	CRX0008NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	10.0 [4.50]
	CRX0008NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	30.0 [13.5]
	CRX0008PC	4.67	29	Open	1	4.13 [105]	2.29 [58]	5.13 [130]	2.81 [71]	1.79 [46]	0.28 x 0.38 [7 x 10]	3.00 [1.40]
	CRX0008PE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	8.00 [3.60]
	CRX0008PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	28.0 [12.6]
11	CRX0011NC	3.4	39	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX0011NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX0011NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.2]
11.8	CRX11D8NC	1.66	51	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	10.5 [4.80]
	CRX11D8NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	15.5 [7.00]
	CRX11D8NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	35.0 [15.8]
	CRX11D8PC	2.73	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX11D8PE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX11D8PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.2]
14	CRX0014NC	2.73	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0014NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0014NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.2]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
15.6	CRX15D6NC	1.28	51	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.0 [5.00]
	CRX15D6NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.0 [7.20]
	CRX15D6NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [16.2]
	CRX15D6PC	2.14	77	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX15D6PE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	17.0 [7.70]
	CRX15D6PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.7]
18	CRX0018NC	2.14	77	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0018NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0018NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.7]
21	CRX0021NC	2.14	77	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX0021NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX0021NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.7]
23	CRX0023NC	1.06	57	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	11.5 [5.20]
	CRX0023NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	16.5 [7.40]
	CRX0023NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.5 [16.2]
	CRX0023PC	1.43	80	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	12.5 [5.70]
	CRX0023PE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.5 [10.1]
	CRX0023PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.5 [15.1]
25	CRX0025NC	1.77	93	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	11.5 [5.20]
	CRX0025NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	21.50 [9.70]
	CRX0025NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	41.5 [18.7]
30.5	CRX30D5NC	0.68	80	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.5 [5.70]
	CRX30D5NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.5 [3.40]
	CRX30D5NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.5 [16.9]
	CRX30D5PC	1.13	115	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	12.0 [5.40]
	CRX30D5PE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.0 [9.90]
	CRX30D5PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.0 [14.9]
33	CRX0033NC	1.13	115	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	12.0 [5.40]
	CRX0033NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.0 [9.90]
	CRX0033NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.0 [14.9]
37.8	CRX37D8NC	0.55	68	Open	1	6.50 [165]	5.00 [127]	6.13 [156]	4.38 [111]	4.00 [102]	0.28 x 0.38 [7 x 10]	12.0 [5.40]
	CRX37D8NE			Type 1	N1	10.00 [254]	8.00 [203]	8.13 [207]	7.00 [178]	6.50 [165]	0.19 [4.78]	17.0 [7.70]
	CRX37D8NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	37.0 [16.7]
	CRX37D8PC	0.94	105	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	12.5 [5.70]
	CRX37D8PE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	22.5 [10.1]
	CRX37D8PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	33.5 [15.1]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
45.2	CRX45D2NC	0.45	130	Open	2	7.12 [181]	4.69 [119]	6.38 [162]	4.80 [122]	3.27 [83]	0.38 x 0.50 [10 x 13]	19.0 [8.60]
	CRX45D2NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	29.0 [13.1]
	CRX45D2NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	40.0 [18.0]
	CRX45D2PC	0.74	170	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX45D2PE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX45D2PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.7]
45	CRX0045NC	0.91	130	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0045NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0045NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.7]
55	CRX0055NC	0.74	170	Open	2	7.12 [181]	5.19 [132]	6.38 [162]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX0055NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX0055NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	46.0 [20.7]
59.8	CRX59D8NC	0.36	110	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	25.0 [11.3]
	CRX59D8NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	35.0 [15.8]
	CRX59D8NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	36.0 [20.7]
	CRX59D8PC	0.59	216	Open	3	9.25 [235]	6.25 [158.75]	7.00 [178]	6.00 [153]	3.70 [93.98]	0.44 x 1.0 [11 x 26]	30.0 [13.5]
	CRX59D8PE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	40.0 [18.0]
	CRX59D8PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	51.0 [23.0]
65	CRX0065NC	0.59	216	Open	3	9.25 [235]	6.25 [158.75]	7.00 [178]	6.00 [153]	3.70 [93.98]	0.44 x 1.0 [11 x 26]	30.0 [13.5]
	CRX0065NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	40.0 [18.0]
	CRX0065NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	51.0 [23.0]
74.4	CRX74D4NC	0.29	105	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	21.0 [9.50]
	CRX74D4NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	31.0 [14.0]
	CRX74D4NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	42.0 [18.9]
	CRX74D4PC	0.49	160	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]
	CRX74D4PE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [15.3]
	CRX74D4PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	45.0 [20.3]
80	CRX0080NC	0.48	210	Open	3	9.25 [235]	8.00 [203]	7.00 [178]	6.00 [153]	5.45 [139]	0.44 x 1.0 [11 x 26]	48.0 [21.6]
	CRX0080NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	58.0 [26.1]
	CRX0080NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	69.0 [31.1]
89	CRX0089NC	0.24	120	Open	3	7.25 [184]	6.00 [153]	5.63 [143]	4.80 [122]	3.77 [96]	0.38 x 0.50 [10 x 13]	24.0 [10.8]
	CRX0089NE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	34.0 [15.3]
	CRX0089NR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	45.0 [20.3]
	CRX0089PC	0.39	170	Open	3	9.25 [235]	8.25 [210]	7.00 [178]	6.00 [153]	5.70 [145]	0.44 x 1.0 [11 x 26]	49.0 [22.1]
	CRX0089PE			Type 1	N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	59.0 [26.6]
	CRX0089PR			Type 3R	DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	70.0 [31.5]

Refer to page 31 - 33 for drawings

RMS Amp	Catalog Number	Inductance (mH)	Watts Loss	Enclosure Style	Dim. Figure #	Overall Dimensions - Inches [mm]			Mounting Dimensions - Inches [mm]			Weight lbs [kg]
						Width	Depth	Height	Mtg. Width	Mtg. Depth	Mtg. Slot	
96	CRX0096NC	0.39	170	Open	3	9.25 [235]	8.25 [210]	7.00 [178]	6.00 [153]	5.70 [145]	0.44 x 1.0 [11 x 26]	49.0 [22.1]
	Type 1			N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	59.0 [26.6]	
	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	70 [31.5]	
111	CRX0111PC	0.29	185	Open	3	9.25 [235]	8.63 [220]	7.00 [178]	3Q			48.0 [21.6]
	Type 1			N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	58.0 [26.1]	
	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	69.0 [31.1]	
130	CRX0130NC	0.35	240	Open	4	10.80 [275]	9.50 [241]	10.00 [254]	7.20 [183]	6.33 [160.79]	0.44 x 1.0 [11 x 26]	74.0 [33.3]
	Type 1			CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	114 [51.0]	
	Type 3R			DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	125 [56.3]	
147	CRX0147NC	0.15	210	Open	3	9.25 [235]	7.00 [178]	7.00 [178]	6.00 [153]	4.08 [103.64]	0.44 x 1.0 [11 x 26]	32.0 [14.4]
	Type 1			N2	14.00 [356]	14.00 [356]	12.13 [308]	10.00 [254]	10.50 [267]	0.19 [4.78]	42.0 [18.9]	
	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	53.0 [23.9]	
	CRX0147PC	0.24	260	Open	3	9.25 [235]	8.63 [220]	7.00 [178]	6.00 [153]	5.70 [145]	0.44 x 1.0 [11 x 26]	32.0 [14.4]
	Type 1			CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	63.0 [28.4]	
	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	70.0 [31.5]	
160	CRX0160NC	0.24	260	Open	3	9.25 [235]	8.63 [220]	7.00 [178]	6.00 [153]	5.70 [145]	0.44 x 1.0 [11 x 26]	32.0 [14.4]
	Type 1			CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	63.0 [28.4]	
	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	74.0 [33.3]	
183	CRX0183NC	0.13	180	Open	3	9.25 [235]	8.88 [225.56]	7.00 [178]	6.00 [153]	5.95 [151.13]	0.44 x 1.0 [11 x 26]	54.0 [24.3]
	Type 1			CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	85.0 [38.3]	
	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	96.0 [43.2]	
	CRX0183PC	0.19	360	Open	4	11.05 [281]	9.50 [241]	10.00 [254]	9.00 [229]	6.05 [153.67]	0.44 x 1.0 [11 x 26]	87.0 [39.2]
	Type 1			CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	127 [57.0]	
	Type 3R			DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	134 [60.3]	
219	CRX0219NC	0.1	225	Open	4	11.05 [281]	8.25 [210]	10.00 [254]	7.20 [183]	5.21 [132]	0.44 x 1.0 [11 x 26]	58.0 [26.1]
	Type 1			CH2	23.50 [597]	16.5 [419]	17.9 [455]	22.4 [569]	6.50 [165]	0.56 [14.3]	89.0 [40.1]	
	Type 3R			DH1	21.50 [546]	20.1 [510]	22.0 [559]	20.0 [508]	9.00 [229]	0.63 [16.2]	96.0 [43.2]	
	CRX0219PC	0.16	435	Open	4	13.75 [350]	11.63 [296]	12.50 [318]	9.00 [229]	8.70 [221]	0.44 x 1.0 [11 x 26]	155 [70.0]
	Type 1			CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	195 [88.0]	
	Type 3R			DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	202 [90.9]	
291	CRX0291NC	0.08	310	Open	4	13.75 [350]	9.00 [229]	12.50 [318]	9.00 [229]	6.05 [153.67]	0.44 x 1.0 [11 x 26]	84.0 [37.8]
	Type 1			CH4	26.10 [663]	20.50 [521]	25.90 [358]	25.00 [635]	6.50 [165]	0.56 [14.3]	124 [56.0]	
	Type 3R			DH2	25.80 [655]	23.80 [604]	28.80 [731]	24.60 [625]	9.00 [229]	0.63 [16.2]	131 [59.0]	
	CRX0291PC	0.12	580	Open	4	13.75 [350]	11.50 [292]	14.50 [368]	9.00 [229]	8.67 [220]	0.44 x 1.0 [11 x 26]	180 [81.0]
	Type 1			CH5	28.10 [714]	21.30 [541]	28.90 [734]	27.00 [686]	6.50 [165]	0.56 [14.3]	236 [106]	
	Type 3R			DH3	28.30 [719]	27.00 [687]	36.00 [914]	21.50 [546]	24.00 [610]	0.63 [16.2]	222 [109]	

Refer to page 31 - 33 for drawings

DIAGRAMS & TERMINATION DETAILS

Figure #1

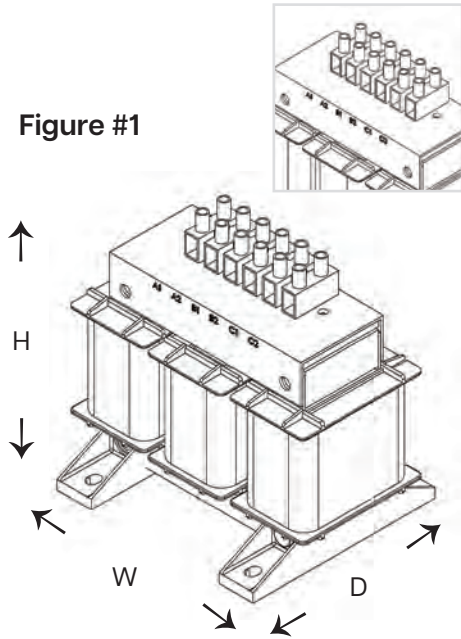


Figure #2

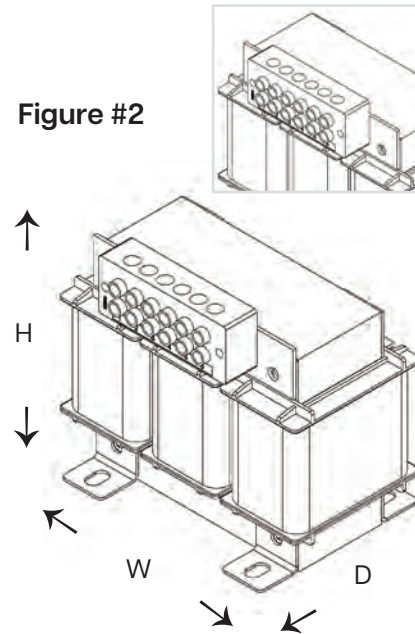


Figure #3

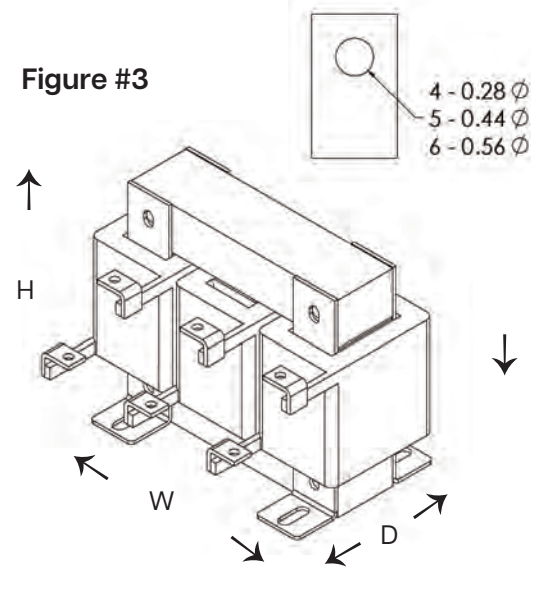


Figure #4


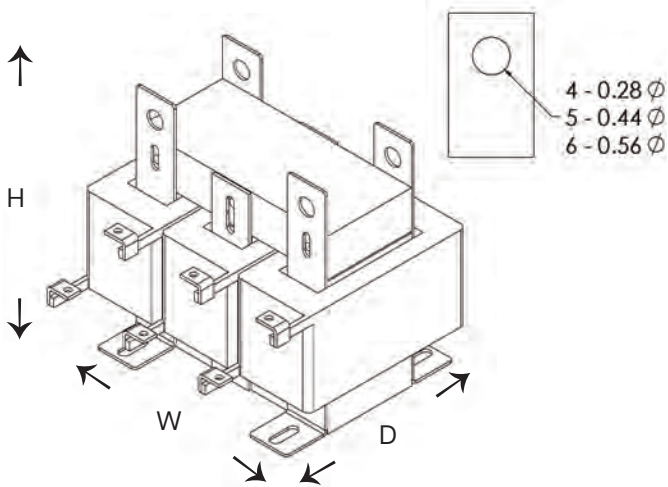


Figure #5

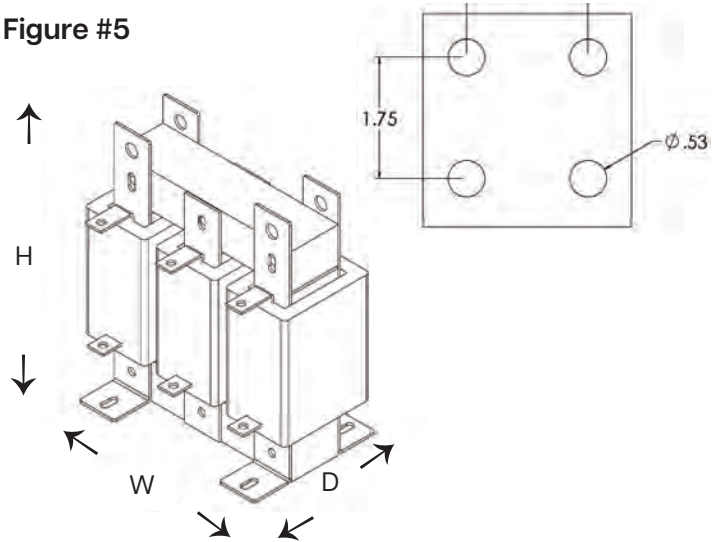

Terminal Information


Fig.	Terminal	Amps	Suitable for	Maximum tightening torque
1	Terminal Block	<=9	18-14 AWG	5 in-lbs
		>9 and <=27	13-10 AWG	11 in-lbs
		>27	14-4 AWG	20 in-lbs
2	Terminal Block	27-30	14-10 AWG	20 in-lbs
		30-45	8 AWG	25 in-lbs
		45-65	6-4 AWG	35 in-lbs
3	Terminal Pad	<=110	1/4 in hardware	10 ft-lbs
		>110	3/8 in hardware	28 ft-lbs
4	Terminal Pad	<=472	3/8 in hardware	28 ft-lbs
		>472	1/2 in hardware	70 ft-lbs
5	Terminal Pad	<=840	1/2 in hardware	70 ft-lbs
		>840 and <1200	4 x 1/2 in hardware	70 ft-lbs

Terminal Style Reference


Style Number	Size	Max. Amps	Max. Torque
1	18-14 AWG	9	5 in-lbs
2	13-10 AWG	27	11 in-lbs
3	4-14 AWG	65	20 in-lbs
4	0.28"	110	10 ft-lbs
5	0.44"	472	28 ft-lbs
6	0.56"	840	70 ft-lbs
7	4 x 0.53"	1200	70 ft-lbs

TYPE 1 ENCLOSED DRAWINGS


N1

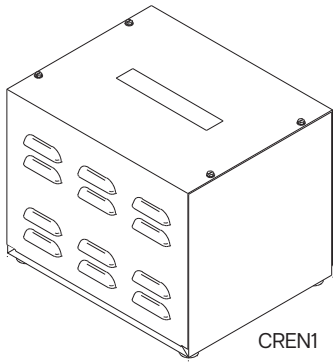


N2

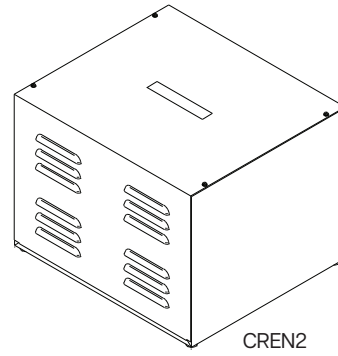


CH2

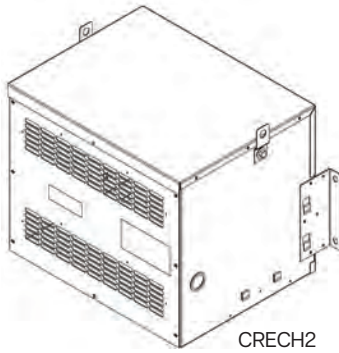


CH4

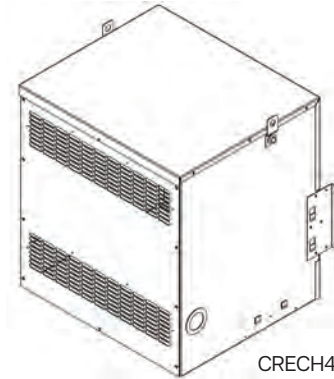


CH5

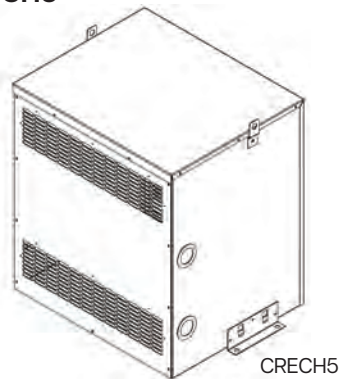

CH6

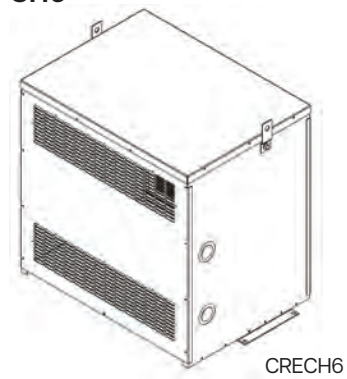


TYPE 3R ENCLOSED DRAWINGS

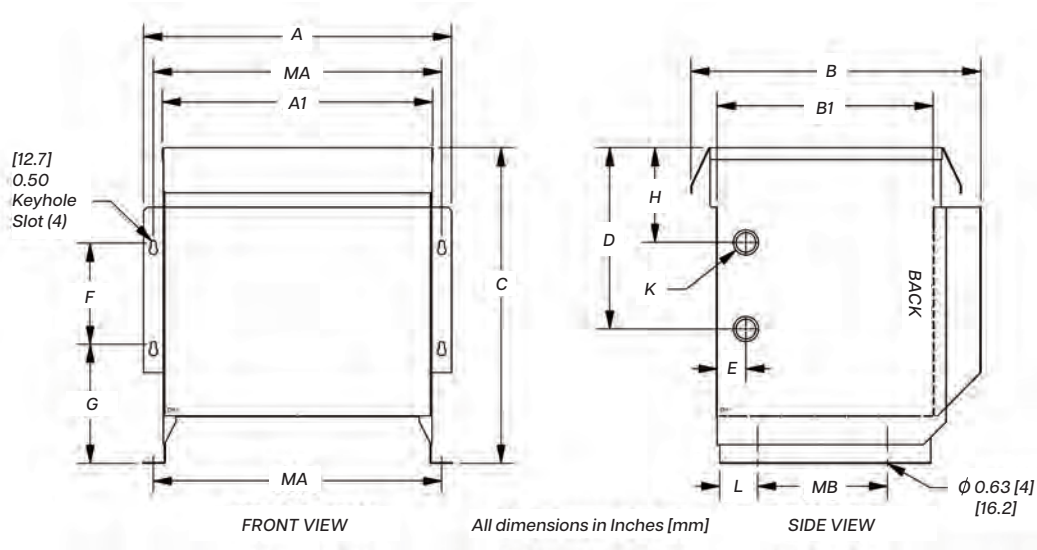

Case Style	Dimensions in Inches [Millimeter]														
	A	A1	B	B1	C	D	E	F	G	H	K	L	MA	MB	
DH1	21.5	18.8	20.1	15	22	12.6	2	7	8.3	6.6	1.38 X 1.75 K.O.	2.6	20	9	
	[546]	[477]	[510]	[381]	[559]	[320]	[51]	[178]	[211]	[168]	[35 x 44 K.O.]	[66]	[508]	[229]	
DH2	25.8	23.3	23.8	18	28.8	17	2	8	10.3	8.6	1.75 X 2.50 K.O.	3.8	24.6	9	
	[655]	[592]	[604]	[457]	[731]	[432]	[51]	[203]	[262]	[218]	[44 X 63 K.O.]	[96]	[625]	[229]	

¹ Knockout (K) sizes are actual diameters of knockout, not conduit sizes.

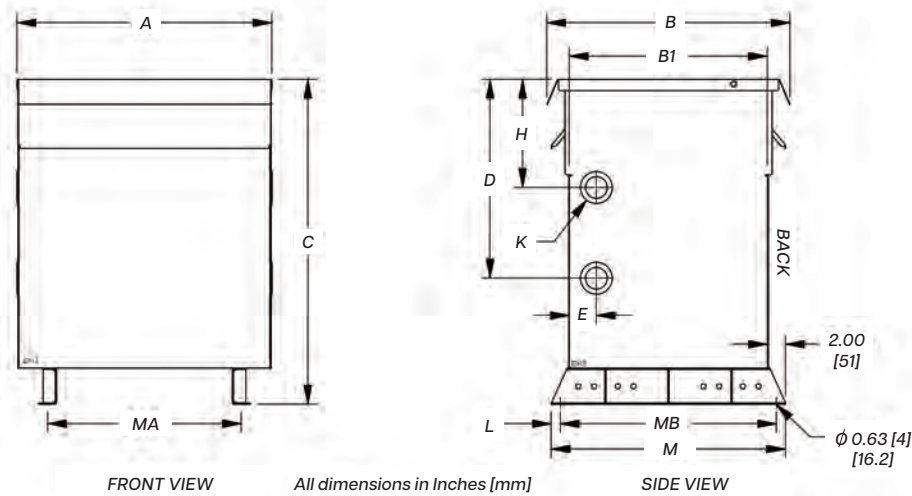

Case Style	Dimensions in Inches [Millimeter]												
	A	B	B1	C	D	E	H	K	L	M	MA	MB	
DH3	28.3	27	22	36	22	3	12	2.00 X 3.00 K.O.	1	26	21.5	24	
	[719]	[687]	[559]	[914]	[559]	[76]	[305]	[50 X 76 K.O.]	[25]	[660]	[546]	[610]	
DH4	31.5	29.5	24.5	44.5	27.5	3	14.5	2.00 X 3.00 K.O.	1	28.5	23.5	26.5	
	[800]	[749]	[622]	[1130]	[698]	[76]	[368]	[50 X 76 K.O.]	[25]	[724]	[597]	[673]	

¹ Knockout (K) sizes are actual diameters of knockout, not conduit sizes.

OTHER HPS POWER QUALITY PRODUCTS



HPS Passive Harmonic Filter

HPS passive harmonic filter improves power quality by simultaneously reducing harmonics and improving true power factor.

The advanced HPS design delivers superior performance compared to traditional harmonic filters by reducing harmonic current distortion to less than 5% and correcting true power factor to over 95%, enabling users to meet IEEE 519 harmonic requirements.

The passive harmonic filter consists of reactors and capacitors in an LCL arrangement designed to reduce a broad range of harmonics associated with VFD's and other three phase rectifiers.



HPS TruWave™ Active Harmonic Filter

HPS TruWave™ Active Harmonic Filter (AHF) is a comprehensive and flexible solution for harmonic mitigation. It provides advanced control and proven reliability that your facility needs to solve harmonic problems generated by non-linear loads such as variable frequency drives.

The AHF monitors load current and quickly responds to power system distortion as it develops. The AHF injects a corrective current to effectively cancel out harmonics produced by three phase non-linear loads. The result is a reduction in harmonic distortion to below 5%, complying with the IEEE-519 recommendations.



dV/dT Filter

The HPS dV/dT filter provides protection for motors by slowing the rate of voltage increase and minimizing the peak voltage that occurs at the motor's terminals and along the cables feeding the motor. It does this by combining the harmonic current limiting ability of an AC line reactor plus a resistive capacitance circuit that forms a damped, low pass filter.

HPS dV/dT filters are specifically designed for drive/motor applications with long lead lengths (usually where the motor cable length is 100 feet and greater).



Energy Efficient Drive Isolation Transformers

HPS drive isolation transformers are suitable for both AC and DC variable speed drives. They are sized to match standard motor horsepower and voltage ratings.

Standard features include:

Meets NRCan 2019

- Three phase ratings from 7 kVA to 660 kVA
- Available in aluminum, copper and optional shield
- UL Listed and CSA Certified
- Type 3R enclosure (optional Type 4, 12 or stainless)



HPS Harmonic Mitigating Transformer

The HPS Energy Efficient, Harmonic Mitigating Transformers with zero sequence flux cancellation technology is specifically designed to treat the harmonics generated by computer equipment and other non-linear, power electronic loads. Harmonic mitigating transformers are superior to K-Rated and conventional transformers in reducing voltage distortion (flat-topping) and power losses due to current harmonics created by single-phase, non-linear loads such as computer equipment. Secondary windings are designed to cancel zero sequence fluxes and eliminate primary winding circulating currents. They treat zero sequence harmonics (3rd, 9th and 15th) within the secondary windings and 5th and 7th harmonics upstream with an appropriate phase shift.



CANADA

Hammond Power Solutions

595 Southgate Drive
Guelph, Ontario N1G 3W6
Tel: (519) 822-2441 | Fax: (519) 822-9701
Toll Free: 1-888-798-8882

sales@hammondpowersolutions.com



UNITED STATES

Hammond Power Solutions

1100 Lake Street
Baraboo, Wisconsin 53913-2866
Tel: (608) 356-3921 | Fax: (608) 355-7623
Toll Free: 1-866-705-4684

sales@hammondpowersolutions.com



MEXICO

Hammond Power Solutions Latin America S.

Av. No. 800,
Parque Industrial Guadalupe
Guadalupe, NL, Mexico, C.P. 67190.
Tel: (819) 690-8000

sales@hammondpowersolutions.com



ASIA

Hammond Power Solutions Pvt. Ltd.

Plot No 6A, Phase -1, IDA,
Pashamylaram, Patancheru (M)
Sangareddy, 502 307, India
Tel: +91-994-995-0009

marketing-india@hammondpowersolutions.com

EMEA (SALES OFFICE)

Hammond Power Solutions SpA

Tel: +49 (152) 08800468

sales-emea@hammondpowersolutions.com



hammondpowersolutions.com



CENTRP-BBH2-EN
May 2025

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com