

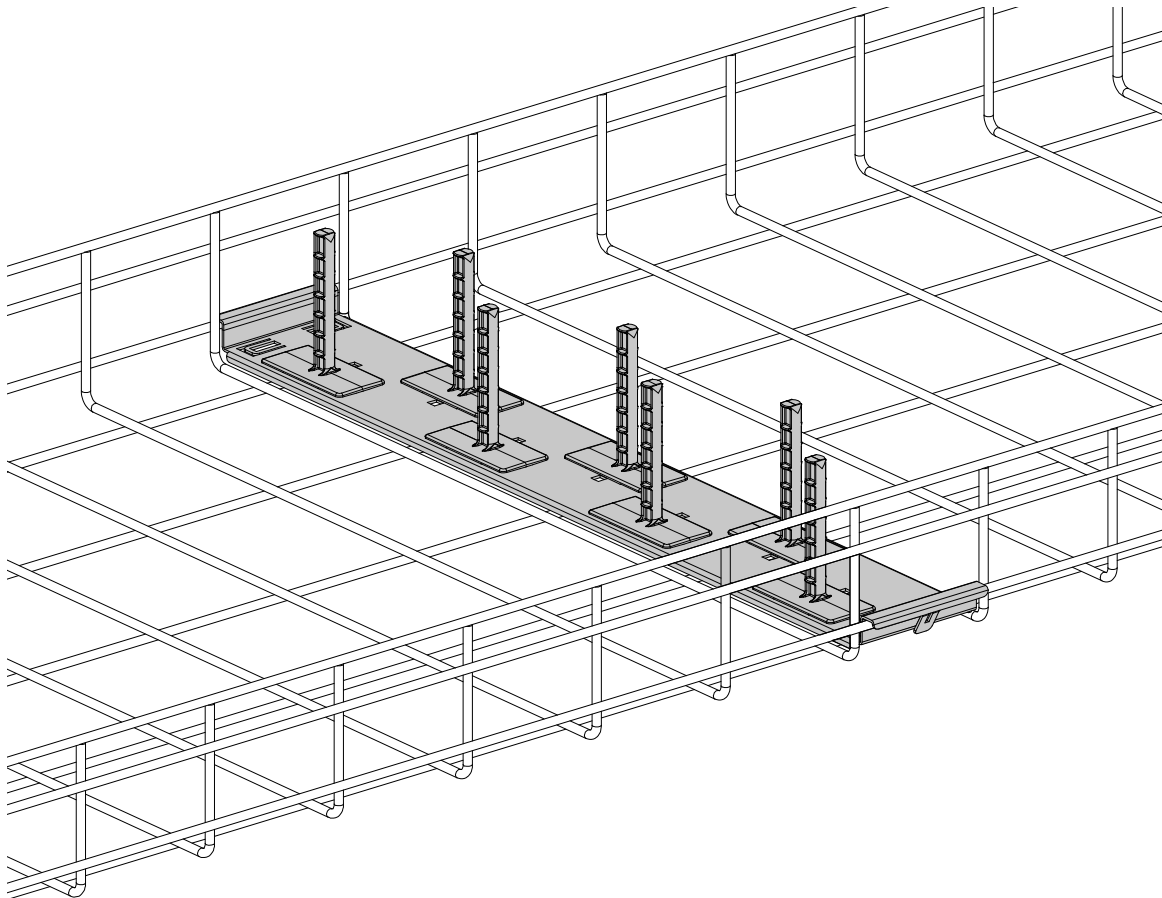


PWBCOP24PG

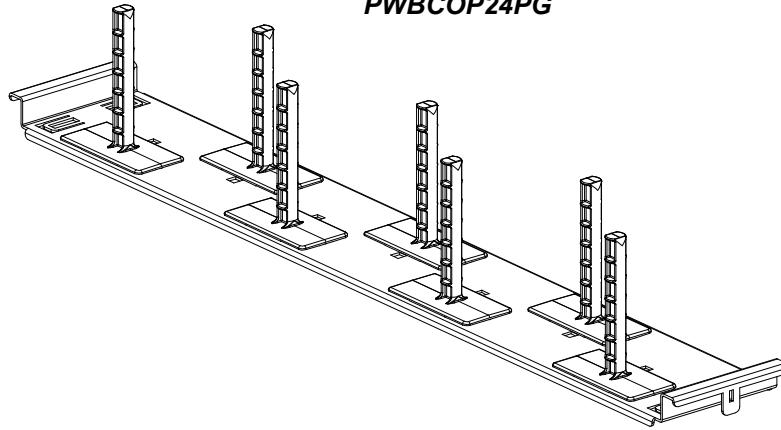


Installing In-Line Cable Organizer to Wire Basket

1

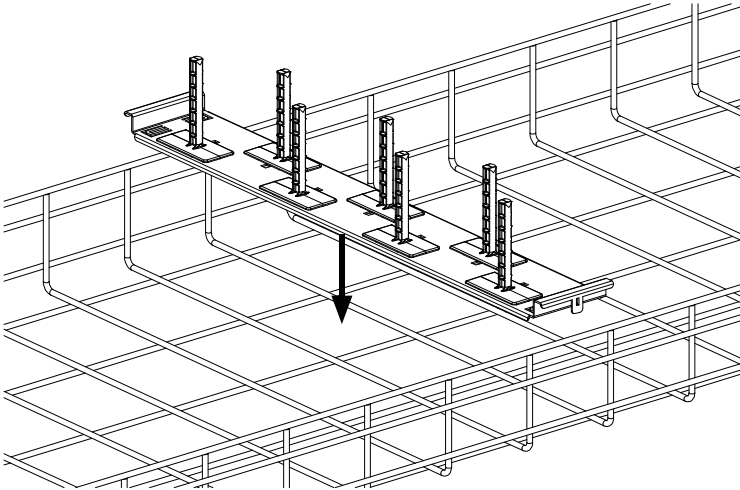


2

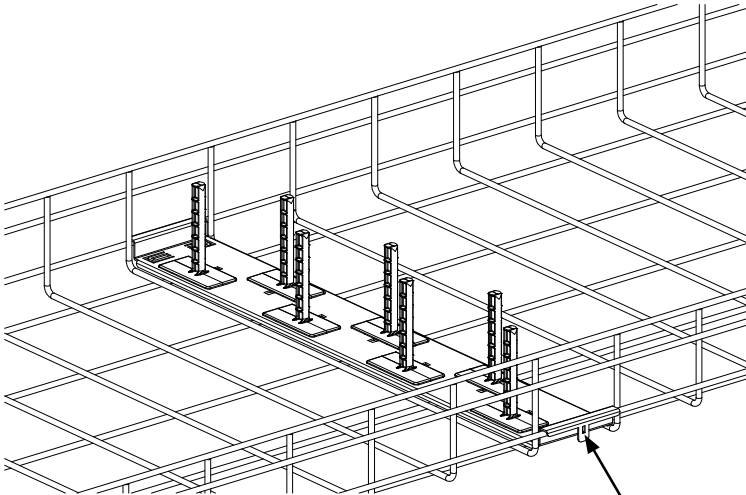


Bend tabs with screw driver to secure PWBCOP**PG to Wire Basket.

3

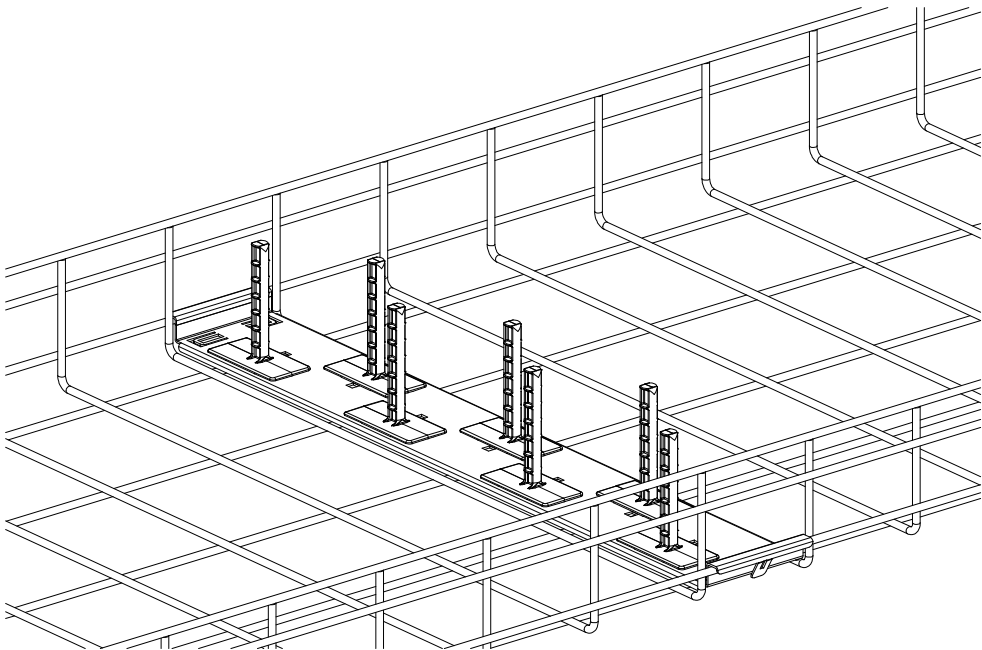


Installing In-Line Cable Organizer to Wire Basket Sidewall

1

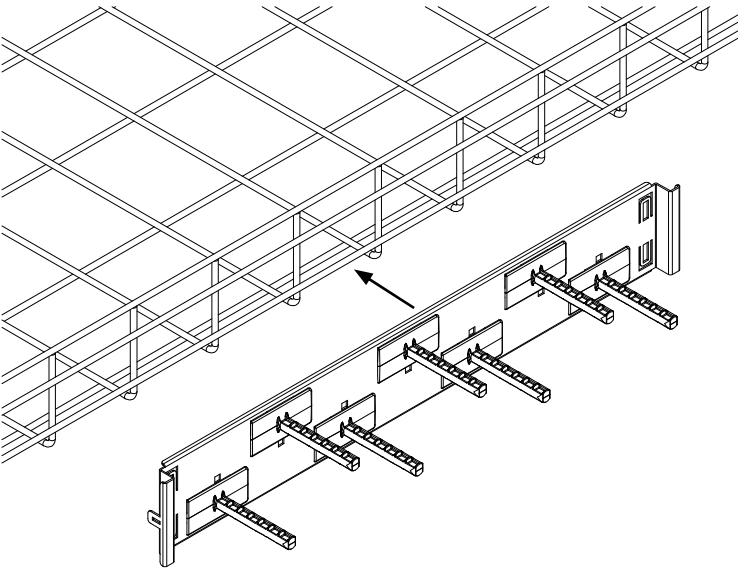


2

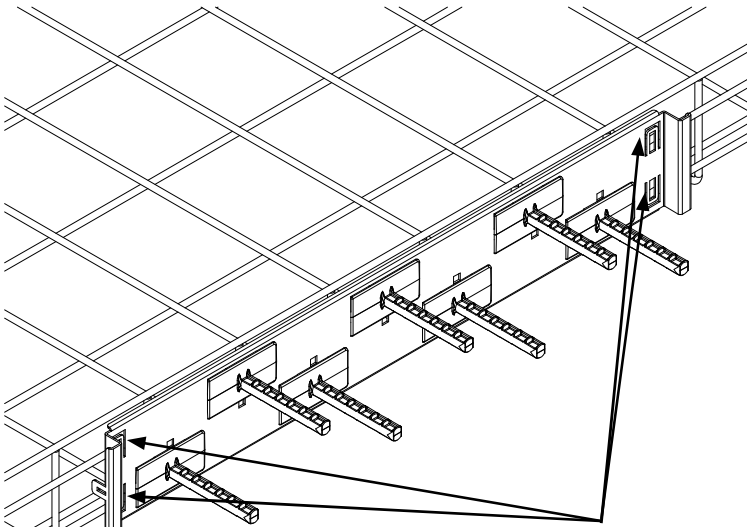


Bend tabs with screw driver to secure PWBCOP**PG to Wire Basket sidewall.


3

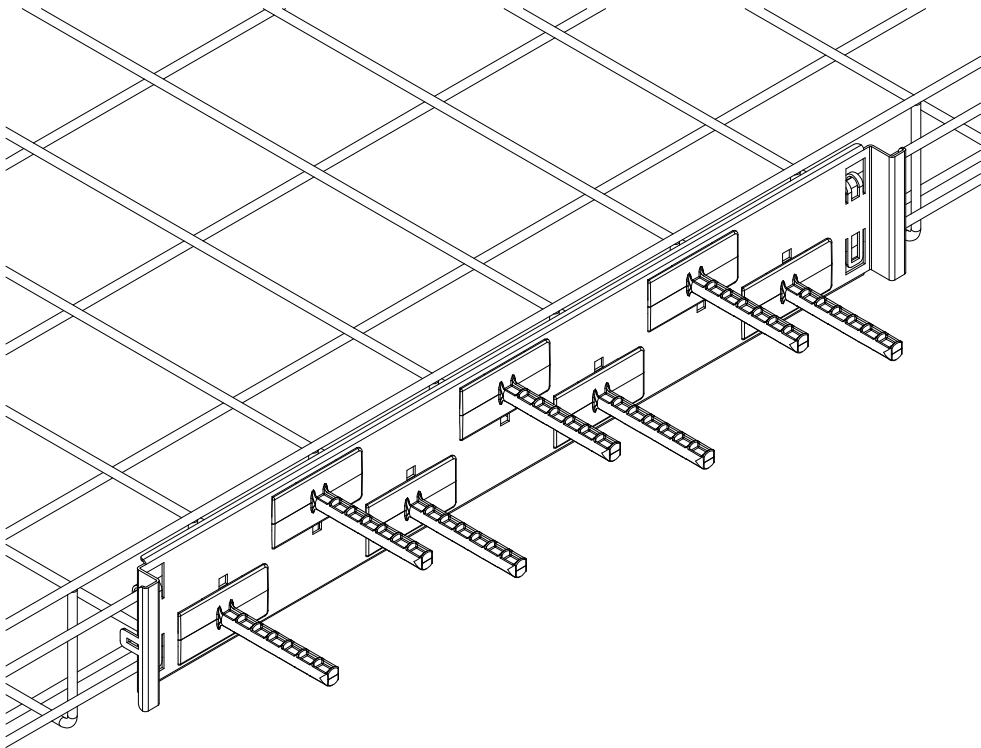

Removal of 4" Post

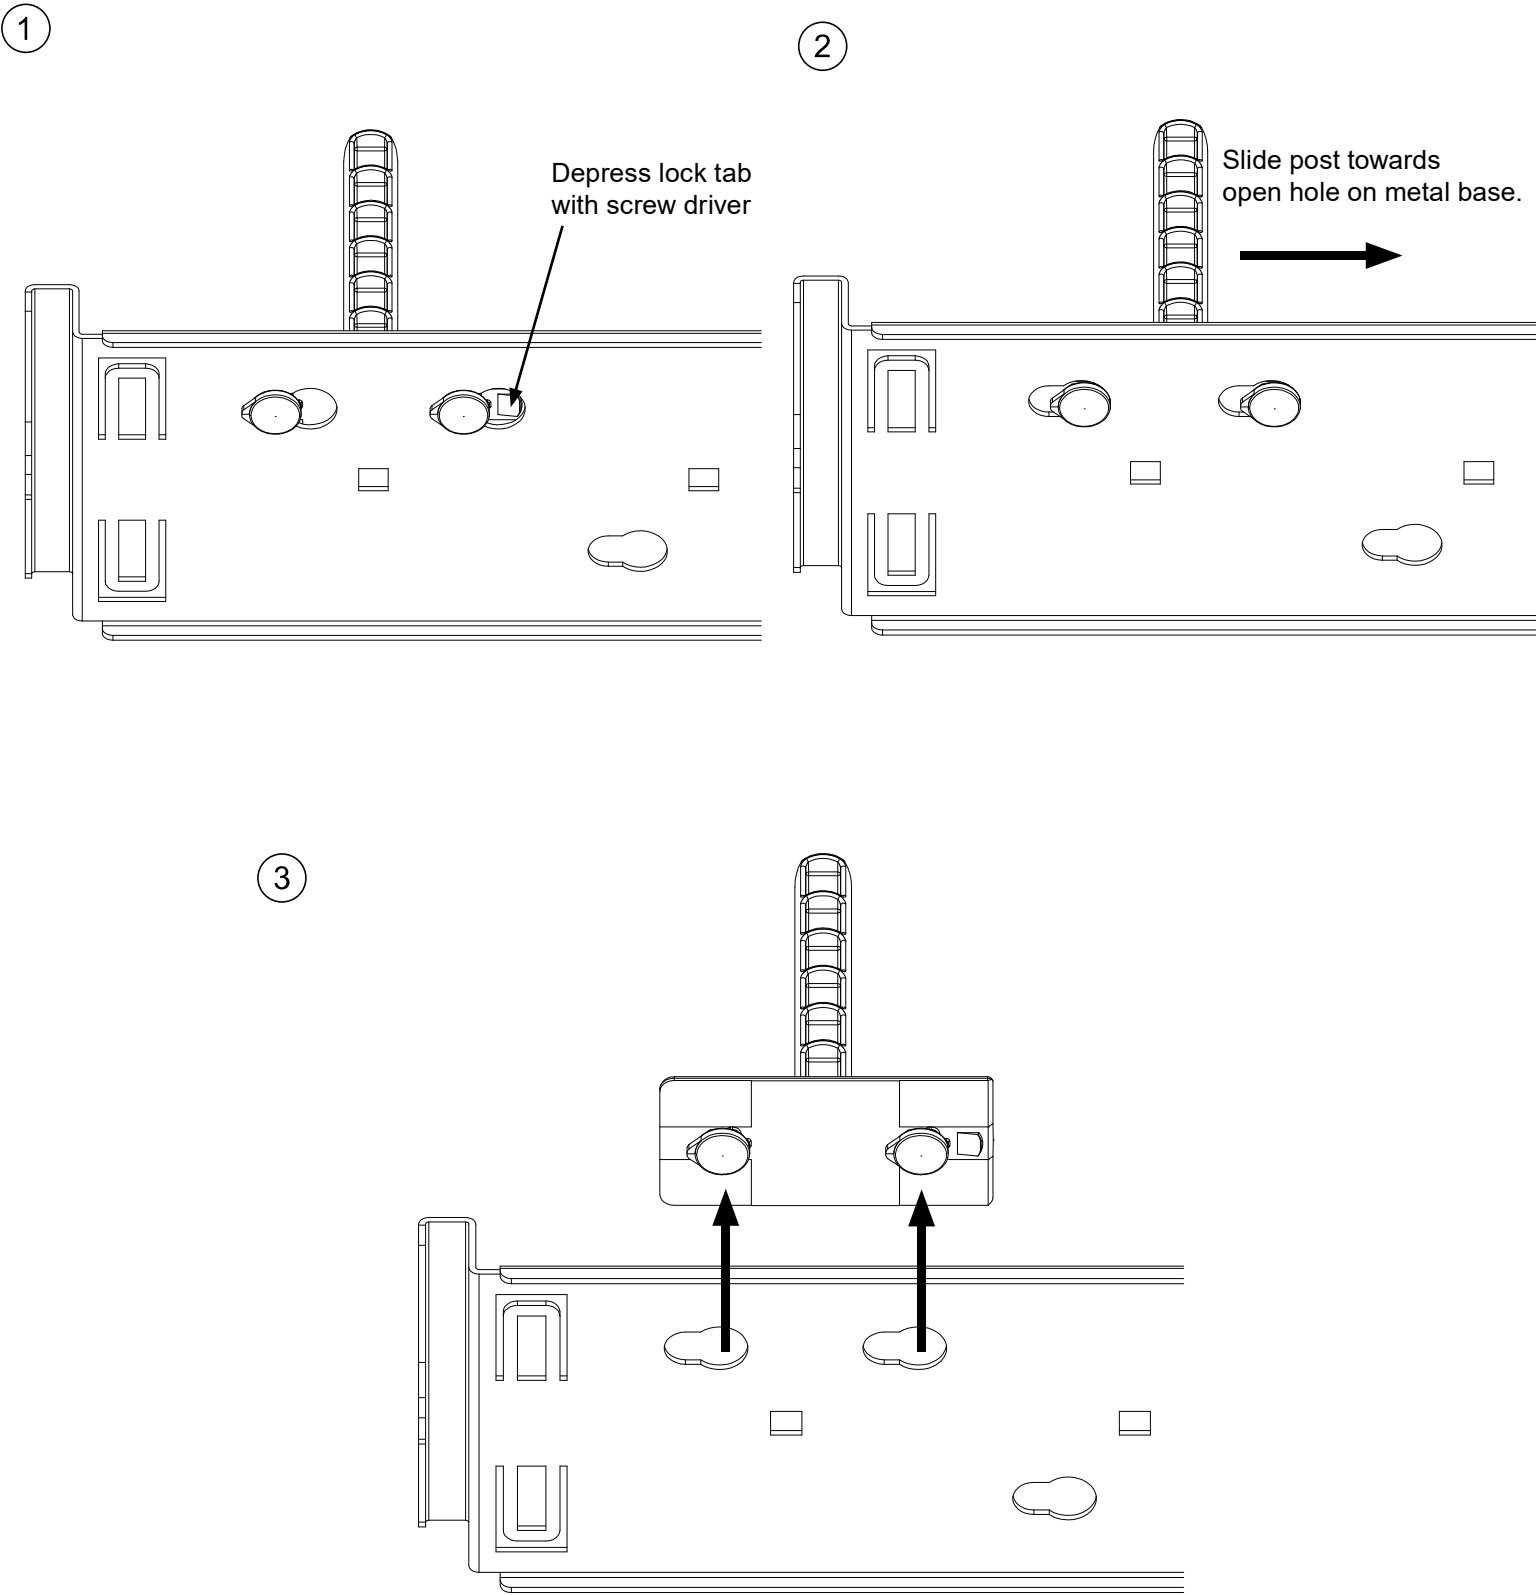

Cable Lane

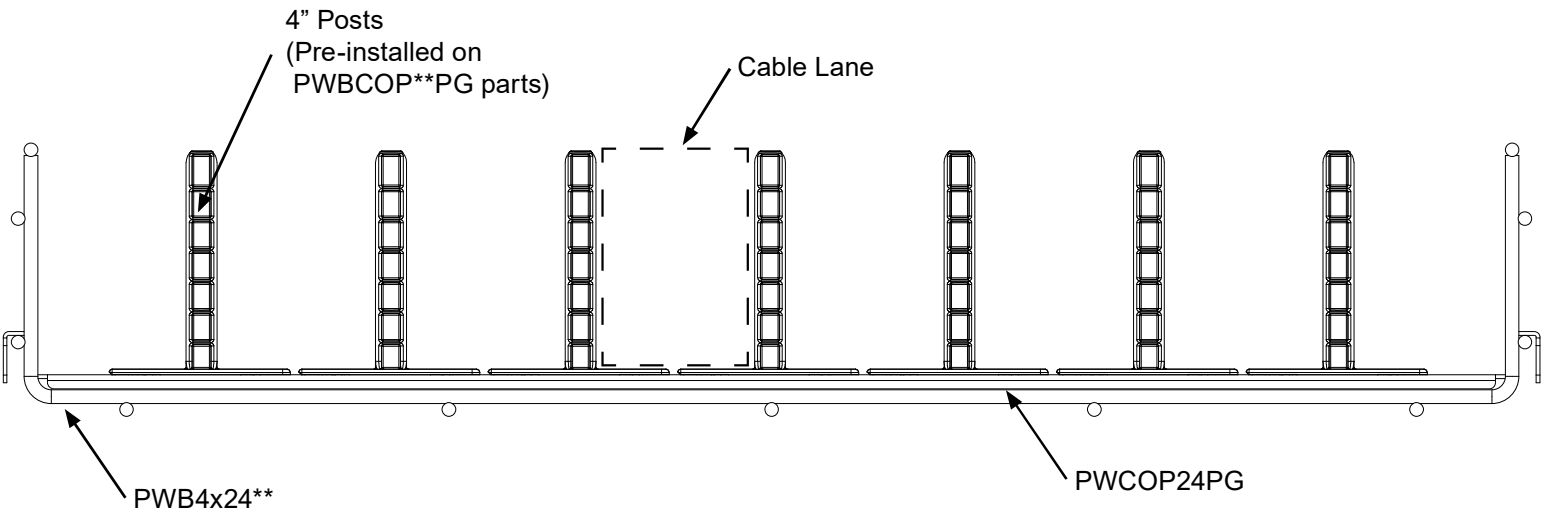

Panduit P/N:	Maximum Number of Cable Lanes
PWBCOP12PG	4
PWBCOP18PG	6
PWBCOP24PG	8
PWBCOP30PG	10
PWBCOP36PG	12

Cable Lane Area

PWB Size	Area Per Number of 4" Posts (in ²)											
	0	1	2	3	4	5	6	7	8	9	10	11
2X12	18.63	17.63	16.63	15.62	-	-	-	-	-	-	-	-
4X12	41.01	39.09	37.16	35.24	-	-	-	-	-	-	-	-
6X12	63.39	61.47	59.54	57.62	-	-	-	-	-	-	-	-
2X18	28.12	27.11	26.10	25.08	24.07	23.06	-	-	-	-	-	-
4X18	61.90	59.97	58.04	56.11	54.17	52.24	-	-	-	-	-	-
6X18	95.68	93.76	91.82	89.89	87.95	86.02	-	-	-	-	-	-
2X24	37.61	36.61	35.61	34.60	33.59	32.59	31.58	30.58	-	-	-	-
4X24	82.79	80.87	78.95	77.02	75.09	73.17	71.24	69.31	-	-	-	-
6X24	127.97	126.06	124.13	122.20	120.27	118.34	116.42	114.49	-	-	-	-
2X30	47.10	46.10	45.10	44.09	43.08	42.08	41.07	40.07	39.06	38.06	-	-
4X30	103.68	101.76	99.84	97.91	95.98	94.06	92.13	90.20	88.27	86.36	-	-
6X30	160.27	158.35	156.41	154.49	152.56	150.64	148.71	146.78	144.86	142.94	-	-
2X36	56.59	55.58	54.59	53.58	52.57	51.57	50.56	49.56	48.55	47.55	46.54	45.53
4X36	124.57	122.65	120.73	118.80	116.87	114.95	113.02	111.09	109.16	107.25	105.32	103.39
6X36	192.56	190.64	188.71	186.78	184.85	182.93	181.00	179.08	177.15	175.23	173.30	171.37

For Instructions in Local Languages
and Technical Support:

www.panduit.com

PANDUIT
www.panduit.com

E-mail:
techsupport@panduit.com

Phone:
866-405-6654