

Installation Instructions

VBRACKET 3P12.5kA

DANGER

All apparatus must be de-energized during installation or removal of part(s).

All apparatus must be installed and operated in accordance with individual user, local, and national work rules. These instructions do not attempt to provide for every possible contingency.

Do not touch or move energized products.

Excess distortion of the assembled product may result in its failure.

Inspect parts for damage, rating and compatibility with mating parts.

FOR MORE INFORMATION ON PARTS, INSTALLATION RATINGS AND COMPATIBILITY, CALL THE NEAREST ELASTIMOLD OFFICE.

This product should be installed only by competent personnel trained in good safety practices involving high voltage electrical equipment. These instructions are not intended as a substitute for adequate training or experience in such safety practices.

Failure to follow these instructions will result in damage to the product and serious or fatal injury.


If this product is supplied with a protective shipping cover(s), remove this shipping cover(s) and replace with the appropriate HV insulated cap(s) or connector(s) before submerging or energizing the circuit.

IMPORTANT

1. Check contents of package to ensure they are complete and undamaged.
2. Check all components to ensure proper fit with cable and/or mating products.
3. Read entire installation instructions before starting.
4. Have all required tools at hand and maintain cleanliness throughout the procedure.


STEP 1

Remove feet from the bracket.

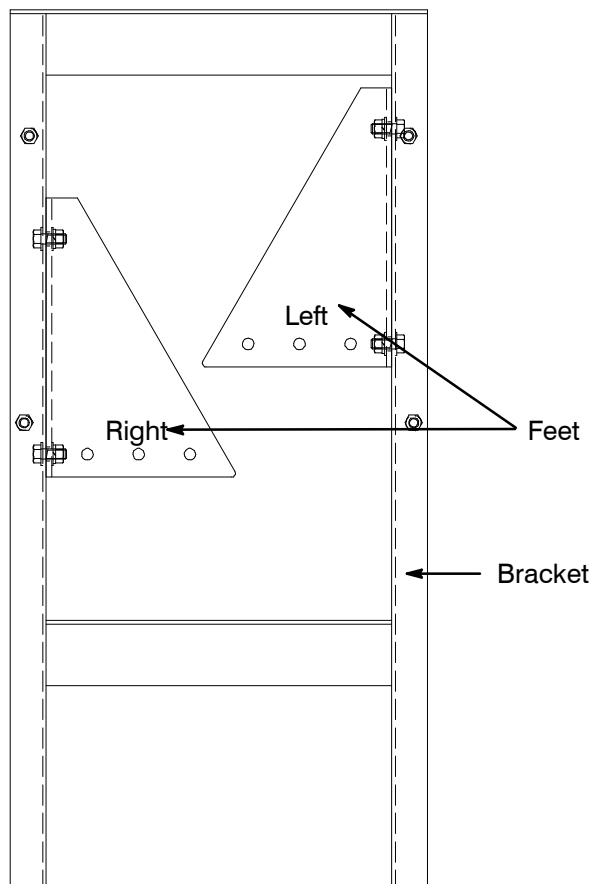


STEP 2

Attach feet using hex bolt, washer, lockwashers and nut. Tighten to 25/30 FT/LBS torque.

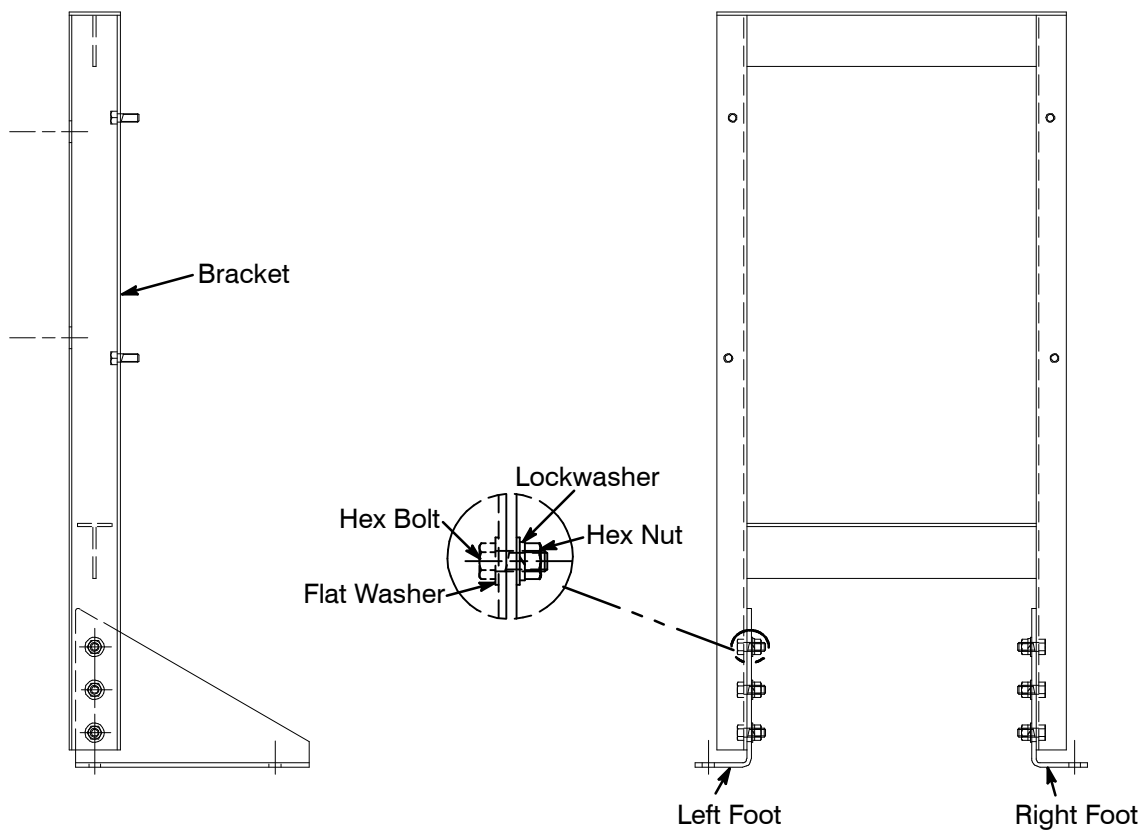

STEP 3

Attach the bracket to the wall and floor using customer supplied bolts.

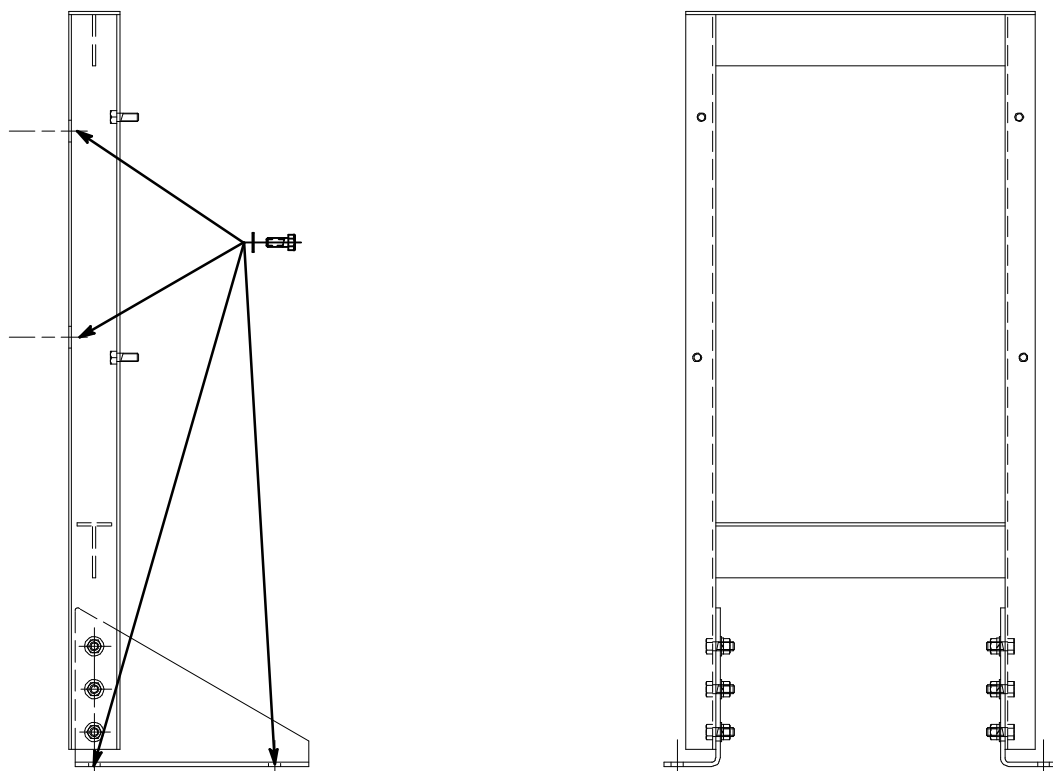

STEP 4

Place switch on (4) studs on the bracket, install flat washer, lockwasher and hex nut and tighten to 25/30 FT/LBS torque.

