

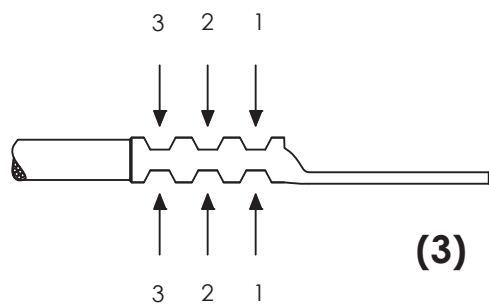
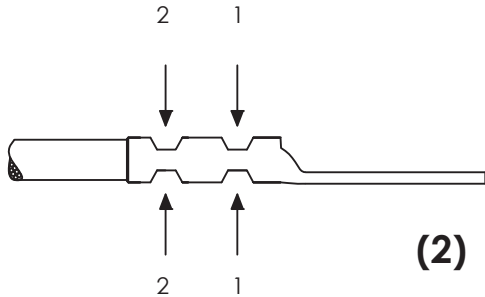
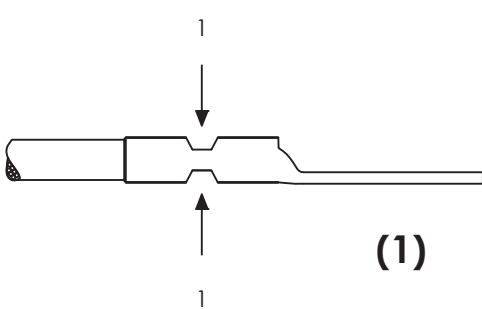
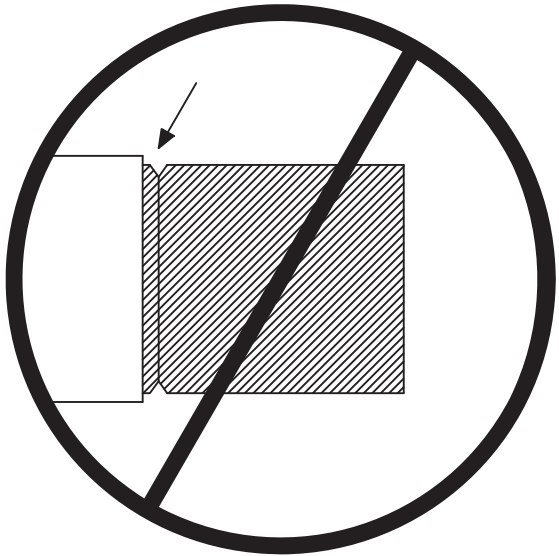


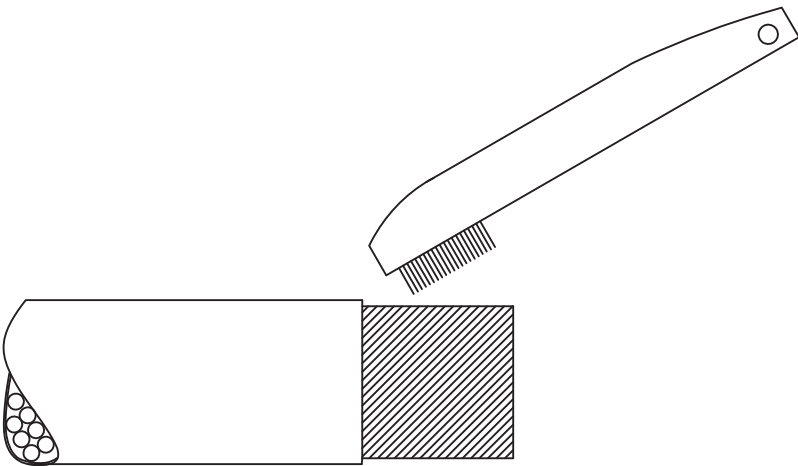

304-PC

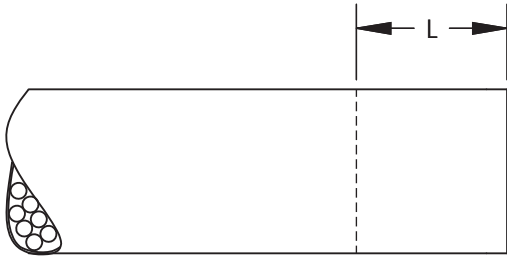

Using installation tooling shown on other side, insert connector in die and crimp between color bands or knurl markings, use these markings as a guide to evenly space crimps on barrel of connector. Begin crimping near the tongue end of the lug and continue crimping toward the wire end.

IMAGES ABOVE DEPICT CRIMP ZONES, AND SERVE AS A GENERAL GUIDELINES FOR THE CRIMP AREA. REQUIRED NUMBER OF COMPRESSIONS SHOWN ON TOOL CHART IN () ON PAGE 2 BASED ON TOOL AND DIE COMBINATION USED.

After crimping, inspect for sharp edges, flash or burrs and remove if present.

Tool Chart for Compression Connectors Type S-R with Copper Cable

			CT-1700①	CT-720	CT-810 ④	CT-1250 ④	CT-2600/L CT-2600/LINT CT-2600/LUK CT-2600/LAUS CT-2600/TO CT-2600/LBT	A See Tool List Below	B See Tool List Below	C See Uni-Die™ Dieless Tools Below	CT-3980 CT-3980/INT CT-3980/UK CT-3980/AUS CT-3980/TO CT-3980/STBT Uni-Die™ Dieless Tool
Panduit Part Number	Std. Wire Size	Wire Strip Length	Panduit Die Part Number Die Index Number (Number of Crimps)								
S8	#8 AWG	7/16"	P21 (2)	CD-720-1 P21 (1)	8 AWG Red (1)	----	KC4-8 Red (1)	CD-2001-8-SET P21 (1)	CD-920-8 P21 (1)	----	STD (1)
S6	#6 AWG	1/2"	P24 (2)	CD-720-1 P24 (1)	6 AWG Blue (1)	----	KC4-6 Blue (1)	CD-2001-6-SET P24 (1)	CD-920-6 P24 (1)	----	STD (1) #4 AWG STR, #2 AWG SOL
S4	#4 AWG	1/2"	P29 (2)	CD-720-1 P29 (1)	4 AWG Gray (1)	----	KC4-4 Gray (1)	CD-2001-4-SET P29 (1)	CD-920-4 P28 (1)	STD (1)	STD (1)
S2	#2 AWG	5/8"	P37 (3)	CD-720-2 P37 (1)	2 AWG Brown (1)	----	KC4-2 Brown (1)	CD-2001-1-SET P37 (1)	CD-920-1 P37 (1)	STD (1)	STD (1)
	#1 AWG	5/8"		CD-720-2 P37 (1)	1 AWG Green (1)	1 AWG Green (1)	KC4-2 Brown (1)	CD-2001-1-SET P37 (1)	CD-920-1 P37 (1)	STD (1)	STD (1)
S1/0	1/0 AWG	5/8"	----	CD-720-2 P42 (1)	1/0 AWG Pink (1)	1/0 AWG Pink (1)	KC4-1/0 Pink (1)	CD-2001-1/0-SET P42 (1)	CD-920-1/0 P42 (1)	STD (1)	STD (1)
S2/0	2/0 AWG	11/16"	----	CD-720-2 P45 (2)	----	2/0 AWG Black (2)	KC4-2/0 Black (2)	CD-2001-2/0-SET P45 (2)	CD-920-2/0 P45 (1)	STD (1)	STD (1)
S3/0	3/0 AWG	7/8"	----	CD-720-2 P50 (2)	----	----	KC4-3/0 Orange (2)	CD-2001-3/0-SET P50 (2)	CD-920-3/0 P50 (1)	STD (1)	STD (1)
S4/0	4/0 AWG	15/16"	----	CD-720-3 P54 (2)	----	4/0 AWG Purple (2)	KC4-4/0 Purple (2)	CD-2001-4/0-SET P54 (2)	CD-920-4/0 P54 (1)	STD (1)	STD (1)
S250	250 kcmil	1-1/16"	----	CD-720-3 P62 (2)	----	----	KC4-250 Yellow (2)	CD-2001-250-SET P62 (2)	CD-920-250 P62 (1)	STD (1)	STD (1)

①The CT-1700 crimp die pockets are integrated into the tool frame.

③CD-920 dies can be used with CT-940CH series and CT-2940 series tools with die adapter.

④ Rotate gauge selector to the indicated gauge setting

A CT-2001, CT-2001/L, CT-2001/LE, CT-2002, CT-2002/L, CT-2002CH, CT-3001, CT-3001/E, CT-3001/ST, CT-3001/STINT, CT-3001/STUK, CT-3001/STAU, CT-3001/STBT, CT-3001/TO, CT-3001/CCP, CT-3001/CCPINT, CT-3001/CCPUK, CT-3001/CCPAUS, CT-3001/CCPTO, CT-3001/CCPBT

B CT-920, CT-920/CV, CT-920CH, CT-920CH/CV, CT-920CH/CCP, CT-930, CT-930CH, CT-930LPCH, CT-940CH③, CT-940CH/BJO③, CT-2920, CT-2920/CCP, CT-2920/CCPINT, CT-2920/CCPUK, CT-2920/CCPAUS, CT-2920/CCPTO, CT-2920/CCPBT, CT-2930, CT-2930/L, CT-2930/LE, CT-2931, CT-2931/ST, CT-2931/STINT, CT-2931/STUK, CT-2931/STAU, CT-2931/TO, CT-2931/STCV, CT-2931/STBT, CT-2931/STCVINT, CT-2931/STCVUK, CT-2931/STCVAUS, CT-2931/CVTO, CT-2940③, CT-2940/L③, CT-2940/LE③, CT-2940/ST③, CT-2940/STINT③, CT-2940/STUK③, CT-2940/STAU③, CT-2940/TO③, CT-2940/STBT③

C CT-980, CT-980CH, CT-980LPCH, CT-2950, CT-2980, CT-2980/L, CT-2980/LE, CT-2980/ST, CT-2980/STINT, CT-2980/STUK, CT-2980/STAU, CT-2980/STBT, CT-2980/TO, CT-2981



For Instructions in Local Languages
and Technical Support:

techsupport@panduit.com

PANDUIT

www.panduit.com

E-mail:
cs@panduit.com

Phone:
800-777-3330