


VIEW ROTATED 180°



CAUTION LABEL 1 CAUTION LABEL 2

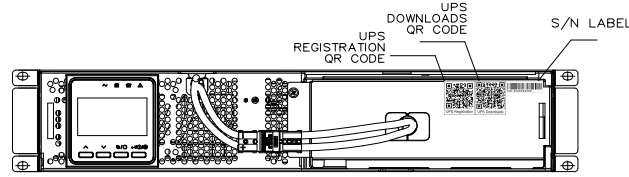

DETAIL A
SCALE 1:2

ENERGY STAR LABEL

SPECIFICATION:

1. STANDARD:

UPS TOPOLOGY: DOUBLE CONVERSION
KVA: 1
BATTERY TYPE: VALVE REGULATED LEAD ACID
FULL-LOAD RUN TIME (MIN): 6 MINUTES
INPUT PLUG: NEMA 5-15P
NOMINAL INPUT VOLTAGE: 100/110/115/120/125VAC
INPUT PHASE: SINGLE
OUTPUT PHASE: SINGLE
NOMINAL OUTPUT VOLTAGE: 100/110/115/120/125VAC
OUTLET TYPE AND QTY: NEMA 5-15R(6)
DISPLAY TYPE: 2.8 INCH, 4 BUTTON
PARALLEL PORT SUPPORT: NO
INPUT BREAKER TYPE: 16A PUSH BUTTON
OUTPUT BREAKER TYPE: N/A
WEIGHT OF Pb(LEAD): 5.1KG
WEIGHT OF H2SO4(SULFURIC ACID): 1.2KG

2. ADDITIONAL:

NONE

3. ACCESSORY COMPONENTS:


P/N U01N11V CONTAINS AN NETWORK MANAGEMENT CARD,(INSTALLED)
NETWORK CARD INCLUDES A SENSOR PORT RJ45 DUST COVER
STABILIZER BRACKET(WITH RUBBER CUSHION),QTY: (4)
INSTALLATION EARS,QTY: (2)
PRODUCT SAFETY WARNING SHEET,QTY: (1)
INCLUDES P/N:UVC036 INTERNAL BATTERY CARTRIDGE, QTY: (1),(INSTALLED)
INCLUDES P/N:URMKIT2 INSTALLATION RAIL KIT, QTY: (1),(U01N11V ONLY)
EPO PLUG WITH SHORTING WIRE,QTY: (1),(INSTALLED)
DOCUMENTATION KIT, QTY(1)
REFER TO ASSOCIATED DRAWINGS FOR PHYSICAL DIMENSIONS AND SPECIFICATIONS

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
U01S11V	STEADYSINE™ ON-LINE DOUBLE CONVERSION UPS, 1KVA, VRLA, 120V	18.1
U01N11V	STEADYSINE™ ON-LINE DOUBLE CONVERSION UPS, 1KVA, VRLA, 120V, NMC	21.6

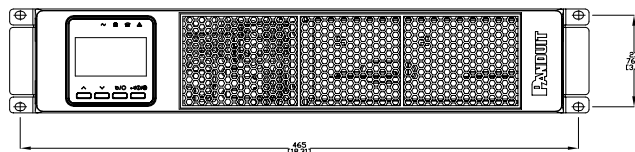

03A	05/08/2025	D.L.	MRWA /G.M	RR00/M.D	M.ADDED NO PHONE SYMBOL NEAR RJ45 SURGE PROTECTOR PORT N.REMOVED PANDUIT.COM/UPS QR CODE P.REMOVED C2-0364 NOTE 4 I.ADDED UPS REGISTRATION QR CODE & UPS DOWNLOADS QR CODE I.ADDED FACTORY ID # I.REMOVED FIRMWARE VERSION I.UPDATED EPO CONNECTOR I.ADDED INC SERVICE DUST COVER I.UPDATED PART DESCRIPTIONS	U01N11V
02A	06/04/2024	D.L.	WZH	GLM/D.B	F.REMOVED "SMARTZONE" FROM DRAWING G.GENERALIZED COUNTRY OF ORIGIN I.ADDED RUBBER CUSHION ON TOWER KIT I.REMOVED DRIP AND USB CABLE I.ADDED DOCUMENTATION KIT	U01N11V
01A	08/02/2022	D.L.	ZRZ	GLM/D.B	A.UPDATED DESCRIPTION B.ADD NOM TO COMPLIANCE LABEL C.UPDATED UI LOGO D.KIT WAS URMKIT1 E.NOTCH REMOVED IN METAL	U01N11V
00A	08/17/2021	D.L.	ZRZ	GLM/D.B	RELEASE TO PRODUCTION	U01N11V
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN



TITLE		UPS U01S11V/U01N11V CUSTOMER DRAWING
NEW NUMBER ONLY		U01S11V/U01N11V/03
REVISION FOR THIS DRAWING		U01S11V/U01N11V-DC/03A
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE IN (IN)		N/A
THIRD ANGLE PROJECTION		U01N11V-DC
DATE BY DATE		08/17/2021 /G.M
SCALE		VARIOUS
SHEET NUMBER		SHT 1 OF 2



UNINTERRUPTIBLE POWER SYSTEMS
MODEL NUMBER: 1B1V1A
INPUT: 100-125 VAC I 50/60Hz I 10.4 A Max. I 1PH+N+PE
BATTERY INPUT: 36 V === 50 A

OUTPUT: 100/110/115/120/125 VAC I 50/60Hz I 1PH+N+PE
1000VA/1000W, 8.0 A(@125VAC input)
1000VA/1000W, 8.3 A(@120VAC input)
1000VA/1000W, 8.7 A(@115VAC input)
1000VA/970W, 9.1 A(@110VAC input)
1000VA/860W, 10.0 A(@100VAC input)
Icc: 3 kA

PROHIBIDO SU USO EN EXTERIORES MADE IN xxx
FACTORY ID: VN063 HECHO EN xxx

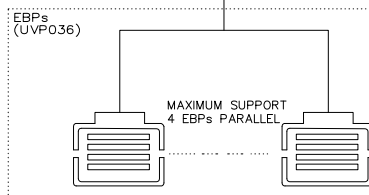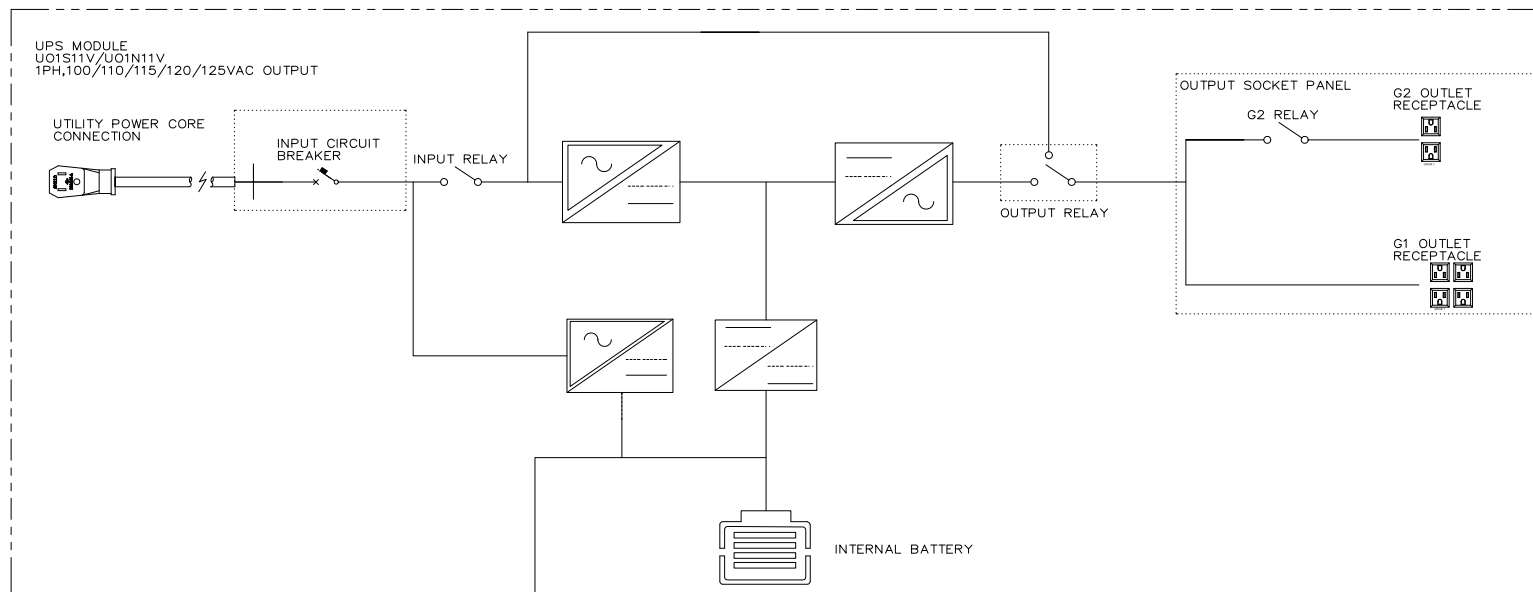

LEGEND			
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER
	RELAY		DC-AC CONVERTER (INVERTER)
	DC-DC CONVERTER		AC-DC CHARGE
			BATTERY

				FILE			
				UPS			
				U01S11V/U01N11V			
				CUSTOMER DRAWING			
				U01S11V/U01N11V/03			
				U01S11V/U01N11V-DC/03A			
				UNLESS OTHERWISE SPECIFIED			
				DIMENSIONAL TOLERANCES ARE IN (IN)			
				THIRD ANGLE PROJECTION			
				U01N11V-DC			
				SHT 2 OF 2			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	
				SEE SHEET 1 FOR CHANGES			