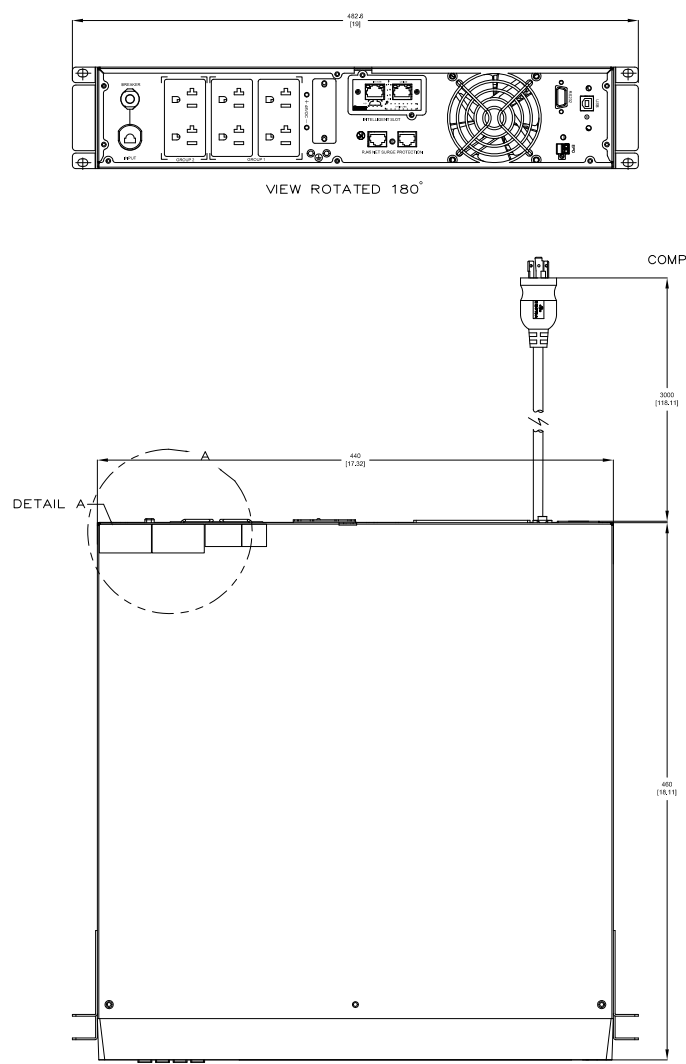


SPECIFICATION:

1. STANDARD:

UPS TOPOLOGY:	DOUBLE CONVERSION
KVA:	2
BATTERY TYPE:	VALVE REGULATED LEAD ACID
FULL-LOAD RUN TIME (MIN):	2.9 MINUTES
INPUT PLUG:	NEMA 5-20P
NOMINAL INPUT VOLTAGE:	100/110/115/120/125VAC
INPUT PHASE:	SINGLE
OUTPUT PHASE:	SINGLE
NOMINAL OUTPUT VOLTAGE:	100/110/115/120/125VAC
OUTLET TYPE AND QTY:	NEMA 5-20R(6)
DISPLAY TYPE:	2.8 INCH, 4 BUTTON
PARALLEL PORT SUPPORT:	NO
INPUT BREAKER TYPE:	25A PUSH BUTTON
OUTPUT BREAKER TYPE:	N/A
WEIGHT OF Pb(LEAD):	6.8KG
WEIGHT OF H2SO4(SULFURIC ACID):	1.6KG



2. ADDITIONAL:
NONE

3. ACCESSORY COMPONENTS:
P/N U02N11V CONTAINS AN NETWORK MANAGEMENT CARD,(INSTALLED)
NETWORK CARD INCLUDES A SENSOR PORT RJ45 DUST COVER
STABILIZER BRACKET(WITH RUBBER CUSHION),QTY:(4)
INSTALLATION EARS,QTY:(2)
PRODUCT SAFETY WARNING SHEET,QTY:(1)
INCLUDES P/N:UVC048 INTERNAL BATTERY CARTRIDGE, QTY:(1),(INSTALLED)
INCLUDES P/N:URMKIT2 INSTALLATION RAIL KIT, QTY:(1),(U02N11V ONLY)
EPO PLUG WITH SHORTING WIRE,QTY:(1),(INSTALLED)
DOCUMENTATION KIT, QTY(1)
REFER TO ASSOCIATED DRAWINGS FOR PHYSICAL DIMENSIONS AND SPECIFICATIONS

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT.

IDENTIFICATION:		
PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
U02S11V	STEADYSINE™ ON-LINE DOUBLE CONVERSION UPS, 2KVA, VRLA, 120V	23.5
U02N11V	STEADYSINE™ ON-LINE DOUBLE CONVERSION UPS, 2KVA, VRLA, 120V, NMC	23.9

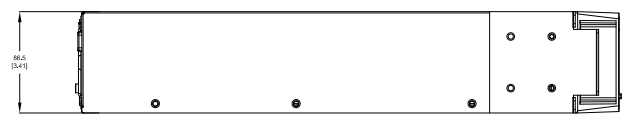
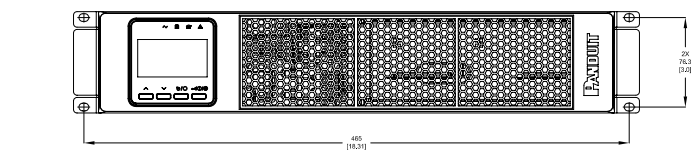


03A	05/08/2025	D.L.	MRWA /G.M	RR00/M.D	M ADDED NO PHONE SYMBOL NEAR RJ45 R REMOVED PROTECTION PORTS R REMOVED PANDUIT.COM/UPS QR CODE P REMOVED CD-104 NOTE, 4 P ADDED UPS REGISTRATION OR CODES UPS DOWNLOADS QR CODE P ADDED FRAME VERSION P ADDED FACTORY ID # U UPDATED EPO CONNECTOR V ADDED NMC SENSOR E-PO U UPDATED TO COMPLIANCE LABEL W UPDATED PART DESCRIPTIONS	U02N11V	FILE UPS U02S11V/U02N11V CUSTOMER DRAWING NEW NUMBER ONLY U02S11V/U02N11V/03 U02S11V/U02N11V-DC/03A UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE IN (IN) N/A THIRD ANGLE PROJECTION U02N11V-DC REV DATE BY CHK APR DESCRIPTION ECN 08/17/2021 08/17/2021 U02N11V VARIOUS SHT 1 OF 2 2
02A	06/04/2024	D.L.	W.DH	GLM/D.B	F REMOVED "SMARTZONE" FROM DRAWING G GENERALIZED COUNTRY OF ORIGIN J ADDED RUBBER CUSHION ON TOWER KIT J REMOVED DES AND USB CABLE L ADDED DOCUMENTATION KIT	U02N11V	
01A	08/02/2022	D.L.	Z.RZ	GLM/D.B	A UPDATED DESCRIPTION B ADD NOM TO COMPLIANCE LABEL C UPDATED UL LOGO D KIT WAS URMKIT2 E NOTCH REMOVED IN METAL	U02N11V	
00A	06/17/2021	D.L.	Z.RZ	GLM/D.B	RELEASE TO PRODUCTION	U02N11V	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	



PROHIBIDO SU USO EN EXTERIORES
FACTORY ID: VN063

MADE IN xxx
HECHO EN xxx

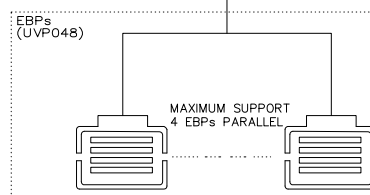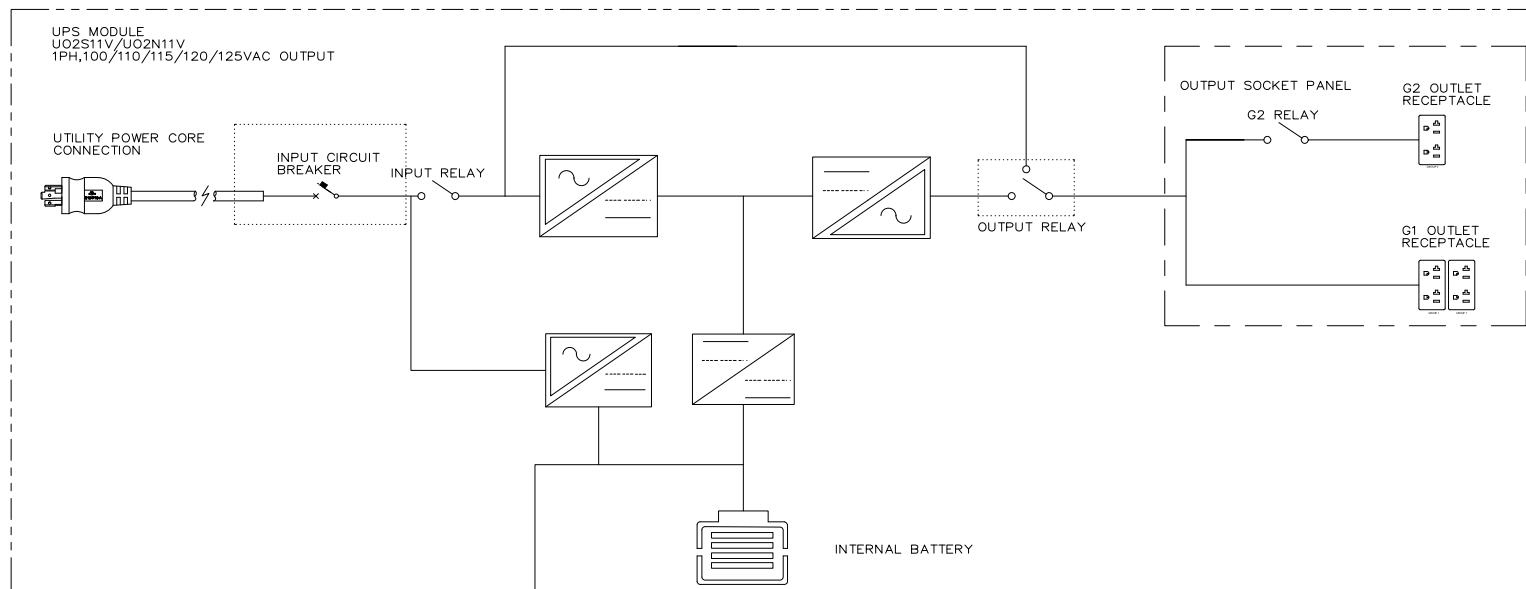

LEGEND			
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER
	RELAY		DC-AC CONVERTER (Inverter)
	DC-DC CONVERTER		AC-DC CHARGE
			BATTERY

[illegible]