


VIEW ROTATED 180°

S/N LABEL

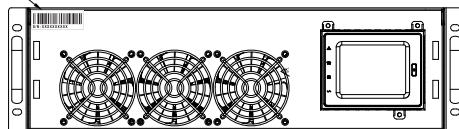

SEE BATTERY CHASSIS ON SHEET 3

CAUTION LABEL 1 CAUTION LABEL 2


COMPLIANCE LABEL



DETAIL A
SCALE 1: 3


INPUT		GROUP1	
L	N	Ⓢ	L

DETAIL B
SCALE 1: 3

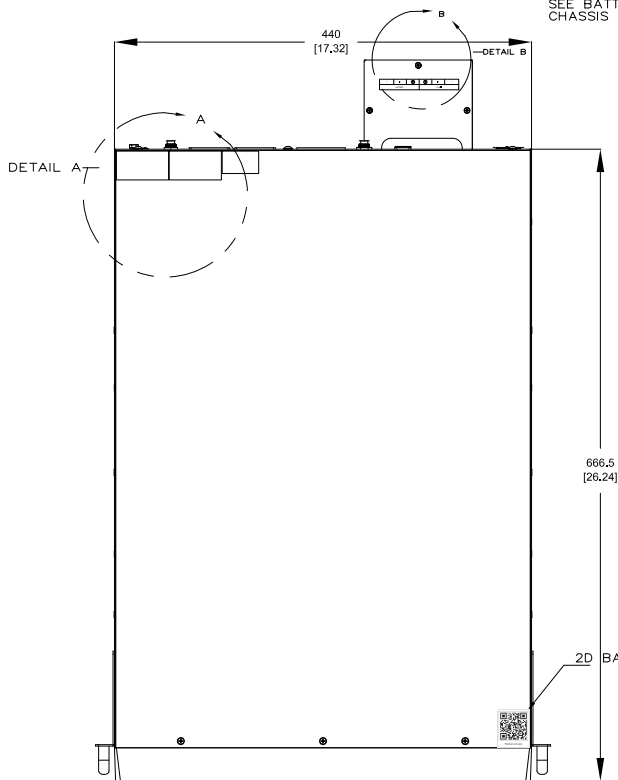


666.5
[26.24]

2D BARCODE LABEL

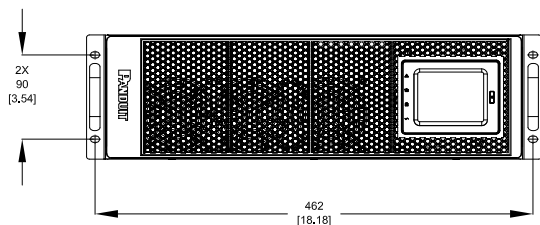

2X
90
[3.54]

462
[18.18]

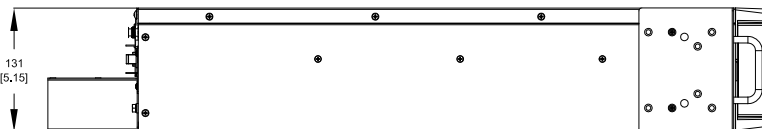

131
[5.15]

SPECIFICATION:

1. STANDARD:

UPS TOPOLOGY:	DOUBLE CONVERSION
KVA:	6
BATTERY TYPE:	VALVE REGULATED LEAD ACID
FULL-LOAD RUN TIME (MIN):	9.7 MINUTES WITH ONE EBP CONNECTED
INPUT PLUG:	TERMINAL CONNECTION(L+N+G)
NOMINAL INPUT VOLTAGE:	220/230/240VAC
INPUT PHASE:	SINGLE
OUTPUT PHASE:	SINGLE
NOMINAL OUTPUT VOLTAGE:	220/230/240VAC
OUTLET TYPE AND QTY:	IEC-C13(2)+IEC-C19(2)+HARDWIRE TERMINAL CONNECTION (L+N+G)
DISPLAY TYPE:	3.5 INCH TOUCH SCREEN
PARALLEL PORT SUPPORT:	NO
INPUT BREAKER TYPE:	40A TOGGLE
OUTPUT BREAKER TYPE:	16A(1)+10A(1) PUSH BUTTON
WEIGHT OF Pb(LEAD):	34KG
WEIGHT OF H2SO4(SULFURIC ACID):	8KG

2. ADDITIONAL:

NONE

3. ACCESSORY COMPONENTS:

P/N U06N12V CONTAINS AN INTELLIGENT NETWORK CARD(INSTALLED)
STABILIZER BRACKET(WITH RUBBER CUSHION), QTY:(4)
STABILIZER BRACKET CONNECTORS(WITH RUBBER CUSHION), QTY:(2)
INSTALLATION EARS, QTY:(2)
PRODUCT SAFETY WARNING SHEET,QTY:(1)
INCLUDES P/N:UVP240 EXTERNAL BATTERY PACK, QTY:(1),(IN A SEPARATE CARTON) SHEET 3
INCLUDES P/N:URMKIT2 INSTALLATION RAIL KIT, QTY:(1)
REFER TO ASSOCIATED DRAWINGS FOR PHYSICAL DIMENSIONS AND SPECIFICATIONS
EPO PLUG WITH SHORTING WIRE,QTY:(1),(INSTALLED)
MBS PLUG WITH SHORTING WIRE,QTY(1)(INSTALLED)
DOCUMENTATION KIT, QTY(1) - TO BE PLACED ON TOP OF ALL PACKAGING MATERIAL

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT.
4. ALL PURCHASED ITEMS CONFORM TO C2-0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT(INCLUDES EXTERNAL BATTERY PACK) (KG)
U06S12V	UPS, 6kVA, 6U (3U UPS + 3U EBP), 230V, SINGLE PHASE, DOUBLE-CONVERSION ON-LINE POWER PROTECTION	99.9
U06N12V	UPS, 6kVA, 6U (3U UPS + 3U EBP), 230V, SINGLE PHASE, DOUBLE-CONVERSION ON-LINE POWER PROTECTION WITH INTELLIGENT NETWORK CARD	103.4

				U06N12V		U06S12V/U06N12V	
				U06N12V		U06S12V/U06N12V-03	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V		U06S12V/U06N12V-DC/03A	
				U06N12V			



COMPLIANCE LABEL

DETAIL A
SCALE 1:2

DETAIL A
SCALE 1:2



1