

HIGH PRECISION HIGH QUALITY

M593-C

For 90 years, MITSUBOSHI has grown to be one of the world's largest belt manufacturers.

Mitsuboshi Belting Ltd. began business in Kobe, Japan, in 1919. Over the years sales and service have been strengthened, business has grown together with its markets, and production systems have continuously improved.

Today Mitsuboshi Group operates around the world, and looking into the 21st century and beyond, we see the group becoming an important contributor to more affluent lifestyles worldwide.



MBL (USA) CORPORATION

601 Dayton Road, Ottawa, IL 61350

Phone: (815) 434-1282

Toll Free Call: (877) 625-7832

Fax: (815) 434-2897

sales@mblyusa.com

www.mblusa.com

M5930101402US ① 676896
Printed in the USA

MITSUBOSHI

**HEAVY DUTY
BELTS**



HIGH PERFORMANCE HIGH PRECISION

HIGH QUALITY HIGH PERFORMANCE




Around the Globe the World's Best Companies Trust Mitsuboshi to Provide Industry Leading Belting Products...You Should Too!

Established in 1973, MBL (USA) Corporation has enjoyed continuous growth through the years. This growth and increasing demand for MBL (USA) quality products provided the base for construction of the Illinois Manufacturing Plant which began production in March, 1988.

Belts manufactured at this plant include all types of V-Belts, V-Ribbed Belts and Raw Edge Belts for both original equipment and service parts in the heavy duty automotive and industrial markets. In addition to supplying the North America Market, products are exported to many countries worldwide.

MBL (USA) has been the recipient of numerous quality and service awards from the world-class companies it supplies. The consensus of customers and visitors from major corporations around the world has been that this plant is truly world class in all areas - technology, equipment, automation, process control, quality control and the like.

Mitsuboshi maintains the most strict quality standards; our domestic and over-seas factories have obtained ISO 9001 or ISO/TS 16949 quality certification in addition to ISO 14000 environmental certification.

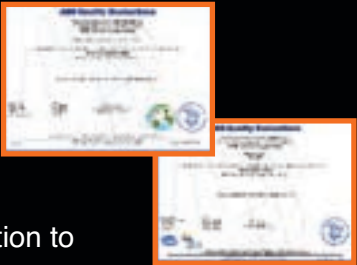

Raw-Edge Cogged & Raw-Edge Banded Cogged A proven, cost-effective design that is the preferred option on many applications

Popular on trucks, agricultural units, heavy equipment and other applications where large gasoline and diesel engines are used

Optimum flexibility provides greater heat dissipation which insures longer operational efficiency. Cogged design provides area for air circulation further reducing heat build-up and provides greater flexibility

Variable spacing of cogs provides improved belt performance by reducing noise and tension decay

Laminated construction of the bottom fabric reduces noise in the drive that is inherently loud



Still maintains a strong replacement market for older cars produced before v-ribbed belts were introduced

CONSTRUCTION



Strong, wear resistant bias cut fabric designed for protection without loss of flexibility



High tensile strength, pre-stretched polyester cords for reduced stretching and constant tension



Reinforced with fiber chips to provide high coefficient of friction, wear resistance and greater flexibility. Insures a smooth and even transfer of load forces to the cords



Crack resistant, highly flexible fabric is impregnated with oil and heat resistant rubber compound. Laminated construction insures a strong bond and reduced noise



Eliminate slip and maintain a positive contact with the pulley grooves for constant, reliable energy transfer

V-Ribbed Belts combine the benefits of flat belt flexibility with the power transmission capability of the v-belt

V-Ribbed Belts provide the ultimate in belt design for use on today's modern engines where space and weight are critical



Accessories can be driven from the top or bottom side of the belt enabling compact designs



Top or backside ribs are capable of handling high load accessories

Rubber compounds are formulated to reduce noise caused by humid conditions and worn pulleys



Proven reliability on drives with or without automatic tensioners

Optimum flexibility provides greater heat dissipation which insures longer operational efficiency for one belt drive systems

CONSTRUCTION



Flexible, bias cut fabric is impregnated with oil and heat resistant rubber to eliminate wear and cracking



Cords are enclosed in an oil and heat resistant rubber compound with strong adhesive qualities for maximum cord support and long life



High tensile strength aramid or pre-stretched polyester cords insure high horsepower capacity and constant belt tension on spring tension systems and locked center drives



Specially designed EPDM heat resistant compound, reinforced with fiber to insure extended life, maximum wear resistance, and reduce noise for most applications