

Power Semiconductor

Selection Guide

A comprehensive portfolio of power semiconductor technology in industry standard and innovative packages

Table of Contents

About this guide

This selection guide offers a comprehensive look at the breadth and depth of the IXYS: A Littelfuse Technology power semiconductor and control IC portfolio. From milliwatt to gigawatt system solutions and everything in between, we've got the devices that meet your needs.

Featured Packages	4	IGBT Modules	99
PressFit-Pin.....	4	Six Pack.....	99
High-voltage / ISO- Discrete.....	5	Buck / Boost / Phase Leg	102
TO-247-4L.....	10	Rectifier Modules	103
ISOPLUS-SMPD™.....	11	Diode Modules – Single and Dual	104
ISOPLUS-DIL™ / ISOPLUS i4-PAC™	16	Thyristor / Diode Modules	107
Power MOSFET	20	Thyristor Modules – Single and Dual.....	110
Nomenclature	20	Bridges with Fast Diodes	115
Trench	25	Single-Phase	116
Polar™	30	Three-Phase	118
Ultra Junction	38	Three Phase, with Brake Unit	121
Q-Class.....	44	AC Controller, TRIAC.....	123
Very High Voltage.....	45	Braking Rectifier Assemblies	123
Standard	46	High Power Devices	124
Linear.....	47	Nomenclature	124
Depletion-mode	49	Rectifier Diodes.....	126
P-Channel.....	51	Fast Recovery Diodes	131
Super Junction.....	53	Soft Recovery Diodes	133
Multi-chip Configurations	54	Extra Fast Recovery Diodes	136
IGBT Discretes	56	Sonic FRDs	137
Nomenclature	56	Phase Control Thyristors	138
XPT™	60	Medium Voltage Thyristors	146
Very High Voltage.....	68	Distributed Gate Thyristors	148
Reverse Conducting (BiMOSFET).....	69	Press-Pack IGBTs	155
Diodes	70	High-Power Devices	156
Silicon Schottky	71	Power Semiconductor Chips	157
Ultrafast Diodes	76	Stacks and Accessories	158
HiPerDyn™ FREDs & Dual Ultrafast.....	77	Modular Solutions.....	160
HiPerFRED2™ & HiPerFRED.....	78	Bar Clamps.....	164
SONIC-FRD™	81	Box Clamps and Heat Sinks.....	168
FRED	82	Coolers	169
FRED & HiPerFRED Modules & Semifast.....	84	Outline Drawings	170
Silicon Carbide Schottky	85	Part Number Alphanumeric Index	234
Rectifier & Avalanche Types	86		
Breakover Diodes	89		
Thyristors	92		
Phase Control.....	92		
Triode.....	93		
SCR	94		
TRIAC.....	96		

Proudly presenting world-class **power semiconductor and IC technologies, quality, and customer support.**

Littelfuse: Everywhere, Every Day

Founded in 1927, Littelfuse is a diversified industrial technology manufacturing company empowering a sustainable, connected, and safer world. Across more than 20 countries, and with approximately 18,000 global associates, we partner with customers to design and deliver innovative, reliable solutions.

Littelfuse offers an extensive technology portfolio - fuses, semiconductors, polymers, ceramics, relays, sensors, switches, and more. Serving over 100,000 end customers, our products are found in a variety of industrial, transportation, and electronics end markets—everywhere, every day.

Why Choose Littelfuse

Our history of innovation, combined with our customer-first culture, drives us to collaborate with you to develop safer, more reliable products that are energy efficient and compliant with global regulations. We will partner with you to solve complex problems wherever electrical energy is used, bringing design, engineering, and technical expertise to deliver business results.

Complementing our wide portfolio of products is a global network of design and technical support expertise. We offer decades of design experience to help you address application challenges and achieve regulatory compliance.

Your Single Source

Littelfuse offers an extensive power semiconductor product line. We design forward-thinking, application-specific solutions to provide assurance that your most demanding requirements will be met. Our goal is to provide the most complete range of options so you will not have to compromise.

Testing Support

Littelfuse can help ensure that your products withstand most common threats repeatedly and fail safely under extreme circumstances. We can serve as an independent source to provide assistance as you design, by offering lab testing capabilities for customer applications. This testing includes industry-specific required power fault and electrostatic discharge (ESD) / electrically fast transients (EFT) / lightning surge conditions.

Application Knowledge

For over 97 years, engineers and designers around the world have relied on Littelfuse products and application knowledge to support their designs.

Global Support

Littelfuse stays close to customers. With manufacturing, lab, and design facilities located around the globe, application knowledge and technical support are locally available. Also, we offer a network of regional customer support offices and hundreds of independent authorized distributor contacts to assist you.

Visit [Littelfuse.com/contact-us](https://www.littelfuse.com/contact-us) to find local support near you.

Operational Excellence

With our global manufacturing footprint, Littelfuse is firmly committed to manufacturing quality products at a competitive price. We build quality into our products and services, striving for zero defects in everything we do, thereby reducing cost and increasing your total satisfaction. We strive to exceed expectations every day.

Quality Assurance

Our global manufacturing facilities abide by strict quality assurance requirements and hold the following quality management system registrations:

- ISO 9001
- ISO14001
- IATF 16949



PressFit-Pin for E2, E3, and SimBus F Module Packages


Littelfuse presents new PressFit-Pin technology for E2 and E3 module packages. Modules equipped with these pins can be connected to the PCB without soldering. For the pressing process, either hand tools or pressing machines can be used. The benefits of the assembly are as follows:

- Simplified process
- Reduced mounting time
- No risk of bad solder contacts
- Reduced aging of pin contact
- No thermal stress for the PCB assembly
- Press-out is possible for maintenance


The pin concept is based on the proven “Bizon-pin” concept. The pressing process is a plastic deformation of pin and via of the board, ending in a cold welding. The pin features are as follows:

- Pin qualification according to IEC 60352-5
- High conductive Cu alloy with Ni gal. tin surface
- Very low contact resistance
- Low press-in force per pin; PCB hole diameter has independent press-out force
- Littelfuse PressFit-Pins are compatible to market standards


A Close Look at the PressFit-Pin Technology

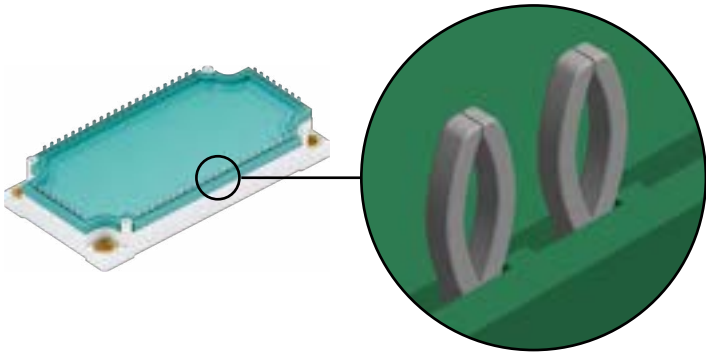


Start with the Following Module Types:



E2



E3




SimBus F

Board and Via Requirements E2 and E3			
Parameter	Min.	Typical	Max.
Drill hole diameter	–	2.35 mm	–
Final hole diameter	2.14 mm	2.20 mm	2.29 mm
Cu thickness inside the hole	>25 µm	–	–
Sn thickness inside the hole	–	–	<15 µm
Cu thickness for PCB tracks	35 µm	70 µm 105 µm	–
PCB thickness	1.60 mm	2.00 mm	–
Metallization PCB	chem. tin	–	–

Board and Via Requirements SimBus F			
Parameter	Min.	Typical	Max.
Drill hole diameter	–	1.16 mm	–
Final hole diameter	1.00 mm	1.05 mm	1.10 mm
Cu thickness inside the hole	>25 µm	–	–
Sn thickness inside the hole	–	–	<15 µm
Cu thickness for PCB tracks	35 µm	70 µm 105 µm	–
PCB thickness	1.60 mm	2.00 mm	–
Metallization PCB	chem. tin	–	–

High Voltage TO-252 (D-Pak) Package

Creepage (min): pin/pin: ≥ 3.6 mm
pin/Cu back-side: ≥ 2.5 mm




X004a
TO-252AA

Part Number	Technology	Config.	V _{RRM}	I _{FAV} / I _D @ T _C	
			V	A	°C
Diode					
DMA10IM1200UZ	Standard Diode	Single	1200	10	150
DMA10IM1600UZ	Standard Diode	Single	1600	10	150
DMA10P1200UZ	Standard Diode	Phase Leg	2 × 1200	10	150
DMA10P1600UZ	Standard Diode	Phase Leg	2 × 1200	10	150
Sonic Diode					
DHG10IM1800UZ	Fast Recovery Diode	Single	1800	10	100
MOSFET					
IXTY1R4N120PHV	Standard MOSFET	Single	1200	1.4	25

High Voltage TO-263 (D²-Pak) Package

Creepage (min): pin/pin: ≥ 4.2 mm
pin/Cu back-side: ≥ 4.7 mm




X011c
TO-263ABHV

Part Number	Technology	Config.	V _{RRM}	I _{FAV} / I _D @ T _C	
			V	A	°C
Diode					
DMA10IM1600PZ	Standard Diode	Single	1600	10	150
DMA30IM1600PZ	Standard Diode	Single	1600	30	140
DNA30E2200PZ	Standard Diode	Single	2200	30	140
DNA30EM2200PZ	Standard Diode	Single	2200	30	140
DMA10P1600PZ	Standard Diode	Phase Leg	2 × 1800	10	150
DMA10P1800PZ	Standard Diode	Phase Leg	2 × 1800	10	150
DAA10EM1800PZ	Avalanche Diode	Single	1800	10	150
DAA10P1800PZ	Avalanche Diode	Phase Leg	2 × 1800	10	150
FRED / HiPerFRED					
DSEI12-12AZ	FRED	Single	1200	11	100
DSEP12-12AZ	HiPerFRED	Single	1200	12	135
DSEP12-12BZ	HiPerFRED	Single	1200	15	130
SiC Diodes					
LSIC2SD065D10A	Schottky Barrier Diode	Single	650	10	147
LSIC2SD065D20A	Schottky Barrier Diode	Single	650	20	135
LSIC2SD120D10A	Schottky Barrier Diode	Single	1200	10	151
DCK20I1200PC	Schottky Barrier Diode	Single	1200	20	135



High Voltage TO-263 (D²-Pak) Package

Creepage (min): pin/pin: ≥ 4.2 mm
pin/Cu back-side: ≥ 4.7 mm



X011c
TO-263ABHV


Part Number	Technology	Config.	V _{RRM}	I _{FAV} / I _D @ T _C	
			V	A	°C
Thyristor					
CLA5E1200PZ	High Efficiency SCR	Single	1200	5	135
CLA15E1200NPZ				15	120
CLA30E1200NPZ	High Efficiency SCR	Single	1200	30	115
CLB30I1200PZ				30	115
CLA40E1200NPZ	High Efficiency SCR	Single	1200	40	125
CLB40I1200PZ				40	125
CMA20E1600PZ	Standard Thyristor	Single	1600	20	115
CMA30E1600PZ				30	115
CME30E1600PZ	Fast Thyristor	Single	1600	30	80
Triac					
CLA30MT1200NPZ	High Efficiency	Triac	1200	15	120
CLA40MT1200NPZ				20	115

Part Number	Technology	Config.	V _{CES}	I _{C25}	V _{CE(sat)}
			V	A	V
IGBT & BiMOS™					
IXA4IF1200UC	XPT™ IGBT	Copack	1200	9	1.8
IXYA20N120C3HV	Fast XPT™ IGBT	Single	1200	40	3.4
IXYA20N120A4HV	Gen4 XPT™ IGBT	Single	1200	80	1.7
IXYA20N120B4HV				76	1.8
IXYA20N120C4HV	Gen4 XPT™ IGBT	Single	1200	68	2.1
IXYA30N120A4HV				106	1.6
IXYA8N250CHV	High Voltage XPT™ IGBT	Single	2500	29	3.4
IXYA12N250CHV				28	3.7
IXBA16N170AHV	High Voltage BiMOS™	Single	1700	16	6
IXBA10N300HV	High Voltage BiMOS™	Single	3000	34	2.8
IXBA14N300HV				38	2.7

Part Number	Technology	Config.	V _{DSS}	I _{D25}	R _{DSon} max.
			V	A	mΩ
MOSFET					
IXFA8N85XHV	X-Class HiPerFET™	Single	850	8	0.85
IXFA14N85XHV				14	0.55
IXFA20N85XHV				20	0.33
IXTA08N100D2HV	Depletion Mode MOSFET	Single	1000	0.8	21
IXTA3N100D2HV				3	6
IXTA3N120HV	High Voltage MOSFET	Single	1200	3	4.5
IXTA3N150HV	High Voltage MOSFET	Single	1500	2	7.3
IXTA4N150HV				4	6
IXTA1N200P3HV	High Voltage MOSFET	Single	2000	1	40
IXTA02N250HV		Single	2500	0.2	450

High Voltage TO-268 (D³-Pak) Package

Creepage (min): pin/pin: ≥ 9.4 mm
pin/Cu back-side: ≥ 5.6 mm




X019a
TO-268HV

Part Number	Technology	Config.	V _{CES} /V _{DSS}	I _{C25} /I _{D25}	V _{CE(sat)} typ.	R _{DSon} Max
			V	A	V	mΩ
IGBT						
IXYT30N65C3H1HV	Gen3™ XPT™ IGBT	Single	650	60	2.7	—
IXYT20N120C3D1HV			1200	36	3.4	—
IXYT40N120A4HV	Gen4™ XPT™ IGBT	Single	1200	150	1.8	—
IXYT55N120A4HV				175	1.5	—
IXYT85N120A4HV				300	1.5	—
IXYT12N250CV1HV	High Voltage XPT™ IGBT	Single	2500	28	3.7	—
IXYT25N250CHV				95	4	—
IXYT30N450HV	High Voltage XPT™ IGBT	Single	4500	60	3.9	—
IXBT16N170AHV	High Voltage BiMOS™	Single	1700	16	6	—
IXBT22N300HV			3000	60	2.7	—
IXBT32N300HV	High Voltage BiMOS™	Single	3000	80	2.8	—
IXBT42N300HV				104	3	—
IXBT16N360HV	High Voltage BiMOS™	Single	3600	48	2.5	—
IXBT20N360HV				70	3.4	—
MOSFET						
IXTT140N075L2HV	Linear MOSFET	Single	75	140	—	11
IXTT44N25L2HV			250	44	—	75
IXFT26N100XHV	X-class HiPerFET™	Single	1000	26	—	320
IXFT32N100XHV				32	—	220
IXTT34N65X2HV	X2-class MOSFET	Single	650	34	—	96
IXFT60N65X2HV	X2-class HiPerFET™	Single	650	60	—	52
IXFT80N65X2HV				80	—	38
IXFT30N85XHV	X2-class HiPerFET™	Single	850	30	—	230
IXFT40N85XHV				40	—	145
IXFT50N85XHV				50	—	105
IXFT140N20X3HV	X3-class HiPerFET™	Single	200	140	—	96
IXFT180N20X3HV				180	—	75
IXFT220N20X3HV				220	—	62
IXFT120N25X3HV	X3-class HiPerFET™	Single	250	120	—	120
IXFT150N25X3HV				150	—	90
IXFT170N25X3HV				170	—	74
IXFT100N30X3HV	X3-class HiPerFET™	Single	300	100	—	135
IXFT120N30X3HV				120	—	110
IXFT150N30X3HV				150	—	83
IXTT240N15X4HV	X4-class MOSFET	Single	150	240	—	4.4
IXTT4N150HV	High Voltage MOSFET	Single	1500	4	—	6
IXTT12N150HV				12	—	2
IXTT3N200P3HV	High Voltage MOSFET	Single	2000	3	—	8
IXTT1N250HV			2500	1.5	—	40
IXTT1N300P3HV	High Voltage MOSFET	Single	3000	1	—	50
IXTT2N300P3HV				2	—	21
IXTT02N450HV	High Voltage MOSFET	Single	4500	0.2	—	625
IXTT1N450HV				1	—	80



High Voltage TO-268 (D³-Pak) Package

Creepage (min): pin/pin: ≥ 9.4 mm
pin/Cu back-side: ≥ 5.6 mm



X019a
TO-268HV

Part Number	Technology	Config.	V _{RRM}	I _{DAV} /I _{TAV} @ T _C	
			V	A	°C
Rectifier					
DSEI120-12AZ	FRED	Single	1200	109	60
DSEP60-12AZ	HiPerFRED	Single	1200	60	115
DSEP90-12AZ	HiPerFRED	Single	1200	90	105
DSP45-12AZ	Standard Diode	Phase leg	2 × 1200	45	130
DSP45-16AZ			2 × 1600	45	130
DLA100IM1200TZ	Standard Diode	Phase leg	1200	100	105
Thyristor					
CMA50E1600TZ	Standard Thyristor	Single	1600	50	110
CLA60MT1200NTZ	High Efficiency	Triac	1200	30	120
CLA100E1200TZ	Standard Thyristor	Single	1200	100	105
CNE60E2200TZ	High Voltage Thyristor	Single	2200	60	80

ISO247™ Package



X016c
ISO247™

Part Number	Technology	Config.	V _{RRM}	I _{DAV} /I _{TAV} @ T _C	
			V	A	°C
Diode					
DSA90C200HR	Schottky Diode	Common Cathode	200	2 × 45	145
DPF30P600HR	HiPerFRED	Phase Leg	2 × 600	30	130
DMA10P1200HR	Standard	Phase Leg	2 × 1200	10	145
DMA10P1600HR			2 × 1600	10	145
DMA30P1600HR	Standard	Phase Leg	2 × 1600	30	105
DMA50P1200HR			2 × 1200	50	105
Thyristor					
CLA40E1200HR	High Efficiency	Single	1200	40	95
CMA40E1600HR	Standard	Single	1600	40	90
CLA60MT1200NHR	High Efficiency	Triac	1200	30	100
CLA80MT1200NHR				40	100
CMA60MT1600NHR	Standard	Triac	1600	30	90
CMA80MT1600NHR				40	95

High Voltage TO-247HV and PLUS247HV Packages



X14c
TO-247HV



X015c
PLUS247HV

Part Number	Technology	V_{CES}/V_{DSS}	$I_{C25}/I_{D25} (I_{C100})$	$V_{CE(sat)}$ typ.	w /Diode	$R_{DS(on)}$ max.	Package
		V	A	V		mΩ	
IGBT							
IXYH8N250CHV	XPT™ IGBT	2500	(8)	4	—	—	TO-247HV
IXYH8N250CV1HV			(8)	4	•	—	
IXYH12N250CHV			(12)	4.5	—	—	TO-247HV
IXYH12N250CV1HV			(12)	4.5	•	—	
IXYH16N250CV1HV			(16)	4	•	—	TO-247HV
IXYH25N250CHV			(25)	4	—	—	
IXYX25N250CV1HV			(25)	4	•	—	PLUS247HV
IXYX40N250CHV			(40)	4	—	—	
IXYH30N450HV		4500	(30)	3.9	—	—	TO-247HV
IXYX40N450HV			40	3.9	—	—	PLUS247HV
IXBH10N300HV	BiMOSFET™	3000	34	2.8	—	—	TO-247HV
IXBH14N300HV			38	2.7	—	—	
IXBH22N300HV			60	2.7	—	—	TO-247HV
IXBX28N300HV			62	2.7	—	—	PLUS247HV
IXBH32N300HV			(32)	2.8	—	—	TO-247HV
IXBH42N300HV			(42)	2.5	—	—	
IXBH16N360HV		3600	48	2.5	—	—	TO-247HV
IXBH20N360HV			70	3.4	—	—	
IXBX50N360HV			125	2.9	—	—	PLUS247HV
MOSFET							
IXTH02N450HV	MOSFET	4500	0.2	—	—	625	TO-247HV
IXTH1N450HV			1	—	—	80	
IXTX1R4N450HV	MOSFET	4500	1.4	—	—	40	PLUS247HV
IXTH1N200P3HV	Polar 3 MOSFET	2000	1	—	—	40	TO-247HV
IXTH3N200P3HV			3	—	—	8	
IXTX6N200P3HV	Polar 3 MOSFET	2000	6	—	—	4	PLUS247HV
IXTH05N250P3HV	Polar 3 MOSFET	2500	0.5	—	—	110	TO-247HV
IXTH04N300P3HV	Polar 3 MOSFET	3000	0.4	—	—	190	TO-247HV
IXTH1N300P3HV			1	—	—	50	
IXTH2N300P3HV			2	—	—	21	
IXTX4N300P3HV	Polar 3 MOSFET	3000	4	—	—	12.5	PLUS247HV



ISO247™ Package



X016c
ISO247™



ISO247-4L

Part Number	Technology	Config.	V _{CES} /V _{DSS}	I _{C25} /I _{D25}	V _{CE(sat)} typ.	R _{DS(on)} max.
			V	A	V	mΩ
IGBT						
IXA20IF1200HR	XPT™ IGBT	Copack	1200	33	1.8	–
IXA30IF1200HR				48	1.8	–
IXA40IF1200HR				63	1.8	–
ITF48IF1200HR	Fast Trench IGBT	Copack	1200	72	2.4	–
MOSFET						
IXFJ26N50P3	Polar3™ HiperFET™	Single	500	14	–	0.265
IXFJ80N25X3	X3-Class HiPerFET™	Single	250	44	–	0.018
IXFJ20N85X			850	9.5	–	0.36
IXTJ4N150	High Voltage MOSFET	Single	1500	2.5	–	6
IXTJ6N150				3	–	3.85
SiC MOSFET						
IXSJ80N120R1	SiC MOSFET	Single	1200	80	–	18
IXSJ43N120R1				43	–	36
IXSJ25N120R1				25	–	62
IXSJ80N120R1K		Single, K-source		80	–	18
IXSJ43N120R1K				43	–	36
IXSJ25N120R1K				25	–	62

Isolated Discrete Packages

ISOPLUS247™ is the Direct Copper Bond (DCB) - isolated version of the PLUS247™ package, TO-247 without a mounting hole. The design of this patented package is revolutionary: the silicon chip is soft soldered onto a DCB substrate instead of the usual copper lead frame. The DCB ceramic, which is the same substrate material used in high-power modules, provides not only a high isolation capability of 2500 V_{RMS} but also unbeatable low thermal resistance compared to conventional, externally mounted isolation materials.

Advantages:

- Isolation capability from leads to backside of 2500 V_{RMS} – no external isolation foil needed
- Thermal resistance from junction to case only slightly higher than for non-isolated versions
- Increased power and temperature cycling capability
- DCB can be patterned like printed circuit boards to allow special functions to be realized

While the junction-to-case thermal resistance is higher than that of an equivalent non-isolated device, what really matters is the total thermal resistance from junction-to-heatsink (R_{thJH}). After comparing a device in ISOPLUS247™ to its companion in the non-isolated package with an external isolation foil, the overall R_{th} was found to be lower for the ISOPLUS247™ package.

Due to the matched thermal expansion coefficients of silicon and DCB ceramic, mechanical stress to the die and solder caused by power and temperature cycling is reduced, improving reliability. Mounting is done with clips; this not only saves time but also guarantees constant pressure over the lifetime of the assembly.

Parts in the ISOPLUS247™ housing can be identified by the letter “R” in the Littelfuse part number. Potentially, all devices now encapsulated in TO-247, TO-264, and PLUS247™ housings can be molded in the ISOPLUS247™. There are already more than 100 types of ISOPLUS247™ available.

Another interesting feature is the capability to pattern the DCB substrate like a printed circuit board. Now, additional special functions can be realized, e.g., the series connection of single diode chips within one package.


ISOPLUS220™, ISOPLUS247™, and ISOPLUS264™ are the DCB-based substitutes for the corresponding standard packages.

A larger version of this packaging technology is the ISOPLUSi4-PAC™, which has up to five terminal pins, making it possible to create full diode bridges, phase-leg transistor configurations, buck and boost converters, and much more within one isolated discrete package.

ISOPLUS-DIL™ 37.5 mm long and 25 mm wide provides the largest mounting area in the ISOPLUS™ family. It is available in 2 pin out version: “GWM” configuration with polar power pins for 300 A_{RMS} on one side, 12 control pins on the opposite side, and the “GMM” configuration with 12 pins on either side. The package is intended for high-current low voltage applications as either a single switch or a 6-pack. With its high power density and reliability, ISOPLUS-DIL™ is recommended for use in automotive designs.

ISOPLUS-SMPD™ is a member of the Littelfuse ISOPLUS™ family and provides an increased creepage distance between pins to DCB.


Package Cross-Section

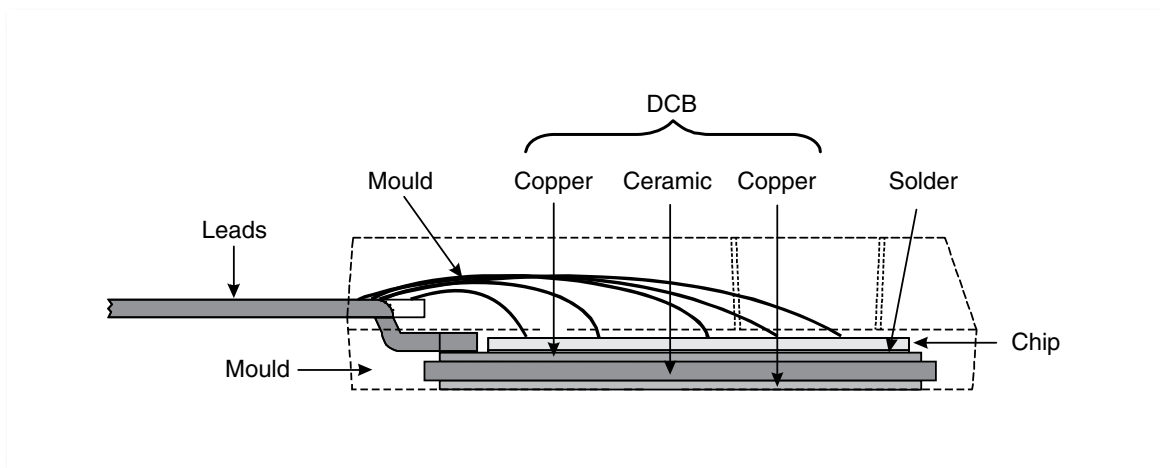

Rectified Modules

Features and Benefits

- Electrical isolation of 2500 V
- Low thermal resistance
- Increased power & temperature cycling
- Saves PCB mounting area
- Replaces multiple discretes
- Reduces parasitic inductance & capacitance
- Reduces EMI
- Improved heat spreading

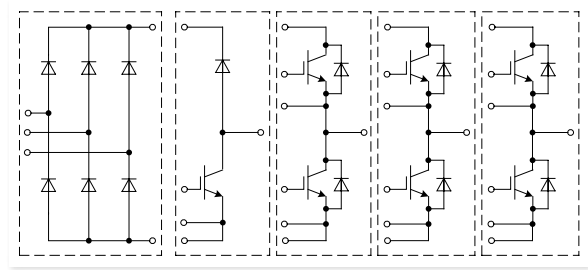

SMPD-B



SMPD-X




Rectifier

Line Rectifier

DNA 90U1800LB

Sonic-FRD

DHG 60U1200LB



Line Rectifier

DLA 100B1200LB

DLA 100B800LB


Fast Rectifier

DPG 60B600LB

DHG 40B1200LB

HiPerFRED


Sonic



Inverter

XPT™ - IGBT

ITF 40PF1200DHGTLB



XPT™ - IGBT


MMIX 1X100N60B3H1

MMIX 1X200N60B3H1

MMIX 1Y82N120C3H1

MMIX 1Y100N120C3H1

IXG 70IF1200LB



More Information


Mounting and Cooling Solutions for SMPD Packages

This application note discusses various mounting solutions for Surface Mount Power Device (SMPD) packages. Mounting instructions are provided for single and multi-device mounting, respectively. Read on to learn more.




Click on to visit now


MOSFETs




X030a
SMPD-B



X031a
SMPD-X




A




B

Part Number	Circuit Diagram/Technology		V _{DS}	I _{D25}	R _{DS(on)} max.	Q _g	Package
			V	A	A	nC	
Single and Copack							
MMIX1T600N04T2	A	Trench2	40	600	1.3	590	SMPD-X
MMIX1T550N055T2	A	Trench2	55	550	1.3	595	
MMIX1F520N075T2	A	Trench2 HiPerFET™	75	500	1.6	545	
MMIX1F420N10T	A	Trench HiPerFET™	100	334	2.6	670	
MMIX1F360N15T2	A	Trench2 HiPerFET™	150	235	4.4	715	
MMIX1F230N20T	A	Trench HiPerFET™	200	156	8.3	358	
MMIX1T500N20X4	A	X4-class	200	500	2	535	
MMIX1F180N25T	A	Trench HiPerFET™	250	132	13	364	
MMIX1F160N30T	A	Trench HiPerFET™	300	102	20	376	
MMIX1F210N30P3	A	Polar3 HiPerFET™	300	108	16	268	
MMIX1F132N50P3	A	Polar3 HiPerFET™	500	63	43	267	
MMIX1F44N100Q3	A	Q3 HiPerFET™	1000	30	245	264	
Phase-Leg							
MMIX2F150N20T	B	Trench™ HiPerFET™	200	84	16.5	177	SMPD-X
MMIX2F60N50P3	B	Trench™ HiPerFET™	500	30	110	96	


IGBTs




X030a
SMPD-B




X031a
SMPD-X




X031b
SMPD-Y




A




C




E



B




D




F

Part Number	Circuit Diagram/Technology		V _{ce}	I _{C25} T _C = 25 °C	V _{CE(sat)} typ. T _C = 25 °C	E _{off} typ. T _J = 150 °C (125 °C)	Package
			V	A	A	mJ	
Single and Copack							
MMIX1X200N60B3	A	XPT™	600	223	1.4	3.45	SMPD-X
MMIX1X100N60B3H1	B	XPT™ & Sonic		145	1.5	2.8	
MMIX1X200N60B3H1	B	XPT™ & Sonic	600	175	1.4	3.45	SMPD-X
MMIX1X340N65B4	A	XPT™ IGBT Gen4™		450	1.4	2.54	
MMIX1Y82N120C3H1	B	XPT™ fast & Sonic	1200	78	2.9	(3.7)	SMPD-X
MMIX1Y100N120C3H1	B	XPT™ fast & Sonic		92	2.9	3.55	
Phase-Leg							
ITF40PF1200DHGTLB	D	Trench IGBT & Sonic & NTC	1200	56	2.05	2.6	SMPD-B
ITF40PG1200DHGLB	C	Trench IGBT & Sonic		56	2.05	2.6	
Full-Bridge							
MMIX4B22N300	F	IGBT for cap discharge	3000	38	3.1 max	-	SMPD-Y


Diodes




X030a
SMPD-B




G




I




K




X031a
SMPD-X




H



J



M



X032
MiniSMPD

Part Number	Circuit Diagram/Technology		V _{RRM}	I _{D(AV)M} @ T _C		Package
			V	A	°C	
Dual						
DSA120X150LB	G	Schottky	150	2 × 60	150	SMPD-B
DSA120X200LB	G	Schottky	200	2 × 60	150	SMPD-B
DSA240X200LB	G	Schottky		2 × 120	150	
DCG40X1200LB	G	SiC	1200	2 × 14.5	80	SMPD-B
1 Phase Bridge						
DPG60B600LB	H	HiPerFRED	600	60	110	SMPD-B
DCG20B650LB	H	SiC	650	21	80	
DLA100B800LB	H	Rectifier	800	124	80	SMPD-B
DMA120B800LB	H	Rectifier		130	90	
DLA100B1200LB	H	Rectifier	1200	124	80	SMPD-B
DHG40B1200LB	H	Sonic		34	80	
3 Phase Bridge						
DHG60U1200LB	I	Sonic	1200	62	80	SMPD-B
DMA90U1800LB	I	Rectifier	1800	99	80	

Thyristors and Triacs

Part Number	Circuit Diagram/Technology		V _{RRM}	I _{TAV} @ T _C		Package
			V	A	°C	
Dual						
CLA60MU1200LB	2 × J	Triac	1200	2 × 30	100	SMPD-B
CMA50P1600LB	K	Thyristor	2 × 1600	50	90	SMPD-B

MOS-Gated Thyristors


Part Number	V _{DM}	I _{TSM} 1μs T _C = 25°C	I _{TSM} 10μs T _C = 25°C	r _T typ.	V _T Max.	Q _{g(on)} typ.	t _{ri} typ. T _C = 25°C	V _{GK(th)} max.	Circuit Diagram	Package
	V	kA	kA	mΩ	V	nC	ns	V		
MMIX1H60N150V1	1500	32	11.8	1.2	6	180	100	5	M	SMPD-X

textured **ISOPLUS**


ISOPLUS-DIL™



X026c
ISOPLUS-DIL™




MTI...W..GC
MTC...W..GC
Surface Mount Device




Part Number	V _{DS} max.	I _D T _C = 25 °C	I _{D90} T _C = 90 °C	R _{DS(on)} typ. T _J = 25 °C	C _{iss} typ.	Q _g typ.	R _{thJC}
	V	A	A	mΩ	nF	nC	K/W
FPO							
MTI85W100GC	100	110	83	3.2	6.3	90	1.5



X026d
ISOPLUS-DIL™



MTI...WX...GD
MTC...X...TGD
GMM...
Surface Mount Device




Part Number	V _{DS} max.	I _D T _C = 25 °C	I _{D90} T _C = 90 °C	R _{DS(on)} typ. T _J = 25 °C	C _{iss} typ.	Q _g typ.	R _{thJC}
	V	A	A	mΩ	nF	nC	K/W
FPO							
MTC120WX75GD	75	160	120	2.2	10.5	178	0.8
MTI85WX100GD	100	110	83	3.2	6.3	90	1.5
MTI145WX100GD		190	145	1.7	11	155	0.9
GMM3X60-015X2	150	50	38	19	5.8	97	1

Potential Application Block Diagram Exmapple (for i4-PAC™)

3, 4, and 5 leaded packages for various circuit topologies and DCB base plate

- Electrical isolation of 2500 V
- Low thermal resistance
- Increased power and temperature cycling
- Saves PCB mounting area
- Replaces multiple discretes
- Reduces parasitic inductance and capacitance
- Reduces EMI
- Less weight

 Solutions offered by Littelfuse
 System implementation options

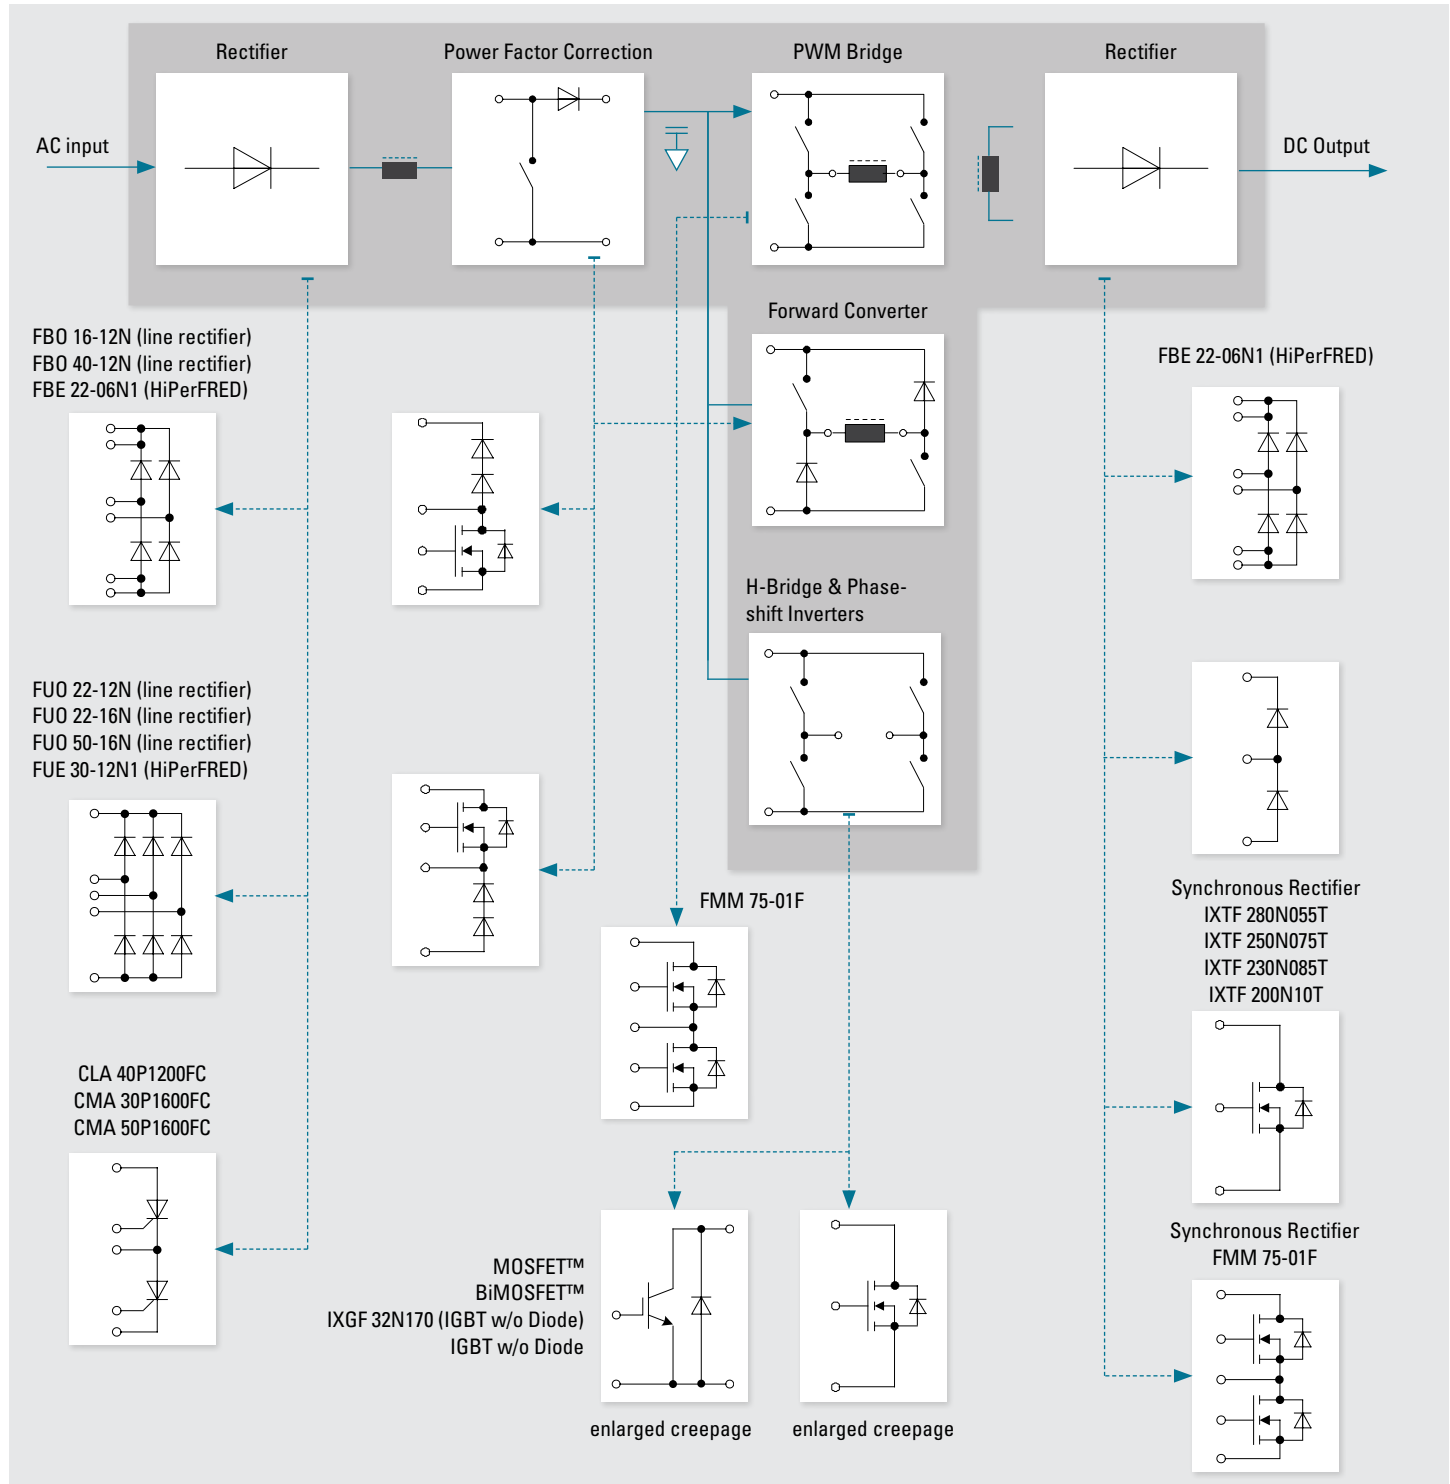



X024a
ISOPLUS-i4pac(5)



X024c
ISOPLUS-i4pac(3asym)



X024e
ISOPLUS-i4pac(2sym)



X024b
ISOPLUS-i4pac(3sym)



X024d
ISOPLUS-i4pac(5HC)


MOSFETs

Part Number	Configuration	Circuit Diagram/Technology		V _{DSS}	I _{D25} T _C = 25 °C	I _{D90/110} T _C = 90 °C (110 °C)	R _{DS(on)} T _C = 25 °C typ.	Package
				V	A	A	mΩ	
IXTF200N10T	Single	A	Trench MOSFET	100	90	na	7	ISOPLUS-i4pac (5HC)
IXTF6N200P3	Single	A	Polar3™ High Voltage MOSFET	2000	4	(2.3)	<(4.2)	ISOPLUS-i4pac(3asym)
IXTF2N300P3		A	Polar3™ High Voltage MOSFET	3000	1.6	(0.9)	<(21)	
IXTF1R4N450	Single	A	High Voltage MOSFET	4500	1.4	na	<(40)	ISOPLUS-i4pac(3asym)
IXTF02N450		A	High Voltage MOSFET		0.2	na	<(625)	
IXTF1N450		A	High Voltage MOSFET		0.9	na	<(80)	
FMM75-01F	Phase leg	B	HiPerFET	100	75	50	18	ISOPLUS-i4pac(5)
FMM60-02TF	Phase leg	B	Trench HiPerFET	200	33	na	32	ISOPLUS-i4pac(5)
FMM50-025TF		B	Trench HiPerFET	250	30	na	<60	
MXB12R600DPHFC	Boost	C	X2-Class Power MOSFET	600	18	12.5	160	


IGBTs

Part Number	Configuration	Circuit Diagram/Technology		V _{CES}	I _{D25} T _C = 25 °C	I _{D90/110} T _C = 90 °C (110 °C)	V _{CE(sat)} typ T _C = 25 °C typ.	Package
				V	A	A	V	
IXYF30N170CV ¹	Single	F	High voltage XPT™ IGBT	1700	36	(20)	3.5	ISOPLUS-i4pac (3asym)
IXGF32N170		E	High voltage IGBT		44	(19)	2.7	
IXGF25N250	Single	E	High voltage IGBT	2500	30	(15)	<2.9	ISOPLUS-i4pac (3asym)
IXYF16N250CV ¹	Single	F	High voltage XPT™ IGBT	2500	26	(14)	3.3	ISOPLUS-i4pac (3asym)
IXBF22N300	Single	F	BiMOSFET™	3000	38	22	2.2	ISOPLUS-i4pac (3asym)
IXBF32N300	Single	F	BiMOSFET™	3000	40	22	2.8	ISOPLUS-i4pac (3asym)
IXBF42N300	Single	F	BiMOSFET™	3000	60	(24)	2.5	ISOPLUS-i4pac (3asym)
IXBF55N300		F	BiMOSFET™		86	(34)	2.7	
IXYF30N450	Single	E	High voltage XPT™ IGBT	4500	23	(17)	3.2	ISOPLUS-i4pac (3asym)
IXYF40N450		E	High voltage XPT™ IGBT		60	(32)	3.2	


¹ Not for new design




A




D




G




J




M




B




E




H




K




N




C



F



I



L

Part Number	Configuration	Circuit diagram/Technology		Voltage	$I_{D(AV)/M}$ $T_c = 90^\circ C$	Package
				V	A	
CS20-22MOF1	Single	M	Thyristor	2200	18	ISOPLUS-i4pac (3asym)
DNA30E2200FE	High voltage	N	Rectifier	2200	30	ISOPLUS-i4pac(2sym)
CS20-25MO1F		M	Thyristor	2500	18	ISOPLUS-i4pac (3asym)
CLA40P1200FC	Phase leg	L	Thyristor	2×1200	40	ISOPLUS-i4pac(5)
DSEE55-24N1F		H	HiPerFRED		55	ISOPLUS-i4pac(3sym)
CMA30P1600FC	Phase leg	L	Thyristor	2×1600	30	ISOPLUS-i4pac(5)
CMA50P1600FC		L	Thyristor		50	
DHH55-36N1F	Phase leg	H	Sonic-FRD	2×1800	50	ISOPLUS-i4pac(3sym)
FBE22-06N1	1-Phase bridge	J	HiPerFRED	600	20	ISOPLUS-i4pac(5)
FBO16-12N	1-Phase bridge	J	Rectifier	1200	22	ISOPLUS-i4pac(5)
FBO40-12N		J	Rectifier		40	
FUO22-12N	3-Phase bridge	K	Rectifier	1200	27	ISOPLUS-i4pac(5)
FUE30-12N1		K	HiPerFRED		30	
FUO22-16N	3-Phase bridge	K	Rectifier	1600	27	ISOPLUS-i4pac(5)
FUO50-16N		K	Rectifier		50	

IXYS enRoute
Discrete Si MOSFET

IX	T	X	6	N	200	P3	HV	Example
----	---	---	---	---	-----	----	----	---------

IX							IXYS – LF Technology	
----	--	--	--	--	--	--	----------------------	--

		MOSFET Type
T		Standard
F		HiPerFET™

		Package Type
A		TO-263
B		PLUS264™
C		ISOPLUS220™
F		ISOPLUS i4-PAC™
G		TOLL
H		TO-247
J		ISO247
K		TO-264
L		ISOPLUS i5-PAC™ (ISOPLUS264™)
N		SOT227B
P		TO-220
Q		TO-3P
R		ISOPLUS247™
T		TO-268
X		PLUS247™
Y		TO-252
Z		DE

		Current Rating Examples
08		08 = 0.8 A
1R6		1R6 = 1.6 A
6		6 = 6 A
64		64 = 64 A
110		110 = 110 A

		MOSFET Channel Type
N		N-Channel type
P		P-Channel type

		Voltage Class Examples
055		055 = 55 V
06		06 = 60 V
50		50 = 500 V
200		200 = 2000 V

		Technology Notes
		Legacy / High Voltage
C		CoolMOS®
D		Depletion
L		Linear
P		Polar™
Q		Q-Class
T		Trench
X		Ultra junction X-Class
	2	Gen.1 Die technology
	3	Gen.2 Die technology
	4	Gen.3 Die technology
		Gen.4 Die technology

		Notes
-4		TO-247 w/ 4 leads
-7		TO-263 w/ 7 leads
A		Automotive qualified
M		Overmolded package
HV		High-voltage package
-TRL		Tape and reel packing

- Valid only for products from Littelfuse Lampertheim.
- Usage for new technologies, chips, packages, and/or groups.
- Newer data sheets contain description of part number.


Index	0	1	2	3	Value 1	4	5	Value 2	6 (a-c)	6 d	7	8		9
Example 1	M	I	X	G	120	W		1200	DPF	T	E	H	–	PC
Example 2		I	X	A	40	P	G	1200	DHG		L	B	–	TUB
Example 3		C	M	A	20	E		1600			P	Z	–	TRL

Index	Description
0	M = Module; no letter for discretes
1	Kind of main chip: C = SCR, D = Diode, I = IGBT, M = MOSFET
2	Chip technology
3	Chip generation respective to precisely defined technology
Value 1	Current rating
4	Basic circuit
5	Precisely defined circuit
Value 2	Voltage rating
6 (a-c)	as Index 1–3; usage (e.g. for special chips like SiC)
6 d	Specials (e.g., thermistor)
7	Basic package
8	Precisely defined package
Hyphen	-
9	Extras (e.g. delivery formats, auxiliaries)

MoSE™ MOSFET

The metal oxide semiconductor field effect transistor (MOSFET) is used for high-frequency switching control of power electronic systems. Littelfuse offers various MOSFET technologies based on the customer requirement for voltage, on-state resistance, and switching frequency. Here is a graphical representation of our basic MOSFET offerings:

$R_{DS(on)}$ and Blocking Voltage Ranges per MOSFET Technology

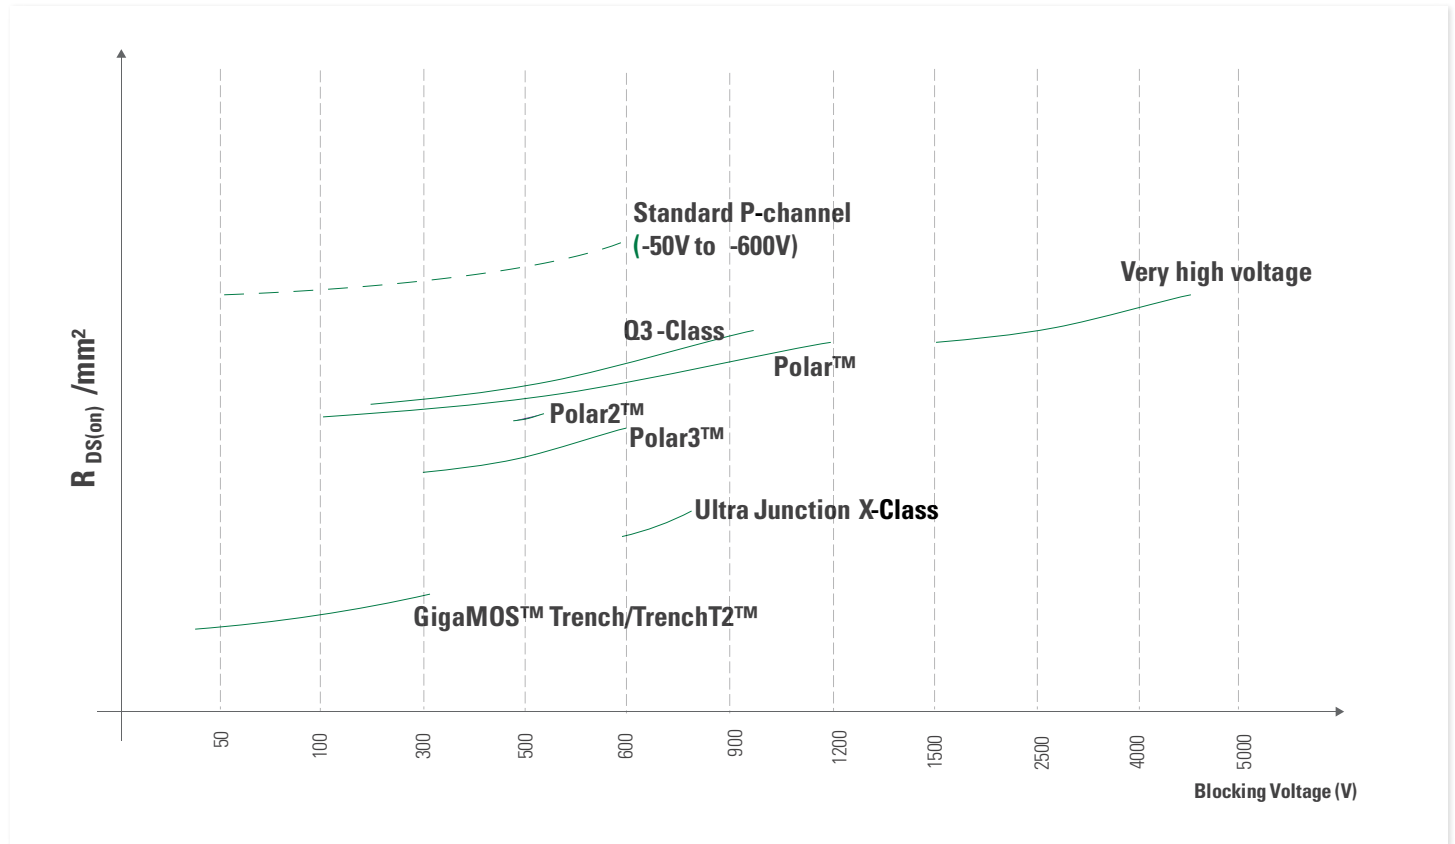

Trench and TrenchT2™ Power MOSFET

Littelfuse Trench Power MOSFETs are ideally suited for low-voltage, high-current applications. These MOSFETs feature an exceptionally low $R_{DS(on)}$, thus guaranteeing low power dissipation. Trench HiPerFET™ versions feature all of the advantages presented by Trench Standard Power MOSFET from Littelfuse with the added benefit of a fast intrinsic body diode that provides low reverse recovery charge (Q_{rr}) and excellent commutating dv/dt ratings for enhanced power switching capabilities and device ruggedness.

Polar™ Power MOSFET

Polar™ MOSFETs (IXT..) feature a proprietary cell design and process that has resulted in a MOSFET with a 30% reduction in $R_{DS(on)}$ per unit area along with a decrease in gate charge. Littelfuse also reduces the wafer thickness, which substantially reduces the thermal resistance. The combination of lower $R_{DS(on)}$, lower gate charge Q_g , and higher power dissipation capability has resulted in a new class of MOSFET that will increase the cost effectiveness in switch mode power supply (SMPS) applications.

Polar™ HiPerFETs™ (IXF..) from Littelfuse combine the strengths of the Polar Standard product family with a faster body diode, whose reverse recovery time (t_{rr}) is reduced, making them suitable for phase-shift bridges, motor control, and uninterruptible power supply applications (UPS). This family of HiPerFETs™ provides the lowest $R_{DS(on)}$, low R_{thJC} , low Q_g , and enhanced dv/dt capability.

PolarP2™ Power MOSFET

PolarP2™ devices represent an optimized range of the standard Polar platform for 500 V device ratings.

PolarP3™ HiPerFET™ Power MOSFET

The PolarP3™ HiPerFET™ product family is the latest addition to benchmark high-performance Polar-Series product line for our product portfolio between 500 V and 600 V. Featuring one of the best-in-class figure of merit (FOM), $R_{DS(on)} \cdot Q_g$, the PolarP3™ HiPerFET™, provides an excellent alternative to weaker super junction technologies. All Littelfuse Polar MOSFET are 100% tested for avalanche energy, proving that it is the industry standard for reliability and ruggedness.

Ultrajunction Technology Power MOSFET

These devices are developed using charge compensation principles and proprietary process technology, resulting in Power MOSFET having significantly reduced resistance $R_{DS(on)}$ and gate charge Q_g . They also exhibit superior dv/dt capability and avalanche performance. The Ultrajunction family of power MOSFETs is available in four generations of technology, namely X, X2, X3 and X4, depending on voltage class. They are designed for applications such as switched mode and resonant mode power supplies, DC-DC converters, PFC circuits, AC and DC motor drives, and robotic and servo control. These MOSFETs enable higher efficiency, along with high power density and cooler system performance. The X-, X2-, and X3-Class Power MOSFETs are also available with fast body diodes (HiPerFET™).

Q3-Class HiPerFET™

Q3-Class HiPerFET™ MOSFETs (identified by the suffix letter Q3) are the direct result of a revolutionary new chip design that decreases the MOSFET total gate charge (Q_g) and the Miller capacitance (C_{rss}) while maintaining the ruggedness and fast-switching intrinsic diode of the company's current HiPerFET™ product line. The result is a MOSFET with dramatically improved switching efficiencies, thus enabling higher frequency operation and smaller power supplies.

Power MOSFETs

Extended FBSOA Linear Power MOSFET

Extended FBSOA Linear Power MOSFETs from Littelfuse are a class of rugged Power MOSFETs tailored specifically for applications that require Power MOSFETs to operate in their current saturation region. These new devices feature low static drain to source on-resistances and provide unparalleled performance and reliability in controlled current output applications. Typical applications that stand to benefit from this new class of extended FBSOA power MOSFETs include circuit breakers, current sources, programmable loads, power controllers, power regulators, motor control, power amplifiers, and soft start applications. In the linear mode, power MOSFETs are subjected to high thermo-electrical stress caused by the simultaneous occurrence of high drain voltage and current, resulting in high power dissipation. Littelfuse has optimized the internal structure of these MOSFETs, achieving an extended forward bias safe operating area (FBSOA) capability to overcome the limitations posed by conventional power MOSFETs operating in current saturation regions. These extended FBSOA Power MOSFETs are not intended for high-speed switching applications.

Depletion-Mode MOSFET

Depletion-Mode Power MOSFETs from Littelfuse operate in a “normally-on” mode that does not require energy or gate voltage to turn on. Unlike the regular enhancement type MOSFETs, these Depletion-Mode MOSFETs require a negative gate bias to turn off. Consequently, they remain at or above zero gate bias voltage; otherwise, however, they have similar MOSFET characteristics. The “normally-on” operational mode of these devices, combined with an enhanced linear operating capability, allows for ideal device selection in terms of current sources, current regulators, solid-state relays, level shifting, active loads, start-up circuits, and active power filters. Since these devices require no energy or gate voltage to turn on, high energy efficiency can be achieved through device implementation in zero power, “normally on” load switch applications. Given the high degree of current regulation, these devices can also act as active inductors with high dynamic impedance in power filter applications to limit the voltage, current noise, and spikes. Furthermore, these devices can provide active circuit protection to limit the surge of current during short circuits or overload conditions.

PolarP™ P-Channel Power MOSFET

Littelfuse Polar technology platform, employed in our PolarP™ P-Channel MOSFETs, uses a proprietary cell design that improves overall device efficiency and performance. This technology platform reduces on-state resistance by as much as 30% and gate charge by 40% compared to legacy counterparts. With such low on-state resistances, these devices offer low conduction and switching losses and low input capacitance. The combination of low $R_{DS(on)}$ and gate charge allows for improved energy efficiency. These P-Channel MOSFETs are dynamic dv/dt and avalanche-rated, making them extremely rugged in demanding operating environments and can easily be paralleled due to an on-state resistance with a positive temperature coefficient. These are ideal for “high-side” switching in which a simple drive circuit referenced to ground can be used, circumventing additional “high-side” driver circuitry commonly involved in the use of N-Channel MOSFETs. This will help designers reduce component count and improve reliability. Furthermore, it allows for the design of a complementary power output stage with a corresponding Littelfuse N-Channel MOSFET for a power half-bridge stage with a simple drive circuit.

TrenchP™ P-Channel Power MOSFET


This family of P-Channel devices from Littelfuse benefits from technological advances derived from robust trench cell design commonly implemented in their wide portfolio of industry-recognized power devices. They feature an ultra low $R_{DS(on)}$, minimizing conduction losses and promoting improved operating and thermal efficiencies. These TrenchP™ P-Channel MOSFETs are suitable for “high-side” switching in which a simple drive circuit referenced to ground can be employed, circumventing additional “high-side” driver circuitry commonly involved in the use of an N-Channel MOSFET. This enables designers to reduce component count, thereby improving drive circuit simplicity and cost structure. Furthermore it allows for the design of a complementary power output stage with a corresponding Littelfuse N-Channel MOSFET for a power half-bridge stage with a simple drive circuit. Common applications that will greatly benefit from these devices include high side Switching, high current regulators, DC Choppers, CMOS high power amplifiers, push-pull amplifiers and power solid state relays.

Very High Voltage Power MOSFET

VHV N-Channel Power MOSFETs from Littelfuse are specifically designed to address demanding, fast-switching applications requiring blocking capabilities of 2.5 kV to 4.5 kV. These VHV Power MOSFETs are also ideally suited for parallel operation due to the positive temperature coefficient of their on-state resistance. Parallel operation with these devices provides a more cost-effective solution than employing series-connected, lower-voltage MOSFET. The reduction or replacement of multiple series-connected devices and the associated gate drive circuitry commonly involved simplifies design, improves reliability, and reduces over-all system costs.

These VHV MOSFETs are an optimal solution in applications such as laser and x-ray generation systems, high-voltage power supplies, pulse circuits, high voltage automated test equipment, and capacitor discharge circuits. 4.5 kV device offerings feature high isolation capability with superior thermal performance.

Trench Power MOSFET



X004
TO-252AA



X005a
TO-220AB



X011b
TO-263AB



X014a
TO-247AD



X017a
TO-3P




X022c
ISOPLUS264™



X024d
ISOPLUS i4-PAC™




X027a
SOT-227B (miniBLOC)



Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	O _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IOTP44N10T	100	44	0.03	1567	27.4	60	1.15	130	TO-220AB
IXTY44N10T		44	0.03	1567	27.4	60	1.15	130	TO-252AA
IOTP60N10T		60	0.018	2650	49	59	0.85	176	TO-220AB
IXTA60N10T		60	0.018	2650	49	59	0.85	176	TO-263AB
IXTQ60N10T		60	0.018	2650	49	59	0.85	176	TO-3P
IOTP80N10T		80	0.014	3040	60	100	0.65	230	TO-220AB
IXTF200N10T		90	0.007	9400	152	76	0.96	156	ISOPLUS i4-PAC™
IOTP130N10T		130	0.0091	5080	104	67	0.42	360	TO-220AB
IXTH130N10T		130	0.0091	5080	104	67	0.42	360	TO-247AD
IXTA130N10T		130	0.0091	5080	104	67	0.42	360	TO-263AB
IXTQ130N10T		130	0.0091	5080	104	67	0.42	360	TO-3P
IOTP180N10T		180	0.0064	6900	151	72	0.31	480	TO-220AB
IXTH180N10T		180	0.0064	6900	151	100	0.31	480	TO-247AD
IXTA180N10T		180	0.0064	6900	151	72	0.31	480	TO-263AB
IXTQ180N10T		180	0.0064	6900	151	100	0.31	480	TO-3P
IXTN200N10T		200	0.0055	9400	152	76	0.3	550	SOT-227B (miniBLOC)
IXTH200N10T		200	0.0055	9400	152	76	0.27	550	TO-247AD
IXTQ200N10T		200	0.0055	9400	152	76	0.27	550	TO-3P
IOTP48N20T	200	48	0.05	3090	60	130	0.5	250	TO-220AB
IXTA48N20T		48	0.05	3090	60	130	0.5	250	TO-263AB
IXTQ48N20T		48	0.05	3090	60	130	0.5	250	TO-3P
IOTP60N20T		60	0.04	4530	73	118	0.3	500	TO-220AB
IXTA60N20T		60	0.04	4530	73	118	0.3	500	TO-263AB
IXTQ60N20T		60	0.04	4530	73	118	0.3	500	TO-3P
IOTP86N20T		86	0.029	4500	90	140	0.31	480	TO-220AB
IXTA86N20T		86	0.029	4500	90	140	0.31	480	TO-263AB
IXTQ86N20T		86	0.029	4500	90	140	0.31	480	TO-3P
IXTH130N20T		130	0.016	8800	150	150	0.18	830	TO-247AD
IOTP50N25T	250	50	0.06	4000	78	166	0.31	400	TO-220AB
IXTA50N25T		50	0.06	4000	78	166	0.31	400	TO-263AB
IXTQ50N25T		50	0.06	4000	78	166	0.31	400	TO-3P
IOTP76N25T		76	0.039	4920	92	148	0.27	460	TO-220AB
IXTH76N25T		76	0.039	4920	92	148	0.27	460	TO-247AD
IXTA76N25T		76	0.039	4920	92	148	0.27	460	TO-263AB
IXTQ76N25T		76	0.039	4920	92	148	0.27	460	TO-3P
IXTH86N25T		86	0.037	5330	105	156	0.23	540	TO-247AD
IXTQ86N25T		86	0.037	5330	105	156	0.23	540	TO-3P
IXTH96N25T		96	0.029	6100	114	158	0.2	625	TO-247AD
IXTQ96N25T		96	0.029	6100	114	158	0.2	625	TO-3P
IXTH110N25T		110	0.024	9400	157	170	0.18	694	TO-247AD

MoS



D5
DE475




X011b
TO-263AB



X016a
ISOPLUS247™



X027a
SOT-227B (miniBLOC)




X004
TO-252AA



X014a
TO-247AD



X019
TO-268AA



X005a
TO-220AB



X015a
PLUS247



X020a
TO-264


Trench HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} max (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFA130N10T	100	130	0.0091	5080	104	67	0.42	360	TO-263AB
IXFP130N10T		130	0.0091	5080	104	67	0.42	360	TO-220AB
IXFH230N10T		230	0.0047	15300	250	-82	0.23	650	TO-247AD
IXFX360N10T		360	0.0029	33000	525	130	0.12	1250	PLUS247
IXFN360N10T		360	0.0026	33000	525	130	0.18	830	SOT-227B (miniBLOC)
IXFK360N10T		360	0.0029	33000	525	130	0.12	1250	TO-264
IXFX420N10T		420	0.0026	47000	670	140	0.09	1670	PLUS247
IXFN420N10T		420	0.0023	47000	670	140	0.14	1070	SOT-227B (miniBLOC)
IXFK420N10T		420	0.0026	47000	670	140	0.09	1670	TO-264
IXFA102N15T	150	102	0.018	5220	87	120	0.33	455	TO-263AB
IXFH102N15T		102	0.018	5220	87	120	0.33	455	TO-247AD
IXFP102N15T		102	0.018	5220	87	120	0.33	455	TO-220AB
IXFH160N15T		160	0.0096	8800	160	90	0.18	830	TO-247AD
IXFH150N20T	200	150	0.015	11700	177	-100	0.14	890	TO-247AD
IXFT150N20T		150	0.015	11700	177	-100	0.14	890	TO-268AA
IXFR230N20T		156	0.008	28000	378	200	0.25	600	ISOPLUS247™
IXFX170N20T		170	0.011	19600	265	200	0.13	1150	PLUS247
IXFK170N20T		170	0.011	19600	265	200	0.13	1150	TO-264
IXFN230N20T		220	0.0075	28000	378	200	0.138	1090	SOT-227B (miniBLOC)
IXFX230N20T		230	0.0075	28000	378	200	0.09	1670	PLUS247
IXFK230N20T		230	0.0075	28000	378	200	0.9	1670	TO-264
IXFZ140N25T	250	100	0.017	19000	255	200	0.28	445	DE475
IXFH110N25T		110	0.024	9400	157	170	0.18	694	TO-247AD
IXFH120N25T		120	0.023	11300	180	-108	0.14	890	TO-247AD
IXFT120N25T		120	0.023	11300	180	-108	0.14	890	TO-268AA
IXFN140N25T		120	0.017	19000	255	200	0.18	690	SOT-227B (miniBLOC)
IXFX140N25T		140	0.017	19000	255	200	0.13	960	PLUS247
IXFK140N25T		140	0.017	19000	255	200	0.13	960	TO-264
IXFN180N25T		168	0.0129	23800	364	200	0.138	900	SOT-227B (miniBLOC)
IXFX180N25T		180	0.0129	23800	364	200	0.09	1390	PLUS247
IXFK180N25T		180	0.0129	23800	364	200	0.09	1390	TO-264
IXFH46N30T	300	46	0.08	4770	86	150	0.27	460	TO-247AD
IXFT46N30T		46	0.08	4770	86	150	0.27	460	TO-268AA
IXFH86N30T		86	0.043	11300	180	150	0.15	830	TO-247AD
IXFT86N30T		86	0.043	11300	180	150	0.15	830	TO-268AA
IXFH94N30T		94	0.036	11400	190	-155	0.14	890	TO-247AD
IXFT94N30T		94	0.036	11400	190	-155	0.14	890	TO-268AA
IXFX120N30T		120	0.024	20000	265	200	0.13	960	PLUS247
IXFK120N30T		120	0.024	20000	265	200	0.13	960	TO-264
IXFN160N30T		130	0.019	28000	335	200	0.138	900	SOT-227B (miniBLOC)
IXFX160N30T		160	0.019	28000	335	200	0.09	1390	PLUS247
IXFK160N30T		160	0.019	28000	335	200	0.09	1390	TO-264

Trench HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} max (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTP100N04T2	40	100	0.007	2690	25,5	34	1	150	TO-220AB
IXTA100N04T2		100	0.007	2690	25,5	34	1	150	TO-263AB
IXTP120N04T2		120	0.0061	3240	58	35	0.75	200	TO-220AB
IXTA120N04T2		120	0.0061	3240	58	35	0.75	200	TO-263AB
IXTP160N04T2		160	0.005	4640	79	40	0.6	250	TO-220AB
IXTA160N04T2		160	0.005	4640	79	40	0.6	250	TO-263AB
IXTP220N04T2		220	0.0035	6820	112	45	0.42	360	TO-220AB
IXTA220N04T2		220	0.0035	6820	112	45	0.42	360	TO-263AB
IXTP300N04T2		300	0.0025	10700	145	53	0.31	480	TO-220AB
IXTH300N04T2		300	0.0025	10700	145	53	0.31	480	TO-247AD
IXTA300N04T2		300	0.0025	10700	145	53	0.31	480	TO-263AB
IXTH500N04T2		500	0.0016	25000	405	84	0.15	1000	TO-247AD
IXTT500N04T2		500	0.0016	25000	405	84	0.15	1000	TO-268AA
IXTX600N04T2		600	0.0015	40000	590	100	0.12	1250	PLUS247
IXTN600N04T2		600	0.0011	40000	590	100	0.16	940	SOT-227B (miniBLOC)
IXTK600N04T2		600	0.0015	40000	590	100	0.12	1250	TO-264
IXTA90N055T2	55	90	0.0084	2770	42	37	1	150	TO-263AB
IXTP90N055T2		90	0.0084	2770	42	37	1	150	TO-220AB
IXTY90N055T2		90	0.0084	2770	42	37	1	150	TO-252AA
IXTP110N055T2		110	0.0066	3060	57	38	0.82	180	TO-220AB
IXTA110N055T2		110	0.0066	3060	57	38	0.82	180	TO-263AB
IXTP140N055T2		140	0.0054	4760	82	40	0.6	250	TO-220AB
IXTA140N055T2		140	0.0054	4760	82	40	0.6	250	TO-263AB
IXTP200N055T2		200	0.0042	6970	109	49	0.42	360	TO-220AB
IXTA200N055T2		200	0.0042	6970	109	49	0.42	360	TO-263AB
IXTP260N055T2		260	0.0033	10800	140	60	0.31	480	TO-220AB
IXTH260N055T2		260	0.0033	10800	140	60	0.31	480	TO-247AD
IXTA260N055T2		260	0.0033	10800	140	60	0.31	480	TO-263AB
IXTH360N055T2		360	0.0024	20000	330	78	0.16	935	TO-247AD
IXTT360N055T2		360	0.0024	20000	330	78	0.16	935	TO-268AA
IXTH440N055T2		440	0.0018	25000	405	76	0.15	1000	TO-247AD
IXTT440N055T2		440	0.0018	25000	405	76	0.15	1000	TO-268AA
IXTX550N055T2		550	0.0016	40000	595	100	0.12	1250	PLUS247
IXTN550N055T2		550	0.0013	40000	595	100	0.16	940	SOT-227B (miniBLOC)
IXTK550N055T2		550	0.0016	40000	595	100	0.12	1250	TO-264
IXTZ550N055T2		550	0.001	40000	595	100	0.25	600	DE475
IXTP70N075T2	75	70	0.012	2580	46	48	1	150	TO-220AB
IXTA70N075T2		70	0.012	2580	46	48	1	150	TO-263AB
IXTP90N075T2		90	0.01	3290	54	50	0.82	180	TO-220AB
IXTA90N075T2		90	0.01	3290	54	50	0.82	180	TO-263AB
IXTP120N075T2		120	0.0077	4740	78	50	0.6	250	TO-220AB
IXTA120N075T2		120	0.0077	4740	78	50	0.6	250	TO-263AB
IXTP170N075T2		170	0.0054	6860	109	63	0.42	360	TO-220AB
IXTA170N075T2		170	0.0054	6860	109	63	0.42	360	TO-263AB
IXTP230N075T2		230	0.0042	10.5	178	66	0.31	480	TO-220AB
IXTA230N075T2		230	0.0042	10.5	178	66	0.31	480	TO-263AB
IXTP80N12T2	120	80	0.017	4740	80	90	0.46	325	TO-220AB
IXTA80N12T2		80	0.017	4740	80	90	0.46	325	TO-263AB

MoS




D5
DE475



X014a
TO-247AD



X020a
TO-264



X005a
TO-220AB




X015a
TO-247AD




X027a
SOT-227B (miniBLOC)



X007a
TO-220ABFP



X019
TO-268AA



X031a
SMPD-X



X011b
TO-263AB

TrenchT2™ MOSFET in SMPD Package

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
MMIX1T600N04T2	40	600	0.0013	40000	590	100	0.18	830	SMPD-X
MMIX1T550N055T2	55	550	0.0013	40000	595	100	0.18	830	SMPD-X
MMIX1F520N075T2	75	500	0.0016	41000	545	150	0.18	830	SMPD-X


TrenchT2™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP230N075T2	75	230	0.0042	10500	178	59	0.31	480	TO-220AB
IXFH230N075T2		230	0.0042	10500	178	59	0.31	480	TO-247AD
IXFA230N075T2		230	0.0042	10500	178	59	0.31	480	TO-263AB
IXFH340N075T2		340	0.0032	19000	300	75	0.16	935	TO-247AD
IXFT340N075T2		340	0.0032	19000	300	75	0.16	935	TO-268AA
IXFH400N075T2		400	0.0023	24000	420	77	0.15	1000	TO-247AD
IXFT400N075T2		400	0.0023	24000	420	77	0.15	1000	TO-268AA
IXFZ520N075T2		420	0.0016	41000	545	n/a	0.25	600	DE475
IXFN520N075T2		480	0.0019	41000	545	n/a	0.16	940	SOT-227B (miniBLOC)
IXFX520N075T2		520	0.0022	41000	545	n/a	0.12	1250	PLUS247
IXFK520N075T2		520	0.0022	41000	545	n/a	0.12	1250	TO-264
IXFP130N10T2	100	130	0.0091	6600	130	n/a	0.42	360	TO-220AB
IXFA130N10T2		130	0.0091	6600	130	n/a	0.42	360	TO-263AB
IXFP180N10T2		180	0.006	10500	185	66	0.31	480	TO-220AB
IXFA180N10T2		180	0.006	10500	185	66	0.31	480	TO-263AB
IXFH320N10T2		320	0.0035	25000	430	98	0.15	1000	TO-247AD
IXFT320N10T2		320	0.0035	26000	430	98	0.15	1000	TO-268AA

TrenchT2™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP76N15T2	150	76	0.02	5800	97	69	0.43	350	TO-220FPAB
IXFA76N15T2		76	0.02	5800	97	69	0.43	350	TO-263AB
IXFP110N15T2		110	0.013	8600	150	85	0.31	480	TO-220AB
IXFH110N15T2		110	0.013	8600	150	85	0.31	480	TO-247AD
IXFA110N15T2		110	0.013	8600	150	85	0.31	480	TO-263AB
IXFH160N15T2		160	0.009	15000	253	n/a	0.17	880	TO-247AD
IXFX240N15T2		240	0.0052	32000	460	n/a	0.12	1250	PLUS247
IXFN240N15T2		240	0.0052	32000	460	n/a	0.18	830	SOT-227B (miniBLOC)
IXFK240N15T2		240	0.0052	32000	460	n/a	0.12	1250	TO-264
IXFN360N15T2		310	0.004	47500	715	n/a	0.14	1070	SOT-227B (miniBLOC)
IXFX360N15T2		360	0.004	47500	715	n/a	0.09	1670	PLUS247
IXFK360N15T2		360	0.004	47500	715	n/a	0.09	1670	TO-264
IXFX220N17T2	170	220	0.0063	31000	500	n/a	0.12	1250	PLUS247
IXFK220N17T2		220	0.0063	31000	500	n/a	0.12	1250	TO-264
IXFN320N17T2		260	0.0052	45000	640	n/a	0.14	1070	SOT-227B (miniBLOC)
IXFX320N17T2		320	0.0052	45000	640	n/a	0.09	1670	PLUS247
IXFK320N17T2	175	320	0.0052	45000	640	n/a	0.09	1670	TO-264
IXFH150N17T2		150	0.012	14600	233	n/a	0.17	880	TO-247AD
IXFT150N17T2		150	0.012	14600	233	n/a	0.17	880	TO-268AA

Mo eMO



X004
TO-252AA

X004a
TO-252AA

X005a
TO-220AB



X011b
TO-263AB

X014a
TO-247AD


X016a
ISOPLUS247™



X017a
TO-3P

X019
TO-268AA

X020a
TO-264



Polar™ Standard MOSFET


Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTP75N10P	100	75	0.025	2250	74	120	0.42	360	TO-220AB
IXTA75N10P		75	0.025	2250	74	120	0.42	360	TO-263AB
IXTQ75N10P		75	0.025	2250	74	120	0.42	360	TO-3P
IXTT110N10P		110	0.015	3550	110	130	0.31	480	TO-268AA
IXTQ110N10P		110	0.015	3550	110	130	0.31	480	TO-3P
IXTR200N10P		120	0.008	7600	235	100	0.5	300	ISOPLUS247™
IXTT140N10P		140	0.011	4700	155	120	0.25	600	TO-268AA
IXTQ140N10P		140	0.011	4700	155	120	0.25	600	TO-3P
IXTK170N10P		170	0.009	6000	198	120	0.21	715	TO-264
IXTT170N10P ¹		170	0.009	6000	198	120	0.21	715	TO-268AA
IXTQ170N10P		170	0.009	6000	198	120	0.21	715	TO-3P
IXTK200N10P		200	0.0075	7600	240	100	0.18	800	TO-264
IXTP62N15P	150	62	0.04	2250	70	150	0.42	350	TO-220AB
IXTA62N15P		62	0.04	2250	70	150	0.42	350	TO-263AB
IXTQ62N15P		62	0.04	2250	70	150	0.42	350	TO-3P
IXTT96N15P		96	0.024	3500	110	150	0.31	480	TO-268AA
IXTQ96N15P		96	0.024	3500	110	150	0.31	480	TO-3P
IXTT120N15P		120	0.016	4900	150	150	0.25	600	TO-268AA
IXTQ120N15P		120	0.016	4900	150	150	0.25	600	TO-3P
IXTK150N15P		150	0.013	5800	190	150	0.21	714	TO-264
IXTQ150N15P		150	0.013	5800	190	150	0.21	714	TO-3P
IXTK180N15P		180	0.01	7000	240	150	0.18	800	TO-264
IXTP50N20P	200	50	0.06	2720	70	150	0.42	360	TO-220AB
IXTA50N20P		50	0.06	2720	70	150	0.42	360	TO-263AB
IXTQ50N20P		50	0.06	2720	70	150	0.42	360	TO-3P
IXTT74N20P		74	0.034	3300	107	160	0.31	480	TO-268AA
IXTQ74N20P		74	0.034	3300	107	160	0.31	480	TO-3P
IXTH96N20P		96	0.024	4800	145	160	0.25	600	TO-247AD
IXTT96N20P		96	0.024	4800	145	160	0.25	600	TO-268AA
IXTQ96N20P		96	0.024	4800	145	160	0.25	600	TO-3P
IXTK120N20P		120	0.022	6000	152	180	0.21	714	TO-264
IXTQ120N20P		120	0.022	6000	152	180	0.21	714	TO-3P
IXTK140N20P		140	0.018	7500	240	180	0.18	800	TO-264
IXTP42N25P	250	42	0.084	2300	70	200	0.42	300	TO-220AB
IXTA42N25P		42	0.084	2300	70	200	0.42	300	TO-263AB
IXTQ42N25P		42	0.084	2300	70	200	0.42	300	TO-3P
IXTT64N25P		64	0.049	3450	105	200	0.31	400	TO-268AA
IXTQ64N25P		64	0.049	3450	105	200	0.31	400	TO-3P
IXTK82N25P		82	0.035	4800	142	200	0.25	500	TO-264
IXTT82N25P		82	0.035	4800	142	200	0.25	500	TO-268AA
IXTQ82N25P		82	0.035	4800	142	200	0.25	500	TO-3P
IXTK100N25P		100	0.027	6300	185	200	0.21	600	TO-264
IXTT100N25P		100	0.027	6300	185	200	0.21	600	TO-268AA
IXTQ100N25P		100	0.027	6300	185	200	0.21	600	TO-3P
IXTK120N25P		120	0.024	8700	185	200	0.18	700	TO-264
IXTP36N30P	300	36	0.11	2250	70	250	0.42	300	TO-220AB
IXTA36N30P		36	0.11	2250	70	250	0.42	300	TO-263AB
IXTQ36N30P		36	0.11	2250	70	250	0.42	300	TO-3P
IXTT52N30P		52	0.066	3490	110	250	0.31	400	TO-268AA
IXTQ52N30P		52	0.066	3490	110	250	0.31	400	TO-3P

¹ ~~IXTT170N10P~~ Replacement part ~~IXTT140N10P~~

Polar™ Standard MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTT69N30P	300	69	0.0490	4960	156	330	0.25	500	TO-268AA
IXTQ69N30P		69	0.0490	4960	156	330	0.25	500	TO-3P
IXTH88N30P		88	0.0400	6300	180	250	0.21	600	TO-247AD
IXTK88N30P		88	0.0400	6300	180	250	0.21	600	TO-264
IXTT88N30P		88	0.0400	6300	180	250	0.21	600	TO-268AA
IXTQ88N30P		88	0.0400	6300	180	250	0.21	600	TO-3P
IXTK102N30P		102	0.0330	7500	224	250	0.18	700	TO-264
IXTK140N30P		140	0.2400	14800	185	250	0.12	1040	TO-264
IXTP12N50P	500	12	0.5000	1830	29	300	0.62	200	TO-220AB
IXTA12N50P		12	0.5000	1830	29	300	0.62	200	TO-263AB
IXTP16N50P		16	0.4000	2480	43	400	0.42	300	TO-220AB
IXTA16N50P		16	0.4000	2480	43	400	0.42	300	TO-263AB
IXTQ16N50P		16	0.4000	2480	43	400	0.42	300	TO-3P
IXTH22N50P		22	0.2700	2880	50	400	0.35	350	TO-247AD
IXTQ22N50P		22	0.2700	2880	50	400	0.35	350	TO-3P
IXTT26N50P		26	0.2300	3600	65	300	0.31	400	TO-268AA
IXTQ26N50P		26	0.2300	3600	65	300	0.31	400	TO-3P
IXTH30N50P		30	0.2000	4150	70	400	0.27	460	TO-247AD
IXTT30N50P		30	0.2000	4150	70	400	0.27	460	TO-268AA
IXTQ30N50P		30	0.2000	4150	70	400	0.27	460	TO-3P
IXTH36N50P		36	0.1700	4700	82	400	0.23	540	TO-247AD
IXTT36N50P		36	0.1700	4700	82	400	0.23	540	TO-268AA
IXTQ36N50P		36	0.1700	4700	82	400	0.23	540	TO-3P
IXTQ44N50P		44	0.1400	5440	98	400	0.19	650	TO-3P
IXTP10N60P	600	10	0.7400	1720	32	500	0.62	200	TO-220AB
IXTA10N60P		10	0.7400	1720	32	500	0.62	200	TO-263AB
IXTP14N60P		14	0.5500	2500	36	500	0.42	300	TO-220AB
IXTA14N60P		14	0.5500	2500	36	500	0.42	300	TO-263AB
IXTQ14N60P		14	0.5500	2500	36	500	0.42	300	TO-3P
IXTQ18N60P		18	0.4200	2500	49	500	0.35	360	TO-3P
IXTQ22N60P		22	0.3500	3600	62	500	0.31	400	TO-3P
IXTH26N60P		26	0.2700	4150	72	500	0.27	460	TO-247AD
IXTT26N60P		26	0.2700	4150	72	500	0.27	460	TO-268AA
IXTH30N60P		30	0.2400	5050	82	500	0.23	540	TO-247AD
IXTQ30N60P		30	0.2400	5050	82	500	0.23	540	TO-3P
IXTP08N100P	1000	0.8	20.000	240	11.3	750	3.00	42	TO-220AB
IXTY08N100P		0.8	20.000	240	11.3	750	3.00	42	TO-252AA
IXTA08N100P		0.8	20.000	240	11.3	750	3.00	42	TO-263AB
IXTP1N100P		1	15.000	331	15.5	750	2.50	50	TO-220AB
IXTY1N100P		1	15.000	331	15.5	750	2.50	50	TO-252AA
IXTA1N100P		1	15.000	331	15.5	750	2.50	50	TO-263AB
IXTP1R4N100P		1.4	11.000	450	17.8	750	2.00	63	TO-220AB
IXTY1R4N100P		1.4	11.000	450	17.8	750	2.00	63	TO-252AA
IXTA1R4N100P		1.4	11.000	666	17.8	750	2.00	63	TO-263AB
IXTP2N100P		2	7.500	655	24.3	800	1.45	86	TO-220AB
IXTY2N100P		2	7.500	655	24.3	800	1.45	86	TO-252AA
IXTA2N100P		2	7.500	655	24.3	800	1.45	86	TO-263AB
IXTP3N100P		3	4.800	1100	39	820	1.00	125	TO-220AB
IXTH3N100P		3	4.800	1100	39	820	1.00	125	TO-247AD
IXTA3N100P		3	4.800	1100	39	820	1.00	125	TO-263AB
IXTP02N120P	1200	0.2	75.000	104	4.7	1600	3.80	33	TO-220AB
IXTY02N120P		0.2	75.000	104	4.7	1600	3.80	33	TO-252AA
IXTP06N120P		0.6	34.000	236	13.3	900	3.00	42	TO-220AB
IXTA06N120P		0.6	34.000	236	13.3	900	3.00	42	TO-263AB
IXTP08N120P		0.8	25.000	333	14	900	2.50	50	TO-220AB
IXTA08N120P		0.8	25.000	333	14	900	2.50	50	TO-263AB
IXTP1N120P		1	20.000	445	17.6	900	2.00	63	TO-220AB
IXTA1N120P		1	20.000	445	17.6	900	2.00	63	TO-263AB
IXTP1R4N120P		1.4	13.000	666	24.8	900	1.45	86	TO-220AB
IXTY1R4N120P		1.4	13.000	666	24.8	900	1.45	86	TO-252AA
IXTY1R4N120PHV		1.4	13.000	666	24.8	900	1.45	86	TO-252AA
IXTA1R4N120P		1.4	13.000	725	24.8	900	1.45	86	TO-263AB
IXTP2R4N120P		2.4	7.500	1207	37	920	1.00	125	TO-220AB
IXTH2R4N120P		2.4	7.500	1207	37	920	1.00	125	TO-247AD
IXTA2R4N120P		2.4	7.500	1207	37	920	1.00	125	TO-263AB

Mo



X005a
TO-220AB



X015a
PLUS247



X020a
TO-264



X027a
SOT-227B (miniBLOC)




X011b
TO-263AB



X016a
ISOPLUS247™



X021a
PLUS264



X014a
TO-247AD



X019
TO-268AA



X022a
ISOPLUS264™

Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFH110N10P	100	110	0.015	3550	110	150	0.31	480	TO-247AD
IXFR200N10P		120	0.009	7600	235	150	0.50	300	ISOPLUS247™
IXFH140N10P		140	0.011	4700	155	150	0.25	600	TO-247AD
IXFT140N10P		140	0.011	4700	155	150	0.25	600	TO-268AA
IXFH170N10P		170	0.009	6000	198	150	0.21	715	TO-247AD
IXFK170N10P		170	0.009	6000	198	150	0.21	715	TO-264
IXFX200N10P		200	0.0075	7600	235	150	0.18	830	PLUS247
IXFN200N10P		200	0.0075	7600	235	150	0.22	680	SOT-227B (miniBLOC)
IXFK200N10P		200	0.0075	7600	235	150	0.18	830	TO-264
IXFX250N10P		250	0.0065	16000	205	200	0.12	1250	PLUS247
IXFK250N10P		250	0.0065	16000	205	200	0.12	1250	TO-264
IXFN300N10P		295	0.0055	23	279	200	0.14	1070	SOT-227B (miniBLOC)
IXFB300N10P		300	0.0055	23	279	200	0.10	1500	PLUS264
IXFH96N15P	150	96	0.024	3500	110	200	0.31	480	TO-247AD
IXFR180N15P		100	0.013	7000	240	200	0.50	300	ISOPLUS247™
IXFH120N15P		120	0.016	4900	150	200	0.25	600	TO-247AD
IXFT120N15P		120	0.016	4900	150	200	0.25	600	TO-268AA
IXFN180N15P		150	0.011	7000	240	200	0.22	680	SOT-227B (miniBLOC)
IXFH150N15P		150	0.013	5800	190	200	0.21	714	TO-247AD
IXFX180N15P		180	0.011	7000	240	200	0.18	830	PLUS247
IXFK180N15P		180	0.011	7000	240	200	0.18	830	TO-264
IXFK220N15P	200	220	0.009	15.4	162	200	0.12	1250	TO-264
IXFH74N20P		74	0.034	3300	107	200	0.31	480	TO-247AD
IXFR140N20P		90	0.022	7500	240	200	0.50	300	ISOPLUS247™
IXFH96N20P		96	0.024	4800	145	200	0.25	600	TO-247AD
IXFT96N20P		96	0.024	4800	145	200	0.25	600	TO-268AA
IXFN140N20P		115	0.018	7500	240	200	0.22	680	SOT-227B (miniBLOC)
IXFH120N20P		120	0.022	6000	152	200	0.21	714	TO-247AD
IXFK120N20P		120	0.022	6000	152	200	0.21	714	TO-264
IXFK140N20P		140	0.018	7500	240	200	0.18	830	TO-264
IXFX170N20P		170	0.014	11.4	185	200	0.12	1250	PLUS247
IXFK170N20P		170	0.014	11.4	185	200	0.12	1250	TO-264
IXFN210N20P		188	0.0105	18.6	255	200	0.14	1070	SOT-227B (miniBLOC)
IXFB210N20P	250	210	0.0105	18.6	255	200	0.10	1500	PLUS264
IXFH100N25P		100	0.027	6300	185	200	0.21	600	TO-247AD
IXFX120N25P		120	0.024	8700	185	200	0.18	700	PLUS247
IXFK120N25P		120	0.024	8700	185	200	0.18	700	TO-264
IXFH52N30P	300	52	0.066	3490	110	200	0.31	400	TO-247AD
IXFR102N30P		60	0.036	7500	224	200	0.50	250	ISOPLUS247™
IXFH69N30P		69	0.049	4960	156	200	0.25	500	TO-247AD
IXFT69N30P		69	0.049	4960	156	200	0.25	500	TO-268AA
IXFR140N30P		70	0.026	14800	185	200	0.35	360	ISOPLUS247™

Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFN102N30P	300	86	0.0330	7500	224	200	0.22	570	SOT-227B (miniBLOC)
IXFH88N30P		88	0.0400	6300	180	200	0.21	600	TO-247AD
IXFK88N30P		88	0.0400	6300	180	200	0.21	600	TO-264
IXFT88N30P		88	0.0400	6300	180	200	0.21	600	TO-268AA
IXFK102N30P		102	0.0330	7500	224	200	0.18	700	TO-264
IXFN140N30P		110	0.0240	14800	185	200	0.18	700	SOT-227B (miniBLOC)
IXFN170N30P		138	0.0018	20	258	200	0.14	890	SOT-227B (miniBLOC)
IXFX140N30P		140	0.0240	14800	185	200	0.12	1040	PLUS247
IXFK140N30P		140	0.0240	14800	185	200	0.12	1040	TO-264
IXFB170N30P		170	0.0180	20	258	200	0.10	1250	PLUS264
IXFP12N50P	500	12	0.500	1830	29	200	0.62	200	TO-220AB
IXFA12N50P		12	0.500	1830	29	200	0.62	200	TO-263AB
IXFP16N50P		16	0.400	2480	43	200	0.42	300	TO-220AB
IXFH16N50P		16	0.400	2480	43	200	0.42	300	TO-247AD
IXFA16N50P		16	0.400	2480	43	200	0.42	300	TO-263AB
IXFR36N50P		19	0.190	5500	93	200	0.75	156	ISOPLUS247™
IXFH22N50P		22	0.270	2880	50	200	0.35	350	TO-247AD
IXFR44N50P		24	0.150	5440	98	200	0.60	208	ISOPLUS247™
IXFH26N50P		26	0.230	3600	60	200	0.31	400	TO-247AD
IXFH30N50P		30	0.200	4150	70	200	0.27	460	TO-247AD
XFT30N50P		30	0.200	4150	70	200	0.27	460	TO-268AA
IXFH36N50P		36	0.170	5500	93	200	0.23	540	TO-247AD
IXFT36N50P		36	0.170	5500	93	200	0.23	540	TO-268AA
IXFR64N50P		37	0.095	9700	150	200	0.42	300	ISOPLUS247™
IXFH44N50P		44	0.140	5440	98	200	0.19	650	TO-247AD
IXFK44N50P		44	0.140	5440	98	200	0.19	650	TO-264
IXFT44N50P		44	0.140	5440	98	200	0.19	650	TO-268AA
IXFR80N50P		45	0.072	12700	197	200	0.35	360	ISOPLUS247™
IXFN64N50P		50	0.085	9700	150	200	0.20	625	SOT-227B (miniBLOC)
IXFX64N50P		64	0.085	9700	150	200	0.15	830	PLUS247
IXFK64N50P		64	0.085	9700	150	200	0.15	830	TO-264
IXFN80N50P		66	0.065	12700	195	200	0.18	700	SOT-227B (miniBLOC)
IXFL100N50P		68	0.052	20000	240	200	0.20	625	ISOPLUS264™
IXFX80N50P		80	0.065	12700	197	200	0.12	1040	PLUS247
IXFK80N50P		80	0.065	12700	197	200	0.12	1040	TO-264
IXFN100N50P		90	0.049	20000	240	200	0.12	1040	SOT-227B (miniBLOC)
IXFB100N50P		100	0.049	20000	240	200	0.10	1250	PLUS264
IXFP10N60P	600	10	0.740	1720	32	200	0.62	200	TO-220AB
IXFA10N60P		10	0.740	1720	32	200	0.62	200	TO-263AB
IXFP14N60P		14	0.550	2500	36	200	0.42	300	TO-220AB
IXFH14N60P		14	0.550	2500	36	200	0.42	300	TO-247AD
IXFA14N60P		14	0.550	2500	36	200	0.42	300	TO-263AB
IXFR30N60P		15	0.250	3820	85	200	0.75	166	ISOPLUS247™
IXFH18N60P		18	0.400	2500	50	200	0.35	360	TO-247AD
IXFR36N60P		20	0.200	5800	102	200	0.60	208	ISOPLUS247™
IXFH22N60P		22	0.350	3600	58	200	0.31	400	TO-247AD
IXFH26N60P		26	0.270	4150	72	200	0.27	460	TO-247AD
IXFT26N60P		26	0.270	4150	72	200	0.27	460	TO-268AA
IXFH30N60P		30	0.240	4000	82	200	0.25	500	TO-247AD
IXFR48N60P		32	0.150	8860	150	200	0.42	300	ISOPLUS247™
IXFR64N60P		36	0.105	12000	200	200	0.35	360	ISOPLUS247™
IXFH36N60P		36	0.190	5800	102	200	0.19	650	TO-247AD
IXFK36N60P		36	0.190	5800	102	200	0.19	650	TO-264
IXFT36N60P		36	0.190	5800	102	200	0.19	650	TO-268AA
IXFN48N60P		40	0.140	8860	150	200	0.20	625	SOT-227B (miniBLOC)
IXFX48N60P		48	0.135	8860	150	200	0.15	830	PLUS247
IXFK48N60P		48	0.135	8860	150	200	0.15	830	TO-264
IXFN64N60P		50	0.096	12000	200	200	0.18	700	SOT-227B (miniBLOC)
IXFL82N60P		55	0.078	23000	240	200	0.20	625	ISOPLUS264™
IXFX64N60P		64	0.096	12000	200	200	0.12	1040	PLUS247
IXFK64N60P		64	0.096	12000	200	200	0.12	1040	TO-264
IXFN82N60P		72	0.075	23000	240	200	0.12	1040	SOT-227B (miniBLOC)
IXFB82N60P		82	0.075	23000	240	200	0.10	1250	PLUS264

Mo eMOT





X005a
TO-220AB



X016a
ISOPLUS247™



X021a
PLUS264



X011b
TO-263AB




X017a
TO-3P



X022a
ISOPLUS264™



X014a
TO-247AD



X019
TO-268AA



X022e
ISOPLUS264/i5-Pak™



X015a
PLUS247



X020a
TO-264



X027a
SOT-227B (miniBLOC)


Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q ₃ typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP7N80P	800	7	1.440	1800	32	250	0.62	200	TO-220AB
IXFA7N80P		7	1.440	1800	32	250	0.62	200	TO-263AB
IXFR20N80P		10	0.570	4685	86	250	0.80	160	ISOPLUS247™
IXFP10N80P		10	1.100	2050	40	250	0.42	300	TO-220AB
IXFH10N80P		10	1.100	2050	40	250	0.42	300	TO-247AD
IXFA10N80P		10	1.100	2050	40	250	0.42	300	TO-263AB
IXFH12N80P		12	0.850	2800	51	250	0.35	360	TO-247AD
IXFR24N80P		13	0.420	7200	105	250	0.60	208	ISOPLUS247™
IXFH14N80P		14	0.720	3900	61	250	0.31	400	TO-247AD
IXFT14N80P		14	0.720	3900	61	250	0.31	400	TO-268AA
IXFH16N80P		16	0.600	4000	70	250	0.27	460	TO-247AD
IXFT16N80P		16	0.600	4000	70	250	0.27	460	TO-268AA
IXFR32N80P		20	0.290	8800	150	250	0.42	300	ISOPLUS247™
IXFH20N80P		20	0.520	4685	86	250	0.25	500	TO-247AD
IXFH24N80P		24	0.400	5800	100	250	0.19	650	TO-247AD
IXFK24N80P		24	0.400	7200	105	250	0.19	650	TO-264
IXFT24N80P		24	0.400	5800	100	250	0.19	650	TO-268AA
IXFR44N80P		26	0.190	12000	200	250	0.35	360	ISOPLUS247™
IXFN32N80P		29	0.270	8820	150	250	0.20	625	SOT-227B (miniBLOC)
IXFX32N80P		32	0.270	8800	150	250	0.15	830	PLUS247
IXFK32N80P		32	0.270	8800	150	250	0.15	830	TO-264
IXFN44N80P		39	0.190	18000	200	250	0.18	694	SOT-227B (miniBLOC)
IXFL60N80P		40	0.150	18000	250	250	0.20	625	ISOPLUS264™
IXFX44N80P		44	0.190	12000	198	250	0.12	1200	PLUS247
IXFK44N80P		44	0.190	12000	198	250	0.12	1200	TO-264
IXFN60N80P		53	0.140	18000	250	250	0.12	1040	SOT-227B (miniBLOC)
IXFB60N80P		60	0.140	18000	250	250	0.10	1250	PLUS264
IXFR18N90P	900	10.5	0.660	5230	97	300	0.62	200	ISOPLUS247™
IXFH12N90P		12	0.900	3080	56	300	0.33	380	TO-247AD
IXFR24N90P		13	0.460	7200	130	300	0.54	230	ISOPLUS247™
IXFH18N90P		18	0.600	5230	97	300	0.23	540	TO-247AD
IXFR40N90P		21	0.230	14000	230	300	0.42	300	ISOPLUS247™
IXFH24N90P		24	0.420	7200	130	300	0.19	660	TO-247AD
IXFT24N90P		24	0.420	7200	130	300	0.19	660	TO-268AA
IXFK32N90P		32	0.300	10600	215	300	0.13	960	TO-264
IXFX32N90P		32	0.300	10600	215	300	0.13	960	PLUS247
IXFN40N90P		33	0.21	14000	230	300	0.18	695	SOT-227B (miniBLOC)
IXFX40N90P		40	0.21	14000	230	300	0.13	960	PLUS247
IXFK40N90P		40	0.21	14000	230	300	0.13	960	TO-264
IXFN52N90P		43	0.16	19000	308	300	0.14	890	SOT-227B (miniBLOC)
IXFB52N90P		52	0.210	19000	308	300	0.13	1250	PLUS264
IXFN56N90P		56	0.210	23000	375	300	0.13	1000	SOT-227B (miniBLOC)

Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP4N100P	1000	4	0.210	1456	26	300	0.83	150	TO-220AB
IXFA4N100P		4	0.160	1456	26	300	0.83	150	TO-263AB
IXFP5N100P		5	0.160	1830	33.4	200	0.50	250	TO-220AB
IXFH5N100P		5	0.145	1830	33.4	200	0.50	250	TO-247AD
IXFA5N100P		5	3.30	1830	33.4	200	0.50	250	TO-263AB
IXFA7N100P		7	3.30	2590	47	300	0.42	300	TO-263AB
IXFH7N100P		7	2.80	2590	47	300	0.42	300	TO-247AD
IXFP7N100P		7	2.80	2590	47	300	0.42	300	TO-220AB
IXFH10N100P		10	2.80	3030	56	300	0.33	380	TO-247AD
IXFH12N100P		12	1.90	4080	80	300	0.27	463	TO-247AD
IXFR26N100P		15	1.90	11900	197	300	0.43	290	ISOPLUS247™
IXFH15N100P		15	1.40	5140	97	300	0.23	543	TO-247AD
IXFR32N100P		18	0.64	14200	225	300	0.39	320	ISOPLUS247™
IXFH20N100P		20	1.05	7300	126	300	0.19	660	TO-247AD
IXFT20N100P		20	0.43	7300	126	300	0.19	660	TO-268AA
IXFL44N100P		22	0.76	19000	305	300	0.35	357	ISOPLUS264/i5-Pak™
IXFN26N100P		23	0.34	11900	197	300	0.21	595	SOT-227B (miniBLOC)
IXFX26N100P		26	0.57	11900	197	300	0.16	780	PLUS247
IXFK26N100P		26	0.57	11900	197	300	0.16	780	TO-264
IXFN32N100P		27	0.24	14200	225	300	0.18	690	SOT-227B (miniBLOC)
IXFL38N100P		29	0.39	24000	350	300	0.24	520	ISOPLUS264/i5-Pak™
IXFX32N100P		32	0.39	14200	225	300	0.13	960	PLUS247
IXFK32N100P		32	0.39	14200	225	300	0.13	960	TO-264
IXFN44N100P		37	0.32	19000	305	300	0.14	890	SOT-227B (miniBLOC)
IXFN38N100P		38	0.23	24000	350	300	0.125	1000	SOT-227B (miniBLOC)
IXFB44N100P		44	0.32	19000	305	300	0.10	1250	PLUS264
IXFN40N110P	1100	34	0.21	19000	310	300	0.14	890	SOT-227B (miniBLOC)
IXFB40N110P		40	0.22	19000	310	300	0.10	1250	PLUS264
IXFP6N120P	1200	6	0.28	2830	92	300	0.50	250	TO-220AB
IXFH6N120P		6	0.26	2830	92	300	0.50	250	TO-247AD
IXFA6N120P		6	0.26	2830	92	300	0.50	250	TO-263AB
IXFR16N120P		9	0.26	6900	120	300	0.54	230	ISOPLUS247™
IXFH12N120P		12	2.40	5400	103	300	0.23	543	TO-247AD
IXFR20N120P		13	2.40	12900	193	300	0.43	290	ISOPLUS247™
IXFR26N120P		15	2.40	14000	225	300	0.39	320	ISOPLUS247™
IXFH16N120P		16	1.04	6900	120	300	0.19	660	TO-247AD
IXFT16N120P		16	1.35	6900	120	300	0.19	660	TO-268AA
IXFX20N120P		20	0.50	11100	193	300	0.16	780	PLUS247
IXFN20N120P		20	0.95	11100	193	300	0.21	595	SOT-227B (miniBLOC)
IXFK20N120P		20	0.95	11100	193	300	0.16	780	TO-264
IXFN26N120P		23	0.38	14000	225	300	0.18	695	SOT-227B (miniBLOC)
IXFL32N120P		24	0.57	21000	360	300	0.24	520	ISOPLUS264/i5-Pak™
IXFX26N120P		26	0.57	14000	225	300	0.13	960	PLUS247
IXFK26N120P		26	0.57	14000	225	300	0.13	960	TO-264
IXFB30N120P		30	0.46	22500	310	300	0.10	1250	PLUS264
IXFN30N120P		30	0.34	19000	310	300	0.14	890	SOT-227B (miniBLOC)
IXFN32N120P		32	0.46	21000	360	300	0.125	1000	SOT-227B (miniBLOC)

Mo eMO



X005a
TO-220AB



X016a
ISOPLUS247™



X020a
TO-264



X031a
SMPD-X




X011b
TO-263AB



X016c
ISO247™



X021a
PLUS264



X014a
TO-247AD




X017a
TO-3P



X022a
ISOPLUS264™



X015a
PLUS247



X019
TO-268AA



X027a
SOT-227B (miniBLOC)


PolarP3™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} max. (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP36N30P3	300	36	0.1100	2040	30	-125	0.36	347	TO-220AB
IXFA36N30P3		36	0.1100	2040	30	-125	0.36	347	TO-263AB
IXFH94N30P3		94	0.0360	5510	102	250	0.12	1040	TO-247AD
IXFQ94N30P3		94	0.0360	5510	102	250	0.12	1040	TO-3P
IXFT94N30P3		94	0.0360	5510	102	250	0.12	1040	TO-268AA
IXFL210N30P3		108	0.0160	16200	268	250	0.24	520	ISOPLUS264™
IXFK120N30P3		120	0.0270	8630	150	250	0.11	1130	TO-264
IXFX120N30P3		120	0.0270	8630	150	250	0.11	1130	PLUS247
IXFK150N30P3		150	0.0190	12100	197	250	0.10	1300	TO-264
IXFX150N30P3		150	0.0190	12100	197	250	0.10	1300	PLUS247
IXFN210N30P3	500	192	0.0145	16200	268	250	0.08	1500	SOT-227B (miniBLOC)
IXFB210N30P3		210	0.0145	16200	268	250	0.07	1890	PLUS264
IXFJ26N50P3		14	0.265	2220	42	250	0.69	180	ISO247™
IXFA16N50P3		16	0.36	1515	29	250	0.38	330	TO-263AB
IXFH16N50P3		16	0.36	1515	29	250	0.38	330	TO-247AD
IXFP16N50P3		16	0.36	1515	29	250	0.38	330	TO-220AB
IXFA20N50P3		20	0.3	1800	36	250	0.36	380	TO-263AB
IXFH20N50P3		20	0.3	1800	36	250	0.36	380	TO-247AD
IXFP20N50P3		20	0.3	1800	36	250	0.36	380	TO-220AB
IXFQ20N50P3		20	0.3	1800	36	250	0.36	380	TO-3P
IXFA26N50P3		26	0.23	2220	42	250	0.25	500	TO-263AB
IXFH26N50P3		26	0.23	2220	42	250	0.25	500	TO-247AD
IXFP26N50P3		26	0.23	2220	42	250	0.25	500	TO-220AB
IXFQ26N50P3		26	0.23	2220	42	250	0.25	500	TO-3P
IXFH34N50P3		34	0.17	3260	60	250	0.18	695	TO-247AD
IXFQ34N50P3		34	0.17	3260	60	250	0.18	695	TO-3P
IXFH60N50P3		60	0.1	6250	96	250	0.12	1040	TO-247AD
IXFQ60N50P3		60	0.1	6250	96	250	0.12	1040	TO-3P
IXFT60N50P3		60	0.1	6250	96	250	0.12	1040	TO-268AA
IXFL132N50P3		63	0.043	18600	250	250	0.24	520	ISOPLUS264™
IXFK78N50P3		78	0.068	9900	147	250	0.11	1130	TO-264
IXFX78N50P3		78	0.068	9900	147	250	0.11	1130	PLUS247
IXFK98N50P3		98	0.05	13100	197	250	0.096	1300	TO-264
IXFX98N50P3		98	0.05	13100	197	250	0.096	1300	PLUS247
IXFN132N50P3		112	0.039	18600	250	250	0.083	1500	SOT-227B (miniBLOC)
IXFB132N50P3		132	0.039	18600	250	250	0.066	1890	PLUS264

PolarP3™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} max. (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFA14N60P3	600	14	0.54	1480	25	250	0.38	327	TO-263AB
IXFH14N60P3		14	0.54	1480	25	250	0.38	327	TO-247AD
IXFP14N60P3		14	0.54	1480	25	250	0.38	327	TO-220AB
IXFA16N60P3		16	0.44	1830	36	250	0.36	347	TO-263AB
IXFH16N60P3		16	0.44	1830	36	250	0.36	347	TO-247AD
IXFP16N60P3		16	0.44	1830	36	250	0.36	347	TO-220AB
IXFA22N60P3		22	0.36	2600	38	250	0.25	500	TO-263AB
IXFH22N60P3		22	0.36	2600	38	250	0.25	500	TO-247AD
IXFP22N60P3		22	0.36	2600	38	250	0.25	500	TO-220AB
IXFQ22N60P3		22	0.36	2600	38	250	0.25	500	TO-3P
IXFH28N60P3		28	0.26	3560	50	250	0.18	695	TO-247AD
IXFQ28N60P3		28	0.26	3560	50	250	0.18	695	TO-3P
IXFH42N60P3		42	0.185	5150	78	250	0.15	830	TO-247AD
IXFR80N60P3		48	0.076	13100	190	250	0.23	540	ISOPLUS247™
IXFH50N60P3		50	0.145	6300	94	250	0.12	1040	TO-247AD
IXFQ50N60P3		50	0.145	6300	94	250	0.12	1040	TO-3P
IXFT50N60P3		50	0.145	6300	94	250	0.12	1040	TO-268AA
IXFK64N60P3		64	0.095	9900	145	250	0.11	1130	TO-264
IXFX64N60P3		64	0.095	9900	145	250	0.11	1130	PLUS247
IXFN80N60P3		66	0.077	13100	190	250	0.13	960	SOT-227B (miniBLOC)
IXFK80N60P3		80	0.07	13100	190	250	0.096	1300	TO-264
IXFX80N60P3		80	0.07	13100	190	250	0.096	1300	PLUS247
IXFN110N60P3		90	0.056	18000	245	250	0.083	1500	SOT-227B (miniBLOC)
IXFB110N60P3		110	0.056	18000	245	250	0.066	1890	PLUS264

Mo eMO



X004
TO-252AA



X005a
TO-220AB



X007a
TO-220ABFP



X011b
TO-263AB



X012c
TO-263AB




X014a
TO-247AD



X015a
PLUS247



X017a
TO-3P




X019a
TO-268HV



X020a
TO-264



X027a
SOT-227B (miniBLOC)



Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
135 V Ultra Junction X4-Class Power MOSFET									
IXTP170N13X4	135	170	0.0063	5460	105	86	0.31	480	TO-220AB
IXTA100N15X4		100	0.0115	3970	74	90	0.4	375	TO-263AB
IXTP100N15X4		100	0.0115	3970	74	90	0.4	375	TO-220AB
IXTH130N15X4		130	0.0085	4770	87	93	0.31	400	TO-247AD
IXTP130N15X4		130	0.0085	4770	87	93	0.31	400	TO-220AB
IXTA130N15X4		130	0.008	4770	87	93	0.31	400	TO-263AB
IXTA130N15X4-7		130	0.008	4770	87	93	0.31	400	TO-263AB
IXTH150N15X4		150	0.0072	5500	105	100	0.31	480	TO-247AD
IXTP150N15X4		150	0.0072	5500	105	100	0.31	480	TO-220AB
IXTA150N15X4		150	0.0069	5500	105	100	0.31	480	TO-263AB
IXTA150N15X4-7		150	0.0069	5500	105	100	0.31	480	TO-263AB
IXTH240N15X4		240	0.0044	8900	195	130	0.16	940	TO-247AD
IXTT240N15X4HV		240	0.0044	8900	195	130	0.16	940	TO-268HV
IXTK400N15X4		400	0.0031	14500	430	175	0.1	1500	TO-264
IXTN400N15X4		400	0.0031	14500	430	175	0.14	1070	SOT-227B (miniBLOC)
IXTX400N15X4		400	0.0031	14500	430	175	0.1	1500	PLUS247
200 V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA36N20X3	200	36	0.0450	1425	21	75	0.73	170	TO-263AB
IXFP36N20X3		36	0.0450	1425	21	75	0.73	170	TO-220AB
IXFP36N20X3M		36	0.0450	1425	21	75	3.50	36	TO-220FPAB
IXFY36N20X3		36	0.0450	1425	21	75	0.73	170	TO-252AA
IXFA50N20X3		50	0.0300	2100	33	70	0.52	240	TO-263AB
IXFP50N20X3		50	0.0300	2100	33	70	0.52	240	TO-220AB
IXFP50N20X3M		50	0.0300	2100	33	70	3.70	34	TO-220FPAB
IXFA72N20X3		72	0.0200	3780	55	95	0.39	320	TO-263AB
IXFP72N20X3		72	0.0200	3780	55	95	0.39	320	TO-220AB
IXFP72N20X3M		72	0.0200	3780	55	95	3.50	36	TO-220FPAB
IXFQ72N20X3		72	0.0200	3780	55	95	0.39	320	TO-3P
IXFA90N20X3 ¹		90	0.0128	5420	78	95	0.32	390	TO-263AB
IXFH90N20X3		90	0.0128	5420	78	95	0.32	390	TO-247AD
IXFP90N20X3		90	0.0128	5420	78	95	0.32	390	TO-220AB
IXFP90N20X3M		90	0.0128	5420	78	95	3.50	36	TO-220FPAB
IXFQ90N20X3		90	0.0128	5420	78	95	0.32	390	TO-3P

¹ I_{AS} = 10 A, replacement part I_{AS} = 10 A


Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
200 V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFH140N20X3	200	140	0.0096	7660	127	105	0.26	480	TO-247AD
IXFQ140N20X3		140	0.0096	7660	127	105	0.26	480	TO-3P
IXFT140N20X3HV		140	0.0096	7660	127	105	0.26	480	TO-268HV
IXFN220N20X3		160	0.0062	13600	204	128	0.32	390	SOT-227B (miniBLOC)
IXFH180N20X3		180	0.0075	10300	154	120	0.17	735	TO-247AD
IXFT180N20X3HV		180	0.0075	10300	154	120	0.17	735	TO-268HV
IXFH220N20X3		220	0.0062	13600	204	128	0.14	890	TO-247AD
IXFK220N20X3		220	0.0062	13600	204	128	0.14	890	TO-264
IXFT220N20X3HV		220	0.0062	13600	204	128	0.14	890	TO-268HV
IXFK300N20X3		300	0.0040	23800	375	172	0.10	1250	TO-264
IXFN300N20X3		300	0.0035	23800	375	172	0.18	695	SOT-227B (miniBLOC)
IXFX300N20X3		300	0.0040	23800	375	172	0.10	1250	PLUS247
200V Ultra Junction X4-Class Power MOSFET									
IXTA86N20X4	200	86	0.013	2250	70	96	0.5	300	TO-263AB
IXTP86N20X4		86	0.013	2250	70	96	0.5	300	TO-220AB
IXTA94N20X4		94	0.0106	5050	77	130	0.42	360	TO-263AB
IXTP94N20X4		94	0.0106	5050	77	130	0.42	360	TO-220AB
IXTH94N20X4		94	0.0106	5050	77	130	0.42	360	TO-247AD
IXTH220N20X4		220	0.0055	12300	157	140	0.19	800	TO-247AD
IXTT220N20X4HV		220	0.0055	12300	157	140	0.19	800	TO-268HV
IXTP60N20X4		60	0.021	2450	33	107	0.6	250	TO-220AB
IXTH60N20X4		60	0.021	2450	33	107	0.6	250	TO-247AD
IXTA60N20X4		60	0.021	2450	33	107	0.6	250	TO-263AB
IXTH120N20X4		120	0.0095	6100	108	190	0.36	417	TO-247AD
IXTP120N20X4		120	0.0095	6100	108	190	0.36	417	TO-220AB
250V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA30N25X3	250	30	0.0600	1450	21	82	0.73	170	TO-263AB
IXFP30N25X3		30	0.0600	1450	21	82	0.73	170	TO-220AB
IXFP30N25X3M		30	0.0600	1450	21	82	3.50	36	TO-220FPAB
IXFY30N25X3		30	0.0600	1450	21	82	0.73	170	TO-252AA
IXFA44N25X3		44	0.0400	2200	33	87	0.52	240	TO-263AB
IXFJ80N25X3		44	0.0180	5430	83	120	1.20	104	X016c
IXFP44N25X3		44	0.0400	2200	33	87	0.52	240	TO-220AB
IXFP44N25X3M		44	0.0400	2220	33	87	3.70	34	TO-220FPAB
IXFA60N25X3		60	0.0230	3610	50	95	0.39	320	TO-263AB
IXFP60N25X3		60	0.0230	3610	50	95	0.39	320	TO-220AB
IXFP60N25X3M		60	0.0230	3610	50	95	3.50	36	TO-220FPAB
IXFQ60N25X3		60	0.0230	3610	50	95	0.39	320	TO-3P
IXFA80N25X3 ²		80	0.0160	5430	83	120	0.32	390	TO-263AB
IXFH80N25X3		80	0.0160	5430	83	120	0.32	390	TO-247AD
IXFP80N25X3		80	0.0160	5430	83	120	0.32	390	TO-220AB
IXFQ80N25X3		80	0.0160	5430	83	120	0.32	390	TO-3P
IXFH120N25X3		120	0.0120	7870	122	140	0.26	480	TO-247AD
IXFQ120N25X3		120	0.0120	7870	122	140	0.26	480	TO-3P
IXFT120N25X3HV		120	0.0120	7870	122	140	0.26	480	TO-268HV
IXFH150N25X3		150	0.0090	10400	154	140	0.17	735	TO-247AD
IXFT150N25X3HV		150	0.0090	10400	154	140	0.17	735	TO-268HV
IXFH170N25X3		170	0.0074	13500	190	140	0.14	890	TO-247AD
IXFK170N25X3		170	0.0074	13500	190	140	0.14	890	TO-264
IXFN170N25X3		170	0.0074	13500	190	135	0.32	390	SOT-227B (miniBLOC)
IXFT170N25X3HV		170	0.0074	13500	190	140	0.14	890	TO-268HV
IXFK240N25X3		240	0.0050	23800	345	177	0.10	1250	TO-264
IXFN240N25X3		240	0.0045	23800	345	165	0.18	695	SOT-227B (miniBLOC)
IXFX240N25X3		240	0.0050	23800	345	177	0.10	1250	PLUS247

2 Replacement part IXFP60N25X3



Mo eMO



X004
TO-252AA



X005a
TO-220AB



X007a
TO-220FPAB



X011b
TO-263AB



X014a
TO-247AD



X015a
PLUS247



X016a
ISOPLUS247™



X017a
TO-3P




X019a
TO-268HV



X020a
TO-264



X027a
SOT-227B (miniBLOC)



Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
300 V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA26N30X3	300	26	0.0660	1465	22	105	0.73	170	TO-263AB
IXFP26N30X3		26	0.0660	1465	22	105	0.73	170	TO-220AB
IXFY26N30X3		26	0.0660	1465	22	105	0.73	170	TO-252AA
IXFA38N30X3		38	0.0500	2240	35	90	0.52	240	TO-263AB
IXFP38N30X3		38	0.0500	2240	35	90	0.52	240	TO-220AB
IXFP38N30X3M		38	0.0500	2440	35	90	3.70	34	TO-220FPAB
IXFA56N30X3		56	0.0270	3750	56	115	0.39	320	TO-263AB
IXFH56N30X3		56	0.0270	3750	56	115	0.39	320	TO-247AD
IXFP56N30X3		56	0.0270	3750	56	115	0.39	320	TO-220AB
IXFP56N30X3M		56	0.0270	3750	56	115	3.50	36	TO-220FPAB
IXFA72N30X3 ¹		72	0.0190	5400	82	100	0.32	390	TO-263AB
IXFH72N30X3		72	0.0190	5400	82	100	0.32	390	TO-247AD
IXFP72N30X3		72	0.0190	5400	82	100	0.32	390	TO-220AB
IXFP72N30X3M		72	0.0190	5400	82	100	3.50	36	TO-220FPAB
IXFQ72N30X3		72	0.0190	5400	82	100	0.32	390	TO-3P
IXFH100N30X3		100	0.0135	7660	122	130	0.26	48	TO-247AD
IXFT100N30X3HV		100	0.0135	7660	122	130	0.26	480	TO-268HV
IXFH120N30X3		120	0.0110	10500	170	145	0.17	735	TO-247AD
IXFT120N30X3HV		120	0.0110	10500	170	145	0.17	735	TO-268HV
IXFH150N30X3		150	0.0083	13100	254	167	0.14	890	TO-247AD
IXFK150N30X3		150	0.0083	13100	254	167	0.14	890	TO-264
IXFT150N30X3HV		150	0.0083	13100	254	167	0.14	890	TO-268HV
IXFK210N30X3		210	0.0055	24200	375	190	0.10	1250	TO-264
IXFN210N30X3		210	0.0046	24200	375	190	0.18	695	SOT-227B (miniBLOC)
IXFX210N30X3		210	0.0055	24200	375	190	0.10	1250	PLUS247

¹ IXFP56N30X3 replacement part IXFA56N30X3


Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
650V X2-Class Power MOSFET									
IXTP2N65X2	650	2	2.300	180	4.3	137	2.27	55	TO-220AB
IXTY2N65X2		2	2.300	180	4.3	137	2.27	55	TO-252AA
IXTA4N65X2		4	0.850	455	8.3	160	1.56	80	TO-263AB
IXTP4N65X2		4	0.850	455	8.3	160	1.56	80	TO-220AB
IXTY4N65X2		4	0.850	455	8.3	160	1.56	80	TO-252AA
IXTA8N65X2		8	0.500	800	12	200	0.83	150	TO-263AB
IXTP8N65X2		8	0.500	800	12	200	0.83	150	TO-220AB
IXTP8N65X2M		8	0.550	800	12	200	3.90	32	TO-220FPAB
IXTY8N65X2		8	0.500	800	12	200	0.83	150	TO-252AA
IXTA12N65X2		12	0.300	1100	17.7	270	0.69	180	TO-263AB
IXTH12N65X2		12	0.300	1100	17.7	270	0.69	180	TO-247AD
IXTP12N65X2		12	0.300	1100	17.7	270	0.69	180	TO-220AB
IXTP12N65X2M		12	0.300	1100	17.7	270	3.10	40	TO-220FPAB
IXTA20N65X2		20	0.185	1450	27	350	0.43	290	TO-263AB
IXTH20N65X2		20	0.185	1450	27	350	0.43	290	TO-247AD
IXTP20N65X2		20	0.185	1450	27	350	0.43	290	TO-220AB
IXTP20N65X2M		20	0.185	1450	27	350	3.50	36	TO-220FPAB
IXTA24N65X2		24	0.145	2060	36	390	0.32	390	TO-263AB
IXTH24N65X2		24	0.145	2060	36	390	0.32	390	TO-247AD
IXTP24N65X2		24	0.145	2060	36	390	0.32	390	TO-220AB
IXTP24N65X2M		24	0.145	2060	36	390	3.37	37	TO-220FPAB
IXTA30N65X2		30	0.120	2260	44	355	0.27	460	TO-263AB
IXTP30N65X2		30	0.120	2260	44	355	0.27	460	TO-247AD
IXTH30N65X2		30	0.120	2260	44	355	0.27	460	TO-247AD
IXTA34N65X2		34	0.096	3000	54	390	0.23	540	TO-263AB
IXTA34N65X2		34	0.096	3000	54	390	0.23	540	TO-263AB
IXTH34N65X2		34	0.096	3000	54	390	0.23	540	TO-247AD
IXTP34N65X2		34	0.096	3000	54	390	0.23	540	TO-220AB
IXTT34N65X2HV		34	0.096	3000	54	390	0.23	540	TO-268HV
IXTH48N65X2		48	0.065	4300	76	400	0.19	660	TO-247AD
IXTR102N65X2		54	0.033	10900	152	450	0.38	330	ISOPLUS247™
IXTH62N65X2		62	0.050	5800	100	445	0.16	780	TO-247AD
IXTN102N65X2		76	0.030	10900	152	450	0.21	595	SOT-227B (miniBLOC)
IXTH80N65X2		80	0.038	7800	137	465	0.14	890	TO-247AD
IXTK102N65X2		102	0.030	10900	152	450	0.12	1040	TO-264
IXTX102N65X2		102	0.030	10900	152	450	0.12	1040	PLUS247
IXTK120N65X2		120	0.023	13600	230	505	0.10	1250	TO-264
IXTQ34N65X2M		34	0.096	3000	54	390	2.9	43	TO-3P
IXTQ48N65X2M		48	0.065	4300	76	400	1.78	70	TO-3P
650V X2-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA8N65X2	650	8	0.45	790	11	105	0.83	150	TO-263AB
IXFP8N65X2		8	0.45	790	11	105	0.83	150	TO-220AB
IXFY8N65X2		8	0.45	790	11	105	0.83	150	TO-252AA
IXFA12N65X2		12	0.31	1134	18.5	155	0.69	180	TO-263AB
IXFH12N65X2		12	0.31	1134	18.5	155	0.69	180	TO-247AD
IXFP12N65X2		12	0.31	1134	18.5	155	0.69	180	TO-220AB
IXFP12N65X2M		12	0.31	1134	18.5	155	3.10	40	TO-220FPAB
IXFA18N65X2		18	0.2	1520	29	135	0.43	290	TO-263AB
IXFH18N65X2		18	0.2	1520	29	135	0.43	290	TO-247AD
IXFP18N65X2		18	0.2	1520	29	135	0.43	290	TO-220AB
IXFP18N65X2M		18	0.2	1520	29	135	3.50	36	TO-220FPAB
IXFA22N65X2		22	0.145	2190	37	145	0.32	390	TO-263AB
IXFH22N65X2		22	0.145	2190	37	145	0.32	390	TO-247AD
IXFP22N65X2		22	0.145	2190	37	145	0.32	390	TO-220AB
IXFP22N65X2M		22	0.145	2190	37	145	3.37	37	TO-220FPAB

Mo eMOT



X003
TO-251AA



X004
TO-252AA



X005a
TO-220AB



X007a
TO-220FPAB



X011b
TO-263AB



L014d
TO-247-4L



X011c
TO-263ABHV



X014a
TO-247AD




X015a
PLUS247



X016c
ISO247™



X017a
TO-3P



X019a
TO-268HV




X020a
TO-264



X021a
PLUS264



X027a
SOT-227B (miniBLOC)



Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
650V X2-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA34N65X2	650	34	0.100	3230	56	164	0.23	540	TO-263AB
IXFH34N65X2		34	0.100	3230	56	164	0.23	540	TO-247AD
IXFP34N65X2		34	0.100	3230	56	164	0.23	540	TO-220AB
IXFP34N65X2M		34	0.100	3230	56	164	3.10	40	TO-220FPAB
IXFH46N65X2		46	0.069	4570	98	180	0.19	660	TO-247AD
IXFH60N65X2		60	0.052	6300	108	180	0.16	780	TO-247AD
IXFH60N65X2-4		60	0.052	6300	108	180	0.16	780	TO-247-4L
IXFT60N65X2HV		60	0.052	6300	108	180	0.16	780	TO-268HV
IXFN100N65X2		78	0.030	10800	183	200	0.21	595	SOT-227B (miniBLOC)
IXFH80N65X2		80	0.038	8300	140	200	0.14	890	TO-247AD
IXFH80N65X2-4		80	0.038	8300	140	200	0.14	890	TO-247-4L
IXFK80N65X2		80	0.038	8300	140	200	0.14	890	TO-264
IXFT80N65X2HV		80	0.038	8300	140	200	0.14	890	TO-268HV
IXFK100N65X2		100	0.030	10800	183	200	0.12	1040	TO-264
IXFX100N65X2		100	0.030	10800	183	200	0.12	1040	PLUS247
IXFN120N65X2		108	0.024	14000	240	220	0.14	890	SOT-227B (miniBLOC)
IXFK120N65X2		120	0.024	14000	240	220	0.10	1250	TO-264
IXFX120N65X2		120	0.024	14000	240	220	0.10	1250	PLUS247
IXFN150N65X2		145	0.017	21000	355	260	0.12	1040	SOT-227B (miniBLOC)
IXFB150N65X2		150	0.017	21000	355	260	0.08	1560	PLUS264
IXFN170N65X2		170	0.013	27000	434	270	0.11	1170	SOT-227B (miniBLOC)

Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
700 V X2-Class Power MOSFET									
IXTA4N70X2	700	4	0.850	386	11.8	186	1.56	80	TO-263AB
IXTP4N70X2		4	0.850	386	11.8	186	1.56	80	TO-220AB
IXTP4N70X2M		4	0.850	386	11.8	186	4.16	30	TO-220FPAB
IXTU4N70X2		4	0.850	386	11.8	186	1.56	80	TO-251AA
IXTY4N70X2		4	0.850	386	11.8	186	1.56	80	TO-252AA
IXTA8N70X2		8	0.500	800	12	200	0.83	150	TO-263AB
IXTP8N70X2		8	0.500	800	12	200	0.83	150	TO-220AB
IXTP8N70X2M		8	0.550	800	12	200	3.90	32	TO-220FPAB
IXTU8N70X2		8	0.500	800	12	200	0.83	150	TO-251AA
IXTY8N70X2		8	0.500	800	12	200	0.83	150	TO-252AA
IXTA12N70X2		12	0.300	960	19	270	0.69	180	TO-263AB
IXTH12N70X2		12	0.300	960	19	270	0.69	180	TO-247AD
IXTP12N70X2		12	0.300	960	19	270	0.69	180	TO-220AB
IXTP12N70X2M		12	0.300	960	19	270	3.10	40	TO-220FPAB
850 V X-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA4N85X	850	3.5	2.500	247	7	170	0.830	150	TO-263AB
IXFP4N85X		3.5	2.500	247	7	170	0.830	150	TO-220AB
IXFP4N85XM		3.5	2.500	247	7	170	3.570	35	TO-220FPAB
IXFY4N85X		3.5	2.500	247	7	170	0.830	150	TO-252AA
IXFA8N85XHV		8	0.850	654	17	125	0.630	200	TO-263ABHV
IXFP8N85X		8	0.850	654	17	125	0.630	200	TO-220AB
IXFP8N85XM		8	0.850	654	17	125	3.780	33	TO-220FPAB
IXFQ8N85X		8	0.850	654	17	125	0.630	200	TO-3P
IXFJ20N85X		9.5	0.360	1660	63	190	1.130	110	ISO247™
IXFA14N85XHV		14	0.550	1043	30	116	0.270	460	TO-263ABHV
IXFH14N85X		14	0.550	1043	30	116	0.270	460	TO-247AD
IXFP14N85X		14	0.550	1043	30	116	0.270	460	TO-220AB
IXFP14N85XM		14	0.550	1043	30	116	3.300	38	TO-220FPAB
IXFA20N85XHV		20	0.330	1660	63	190	0.230	540	TO-263ABHV
IXFH20N85X		20	0.330	1660	63	190	0.230	540	TO-247AD
IXFP20N85X		20	0.330	1660	63	190	0.230	540	TO-220AB
IXFH30N85X		30	0.230	2460	68	160	0.180	695	TO-247AD
IXFT30N85XHV		30	0.230	2460	68	160	0.180	695	TO-268HV
IXFH40N85X		40	0.145	3700	98	200	0.145	860	TO-247AD
IXFT40N85XHV		40	0.145	3700	98	200	0.145	860	TO-268HV
IXFH50N85X		50	0.105	4480	152	218	0.140	890	TO-247AD
IXFK50N85X		50	0.105	4480	152	218	0.140	890	TO-264
IXFT50N85XHV		50	0.105	4480	152	218	0.140	890	TO-268HV
IXFN66N85X		65	0.065	8900	230	250	0.150	830	SOT-227B (miniBLOC)
IXFK66N85X		66	0.065	8900	230	250	0.100	1250	TO-264
IXFX66N85X		66	0.065	8900	230	250	0.100	1250	PLUS247
IXFB90N85X		90	0.041	13300	340	250	0.070	1785	PLUS264
IXFN90N85X		90	0.041	13300	340	250	0.104	1200	SOT-227B (miniBLOC)
IXFN110N85X		110	0.033	17000	425	205	0.107	1170	SOT-227B (miniBLOC)
1000 V X-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFH26N100X	1000	26	0.32	3290	113	220	0.145	860	TO-247AD
IXFT26N100XHV		26	0.32	3290	113	220	0.145	860	TO-268HV
IXFH32N100X		32	0.22	4075	130	200	0.140	890	TO-247AD
IXFK32N100X		32	0.22	4075	130	200	0.140	890	TO-264
IXFT32N100XHV		32	0.22	4075	130	200	0.140	890	TO-268HV
IXFN52N100X		44	0.125	6725	245	260	0.150	830	SOT-227B (miniBLOC)
IXFK52N100X		52	0.125	6725	245	260	0.100	1250	TO-264
IXFX52N100X		52	0.125	6725	245	260	0.100	1250	PLUS247
IXFN70N100X		65	0.089	9150	350	310	0.104	1200	SOT-227B (miniBLOC)
IXFB70N100X		70	0.089	9160	350	310	0.070	1785	PLUS264
IXFN74N100X		74	0.0660	17000	425	290	0.107	1170	SOT-227B (miniBLOC)

 **eMOS**

Q3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} max. (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFH70N20Q3	200	70	0.040	3150	67	250	0.18	690	TO-247AD
IXFT70N20Q3		70	0.040	3150	67	250	0.18	690	TO-268AA
IXFH50N30Q3		50	0.080	3160	65	250	0.18	690	TO-247AD
IXFT50N30Q3	300	50	0.080	3160	65	250	0.18	690	TO-268AA
IXFT70N30Q3		70	0.054	4735	98	250	0.15	830	TO-268AA
IXFH70N30Q3		70	0.054	4735	98	250	0.15	830	TO-247AD
IXFR44N50Q3	500	25	0.154	4800	93	250	0.41	300	ISOPLUS247™
IXFT30N50Q3		30	0.200	3200	62	250	0.18	690	TO-268AA
IXFH30N50Q3		30	0.200	3200	62	250	0.18	690	TO-247AD
IXFH44N50Q3		44	0.140	4800	93	250	0.15	830	TO-247AD
IXFT44N50Q3		44	0.140	4800	93	250	0.15	830	TO-268AA
IXFR64N50Q3		45	0.094	6950	145	250	0.25	500	ISOPLUS247™
IXFR80N50Q3		50	0.072	10000	200	250	0.22	570	ISOPLUS247™
IXFN80N50Q3		63	0.065	10000	200	250	0.16	780	SOT-227B (miniBLOC)
IXFK64N50Q3		64	0.085	6950	145	250	0.13	1000	TO-264
IXFX64N50Q3		64	0.085	6950	145	250	0.13	1000	PLUS247
IXFX80N50Q3		80	0.065	10000	200	250	0.10	1250	PLUS247
IXFK80N50Q3		80	0.065	10000	200	250	0.10	1250	TO-264
IXFN100N50Q3		82	0.049	13800	255	250	0.13	960	SOT-227B (miniBLOC)
IXFB100N50Q3		100	0.049	13800	255	250	0.08	1560	PLUS264
IXFR48N60Q3	600	32	0.154	7020	140	300	0.25	500	ISOPLUS247™
IXFR64N60Q3		42	0.104	9930	190	300	0.22	568	ISOPLUS247™
IXFK48N60Q3		48	0.140	7020	140	300	0.13	1000	TO-264
IXFX48N60Q3		48	0.140	7020	140	300	0.13	1000	PLUS247
IXFK64N60Q3		64	0.095	9930	190	300	0.10	1250	TO-264
IXFX64N60Q3		64	0.095	9930	190	300	0.10	1250	PLUS247
IXFN82N60Q3		66	0.075	13500	275	300	0.13	960	SOT-227B (miniBLOC)
IXFB82N60Q3		82	0.075	13500	275	300	0.08	1560	PLUS264
IXFR32N80Q3	800	24	0.300	6940	140	300	0.25	500	ISOPLUS247™
IXFK32N80Q3		32	0.270	6940	140	300	0.125	1000	TO-264
IXFX32N80Q3		32	0.270	6940	140	300	0.125	1000	PLUS247
IXFN44N80Q3		37	0.190	10950	185	300	0.16	780	SOT-227B (miniBLOC)
IXFX44N80Q3		44	0.190	10950	185	300	0.10	1250	PLUS247
IXFK44N80Q3		44	0.190	10950	185	300	0.10	1250	TO-264
IXFN62N80Q3		49	0.140	13600	270	300	0.13	960	SOT-227B (miniBLOC)
IXFB62N80Q3		62	0.140	13600	270	300	0.08	1560	PLUS264
IXFR15N100Q3	1000	10	1.200	3250	64	250	0.31	400	ISOPLUS247™
IXFT15N100Q3		15	1.050	3250	64	250	0.18	690	TO-268AA
IXFH15N100Q3		15	1.050	3250	64	250	0.18	690	TO-247AD
IXFH18N100Q3		18	0.660	4890	90	300	0.15	830	TO-247AD
IXFT18N100Q3		18	0.660	4890	90	300	0.15	830	TO-268AA
IXFR24N100Q3		18	0.490	7200	140	300	0.25	500	ISOPLUS247™
IXFR32N100Q3		23	0.350	10900	195	300	0.22	570	ISOPLUS247™
IXFK24N100Q3		24	0.440	7200	140	300	0.125	1000	TO-264
IXFX24N100Q3		24	0.440	7200	140	300	0.125	1000	PLUS247
IXFN32N100Q3		28	0.320	10900	195	300	0.16	780	SOT-227B (miniBLOC)
IXFK32N100Q3		32	0.320	10900	195	250	0.10	1250	TO-264
IXFX32N100Q3		32	0.320	10900	195	250	0.10	1250	PLUS247
IXFN44N100Q3		38	0.220	13600	264	300	0.13	960	SOT-227B (miniBLOC)
IXFB44N100Q3		44	0.220	13600	264	300	0.08	1560	PLUS264
IXFN40N110Q3	1100	35	0.260	14000	300	-434	0.13	960	SOT-227B (miniBLOC)
IXFB40N110Q3		40	0.260	14000	300	-434	0.08	1560	PLUS264


X011c
TO-263ABHV


X014a
TO-247AD


X014c
TO-247HV


X015a
PLUS247


X015c
PLUS247HV


X016a
ISOPLUS247™


X016c
ISO247™



X019
TO-268AA


X020a
TO-264


X021a
PLUS264


X022e
ISOPLUS264/i5-Pak™


X024c
ISOPLUS i4-PAC™


X027a
SOT-227B (miniBLOC)


Very High Voltage Power MOSFET (2–4.7 kV)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTH1N200P3	2000	1	40	646	23.5	2300	1.00	125	TO-247AD
IXTH1N200P3HV		1	40	646	23.5	2300	1.00	125	TO-247HV
IXTA1N200P3HV		1	40	646	23.5	2300	1.00	125	TO-263ABHV
IXTH3N200P3HV		3	8	1860	70	420	0.24	520	TO-247HV
IXTT3N200P3HV		3	8	1860	70	420	0.24	520	TO-268HV
IXTF6N200P3		4	4.2	3700	143	520	0.58	215	ISOPLUS i4-PAC™
IXTX6N200P3HV	2500	6	4	3700	143	520	0.13	960	PLUS247HV
IXTA02N250HV		0.2	450	116	7.4	1500	1.50	83	TO-263ABHV
IXTH02N250		0.2	450	116	7.4	1500	1.50	83	TO-247AD
IXTH05N250P3HV		0.5	110	303	10.5	1200	1.20	104	TO-247HV
IXTF1N250		1	40	1660	41	2500	1.13	110	ISOPLUS i4-PAC™
IXTH1R4N250P3		1.4	28	960	33	1800	0.64	195	TO-247AD
IXTH1N250		1.5	40	1660	41	2500	0.50	250	TO-247AD
IXTT1N250HV		1.5	40	1660	41	2500	0.50	250	TO-268HV
IXTN5N250		5	8.8	8560	200	1200	0.18	700	SOT-227B (miniBLOC)
IXTK5N250		5	8.8	8560	200	1200	0.13	960	TO-264
IXTX5N250		5	8.8	8560	200	1200	0.13	960	PLUS247
IXTH04N300P3HV	3000	0.4	190	283	13	1100	1.20	104	TO-247HV
IXTT1N300P3HV		1	50	895	30.6	1800	0.64	195	TO-268HV
IXTH1N300P3HV		1	50	895	30.6	1800	0.64	195	TO-247HV
IXTF2N300P3		1.6	21	1890	73	400	0.77	160	ISOPLUS i4-PAC™
IXTH2N300P3HV		2	21	1890	73	400	0.24	520	TO-247HV
IXTT2N300P3HV		2	21	1890	73	400	0.24	520	TO-268HV
IXTX4N300P3HV		4	12.5	3680	139	420	0.13	960	PLUS247HV
IXTH02N450HV	4500	0.2	625	246	10.6	1600	1.10	113	TO-247HV
IXTF02N450		0.2	625	246	10.6	1600	1.60	78	ISOPLUS i4-PAC™
IXTT02N450HV		0.2	625	246	10.6	1600	1.10	113	TO-268HV
IXTF1N450		0.9	80	1700	46	1750	0.77	165	ISOPLUS i4-PAC™
IXTT1N450HV		1	80	1700	46	1750	0.24	520	TO-268HV
IXTH1N450HV		1	80	1700	46	1750	0.24	520	TO-247HV
IXTF1R4N450		1.4	40	3300	88	660	0.65	190	ISOPLUS i4-PAC™
IXTX1R4N450HV		1.4	40	3300	88	660	0.13	960	PLUS247HV
IXTL2N450		2	20	6860	180	1750	0.56	220	ISOPLUS264/i5-Pak
IXTL2N470		2	20	6860	180	1750	0.56	220	ISOPLUS264/i5-Pak

Power MOSFET




X005a
TO-220AB




X017a
TO-3P



X020a
TO-264



X011c
TO-263ABHV



X019
TO-268AA



X027a
SOT-227B (miniBLOC)




X014a
TO-247AD



X015a
PLUS247



X016c
ISO247™



X019a
TO-268HV


Legacy (Standard) Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTA05N100HV ¹	1000	0.75	17	260	7.8	710	3.10	40	TO-263ABHV
IXTP3N120	1200	3.00	4.5	1050	39	700	0.62	200	TO-220AB
IXTH3N120		3.00	4.5	1050	39	700	0.80	100	TO-247AD
IXTA3N120		3.00	4.5	1050	39	700	0.62	200	TO-263AB
IXTA3N120HV		3.00	4.5	1050	39	700	0.62	200	TO-263ABHV
IXTH6N120		6.00	2.4	1950	56	850	0.42	300	TO-247AD
IXTT6N120		6.00	2.4	1950	56	850	0.42	300	TO-268HV
IXTA3N150HV	1500	3.00	7.3	1375	38.6	900	0.50	110	TO-263ABHV
IXTH3N150		3.00	7.3	1375	38.6	900	0.50	250	TO-247AD
IXTA4N150HV		4.00	6	1576	44.5	900	0.45	280	TO-263ABHV
IXTH4N150		4.00	6	1576	44.5	900	0.45	280	TO-247AD
IXTJ4N150		2.50	6	1576	44.5	900	1.13	110	ISO247™
IXTT4N150HV		4.00	6	1576	44.5	900	0.45	280	TO-268HV
IXTH6N150		6.00	3.5	2230	67	1500	0.23	540	TO-247AD
IXTJ6N150		3.00	3.85	2230	67	1500	1.00	125	ISO247™
IXTT6N150		6.00	3.5	2230	67	1500	0.23	540	TO-247AD
IXTT12N150HV		12	2	3720	106	1200	0.14	890	TO-268HV

¹ IFR05. Replacement part IFR05100P




X014a
TO-247AD



X019
TO-268AA



X021a
PLUS264



X015a
PLUS247



X020a
TO-264



X027a
SOT-227B (miniBLOC)



X017a
TO-3P

Linear LTM Power MOSFET with Extended FBSOAs

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTH80N20L	200	80	0.032	6160	180	250	0.24	520	TO-247AD
IXTT80N20L		80	0.032	6160	180	250	0.24	520	TO-268AA
IXTN46N50L	500	46	0.16	7000	260	600	0.18	700	SOT-227B (miniBLOC)
IXTK46N50L		46	0.16	7000	260	600	0.18	700	TO-264
IXTX46N50L		46	0.16	7000	260	600	0.18	700	PLUS247
IXTH24N50L		24	0.3	2500	160	500	0.31	400	TO-247AD
IXTN30N100L	1000	30	0.45	13700	545	1000	0.156	800	SOT-227B (miniBLOC)
IXTB30N100L		30	0.45	13700	545	1000	0.156	800	PLUS264
IXTN22N100L		22	0.6	7050	270	1000	0.18	700	SOT-227B (miniBLOC)
IXTK22N100L		22	0.6	7050	270	1000	0.18	700	TO-264
IXTX22N100L		22	0.6	7050	270	1000	0.18	700	PLUS247
IXTH12N100L		12	1.3	2500	155	1000	0.31	400	TO-247AD
IXTH4N100L	1200	4	2.8	1496	75	1100	0.43	290	TO-247AD
IXTK17N120L		17.00	0.9	8300.00	155	1830	0.18	700	TO-264
IXTX17N120L		17.00	0.9	8300.00	155	1830	0.18	700	PLUS247
IXTN17N120L		15.0	0.9	8300.00	155	1830	0.23	540	SOT-227B (miniBLOC)
IXTK8N150L		8.00	3.6	8000.00	250	1700	0.18	700	TO-264
IXTX8N150L		8.00	3.6	8000.00	250	1700	0.18	700	PLUS247
IXTN8N150L	1500	7.50	3.6	8000.00	250	1700	0.23	545	SOT-227B (miniBLOC)
IXTH2N150L		2.00	15	1470.00	72	1860	0.43	290	TO-247AD
IXTN3N250L		3.00	0.0083	5400.00	230	370	0.36	347	SOT-227B (miniBLOC)
IXTK3N250L	2500	3.00	0.0083	5400.00	230	370	0.3	471	TO-264
IXTX3N250L		3.00	0.0083	5400.00	230	370	0.3	417	PLUS247

 **eMOS**

Linear L2™ Power MOSFET With Extended FBSOAs


Part Number	V _{DSS}	I _{D(cont)} Chip T _c = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTP80N075L2	75	80	0.024	3600	103	160	0.35	357	TO-220AB
IXTA80N075L2		80	0.024	3600	103	160	0.35	357	TO-263AB
IXTH80N075L2		80	0.024	3600	103	160	0.35	357	TO-247AD
IXTH140N075L2		140	0.011	9300	275	200	0.23	540	TO-247AD
IXTT140N075L2HV		140	0.011	9300	275	200	0.23	540	TO-268HV
IXTN240N075L2		225	0.007	19000	546	206	0.17	735	SOT-227B (miniBLOC)
IXTK240N075L2		240	0.007	19000	546	206	0.13	960	TO-264
IXTX240N075L2		240	0.007	19000	546	206	0.13	960	PLUS247
IXTA64N10L2		64	0.032	3620	100	180	0.35	357	TO-263AB
IXTH64N10L2	100	64	0.032	3620	100	180	0.35	357	TO-247AD
IXTP64N10L2		64	0.032	3620	100	180	0.35	357	TO-220AB
IXTH75N10L2		75	0.021	8100	215	180	0.31	400	TO-247AD
IXTT75N10L2		75	0.021	8100	215	180	0.31	400	TO-268AA
IXTH110N10L2		110	0.018	10500	260	230	0.21	600	TO-247AD
IXTT110N10L2		110	0.018	10500	260	230	0.21	600	TO-268AA
IXTN200N10L2		178	0.011	23000	540	245	0.15	830	SOT-227B (miniBLOC)
IXTX200N10L2		200	0.011	23000	540	245	0.12	1040	PLUS247
IXTK200N10L2		200	0.011	23000	540	245	0.12	1040	TO-264
IXTH60N20L2	200	60	0.045	10500	255	330	0.23	540	TO-247AD
IXTT60N20L2		60	0.045	10500	255	330	0.23	540	TO-268AA
IXTQ60N20L2		60	0.045	10500	255	330	0.23	540	TO-3P
IXTN110N20L2		100	0.024	23000	500	420	0.17	735	SOT-227B (miniBLOC)
IXTX110N20L2		110	0.024	23000	500	420	0.13	960	PLUS247
IXTK110N20L2		110	0.024	23000	500	420	0.13	960	TO-264
IXTA30N25L2	250	30	0.140	3200	130	315	0.35	355	TO-263AB
IXTH30N25L2		30	0.140	3200	130	315	0.35	355	TO-247AD
IXTP30N25L2		30	0.140	3200	130	315	0.35	355	TO-220AB
IXTH44N25L2		44	0.075	5740	256	366	0.31	400	TO-247AD
IXTT44N25L2HV		44	0.075	5740	256	366	0.31	400	TO-268AA
IXTH58N25L2		58	0.064	9200	330	400	0.23	540	TO-247AD
IXTX90N25L2		90	0.033	23000	640	266	0.13	960	PLUS247
IXTN90N25L2		90	0.033	23000	640	266	0.17	735	SOT-227B (miniBLOC)
IXTK90N25L2		90	0.033	23000	640	266	0.13	960	TO-264
IXTH38N30L2	300	38	0.100	7200	260	420	0.31	400	TO-247AD
IXTT38N30L2		38	0.100	7200	260	420	0.31	400	TO-268AA
IXTH50N30L2		50	0.072	9300	330	430	0.23	540	TO-247AD
IXTK80N30L2		80	0.038	19100	660	485	0.13	960	TO-264
IXTN80N30L2		80	0.038	19100	660	485	0.17	735	SOT-227B (miniBLOC)
IXTX80N30L2		80	0.038	19100	660	485	0.13	960	PLUS247
IXTA15N50L2	500	15	0.480	4080	123	570	0.42	300	TO-263AB
IXTP15N50L2		15	0.480	4080	123	570	0.42	300	TO-220AB
IXTH15N50L2		15	0.480	4080	123	570	0.42	300	TO-247AD
IXTH30N50L2		30	0.200	8100	240	500	0.31	400	TO-247AD
IXTT30N50L2		30	0.200	8100	240	500	0.31	400	TO-268AA
IXTQ30N50L2		30	0.200	8100	240	500	0.31	400	TO-3P
IXTH40N50L2		40	0.170	10400	320	500	0.23	540	TO-247AD
IXTT40N50L2		40	0.170	10400	320	500	0.23	540	TO-268AA
IXTQ40N50L2		40	0.170	10400	320	500	0.23	540	TO-3P
IXTN60N50L2		53	0.100	24000	610	980	0.17	735	SOT-227B (miniBLOC)
IXTX60N50L2	600	60	0.100	24000	610	980	0.13	960	PLUS247
IXTK60N50L2		60	0.100	24000	610	980	0.13	960	TO-264
IXTH30N60L2		30	0.240	10700	335	710	0.23	540	TO-247AD
IXTT30N60L2		30	0.240	10700	335	710	0.23	540	TO-268AA
IXTQ30N60L2		30	0.240	10700	335	710	0.23	540	TO-3P



X003
TO-251AA




X011b
TO-263AB



X015a
PLUS247



X019a
TO-268HV



X004
TO-252AA



X011c
TO-263ABHV



X017a
TO-3P



X020a
TO-264



X005a
TO-220AB



X014a
TO-247AD



X019
TO-268AA



X027a
SOT-227B (miniBLOC)

Depletion Mode Power MOSFET

"Normally on" devices

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	V _{GS(off)} max.	C _{iss} typ.	C _{rss} typ.	Q _g typ.	R _{thJC}	Package
	V	A	Ω	V	pF	pF	nC	K/W	
IXTH16N20D2	200	16.00	0.073	-4	5500	607	208	695	TO-247AD
IXTT16N20D2		16.00	0.073	-4	5500	607	208	695	TO-268AA
IXTP08N50D2	500	0.80	4.6	-4	312	11	12.7	60	TO-220AB
IXTY08N50D2		0.80	4.6	-4	312	11	12.7	60	TO-252AA
IXTA08N50D2		0.80	4.6	-4	312	11	12.7	60	TO-263AB
IXTP1R6N50D2		1.60	2.3	-4	645	16.5	23.7	100	TO-220AB
IXTY1R6N50D2		1.60	2.3	-4	645	16.5	23.7	100	TO-252AA
IXTA1R6N50D2		1.60	2.3	-4	645	16.5	23.7	100	TO-263AB
IXTP3N50D2		3.00	1.5	-4	1070	24	40	125	TO-220AB
IXTA3N50D2		3.00	1.5	-4	1070	24	40	125	TO-263AB
IXTP6N50D2		6.00	0.5	-4	2800	64	96	300	TO-220AB
IXTH6N50D2		6.00	0.5	-4	2800	64	96	300	TO-247AD
IXTA6N50D2		6.00	0.5	-4	2800	64	96	300	TO-263AB
IXTH16N50D2		16.00	0.24	-4	5250	130	199	695	TO-247AD
IXTT16N50D2		16.00	0.24	-4	5250	130	199	695	TO-268AA
IXTP08N100D2	1000	0.80	21	-4	325	6.5	14.6	60	TO-220AB
IXTY08N100D2		0.80	21	-4	325	6.5	14.6	60	TO-252AA
IXTA08N100D2		0.80	21	-4	325	6.5	14.6	60	TO-263AB
IXTA08N100D2HV		0.80	21	-4	325	6.5	14.6	60	TO-263ABHV
IXTP1R6N100D2		1.60	10	-4.5	645	11	27	100	TO-220AB
IXTY1R6N100D2		1.60	10	-4.5	645	11	27	100	TO-252AA
IXTA1R6N100D2		1.60	10	-4.5	645	11	27	100	TO-263AB
IXTP3N100D2		3.00	5.5	-4.5	1020	17	37.5	125	TO-220AB
IXTA3N100D2		3.00	5.5	-4.5	1020	17	37.5	125	TO-263AB
IXTA3N100D2HV		3.00	6	-4.5	1020	17	37.5	125	TO-263ABHV
IXTP6N100D2		6.00	2.2	-4.5	2650	41	95	300	TO-220AB
IXTH6N100D2		6.00	2.2	-4.5	2650	41	95	300	TO-247AD
IXTA6N100D2		6.00	2.2	-4.5	2650	41	95	300	TO-263AB
IXTT10N100D2		10.00	1.5	-4.5	5320	70	200	695	TO-268AA
IXTH10N100D2		10.00	1.5	-4.5	5320	70	200	695	TO-247AD
IXTT2N170D2	1700	2.00	6.5	-4	3650	80	110	568	TO-268AA
IXTH2N170D2		2.00	6.5	-4	3650	80	110	568	TO-247AD
IXTA1N170D2HV		1.00	16	-4.5	3090	30	47	290	TO-263ABHV
IXTH1N170D2HV		1.00	16	-4.5	3090	30	47	290	TO-247HV

MO



N-Channel Depletion Mode FETs



Our N-channel depletion mode field effect transistors (FETs) utilize a proprietary third-generation vertical DMOS process. This third-generation process realizes world-class, high-voltage MOSFET performance in an economical silicon gate process. This process also yields a robust device for low-power applications with high input impedance. These highly reliable FET devices have been used extensively in our solid-state relays for industrial and telecommunications applications. These “normally on” MOSFETs are well suited for low-cost, pre-regulator applications that are tolerant of high voltage drops and power dissipation between the power source and the output regulator stage.

Part Number	$V_{(BR)DSX}$	$R_{DS(on)}$ max.	$V_{GS(off)}$ min.	$V_{GS(off)}$ max.	I_D min.	Package
	V	Ω	V	V	mA	
CPC3701	60	1	-1.4	-3.1	600	SOT-89
CPC3703	250	4	-1.6	-3.9	360	SOT-89
CPC3708	350	14	-2	-3.6	130	SOT-89 / SOT-223
CPC3710	250	10	-1.6	-3.9	220	SOT-89
CPC3714	350	14	-1.6	-3.9	240	SOT-89
CPC3720	350	22	-1.6	-3.9	130	SOT-89
CPC3730	350	35	-1.6	-3.9	140	SOT-89
CPC3902	250	2.5	-1.4	-3.1	400	SOT-89 / SOT-223
CPC3909	400	6	-1.4	-3.1	300	SOT-89 / SOT-223
CPC3960	600	44	-1.4	-3.1	100	SOT-223
CPC3980	800	45	-1.4	-3.1	100	SOT-223
CPC3981	800	45	-1.4	-3.1	100	SOT-223-2L
CPC3982	800	380	-1.4	-3.1	20	SOT-23

Switchable Current Regulators

Switchable current regulators are a new family of useful and versatile devices targeted for use in communications, networking, and power conversion circuits. Current regulators (or current sources) are traditionally made up of resistors and other discrete active components, and are extensively used in the design of high performance analog and mixed signal circuits and systems. With the introduction of simple to use switchable three terminal current regulators, board level system designers can now simplify their circuits by putting these new devices to work.

Part Number	V_{DSS}	$I_{D(cont)}$ Chip $T_C = 25\text{ }^{\circ}\text{C}$	Configuration	R_{thJC}	P_D	Package
	V	A		K/W	W	
IXCP10M45S	450	-0.3	Single	3.1	40	TO-220
IXCY10M45S	450	-0.3	Single	3.1	40	TO-252
IXCP10M90S	900	-	Single	3.1	40	TO-220
IXCY10M90S	900	-	Single	3.1	40	TO-252

**X005a**
TO-220AB**X015a**
PLUS247**X019**
TO-268AA**X027a**
SOT-227B (miniBLOC)**X011b**
TO-263AB**X016a**
ISOPLUS247™**X020a**
TO-264**X014a**
TO-247AD**X017a**
TO-3P**X021a**
PLUS264

P-Channel PolarP™ Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTX32P60P	-600	-32	0.350	11100	196	480	0.14	890	PLUS247
IXTN32P60P		-32	0.350	11100	196	480	0.14	890	SOT-227B miniBLOC
IXTK32P60P		-32	0.350	11100	196	480	0.14	890	TO-264
IXTR32P60P		-18	0.385	11100	196	480	0.40	310	ISOPLUS247™
IXTH16P60P		-16	0.720	5120	92	440	0.27	460	TO-247AD
IXTT16P60P		-16	0.720	5120	92	440	0.27	460	TO-268AA
IXTR16P60P		-10	0.790	5120	92	440	0.66	190	ISOPLUS247™
IXTX40P50P	-500	-40	0.230	11.5	205	477	0.14	890	PLUS247
IXTN40P50P		-40	0.230	11500	205	477	0.14	890	SOT-227B miniBLOC
IXTK40P50P		-40	0.230	11500	205	477	0.14	890	TO-264
IXTR40P50P		-22	0.260	11500	205	477	0.40	312	ISOPLUS247™
IXTH20P50P		-20	0.450	5120	103	406	0.27	460	TO-247AD
IXTT20P50P		-20	0.450	5120	103	406	0.27	460	TO-268AA
IXTR20P50P		-13	0.490	5120	103	406	0.66	190	ISOPLUS247™
IXTP10P50P		-10	1.000	2670	50	414	0.50	300	TO-220AB
IXTH10P50P		-10	1.000	2670	50	414	0.50	300	TO-247AD
IXTA10P50P		-10	1.000	2670	50	414	0.50	300	TO-263AB
IXTQ10P50P		-10	1.000	2670	50	414	0.50	300	TO-3P
IXTX90P20P	-200	-90	0.044	12000	205	315	0.14	890	PLUS247
IXTN90P20P		-90	0.044	12000	205	315	0.14	890	SOT-227B miniBLOC
IXTK90P20P		-90	0.044	12000	205	315	0.14	890	TO-264
IXTR90P20P		-53	0.048	12000	205	315	0.40	312	ISOPLUS247™
IXTH48P20P		-48	0.085	5400	103	260	0.27	462	TO-247AD
IXTT48P20P		-48	0.085	5400	103	260	0.27	462	TO-268AA
IXTR48P20P		-30	0.093	5400	103	260	0.66	190	ISOPLUS247™
IXTP26P20P		-26	0.170	2740	56	240	0.42	300	TO-220AB
IXTH26P20P		-26	0.170	2740	56	240	0.42	300	TO-247AD
IXTA26P20P		-26	0.170	2740	56	240	0.42	300	TO-263AB
IXTQ26P20P		-26	0.170	2740	56	240	0.42	300	TO-3P
IXTP36P15P	-150	-36	0.110	3100	55	228	0.42	300	TO-220AB
IXTH36P15P		-36	0.110	3100	55	228	0.42	300	TO-247AD
IXTA36P15P		-36	0.110	3100	55	228	0.42	300	TO-263AB
IXTQ36P15P		-36	0.110	3100	55	228	0.42	300	TO-3P
IXTR36P15P		-22	0.120	2950	55	150	1.00	150	ISOPLUS247™
IXTX170P10P	-100	-170	0.012	12600	240	176	0.14	890	PLUS247
IXTN170P10P		-170	0.012	12600	240	176	0.14	890	SOT-227B miniBLOC
IXTK170P10P		-170	0.012	12600	240	176	0.14	890	TO-264
IXTR170P10P		-108	0.013	12600	240	176	0.40	312	ISOPLUS247™
IXTH90P10P		-90	0.025	5800	120	144	0.27	462	TO-247AD
IXTT90P10P		-90	0.025	5800	120	144	0.27	462	TO-268AA
IXTP52P10P		-52	0.050	2845	60	120	0.42	300	TO-220AB
IXTH52P10P		-52	0.050	2845	60	120	0.42	300	TO-247AD
IXTA52P10P		-52	0.050	2845	60	120	0.42	300	TO-263AB
IXTQ52P10P		-52	0.05	2845	60	120	0.42	300	TO-3P


Automotive Grade Power MOSFET

P-Channel PolarP™ Power MOSFET



Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTY2P50PA	-500	-2	4.2	600	11.9	300	2.15	58	TO-252

 **eMOS**

P-Channel TrenchP™ Power MOSFET



Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{D(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ. (max)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTK120P20T	-200	-120	0.030	73000	740	-300	0.12	1040	TO-264
IXTX120P20T		-120	0.030	73000	740	-301	0.12	1040	PLUS247
IXTN120P20T		-106	0.030	73000	740	-302	0.15	830	SOT-227B (miniBLOC)
IXTR120P20T		-90	0.032	73000	740	-303	0.21	595	ISOPLUS247™
IXTH68P20T		-68	0.055	33400	380	245	0.22	568	TO-247AD
IXTT68P20T		-68	0.055	33400	380	245	0.22	568	TO-268AA
IXTR68P20T		-44	0.064	33400	380	245	0.46	270	ISOPLUS247™
IXTA32P20T		-32	0.130	14500	185	190	0.42	300	TO-263AB
IXTP32P20T		-32	0.130	14500	185	190	0.42	300	TO-220AB
IXTH32P20T		-32	0.130	14500	185	190	0.42	300	TO-247AD
IXTQ32P20T		-32	0.130	14500	185	190	0.42	300	TO-3P
IXTP44P15T	-150	-44	0.065	13400	175	140	0.42	298	TO-220AB
IXTH44P15T		-44	0.065	13400	175	140	0.42	298	TO-247AD
IXTA44P15T		-44	0.065	13400	175	140	0.42	298	TO-263AB
IXTQ44P15T		-44	0.065	13400	175	140	0.42	298	TO-3P
IXTP15P15T		-15	0.240	3650	48	116	0.83	150	TO-220AB
IXTY15P15T		-15	0.240	3650	48	116	0.83	150	TO-252AA
IXTA15P15T		-15	0.240	3650	48	116	0.83	150	TO-263AB
IXTP10P15T		-10	0.350	2210	36	120	1.50	83	TO-220AB
IXTY10P15T		-10	0.350	2210	36	120	1.50	83	TO-252AA
IXTA10P15T		-10	0.350	2210	36	120	1.50	83	TO-263AB
IXTK210P10T	-100	-210	0.008	69500	740	-200	0.12	1040	TO-264
IXTN210P10T		-210	0.008	69500	740	-201	0.15	830	SOT-227B (miniBLOC)
IXTX210P10T		-210	0.008	69500	740	-202	0.12	1040	PLUS247
IXTR210P10T		-195	0.008	69500	740	-203	0.32	390	ISOPLUS247™
IXTH140P10T		-140	0.012	31400	400	130	0.22	568	TO-247AD
IXTT140P10T		-140	0.012	31400	400	130	0.22	568	TO-268AA
IXTR140P10T		-90	0.013	31400	400	130	0.46	270	ISOPLUS247™
IXTP76P10T		-76	0.025	13700	197	70	0.42	298	TO-220AB
IXTH76P10T		-76	0.025	13700	197	70	0.42	298	TO-247AD
IXTA76P10T		-76	0.025	13700	197	70	0.42	298	TO-263AB
IXTP26P10T		-26	0.090	3820	52	70	0.83	150	TO-220AB
IXTY26P10T		-26	0.090	3820	52	70	0.83	150	TO-252AA
IXTA26P10T		-26	0.090	3820	52	70	0.83	150	TO-263AB
IXTP18P10T		-18	0.120	2100	39	62	1.50	83	TO-220AB
IXTY18P10T		-18	0.120	2100	39	62	1.50	83	TO-252AA
IXTA18P10T		-18	0.120	2100	39	62	1.50	83	TO-263AB
IXTP96P085T		-96	0.013	13100	180	55	0.42	298	TO-220AB
IXTH96P085T		-96	0.013	13100	180	55	0.42	298	TO-247AD
IXTA96P085T	-85	-96	0.013	13100	180	55	0.42	298	TO-263AB
IXTP24P085T		-24	0.065	2090	41	40	1.50	83	TO-220AB
IXTA24P085T	-65	-24	0.065	2090	41	40	1.50	83	TO-263AB
IXTP120P065T		-120	0.010	13200	185	53	0.42	298	TO-220AB
IXTH120P065T	-50	-120	0.010	13200	185	53	0.42	298	TO-247AD
IXTA120P065T		-120	0.010	13200	185	53	0.42	298	TO-263AB
IXTP28P065T	-50	-28	0.045	2030	46	31	1.50	83	TO-220AB
IXTA28P065T		-28	0.045	2030	46	31	1.50	83	TO-263AB
IXTP140P05T	-50	-140	0.009	13500	200	53	0.42	298	TO-220AB
IXTH140P05T		-140	0.009	13500	200	53	0.42	298	TO-247AD
IXTA140P05T		-140	0.009	13500	200	53	0.42	298	TO-263AB
IXTP48P05T		-48	0.030	3660	53	30	0.83	150	TO-220AB
IXTY48P05T		-48	0.030	3660	53	30	0.83	150	TO-252AA
IXTA48P05T		-48	0.030	3660	53	30	0.83	150	TO-263AB
IXTP32P05T		-32	0.039	1975	46	26	1.50	83	TO-220AB
IXTY32P05T		-32	0.039	1975	46	26	1.50	83	TO-252AA
IXTA32P05T		-32	0.039	1975	46	26	1.50	83	TO-263AB

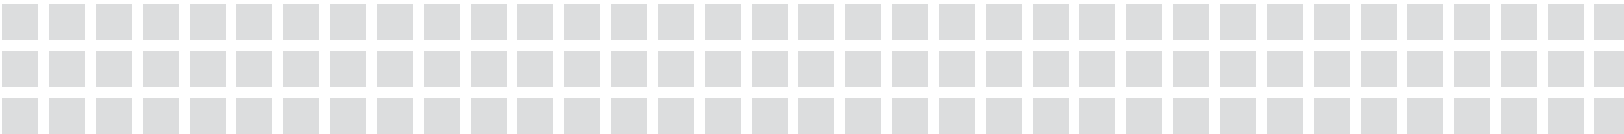

X004
TO-252AA



X005a
TO-220AB



X011b
TO-263AB




X014a
TO-247AD



X015a
PLUS247



X016a
ISOPLUS247™



X017a
TO-3P



X019
TO-268AA



X020a
TO-264



X022c
ISOPLUS264



X024a
ISOPLUS i4-PAC™




X024c
ISOPLUS i4-PAC™




X027a
SOT-227B (miniBLOC)




X030a
SMPD-B




...P...




IXKF



FMD



...RK...



LKK

Superjunction Power MOSFET

Part Number	V _{DSS}	I _{D25} T _C = 25 °C	R _{DS(on)} max. T _J = 25 °C	Q _g typ.	R _{thJC}	Config.	Package
	V	A	Ω	nC	K/W		
Configurations in i4-PAC™							
MXB12R600DPHFC	600	18	160	37	2	Boost	ISOPLUS i4-PAC™
Configuration in the ISOPLUS264™ Package							
LKK47-06C5	600	2 × 47	0.045	150	0.45	dual	ISOPLUS264
Configurations in the SMPD Package							
MKE38RK600DFELB ¹	600	50	0.045	150	0.40	buck/boost	SMPD-B

¹ Replacement part MKE4000600DFEL




MoS

Littelfuse SiC MOSFETs offer a rewarding alternative to traditional Si-based power transistor devices. The MOSFET device structure enables lower per-cycle Switching losses and improved light-load efficiency when compared to similarly rated IGBTs. Inherent material properties allow the SiC MOSFET to outclass its Si MOSFET counterparts in terms of blocking voltage, specific on resistances, and junction capacitances.



L012b
TO-263 (7)



L019a
TO-268AA (HV)




L027a
SOT-227B (miniBLOC)



L014a
TO-247 AD




X024a
ISOPLUS i4-PAC™



TOLL




L014d
TO-247-4L




X030a
SMPD -B

SiC MOSFET




Part Number	V _{DSS}	I _D T _C = 25 °C	R _{DS(on)} typ. T _J = 25 °C	C _{iss} typ.	Q _g typ.	R _{thJC}	Package
	V	A	mΩ	pF	nC	K/W	
IXSA110N65L2-7TR	650	110	25	3090	125	0.25	TO263-7
IXSA40N65L2-7TR	650	40	60	1218	64	0.86	TO263-7
IXSA60N65L2-7TR	650	60	40	2000	95	0.6	TO263-7
IXSG110N65L2K	650	110	25	3090	125	0.25	TOLL
IXSG40N65L2K	650	40	60	1218	64	0.86	TOLL
IXSG60N65L2K	650	60	40	2000	95	0.6	TOLL
IXSH100N65L2KHV	650	100	25	3090	125	0.33	TO247-4
IXSH40N65L2KHV	650	40	60	1218	64	0.86	TO247-4
IXSH60N65L2KHV	650	60	40	2000	95	0.6	TO247-4
IXSA40N120L2-7TR	1200	40	80	1160	53	0.6	TO263-7
IXSA80N120L2-7TR	1200	80	30	3000	135	0.38	TO263-7
IXSH40N120L2KHV	1200	40	80	1214	53	0.6	TO247-4
IXSH80N120L2KHV	1200	80	30	3000	135	0.38	TO247-4
IXSA20N120L2-7TR	1200	20	160	580	29	1.1	TO263-7
IXSA65N120L2-7TR	1200	65	40	2160	110	0.36	TO263-7
IXSH150N120L3KHV	1200	150	13	2082	83	0.22	TO247-4
IXSH20N120L2KHV	1200	20	160	580	29	1.1	TO247-4
IXSH65N120L2KHV	1200	65	40	2160	110	0.4	TO247-4
LSIC1MO170E0750	1700	5	750	200	15	2.3	TO-247 AD
LSIC1MO170T0750	1700	5	750	200	15	2.3	TO-263 (7)
LSIC1MO170H0750	1700	5	750	200	15	2.3	TO-268AA (HV)
Isolated Package							
IXSJ80N120R1	1200	80	18	4522	154	0.55	ISO247-3
IXSJ43N120R1	1200	43	36	2453	79	0.90	
IXSJ25N120R1	1200	25	62	1498	154	1.35	
IXSJ80N120R1K	1200	80	18	4522	154	0.55	ISO247-4
IXSJ43N120R1K	1200	43	36	2453	79	0.90	
IXSJ25N120R1K	1200	25	62	4522	154	1.35	

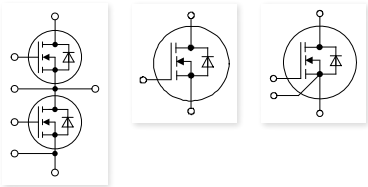

Part Number	V _{DSS}	I _D T _C = 25 °C	I _{D80} T _C = 80 °C	R _{DS(on)} typ. T _J = 25 °C	C _{iss} typ.	Q _g typ.	R _{thJC}	Package
	V	A	A	mΩ	pF	nC	K/W	
IXFN130N90SK ¹	900	136	109	10	4500	68	0.42	SOT-227B (miniBLOC)
IXFN30N120SK ¹	1200	30	24	75	1390	48	1.1	SOT-227B (miniBLOC)
IXFN55N120SK ¹		54	43	32	3360	107	0.71	SOT-227B (miniBLOC)
IXFN75N120SK ¹		75	60	21	4820	158	0.57	SOT-227B (miniBLOC)
Phase Leg								
MCL10P1200LB	1200	16	11	160	890	50	2.30	SMPD-B

¹ Kelvin source gate connection;


Buck/Boost Circuits




Part Number	Circuit and Technology	V _{DSS} max.	I _{D80} T _C = 80 °C	R _{DS(on)} typ.	I _{F80} Boost Diode	Package
		V	A	Ω	A	
MXB12R600DPHFC	X2 Class MOSFET + HiperDynFRED diode	650	13	0.16 (max)	16	ISOPLUS i4-PAC™

Part Number	Circuit and Technology		V _{DSS} max.	I _D TC = 25°C	RDS(on) max.	V _{RRM} Boost Diode	Package
			V	A	Ω	A	
MOSFET							
MKE38RK600DFELB ¹	F	Superjunction CP1	650	50	0.045	600	SMPD-B


¹ Recommended replacement part MKE340B600DFELB



A 1 Phase Bridge



C MOS + HiPerDyn



F buck/boost

1-phase PFC

Part Number	Circuit and Technology		V _{RRM}	I _{DAV} @ T _C	Package
			V	A	
Rectifier					
FBO16-12N ¹	A	Standard	1200	22	ISOPLUS i4-PAC™
FBO40-12N ¹		Standard	1200	40	
DLA100B800LB ^{2, 3}	A	low VF	800	124	SMPD-B
DLA100B1200LB ²		low VF	1200	124	

¹ Recommended in combination with FM and F
² Recommended in combination with M, M, and M
³ C-101



IXYS enRoute
Discrete IGBT

IX	Y	T	30	N	65	C3	*	H1	HV	Example
IX										IXYS – LF Technology

		Technology Types
B		BiMOSFET™
G		NPT, PT IGBT
H		MOS-gated thyristor
V		NPT Trench IGBT
X		Short-circuit rated XPT™
Y		XPT™

		Package Type
A		TO-263
B		PLUS264™
C		ISOPLUS220™
E		ISOPLUS227™
F		ISOPLUS i4-PAC™
H		TO-247
I		TO-262
J		ISO247
K		TO-264
L		ISOPLUS i5-PAC™ (ISOPLUS264™)
M		TO-3
N		SOT227B
P		TO-220
Q		TO-3P
R		ISOPLUS247™
T		TO-268
V		PLUS220™
X		PLUS247™
Y		TO-252
Z		DE

		Current Rating (Amperes) at High Temperature *
30		30 = 30 A
200		200 = 200 A
400		400 = 400 A

		Channel Type
N		N = N-channel type

		Voltage Class (Volts)
65		65 = 650 V
120		120 = 1200 V
250		250 = 2500 V

		Switching Frequency Class
A		Low frequency (≤5 kHz) switching
B		Medium frequency (5 kHz - 20 kHz) switching
C		High frequency (≥20 kHz) switching
3		Gen.3 Die technology
4		Gen.4 Die technology
5		Gen.5 Die technology
6		Gen.6 Die technology

		Options
A		Automotive qualified

		Diode Type
C1		SiC diode
D1		FRED™ diode
H1		SONIC-FRD™ diode
V1		Other Si diode

		Package
M		Overmolded package
HV		High-voltage package

I	X	A	20	IF	1200	PZ	IGBT
I							IGBT

		Technology
X		XPT™
Y		XPT Trench
T		Trench IGBT

		Chip Generation
A		XPT
E		Gen.5 Medium frequency (5 kHz – 20 kHz) switching
F		Gen.4 High frequency (≥20 kHz) switching

		Current Rating at High Temperature *
20		20 A
200		200 A
400		400 A

		Configuration
I		Single
R		Reverse blocking
IF		Co-Pack diode
RG		Boost configuration
PG		Half-bridge with free wheeling and desat diode configuration
PF		Half-bridge with free wheeling diode configuration

		Voltage Classes
600		600 = 600 V
1200		1200 = 1200 V
2500		2500 = 2500 V

		Package Type
HB		TO-247AD (3)
HF		PLUS247™ (3)
HJ		ISOPLUS247™ (3)
HR		ISO247™ (3)
LB		SMPD-B
NA		SOT-227B (minibloc)
PB		TO-220AB (3)
PJ		ISOPLUS220™ AB (3)
PZ		TO-263AB (D2PAC) (2HV)
TC		TO-268AA (D3PAC) (2)
UC		TO-252AA (DPAC)

*Old technologies are rated at room temperature



IGBT is elite

The Insulated Gate Bipolar Transistor (IGBT) is a key component used in major industrial and automotive applications today. Littelfuse is one of the largest portfolios of IGBTs in terms of package, current, and voltage. Adapting to the different needs of various applications, Littelfuse offers optimized IGBTs for conduction and switching losses. These IGBTs come in A, B, and C switching classes. The portfolio includes both single IGBTs and co-pack IGBTs having anti-parallel diode inside the package. The A class is optimized for low frequency applications and has considerably less conduction losses. Class B and C IGBTs are optimized for medium and high-switching frequency applications.

IGBTs from Littelfuse offer low thermal resistance $R_{th(j-c)}$ which helps simplify and enhance the overall thermal efficiency of the system. The industry leading low gate charge QG requirement drastically reduces the gate driver requirements of the IGBTs, respectively.

The following table summarizes the IGBT portfolio.

IGBT Technology

IGBT Technologies and their Distinctive Characteristics
600–1200 V

IGBT Characteristics	XPT™ Gen3 Planar			XPT™ Gen3 Planar			XPT™ Gen4 Trench			XPT™ Gen5Trench		
Sub-family	IXA*	IXX*		IXY*			IXX* (650 V), IXY* (1200 V)			IXY*		
Switching class	–	B3	C3	A3	B3	C3	A4	B4	C4	A5	B5	C5
Speed	Medium	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High
Surge Currnet Capability	Medium	Medium		Medium			Medium (650 V), High (1200 V)			High		
Square RBSOA	Yes	Yes		Yes			Yes (650 V), No (1200 V)			Yes		
Short Circuit Rated	Yes	Yes	Yes	Yes (650 V)		Yes (650 V), No (1200 V)					No	
				No (900 V, 1200 V)								
Voltage Class	1200 V	600 V		650 V, 900 V, 1200 V			650 V, 1200 V			650 V		

IGBT Technologies and their Distinctive Characteristics
1600–4500 V

IGBT Characteristics	XPT™ Gen3 Planar		XPT™ Gen3 Planar	
Sub-family	IXY*		IXB*	
Switching class	–		–	
Speed	Medium		Medium	
Surge Current Capability	Medium		Medium	
Square RBSOA	No		No	
Short Circuit Rated	No		No	
Voltage Class	1700–4500 V		1600–3600 V	



IGBT Product Families

Xtreme Light Punch Through (XPT™) Planar IGBTs

This is the extremely rugged technology platform of IGBTs, which are ideal for critical applications that require low conduction and low switching losses with a 10 μ s short circuit withstand capability. Both discrete as single or co-packaged with ultrafast soft recovery Sonic diodes is available. Littelfuse XPT™ IGBTs have lower saturation voltage $V_{CE(sat)}$ and low total switching energy ($E_{on} + E_{off}$). A large portfolio of module-packed Planar XPT™ s is available for applications such as UPS, Motor Drive, and solar inverters.

Xtreme Light Punch Through (X2PT™) Planar IGBTs

This is the second generation of XPT™ IGBTs. Its features are 10 μ s short circuit capability, 175 °C max junction temperature, further reduced $V_{CE(sat)}$, and lower turn-off losses (E_{off}), resulting in competitive performance that is comparable to the latest trench devices at reduced R_{th} . Thus, they are ideally suited for Motor Drive inverters.

Xtreme Light Punch Through (XPT™) Trench IGBTs


This is the latest development from Littelfuse, starting at 650 V. This range features not only a low $V_{CE(sat)}$, but also extremely low switching losses, making the platform attractive for fast switching applications whilst retaining good SOA ratings and a positive temperature coefficient. Both, discrete single or co-packaged with ultrafast soft recovery sonic diodes is available. Littelfuse XPT™ IGBTs have industry leading efficiency at medium to high switching frequency.



Very High Voltage (2500 V–4000 V) IGBTs

Littelfuse offers a unique portfolio of discrete 2500 V, 3000 V, and 4000 V VHV IGBTs with collector current ratings spanning from 2 A to 75 A ($T_c = 110$ °C). The voltage and current ratings of these devices, coupled with simplified MOS gate-control, allow the system designer to greatly reduce the complexity of many high voltage switching designs. These IGBTs enable the use of a single device in systems where circuits previously used multiple, cascaded, lower-voltage switches.

BiMOSFET™ IGBTs

IXYS BiMOSFET™ s are devices that combine the strengths of MOSFETs and IGBTs. BiMOSFET™ s feature a monolithic intrinsic diode that can reduce die count in many applications.

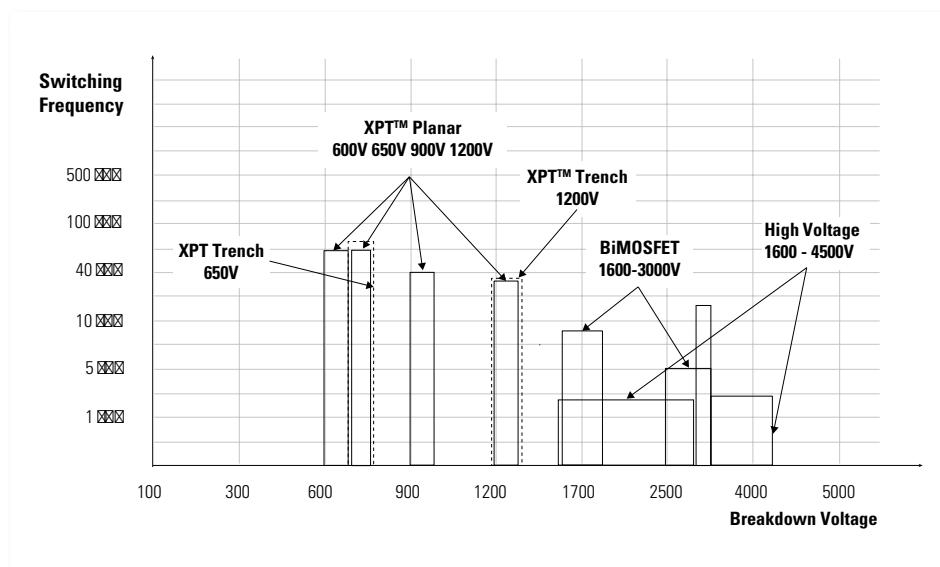

IGBT **X005a**
TO-220AB**X016a**
ISOPLUS247™**X019a**
TO-268HV**IXX...**
IXY...**X011b**
TO-263AB**X017a**
TO-3P**X020a**
TO-264**IXX...D1/H1**
IXY...D1/H1**X014a**
TO-247AD**X017c**
TO-3PFP**X027a**
SOT-227B (miniBLOC)**X015a**
PLUS247**600V XPT™ Planar IGBTs**


XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
B3 Class (5–30 kHz Switching)												
IXXQ30N60B3M	600	33	19	1.85	180	0.7	1.66	–	–	–	90	TO-3PFP
IXXH30N60B3		60	30	1.85	180	0.7	0.55	–	–	–	270	TO-247AD
IXXH30N60B3D1		60	30	1.85	180	0.7	0.55	•	30	0.9	270	TO-247AD
IXXA50N60B3		120	50	1.8	190	1.2	0.25	–	–	–	600	TO-263AB
IXXH50N60B3		120	50	1.8	190	1.2	0.25	–	–	–	600	TO-247AD
IXXH50N60B3D1		120	50	1.8	190	1.2	0.25	•	30	0.9	600	TO-247AD
IXXP50N60B3		120	50	1.8	190	1.2	0.25	–	–	–	600	TO-220AB
IXXR100N60B3H1		145	68	1.8	200	2.8	0.31	•	–	0.62	400	ISOPLUS247™
IXXH75N60B3		160	75	1.85	170	2.2	0.2	–	–	–	750	TO-247AD
IXXH75N60B3D1		160	75	1.85	170	2.2	0.200	•	30	0.9	750	TO-247AD
IXXN100N60B3H1		170	100 (90°C)	1.8	200	2.8	0.25	•	50	0.42	500	SOT-227B (miniBLOC)
IXXK100N60B3H1		200	100 (100°C)	1.8	200	2.8	0.18	•	65	0.3	695	TO-64
IXXN200N60B3H1		200	98	1.7	215	3.45	0.16	•	30	0.7	780	SOT-227B (miniBLOC)
IXXX100N60B3H1		200	100 (100°C)	1.8	200	2.8	0.18	•	65	0.3	695	PLUS247
IXXH100N60B3		220	100	1.8	200	2.8	0.18	–	–	–	830	TO-247AD
IXXN200N60B3		280	160	1.7	215	3.45	0.16	–	–	–	940	SOT-227B (miniBLOC)
IXXK200N60B3	380	200	1.7	215	3.45	0.092	–	–	–	1630	TO-64	
IXXX200N60B3	380	200	1.7	215	3.45	0.092	–	–	–	1630	PLUS247	
IXXK300N60B3	550	300	1.6	200	3.7	0.065	–	–	–	2300	TO-64	
IXXX300N60B3	550	300	1.6	200	3.7	0.065	–	–	–	2300	PLUS247	
C3 Class (20–60 kHz Switching)												
IXXH30N60C3	600	60	30	2.2	32	0.4	0.55	–	–	–	270	TO-247AD
IXXH30N60C3D1		60	30	2.2	78	0.4	0.55	•	30	0.9	270	TO-247AD
IXXH50N60C3		100	50	2.3	90	0.48	0.25	–	–	–	600	TO-247AD
IXXH50N60C3D1		100	50	2.3	90	0.48	0.25	•	30	0.9	600	TO-247AD
IXXH75N60C3		150	75	2.3	80	1.07	0.2	–	–	–	750	TO-247AD
IXXH75N60C3D1		150	75	2.3	80	1.07	0.2	•	30	0.9	750	TO-247AD
IXXK100N60C3H1		170	100 (90°C)	2.2	115	1.4	0.18	•	65	0.3	695	TO-64
IXXX100N60C3H1		170	100 (90°C)	2.2	115	1.4	0.18	•	65	0.3	695	PLUS247
IXXH100N60C3		190	100	2.2	115	1.4	0.18	–	–	–	830	TO-247AD
IXXN200N60C3H1		200	98	2.1	90	2.1	0.16	•	30	0.7	780	SOT-227B (miniBLOC)
IXXK200N60C3		340	200	2.1	90	2.1	0.092	–	–	–	1630	TO-64
IXXX200N60C3		340	200	2.1	90	2.1	0.092	–	–	–	1630	PLUS247
IXXK300N60C3		510	300	2	90	2.35	0.065	–	–	–	2300	TO-64
IXXX300N60C3		510	300	2	90	2.35	0.065	–	–	–	2300	PLUS247

650V XPT™ Planar IGBTs

XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A3 Class (up to 5 kHz Switching)												
IXYN100N65A3	650	170	100	1.8	160	2.4	0.25	–	–	–	600	SOT-227B (miniBLOC)
IXYH100N65A3		240	100	1.8	225	3.7	0.18	–	–	–	470	TO-247AD
IXYN300N65A3		470	300	1.6	175	7.3	0.1	–	–	–	1500	SOT-227B (miniBLOC)
IXYK300N65A3		600	300	1.6	175	7.3	0.065	–	–	–	2300	TO-264
IXYX300N65A3		600	300	1.6	175	7.3	0.065	–	–	–	2300	PLUS247
B3 Class (10–30 kHz Switching)												
IXYA20N65B3	650	58	20	2.1	147	0.76	0.65	–	–	–	230	TO-263AB
IXYH20N65B3		58	20	2.1	147	0.76	0.65	–	–	–	230	TO-247AD
IXYP20N65B3		58	20	2.1	147	0.76	0.65	–	–	–	230	TO-220AB
IXYH40N65B3		86	40	2	174	1.15	0.5	–	–	–	300	TO-247AD
IXYH40N65B3D1		86	40	2	174	1.15	0.5	•	50	0.6	300	TO-247AD
IXYH100N65B3		225	100	1.85	160	2.16	0.18	–	–	–	830	TO-247AD
IXYH120N65B3		340	120	1.9	196	2.2	0.11	–	–	–	–	TO-247AD
IXYK200N65B3		410	200	1.7	230	5.6	0.096	–	–	–	–	TO-264
IXYX200N65B3		410	200	1.7	230	5.6	0.096	–	–	–	–	PLUS247
C3 Class (20–60 kHz Switching)												
IXYP10N65C3	650	30	10	2.5	38	0.15	0.94	–	–	–	160	TO-220AB
IXYP15N65C3		38	15	2.5	42	0.24	0.75	–	–	–	200	TO-220AB
IXYA20N65C3		50	20	2.5	36	0.4	0.65	–	–	–	230	TO-263AB
IXYP10N65C3		30	10	2.5	38	0.15	0.94	–	–	–	160	TO-220AB
IXYA15N65C3D1		38	15	2.5	42	0.24	0.75	•	23	1.85	200	TO-263AB
IXYP15N65C3		38	15	2.5	42	0.24	0.75	–	–	–	200	TO-220AB
IXYP15N65C3D1		38	15	2.5	42	0.24	0.75	•	23	1.85	200	TO-220AB
IXYA20N65C3		50	20	2.5	36	0.4	0.65	–	–	–	230	TO-263AB
IXYA20N65C3D1		50	20	2.5	36	0.4	0.65	•	18	1.85	200	TO-263AB
IXYH20N65C3		50	20	2.5	36	0.4	0.65	–	–	–	230	TO-247AD
IXYP20N65C3D1		50	20	2.5	36	0.4	0.65	•	18	1.85	200	TO-220AB
IXYH30N65C3H1		60	30	2.7	30	0.41	0.55	•	29	0.8	270	TO-247AD
IXYH30N65C3		60	30	2.7	30	0.41	0.55	–	–	–	270	TO-247AD
IXYT30N65C3H1HV		60	30	2.7	30	0.41	0.55	•	29	0.8	270	TO-268HV
IXYP30N65C3		60	30	2.7	30	0.41	0.55	–	–	–	270	TO-220AB
IXYQ40N65C3D1		80	40	2.35	30	0.53	0.5	•	50	0.6	300	TO-3P
IXYH40N65C3		80	40	2.35	30	0.53	0.5	–	–	–	300	TO-247AD
IXYH40N65C3H1		80	40	2.35	80	0.46	0.5	•	40	0.6	300	TO-247AD
IXYH50N65C3H1		130	50	2.1	42	0.56	0.25	•	40	0.6	600	TO-247AD
IXYP50N65C3		132	50	2.1	32	0.7	0.25	–	–	–	600	TO-220AB
IXYH50N65C3		132	50	2.1	32	0.7	0.25	–	–	–	600	TO-247AD
IXYA50N65C3		132	50	2.1	32	0.7	0.25	–	–	–	600	TO-263AB
IXYN100N65C3H1		160	90	2.3	66	1.15	0.25	•	50	0.42	600	SOT-227B (miniBLOC)
IXYH75N65C3H1		170	75	2.3	58	1.3	0.2	•	62	0.45	750	TO-247AD
IXYH75N65C3		175	75	2.3	64	1.3	0.2	–	–	–	750	TO-247AD
IXYX100N65C3D1		200	100	2.3	66	1.15	0.18	•	67	0.36	830	PLUS247
IXYH100N65C3		200	100	2.3	66	1.15	0.18	–	–	–	830	TO-247AD
IXYK100N65C3D1		200	100	2.3	66	1.15	0.18	•	67	0.36	830	TO-264
IXYH120N65C3		260	120	2.8	60	0.7	0.11	–	–	–	–	TO-247AD

IGBT is eteX005a
TO-220ABX014a
TO-247ADX019a
TO-268HVIXX...
IXY...X007a
TO-220ABFPX015a
PLUS247X020a
TO-264IXX...D1/H1
IXY...D1/H1X014a
TO-247ADX016a
ISOPLUS247™X027a
SOT-227B (miniBLOC)X011c
TO-263ABHV

650 V XPT™ Trench IGBTs

XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A4 Class (up to 5 kHz Switching)												
IXXN200N65A4	650	440	200	1.8	190	8	0.12	–	–	–	1250	SOT-227B (miniBLOC)
A5 Class (up to 5 kHz Switching)												
IXYP60N65A5	650	134	60	1.35	240	2.5	0.38	–	–	–	395	TO-220AB
IXYH90N65A5		220	90	1.35	360	5	0.23	–	–	–	650	TO-247AD
IXYH120N65A5		290	120	1.35	290	4.7	0.18	–	–	–	830	TO-247AD
B4 Class (5–30 kHz Switching)												
IXXP12N65B4	650	38	12	1.95	110	0.38	0.94	–	–	–	160	TO-220AB
IXXP12N65B4D1		38	12	1.95	110	0.38	0.94	•	11	2.3	160	TO-220AB
IXXH30N65B4		70	30	2	60	1.07	0.65	–	–	–	230	TO-247AD
IXXH40N65B4		115	40	2	116	1.3	0.33	–	–	–	455	TO-247AD
IXXH60N65B4		120	60	2.2	88	1.8	0.33	–	–	–	536	TO-247AD
IXXH60N65B4H1		120	60	2.2	88	1.8	0.33	•	47	0.6	536	TO-247AD
IXXH40N65B4H1		123	40	2	73	1.4	0.33	•	40	0.6	455	TO-247AD
IXXR110N65B4H1		150	70	2.2	105	1.4	0.33	•	48	0.7	455	ISOPLUS247™
IXXH80N65B4		160	80	2.1	94	2.7	0.24	–	–	–	625	TO-247AD
IXXH80N65B4H1		160	80	2.1	102	3.1	0.24	•	62	0.45	625	TO-247AD
IXXN110N65B4H1		230	110	2.1	110	2.16	0.2	•	70	0.42	750	SOT-227B (miniBLOC)
IXXH110N65B4		250	110	2.1	110	2.16	0.17	–	–	–	880	TO-247AD
IXXK110N65B4H1		250	110	2.1	110	2.16	0.17	•	78	0.38	880	TO-264
IXXX110N65B4H1		250	110	2.1	110	2.16	0.17	•	78	0.38	880	PLUS247
IXXK160N65B4		310	160	1.8	160	2.36	0.16	–	–	–	940	TO-264
IXXX160N65B4		310	160	1.8	160	2.36	0.16	–	–	–	940	PLUS247
IXXH140N65B4		340	140	1.9	100	3.9	0.125	–	–	–	1200	TO-247AD
IXXX140N65B4H1		350	140	1.9	100	3.9	0.125	•	72	0.24	1200	PLUS247
IXXK200N65B4		480	200	1.7	120	5	0.092	–	–	–	1630	TO-264
IXXX200N65B4		480	200	1.7	120	2.54	0.092	–	–	–	1630	PLUS247
IXXN340N65B4		520	340 (90°C)	1.7	110	2.54	0.1	–	–	–	1500	SOT-227B (miniBLOC)
C4 Class (20–60 kHz Switching)												
IXXH60N65C4	650	125	60	2.4	54	1.5	0.33	–	–	–	536	TO-247AD
IXXN110N65C4H1		210	110	2.35	40	0.9	0.2	•	70	0.42	750	SOT-227B (miniBLOC)
IXXH110N65C4		235	110	2.35	40	0.9	0.17	–	–	–	880	TO-247AD
IXXK160N65C4		290	160	2.1	57	1.3	0.16	–	–	–	940	TO-264
IXXX160N65C4		290	160	2.1	57	1.3	0.16	–	–	–	940	PLUS247
IXXH140N65C4		320	160	2.3	63	2.5	0.125	–	–	–	1200	TO-247AD

1200 V XPT™ Trench IGBTs

XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110° C	V _{CE(sat)} T _C = 25 °C	t _n typ. T _J = 125 °C	E _{off} typ. T _J = 120 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A4 Class (up to 5 kHz Switching)												
IXYA20N120A4HV	1200	80	20	1.9	286	4.85	0.4	–	–	–	375	TO-263ABHV
IXYP20N120A4		80	20	1.9	286	4.85	0.4	–	–	–	375	TO-220AB
IXYA30N120A4HV		106	30	1.9	270	5.6	0.3	–	–	–	500	TO-263ABHV
IXYH30N120A4		106	30	1.9	270	5.6	0.3	–	–	–	500	TO-247AD
IXYP30N120A4		106	30	1.9	270	5.6	0.3	–	–	–	500	TO-220AB
IXYH40N120A4		150	40	1.8	365	8.3	0.22	–	–	–	680	TO-247AD
IXYT40N120A4HV		150	40	1.8	365	8.3	0.22	–	–	–	680	TO-268HV
IXYT55N120A4HV		175	55	1.8	270	8.8	0.23	–	–	–	650	TO-268HV
IXYH55N120A4		175	55	1.8	270	8.8	0.23	–	–	–	650	TO-247AD
IXYT85N120A4HV		300	85	1.8	280	13.7	0.13	–	–	–	1150	TO-268HV
IXYH85N120A4		300	85	1.8	280	13.7	0.13	–	–	–	1150	TO-247AD
IXYK110N120A4		375	140	1.8	320	20	0.1	–	–	–	1360	TO-264
IXYN110N120A4		375	140	1.8	320	20	0.14	–	–	–	830	SOT0227B miniBLOC
IXYX110N120A4		375	140	1.8	320	20	0.1	–	–	–	1360	PLUS247
IXYK140N120A4		480	140	1.7	320	20	0.1	–	–	–	1500	TO-264
IXYN140N120A4		480	140	1.7	320	20	0.14	–	–	–	1070	SOT0227B miniBLOC
IXYX140N120A4	480	140	1.7	320	20	0.1	–	–	–	1500	PLUS247	
B4 Class (5–30 kHz Switching)												
IXYA20N120B4HV	1200	76	20	2.1	170	2.7	0.4	–	–	–	375	TO-263ABHV
IXYP20N120B4		76	20	2.1	170	2.7	0.4	–	–	–	375	TO-220AB
IXYH30N120B4		100	30	2.1	190	4	0.3	–	–	–	500	TO-247AD
IXYH40N120B4		136	40	2.1	190	4.4	0.22	–	–	–	680	TO-247AD
IXYK110N120B4		340	110	2.1	210	6.45	0.11	–	–	–	1360	TO-264
IXYX110N120B4		340	110	2.1	210	6.45	0.11	–	–	–	1360	PLUS247
IXYH40N120B4H1		112	40	2.1	190	4.4	0.25	•	32	0.35	600	TO-247AD
IXYH55N120B4H1		138	55	2.1	340	4.5	0.23	•	32	0.35	650	TO-247AD
IXYN110N120B4H1		218	110	2.1	210	6.45	0.18	•	74	0.41	830	SOT227B miniBLOC
C4 Class (20–50 kHz Switching)												
IXYA20N120C4HV	1200	68	20	2.5	86	1.6	0.4	–	–	–	375	TO-263ABHV
IXYP20N120C4		68	20	2.5	86	1.6	0.4	–	–	–	375	TO-220AB
IXYH30N120C4		94	30	2.4	100	2.7	0.3	–	–	–	500	TO-247AD
IXYH40N120C4		120	40	2.5	80	2.65	0.22	–	–	–	680	TO-247AD
IXYH55N120C4		140	55	2.5	123	2.5	0.23	–	–	–	650	TO-247AD
IXYH85N120C4		160	85	2.5	112	3.3	0.13	–	–	–	1150	TO-247AD
IXYK110N120C4		310	110	2.4	90	3.2	0.11	–	–	–	1360	TO-264
IXYN110N120C4		220	110	2.4	90	3.2	0.17	–	–	–	830	SOT0227B miniBLOC
IXYX110N120C4		310	110	2.4	110	3.2	0.11	–	–	–	1360	PLUS247
IXYH40N120C4H1		110	40	2.5	80	2.65	0.22	•	32	0.35	680	TO-247AD
IXYH55N120C4H1		126	55	2.5	123	2.5	0.35	•	37	0.35	650	TO-247AD
IXYN85N120C4H1		150	85	2.5	110	3.3	0.25	•	74	0.41	600	SOT227B miniBLOC
IXYK85N120C4H1		220	85	2.5	110	3.3	0.13	•	140	0.16	1150	TO-264
IXYN110N120C4H1		210	110	2.4	90	3.2	0.18	•	74	0.41	830	SOT227B miniBLOC

IGBT isXtreme



XPT™ Planar IGBT

XPT™ = Xtreme Light Punch Through

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
1700V XPT™ Planar IGBTs												
IXYH10N170C	1700	36	10	4.1	94	0.9	0.53	–	–	–	280	TO-247AD
IXYH10N170CV1		36	10	4.1	94	0.9	0.53	•	22	0.7	280	TO-247AD
IXYF30N170CV1		36	20	4	134	3.5	0.65	•	20	0.86	230	ISOPLUS i4-PAC™
IXYH16N170C		40	16	3.8	140	1.95	0.48	–	–	–	310	TO-247AD
IXYH16N170CV1		40	16	3.8	140	1.95	0.48	•	22	0.7	310	TO-247AD
IXYH24N170C		58	24	4	140	2.66	0.3	–	–	–	500	TO-247AD
IXYH24N170CV1		58	24	4	140	2.66	0.3	•	28	0.55	500	TO-247AD
IXYN30N170CV1		80	30	4	134	3.5	0.22	•	33	0.43	680	SOT-227B (miniBLOC)
IXYL50N170CV1		90	46	3.7	160	8.2	0.26	•	26	0.83	580	ISOPLUS264™
IXYH30N170C		100	30	4	134	3.5	0.16	–	–	–	937	TO-247AD
IXYK30N170CV1		100	30	4	134	3.5	0.16	•	38	0.36	937	To-264
IXYX30N170CV1		100	30	4	134	3.5	0.16	•	38	0.36	937	PLUS247
IXYN50N170CV1		120	50	3.7	160	8.2	0.17	•	42	0.42	880	SOT-227B (miniBLOC)
IXYX50N170C		178	50	3.7	160	8.2	0.1	–	–	–	1500	PLUS247
2500V XPT™ Planar IGBTs												
IXYF16N250CV1	2500	26	14	4	236	4.4	0.83	•	9	1.5	180	ISOPLUS i4-PAC™
IXYA12N250CHV		28	12	4.5	138	1.95	0.48	–	–	–	310	TO-263ABHV
IXYH12N250CHV		28	12	4.5	138	1.95	0.48	–	–	–	310	TO-247HV
IXYH12N250CV1HV		28	12	4.5	138	1.95	0.48	•	14	0.8	310	TO-247HV
IXYT12N250CV1HV		28	12	4.5	138	1.95	0.48	•	14	0.8	310	TO-268HV
IXYA8N250CHV		29	8	4	128	1.2	0.53	–	–	–	280	TO-263ABHV
IXYH8N250CHV		29	8	4	128	1.2	0.53	–	–	–	280	TO-247HV
IXYH8N250CV1HV		29	8	4	128	1.2	0.53	•	14	0.8	280	TO-247HV
IXYH16N250CV1HV		38	16	4	236	4.4	0.3	•	14	0.8	500	TO-247HV
IXYL40N250CV1		80	40	4	250	11.5	0.26	•	23	0.83	577	ISOPLUS264™
IXYH25N250CHV		95	25	4	350	10.5	0.16	–	–	–	937	TO-247HV
IXYT25N250CHV		95	25	4	350	10.5	0.16	–	–	–	937	TO-268HV
IXYX25N250CV1		95	25	4	350	10.5	0.16	•	30	0.32	937	PLUS247
IXYX25N250CV1HV		95	25	4	350	10.5	0.16	•	30	0.32	937	PLUS247 HV
IXYX40N250CHV		154	40	4	250	11.5	0.1	–	–	–	1500	PLUS247 HV

900/1200 V XPT™ Planar IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C (90 °C)	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 125 °C (150 °C)	E _{off} typ. T _J = 125 °C (150 °C)	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
C3 Class (20–50 kHz Switching)												
IXYA8N90C3D1	900	20	8	2.5	163	0.22	1.2	•	12	2.5	125	TO-263AB
IXYP8N90C3		20	8	2.5	163	0.22	1.2	–	–	–	125	TO-220AB
IXYP8N90C3D1		20	8	2.5	163	0.22	1.2	•	12	2.5	125	TO-220AB
IXYY8N90C3		20	8	2.5	163	0.22	1.2	–	–	–	125	TO-252AA
IXYH24N90C3		44	24	2.7	130	0.55	0.62	–	–	–	240	TO-247AD
IXYH24N90C3D1		44	(24)	2.7	130	0.55	0.62	•	15	1.6	200	TO-247AD
IXYH40N90C3D1		90	40	2.5	150	1.2	0.25	•	25	0.9	500	TO-247AD
IXYH40N90C3		105	40	2.5	150	1.2	0.25	–	–	–	600	TO-247AD
IXYN80N90C3H1		115	(70)	2.7	(98)	(2.5)	0.25	•	42	0.42	500	SOT-227B (miniBLOC)
IXYH60N90C3		140	60	2.7	(165)	(2.15)	0.2	–	–	–	750	TO-247AD
IXYH80N90C3		165	80	2.7	(98)	(2.5)	0.18	–	–	–	830	TO-247AD
IXYT80N90C3		165	80	2.7	(98)	(2.5)	0.18	–	–	–	830	TO-268AA
IXYK140N90C3		310	140	2.7	(125)	(5)	0.09	–	–	–	1630	TO-264
IXYX140N90C3		310	140	2.7	(125)	(5)	0.09	–	–	–	1630	PLUS247
B3 Class (5–30 kHz Switching)												
IXYH40N120B3D1	1200	86	40	2.9	206	2.05	0.26	•	25	0.9	480	TO-247AD
IXYH40N120B3		96	40	2.9	206	2.05	0.26	–	–	–	577	TO-247AD
IXYN100N120B3H1		165	76	2.6	(260)	(10.1)	0.18	•	42	0.42	690	SOT-227B (miniBLOC)
IXYK100N120B3		225	100	2.6	(260)	(10.1)	0.13	–	–	–	1150	TO-264
IXYX100N120B3		225	100	2.6	(260)	(10.1)	0.13	–	–	–	1150	PLUS247
IXYK120N120B3		320	120	2.2	(406)	(27.9)	0.1	–	–	–	1500	TO-264
IXYX120N120B3		320	120	2.2	(407)	(27.9)	0.1	–	–	–	1500	PLUS247
C3 Class (20–50 kHz Switching)												
IXYH20N120C3D1	1200	36	17	3.4	(105)	(0.7)	0.54	•	23	0.9	230	TO-247AD
IXYT20N120C3D1HV		36	17	3.4	(105)	(0.7)	0.54	•	23	0.9	230	TO-268HV
IXYA20N120C3HV		40	20	3.4	(105)	(0.7)	0.54	–	–	–	278	TO-263ABHV
IXYH20N120C3		40	20	3.4	(105)	(0.7)	0.54	–	–	–	278	TO-247AD
IXYP20N120C3		40	20	3.4	(105)	(0.7)	0.54	–	–	–	278	TO-220AB
IXYR50N120C3D1		56	(32)	4	(60)	(1.4)	0.43	•	25	0.9	290	ISOPLUS247™
IXYH30N120C3D1		66	30	4	88	0.9	0.3	•	25	0.9	416	TO-247AD
IXYH30N120C3		75	30	3.3	(140)	(1.6)	0.3	–	–	–	500	TO-247AD
IXYP30N120C3		75	30	3.3	(140)	(1.6)	0.3	–	–	–	500	TO-220AB
IXYH40N120C3D1		80	(40)	3.5	(143)	(2.1)	0.26	•	25	0.9	480	TO-247AD
IXYH40N120C3		90	40	3.5	(143)	(2.1)	0.26	–	–	–	577	TO-247AD
IXYH50N120C3D1		90	50**	4	(60)	(1.4)	0.2	•	25	0.9	625	TO-247AD
IXYH50N120C3		100	50	3.5	60	1.4	0.2	–	–	–	750	TO-247AD
IXYR100N120C3		104	58	3.5	125	3.55	0.31	–	–	–	484	ISOPLUS247™
IXYN82N120C3H1		105	46	3.2	95	3.7	0.25	•	42	0.42	500	SOT-227B (miniBLOC)
IXYN82N120C3		120	66	3.2	95	3.7	0.25	–	–	–	600	SOT-227B (miniBLOC)
IXYN100N120C3H1		134	62	3.5	125	3.55	0.18	•	42	0.42	690	SOT-227B (miniBLOC)
IXYN100N120C3		152	86	3.5	125	3.55	0.18	–	–	–	830	SOT-227B (miniBLOC)
IXYB82N120C3H1		164	82	3.2	95	3.7	0.12	•	42	0.35	1040	ISOPLUS i4-PAC™
IXYK100N120C3		188	100	3.5	125	3.55	0.13	–	–	–	–	TO-264
IXYX100N120C3		188	100	3.5	125	3.55	0.13	–	–	–	–	PLUS247
IXYH82N120C3		200	82	3.2	95	3.7	0.12	–	–	–	–	TO-247AD
IXYK120N120C3		240	120	3.2	(120)	(7.2)	0.1	–	–	–	1500	TO-264
IXYX120N120C3		240	120	3.2	(120)	(7.2)	0.1	–	–	–	1500	PLUS247
IXYN120N120C3		240	120	3.2	(120)	(7.2)	0.13	–	–	–	1200	SOT-227B (miniBLOC)


IGBT isXtreme




X004
TO-252AA



X014a
TO-247AD



X019
TO-268AA



IXA...R...




X005a
TO-220AB




X015a
PLUS247



X020a
TO-264



**IXX...
IXY...**




X011b
TO-263AB




X016a
ISOPLUS247™



X027a
SOT-227B (miniBLOC)



**IXX...D1/H1
IXY...D1/H1**



X011c
TO-263ABHV



X016c
ISO247™

XPT™ IGBT

XPT™ = Xtreme Light Punch Through

Part Number	V _{CES}	I _{C25} IGBT T _C = 25 °C	I _{C110} IGBT T _C = 110 °C	V _{CE(sat)} typ. IGBT T _C = 25 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	Diode	I _{F100} Diode T _J = 100 °C	Package
	V	A	A	V	mJ	K/W		A	
1200 V XPT™ IGBT									
IXA4IF1200UC	1200	9	5	1.8	0.25	2.7	•	6	TO-252AA
IXA4IF1200TC		9	5	1.8	0.25	2.7	•	6	TO-268AA
IXA12IF1200HB		20	13	1.8	1.1	1.5	•	14	TO-247AD
IXA12IF1200PB		20	13	1.8	1.1	1.5	•	14	TO-220AB
IXA12IF1200TC		20	13	1.8	1.1	1.5	•	14	TO-268AA
IXA17IF1200HJ		28	18	1.8	1.7	1.26	•	19	ISOPLUS247™
IXA20IF1200HB		38	22	1.8	1.7	0.76	•	24	TO-247AD
IXA20I1200PB		38	22	1.8	1.7	0.76	–	–	TO-220AB
IXA20I1200PZ		38	22	1.8	1.7	0.76	–	–	TO-263ABHV
IXA27IF1200HJ		43	24	1.8	3	0.84	•	25	ISOPLUS247™
IXA33IF1200HB		58	34	1.8	3	0.5	•	33	TO-247AD
IXA37IF1200HJ		58	33	1.8	4.1	0.64	•	25	ISOPLUS247™
IXA45IF1200HB		78	45	1.8	4.1	0.38	•	33	TO-247AD
IXA55I1200HJ		84	54	1.8	5.5	0.43	–	–	ISOPLUS247™
IXA60IF1200NA		88	56	1.8	5.5	0.43	•	51	SOT-227B (miniBLOC)
IXA70I1200NA	100	65	1.8	5.5	0.35	–	–	SOT-227B (miniBLOC)	
1200 V Fast Trench IGBT									
ITF48IF1200HR	1200	72	56 (80°C)	2.05	2.4 (150°C)	0.38	•	(80°C) 50	ISO247™
FPO									
IXG70IF1200NA	1200	130	86	1.8	5.3 (150°C)	0.38	•	71	SOT-227B (miniBLOC)

600 V, 1000 V, and 1200 V IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} max. T _C = 25 °C	t _{fi} typ. T _J = 125 °C	E _{off} typ. T _J = 125 °C	R _{thJC} max.	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A4 Class (5–20 kHz Switching)												
IXGH48N60A3D1	1200	75	48	1.35	224	5.6	0.42	•	–	0.9	300	TO-247AD
IXGH72N60A3		75	72	1.35	250	6.5	0.23	–	–	–	540	TO-247AD
IXGT72N60A3		75	72	1.35	250	6.5	0.23	–	–	–	540	TO-268AA
IXGX120N60A3		200	120	1.35	260	10.4	0.16	–	–	–	780	PLUS247
IXGK320N60A3		320	210	1.25	740	na	0.13	–	–	–	1000	TO-264a
IXGN320N60A3		320	170	1.25	740	na	0.17	–	–	–	735	SOT-227B (miniBLOC)
IXGN400N60A3		400	190	1.25	270	na	0.15	–	–	–	830	SOT-227B (miniBLOC)
IXGA48N60A3		na	48	1.35	224	5.6	0.42	–	–	–	300	TO-263AB
IXGH48N60A3		na	48	1.35	224	5.6	0.42	–	–	–	300	TO-247AD
IXGP36N60A3		na	36	1.4	325	5.3	0.56	–	–	–	220	TO-220AB
IXGP48N60A3		na	48	1.35	224	5.6	0.42	–	–	–	300	TO-220AB
IXGT32N100A3		75	32	2.2	540	13	0.42	–	–	–	300	TO-268AA
IXGA12N120A3		22	na	3	1035	na	1.25	–	–	–	100	TO-263AB
IXGH12N120A3		22	na	3	1035	na	1.25	–	–	–	100	TO-247AD
IXGP12N120A3		22	na	3	1035	na	1.25	–	–	–	100	TO-220AB
IXGA20N120A3		40	20	2.5	715	10.1	0.69	–	–	–	180	TO-263AB
IXGH20N120A3		40	20	2.5	715	10.1	0.69	–	–	–	180	TO-247AD
IXGP20N120A3		40	20	2.5	715	10.1	0.69	–	–	–	180	TO-220AB
IXGH32N120A3		75	na	2.35	1240	na	0.42	–	–	–	300	TO-247AD
IXGT32N120A3		75	32	2.35	1240	na	0.42	–	–	–	300	TO-268AA
IXGK55N120A3H1		125	55	2.3	282	29	0.27	•	–	0.42	460	TO-264a
IXGX55N120A3H1		125	55	2.3	282	29	0.27	•	–	0.42	460	PLUS247
IXGK120N120A3		240	120	2.2	325	58	0.15	–	–	–	830	TO-264a
IXGX120N120A3		240	120	2.2	325	58	0.15	–	–	–	830	PLUS247
IXGK82N120A3		260	82	2.05	780	22.5	0.1	–	–	–	1250	TO-264a
IXGX82N120A3		260	82	2.05	780	22.5	0.1	–	–	–	1250	PLUS247

IGBT isXtreme



X011c
TO-263HV



X015c
PLUS247HV



X022e
ISOPLUS264™



X014a
TO-247AD




X016a
ISOPLUS247™



X024c
ISOPLUS i4-PAC™



X014c
TO-247HV



X019a
TO-268HV




X027a
SOT-227B (miniBLOC)




X015a
PLUS247



X020a
TO-264



IX...



IXG...H1

Very High Voltage NPT IGBTs

2.5 kV – 4.5 kV NPT IGBT

Part Type	V _{ce}	I _{C25} T _C = 25 °C	I _{C110} T _C = 90 °C (100 °C) 110 °C	V _{CE(sat)} max. T _C = 25 °C	t _{fi} typ. T _J = 25 °C	E _{off} typ. T _J = 125 °C	R _{thJC} IGBT	P _C	Package
	V	A	A	V	ns	mJ	K/W	W	
IXGA20N250HV	2500	30	12	3.1	930	na	0.83	150	TO-263HV
IXGF25N250		30	15	2.9	200	na	1.1	114	ISOPLUS i4-PAC™
IXGH25N250		60	25	2.9	200	na	0.5	250	TO-247AD
IXGT25N250		60	25	2.9	200	na	0.5	250	TO-268AA
IXGT25N250HV		60	25	2.9	200	na	0.5	250	TO-268HV
IXGL75N250		110	[65]	2.9	455	na	0.29	430	ISOPLUS264™
IXGK75N250		170	75	2.7	455	na	0.16	780	TO-264
IXGX75N250		170	75	2.7	455	na	0.16	780	PLUS247
IXEL40N400	4000	90	40	3.5	425	205	0.26	380	ISOPLUS264™
IXG50I4500KN	4500	74	-42	3.2	1350	73	0.34	368	ISOPLUS264™

XPT Very High Voltage IGBTs

Part Type	V _{ce}	I _{C25} T _C = 25 °C	I _{C110} T _C = 90 °C (100 °C) 110 °C	V _{CE(sat)} max. T _C = 25 °C	t _{fi} typ. T _J = 25 °C	E _{off} typ. T _J = 125 °C	R _{thJC} IGBT	P _C	Package
	V	A	A	V	ns	mJ	K/W	W	
IXYF30N450	4500	23	17	3.9	1220	na	0.54	230	ISOPLUS i4-PAC™
IXYT30N450HV		60	30	3.9	1220	na	0.29	430	TO-268HV
IXYF40N450		60	32	3.9	1120	na	0.43	290	ISOPLUS i4-PAC™
IXYH30N450HV		60	30	3.9	1220	na	0.29	430	TO-247HV
IXYL60N450		90	38	3.3	1360	na	0.3	417	ISOPLUS264™
IXYX40N450HV		95	40	3.9	1120	na	0.19	660	PLUS247HV
IXYF30N400	4000	39	16	5.5	250	na	0.66	190	ISOPLUS i4-PAC™
IXYF20N400C		29	13	4.2	190	na	0.66	190	ISOPLUS i4-PAC™
IXYF30N400V1		39	16	3.3	250	na	0.66	190	ISOPLUS i4-PAC™

Reverse Conducting IGBTs (BiMOSFET™) 1.7 kV–2.5 kV

Part Number	V _{ce}	I _{C25} T _C = 25 °C	I _C T _C = 110 °C	V _{CE(sat)} typ. max. T _C = 25 °C	O ₉ typ.	t _f (t _{fi}) typ. T _J = 125 °C	R _{thJC} IGBT	Package
	V	A	A	V	ns	mJ	K/W	
IXBH6N170	1700	12	6	2.84	17	600	1.65	TO-247AD
IXBT6N170		12	6	2.84	17	600	1.65	TO-268AA
IXBA16N170AHV		16	10	–	65	–	0.83	TO-263ABHV
IXBH16N170A		16	10	–	65	–	0.83	TO-247AD
IXBT16N170A		16	10	–	65	–	0.83	TO-268AA
IXBT16N170AHV		16	10	–	65	–	0.83	TO-268HV
IXBH10N170		20	10	3.4	30	–	0.89	TO-247AD
IXBT10N170		20	10	3.4	30	–	0.89	TO-268AA
IXBN42N170A		38	21	5.2	188	–	0.4	SOT-227B (miniBLOC)
IXBH16N170		40	16	–	72	705	0.5	TO-247AD
IXBH42N170A		42	21	5.2	188	–82	0.35	TO-247AD
IXBT42N170A		42	21	5.2	188	–82	0.35	TO-268AA
IXBR42N170		57	32	–	188	740	0.62	ISOPLUS247™
IXBH24N170		60	24	–	140	960	0.5	TO-247AD
IXBT24N170		60	24	–	140	960	0.5	TO-268AA
IXBH42N170		80	42	–	188	740	0.35	TO-247AD
IXBT42N170		80	42	–	188	740	0.35	TO-268AA
IXBX75N170A		110	65	4.95	358	–175	0.12	PLUS247
IXBN75N170		145	75	2.6	350	580	0.2	SOT-227B (miniBLOC)
IXBK75N170		200	75	2.6	350	580	0.12	TO-264
IXBX75N170		200	75	2.6	350	580	0.12	PLUS247
IXCH36N250	2500	73	36	2.6	177	900	0.21	TO-247AD
IXCK36N250		73	36	2.6	177	900	0.21	TO-264
IXBL64N250		116	46	2.5	400	175	0.25	ISOPLUS264™
IXBK64N250		156	64	2.5	400	175	0.17	TO-264
IXBX64N250		156	64	2.5	400	175	0.17	PLUS247

Reverse Conducting IGBTs (BiMOSFET™) 3 kV

Part Number	V _{ce}	I _{C25} T _C = 25 °C	I _C T _C = 110 °C	V _{CE(sat)} typ. max. T _C = 25 °C (110 °C)	O ₉ typ.	t _f (t _{fi}) typ. T _J = 125 °C	R _{thJC} IGBT	Package
	V	A	A	V	ns	mJ	K/W	
IXBH10N300	3000	30	10	2.8	45	1030	0.69	TO-247AD
IXBA10N300HV		34	10	2.2	46	2010	0.69	TO-263ABHV
IXBH10N300HV		34	10	2.2	46	2010	0.69	TO-247HV
IXBF22N300		38	22	2.2	110	1650	0.83	ISOPLUS i4-PAC™
IXBA14N300HV		38	14	2.2	62	1730	0.62	TO-263ABHV
IXBH14N300HV		38	14	2.2	62	1730	0.62	TO-247HV
IXBF32N300		40	22	2.8	142	630	0.78	ISOPLUS i4-PAC™
IXBF42N300		60	24	2.5	200	490	0.52	ISOPLUS i4-PAC™
IXBT22N300HV		60	22	2.2	110	1650	0.43	TO-268HV
IXBH22N300HV		60	22	2.2	110	1650	0.43	TO-247HV
IXBX28N300HV		62	28	2.3	110	3280	0.36	PLUS247HV
IXBH32N300		80	32	2.8	142	630	0.31	TO-247AD
IXBH32N300HV		80	32	2.8	142	630	0.31	TO-247HV
IXBT32N300HV		80	32	2.8	142	630	0.31	TO-268HV
IXBF55N300		86	34	2.7	335	260	0.35	ISOPLUS i4-PAC™
IXBH42N300HV		104	42	2.5	200	490	0.25	TO-247HV
IXBT42N300HV		104	42	2.5	200	490	0.25	TO-268HV
IXBK55N300		130	55	2.7	335	260	0.2	TO-264
IXBX55N300		130	55	2.7	335	260	0.2	PLUS247



Diodes for High Switching Frequencies

Fast Recovery Epitaxial Diodes (HiPerFRED, FRED) and FRD (SONIC)

Power switches (IGBT, MOSFET, BJT, GTO) for applications in electronics are only as good as their associated free wheeling diodes. At increasing switching frequencies, the proper functioning and efficiency of the power switch, aside from conduction losses, is determined by the turn-off behavior of the diode (characterized by Q_{rr} , I_{RM} , and t_{rr} , Figure 1). With optimized ultra-fast switching diodes, the development engineer has various possibilities: either higher pulse rate or higher current load, or smaller heatsink or more conservative operation due to cooler chips.

The reverse current characteristic following the peak reverse-current I_{RM} is another important property of our diodes. The slope of the decaying reverse current dI_{rr}/dt results from design parameters (i.e., technology and diffusion of the diode chips). In a circuit, this current slope, in conjunction with parasitic inductances (e.g., connecting leads), causes over-voltage spikes and high-frequency interference voltages. The higher the dI_{rr}/dt ("hard recovery" or "snap-off" behavior), the higher the resulting additional stress for both the diode and the paralleled switch. A slow decay of the reverse current ("soft recovery" behavior) is the most desirable characteristic, and this is designed into all diodes. The wide range of available blocking voltages makes it possible to apply these diodes as output rectifiers in switch-mode power supplies (SMPS) as well as protective and free-wheeling diodes for power switches in inverters.

Silicon Carbide (SiC) Schottky Barrier Diodes

SiC Schottky Barrier Diodes (SBD) offer promising potential for high-efficiency high power density applications due to their superior performance over Si devices. For SiC SBD, the reverse recovery (RR) behavior caused by minority carrier extraction during forced diode turnoffs can be eliminated, as compared with Si P-N junction diodes. The switching losses are ultra-low, and they are independent of dI/dt , current level, and temperature. The paralleling of SiC SBD are easy thanks to its positive temperature coefficient. The merged p-n Schottky (MPS) device architecture enhances surge capability and provides low leakage.

Diodes for General Purpose Applications



Rectifier Diodes

Diodes of the DS-series (anode on stud) and of the DSI-series (cathode on stud) are mainly used for rectifying 50 or 60 Hz main currents. Discrete diodes in plastic and metal housings, as well as different diode bridges, are available for standard line voltages from 110 V to 690 V AC.


Avalanche Diodes

Avalanche diodes or surge-voltage-proof rectifier diodes of the series DSA (anode on stud) and DSAI (cathode on stud) differ from standard diodes of the series DS and DSI: the operation in avalanche breakdown above the normal reverse blocking voltage (VRRM) can be tolerated as long as the power is within the specified maximum permissible non-repetitive reverse surge dissipation PRSM at the specified pulse width. For technologically good control of the avalanche breakdown, it is important to ensure homogeneous doping of the middle zone of the silicon chip and suitable junction termination and passivation at the edges where PN-junctions are exposed to the surface (high field strength at the edge). Because of this ruggedness against periodically occurring short-term voltage surges in the blocking direction, the user can frequently do without protective overvoltage networks. In addition, if avalanche diodes are placed in series for high voltage applications, the sharp avalanche breakdown of the blocking characteristic ensures static and dynamic voltage distribution uniformly across each device. Thus, in general, none of the series diodes will be overstressed by reverse voltages that are substantially above the avalanche voltage. All high-voltage rectifier modules manufactured in quantity are assembled with avalanche diodes.


Figure 1:
Current and Voltage During Turn-On and Turn-Off Switching of Fast Diodes

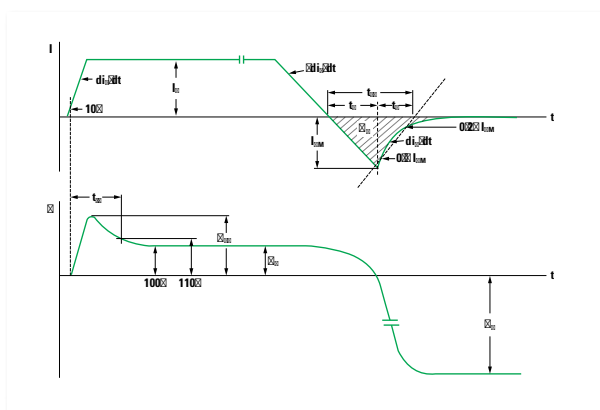


DS...I...




DS...X...




DS...IM...




DS...C...



DS...P...



DS...I...NA

**X004**
TO-252AA**X007b**
TO-220ACFP**X014a**
TO-247AD**X005a**
TO-220AB**X008a**
TO-262AA (I²-PAK)**X017a**
TO-3P**X005b**
TO-220AC**X011b**
TO-263AB**X027a**
SOT-227B (miniBLOC)**X007a**
TO-220ABFP

Schottky Gen² Diodes

Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{VJM}	R _{thJC}	Package	
		d = 0.5		T _{VJ} = 125 °C					
	V	A	°C	V	A	°C	K/W		
DSB20I15PA	15	20	130	0.39	20	150	1.75	TO-220AC	
DSB40C15PB		2 × 20	130	0.39	20	150	1.75	TO-220AB	
DSB15IM30UC		15	130	0.44	15	150	2.00	TO-252AA	
DSB30C30PB	30	2 × 15	135	0.44	15	150	1.75	TO-220AB	
DSB60C30PB		2 × 30	130	0.49	30	150	0.85	TO-220AB	
DSB10I45PM		10	115	0.52	10	150	4.50	TO-220ACFP	
DSA20C45PB	45	2 × 10	160	0.64	10	175	2.40	TO-220AB	
DSA15I45PA		15	155	0.63	15	175	1.75	TO-220AC	
DSA15IM45UC		15	150	0.63	15	175	2.00	TO-252AA	
DSA15IM45IB		15	155	0.63	15	175	1.75	TO-262AA (I2-PAK)	
DSB15IM45IB		15	130	0.60	15	150	1.75	TO-262AA (I2-PAK)	
DSA30C45PB		2 × 15	155	0.63	15	175	1.75	TO-220AB	
DSA30C45PC		2 × 15	155	0.63	15	175	1.75	TO-263AB	
DSB30C45PB		2 × 15	130	0.60	15	150	1.75	TO-220AB	
DSA60C45PB		2 × 30	155	0.70	30	175	0.85	TO-220AB	
DSB60C45PB		2 × 30	125	0.64	30	150	0.85	TO-220AB	
DSA60C45HB		2 × 30	159	0.71	30	175	0.90	TO-247AD	
DSB60C45HB		2 × 30	113	0.62	30	125	0.80	TO-247AD	
DSA80C45HB		2 × 40	152	0.61	40	175	0.40	TO-247AD	
DSA20C60PB		60	2 × 10	155	0.70	10	150	2.40	TO-220AB
DSA20C60PN			2 × 10	140	0.70	10	150	4.80	TO-220ABFP
DSB20C60PN	2 × 10		110	0.62	10	150	4.50	TO-220ABFP	
DSA30C60PB	2 × 15		155	0.72	15	175	1.75	TO-220AB	
DSB30C60PB	2 × 15		130	0.64	15	150	1.75	TO-220AB	
DSA60C60PB	2 × 30		155	0.77	30	175	0.85	TO-220AB	
DSB60C60PB	2 × 30		125	0.69	30	150	0.85	TO-220AB	
DSA60C60HB	100	2 × 30	159	0.77	30	175	0.90	TO-247AD	
DSA10I100PM		10	140	0.71	10	175	4.50	TO-220ACFP	
DSA10IM100UC		10	150	0.71	10	175	3.00	TO-252AA	
DSA20C100PB		2 × 10	155	0.71	10	175	2.40	TO-220AB	
DSA20C100PN		2 × 10	140	0.71	10	175	4.50	TO-220ABFP	
DSA30C100PB		2 × 15	155	0.73	15	175	1.75	TO-220AB	
DSA30C100PN		2 × 15	120	0.73	15	175	4.20	TO-220ABFP	
DSA30C100HB		2 × 15	168	0.72	15	175	0.80	TO-247AD	
DSA30C100QB		2 × 15	155	0.72	15	175	1.75	TO-3P	
DSA50C100HB		2 × 25	162	0.72	25	175	0.70	TO-247AD	
DSA50C100QB		2 × 25	155	0.72	25	175	0.95	TO-3P	
DSA30I100PA		30	150	0.78	30	175	0.85	TO-220AC	
DSA60C100PB		2 × 30	150	0.78	30	175	0.85	TO-220AB	
DSA70C100HB	2 × 35	151	0.76	35	175	0.90	TO-247AD		
DSA80C100PB	2 × 40	150	0.80	40	175	0.60	TO-220AB		

Diodes



X004
TO-252AA



X005a
TO-220AB



X005b
TO-220AC



X007a
TO-220ABFP



X008a
TO-262AA (I²-PAK)



X011b
TO-263AB



X016c
ISO247™



X014a
TO-247AD



X014b
TO-247AD



X017a
TO-3P




X024a
ISOPLUS i4-PAC™




X027a
SOT-227B (miniBLOC)




X030a
SMPD -B




DS...C...




DS...I...NA



DS...IM...




DS...I...




DS...X...

Schottky Gen² Diodes


Part Number	V _{RRM} V	I _{FAV} @ T _C d = 0.5		V _F @ I _F T _{VJ} = 125 °C		T _{VJM} °C	R _{thJC} K/W	Package
		A	°C	V	A			
DSA10C150PB	150	2 × 5	160	0.71	5	175	4.80	TO-220AB
DSA10C150UC		2 × 5	155	0.71	5	175	4.80	TO-252AA
DSA20C150PB		2 × 10	140	0.73	10	175	2.40	TO-220AB
DSA20C150PN		2 × 10	140	0.73	10	175	4.50	TO-220ABFP
DSA15IM150UC		15	150	0.75	15	175	2.00	TO-252AA
DSA30C150PB		2 × 15	155	0.75	15	175	1.75	TO-220AB
DSA30C150PC		2 × 15	155	0.75	15	175	1.75	TO-263AB
DSA50C150HB		2 × 25	162	0.72	25	175	0.70	TO-247AD
DSA30I150PA		30	150	0.80	30	175	0.85	TO-220AC
DSA60C150PB		2 × 30	150	0.80	30	175	0.85	TO-220AB
DSA70C150HB		2 × 35	155	0.76	35	175	0.70	TO-247AD
DSA120C150QB		2 × 60	150	0.85	60	175	0.40	TO-3P
DSA120X150LB		2 × 60	150	0.80	60	175	0.80	SMPD-B
DSA240X150NA		2 × 120	110	0.85	120	150	0.50	SOT-227B (miniBLOC)
DSA20C200PB	200	2 × 10	155	0.75	10	175	2.40	TO-220AB
DSA15IM200UC		15	150	0.78	15	175	2.00	TO-252AA
DSA30C200IB		2 × 15	155	0.78	15	175	1.75	TO-262AA (I ² -PAK)
DSA30C200PB		2 × 15	155	0.78	15	175	1.75	TO-220AB
DSA30C200PC		2 × 15	155	0.78	15	175	1.75	TO-263AB
DSA70C200HB		2 × 35	155	0.78	35	175	0.70	TO-247AD
DSA90C200HB		2 × 45	148	0.78	45	175	0.70	TO-247AD
DSA90C200HR		2 × 45	110	0.80	45	175	0.70	ISO-247
DSA120X200LB		2 × 60	150	0.87	60	175	0.80	SMPD-B
DSA240X200LB		2 × 120	150	0.87	120	175	0.40	SMPD-B
DSA240X200NA		2 × 120	110	0.87	120	150	0.50	SOT-227B (miniBLOC)




DSS...




DSSS...



DSSK...



DSS 2x...



DSS 2x...

Schottky Diodes

Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{VJM}	R _{thJC}	Package
		d = 0.5		T _{VJ} = 125 °C				
	V	A	°C	V	A	°C	K/W	
DSS40-0008D	8	40	88	–	–	100	0.70	TO-247AD
DSSK80-0008D		2 × 40	88	–	–	100	0.70	TO-247AD
DSS20-0015B	15	20	135	0.33	20	150	1.40	TO-220AC
DSSK40-0015B		2 × 20	92	–	–	100	0.70	TO-247AD
DSS6-0025BS	25	6	140	0.35	6	150	3.00	TO-252AA
DSS25-0025B		25	125	0.45	25	150	1.40	TO-220AC
DSSK18-0025BS		2 × 10	140	0.37	10	150	1.70	TO-263AB
DSSK38-0025B		2 × 20	130	0.40	20	150	1.40	TO-220AB
DSSK38-0025BS		2 × 20	130	0.40	20	150	1.40	TO-263AB
DSSK80-0025B		2 × 40	108	0.42	40	125	0.40	TO-247AD
DSSK48-003BS	30	2 × 25	130	0.40	20	150	1.20	TO-263AB
DSSK80-003B		2 × 40	108	0.42	40	125	0.40	TO-247AD
DSS6-0045AS	45	6	165	0.53	6	175	3.00	TO-252AA
DSS10-0045B		10	135	0.50	10	150	1.70	TO-220AC
DSS16-0045A		16	160	0.60	16	175	1.40	TO-220AC
DSS16-0045AS		16	160	0.60	16	175	1.40	TO-263AB
DSS25-0045A		25	155	0.64	25	175	1.10	TO-220AC
DSS60-0045B		60	94	0.56	60	125	0.70	TO-247AD
DSSK20-0045B		2 × 10	135	0.46	10	150	1.70	TO-220AB
DSSK28-0045BS		2 × 15	135	0.43	15	150	1.40	TO-263AB
DSSK60-0045A		2 × 30	159	0.55	30	175	0.40	TO-247AD
DSSK80-0045B		2 × 40	108	0.49	40	125	0.70	TO-247AD
DSS2x61-0045A		2 × 60	110	0.62	60	150	0.50	SOT-227B (miniBLOC)
DSS2x81-0045B		2 × 80	110	0.60	80	150	0.50	SOT-227B (miniBLOC)
DSS2x121-0045B		2 × 120	110	0.59	120	150	0.50	SOT-227B (miniBLOC)
DSS10-006A	60	10	160	0.65	10	175	1.70	TO-220AC
DSSK28-006BS		2 × 15	135	0.52	15	150	1.40	TO-263AB
DSSK80-006B		2 × 40	108	0.63	40	125	0.40	TO-247AD
DSSK70-008A	80	2 × 35	159	0.65	35	175	0.70	TO-247AD
DSS2x111-008A		2 × 110	110	0.82	100	150	0.50	SOT-227B (miniBLOC)
DSS10-01A	100	10	160	0.66	10	175	1.70	TO-220AC
DSS10-01AS		10	160	0.66	10	175	1.70	TO-263AB
DSS16-01A		16	155	0.65	16	175	1.40	TO-220AC
DSS16-01AS		16	155	0.65	16	175	1.40	TO-263AB
DSSK16-01A		2 × 8	165	0.63	8	175	1.70	TO-220AB
DSSK16-01AS		2 × 8	165	0.63	8	175	1.70	TO-263AB
DSSK28-01AS		2 × 15	160	0.64	15	175	1.40	TO-263AB
DSSK50-01A		2 × 25	164	0.61	25	175	0.70	TO-247AD
DSS2x41-01A		2 × 40	110	0.70	40	150	0.50	SOT-227B (miniBLOC)
DSS2x61-01A		2 × 60	110	0.74	60	150	0.50	SOT-227B (miniBLOC)

Diodes



Schottky Diodes



Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{VJM}	R _{thJC}	Package
		d = 0.5		T _{VJ} = 125 °C				
	V	A	°C	V	A	°C	K/W	
DSS6-015AS	150	6	165	0.65	6	175	3.0	TO-252AA
DSSK20-015A		2 × 10	165	0.65	10	175	1.4	TO-220AB
DSSK50-015A		2 × 25	163	0.68	25	175	0.7	TO-247AD
DSSK60-015A		2 × 30	160	0.70	30	175	0.7	TO-247AD
DSS2X101-015A		2 × 100	110	0.84	100	150	0.50	SOT-227B (miniBLOC)
DSSK10-018A	180	2 × 5	165	0.66	5	175	1.7	TO-220AB
DSSK30-018A		2 × 15	165	0.72	15	175	0.9	TO-247AD
DSSK60-02A	200	2 × 30	159	0.71	30	175	0.7	TO-247AD
DSS2X101-02A		2 × 100	110	0.89	100	150	0.50	SOT-227B (miniBLOC)

Traditional Schottky (MBR)



Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{JM}	R _{thJC}	Package
		d = 0.5		T _J = 125 °C				
	V	A	°C	V	A	°C	K/W	
MBR1045	45	10	115	–	–	150	2.0	TO-220AC
MBRF2045CT		2 x 10	105	0.72	20	150	5.0	ITO-220AB
MBR6045WT		2 x 30	135	0.55	30	150	1.0	TO-247AD
MBRB1060CT		2 x 5	105	0.65	5	150	2.0	D ² PAK(TO-263)
MBRF1060CTL	60	2 x 5	75	–	–	125	3.5	ITO-220AB
MBR1060CTL		2 x 5	100	–	–	125	2.0	TO-220AB
MBRB2060CT		2 x 10	105	–	–	150	2.3	D ² PAK(TO-263)
MBRF2060CT		2 x 10	105	–	–	150	2.3	ITO-220AB
MBR2060CT		2 x 10	100	0.70	10	150	2.3	TO-220AB
MBRF3060CT		2 x 15	95	0.67	15	150	3.0	ITO-220AB
MBRB10100CT		2 x 5	105	0.75	5	150	6.0	D ² PAK(TO-263)
MBRD10100CT	100	2 x 5	105	0.75	5	150	6.0	DPAK(TO-252)
MBRF10100CTL		2 x 5	135	0.75	5	150	4.5	ITO-220AB
MBRF10100CTR		2 x 5	105	0.75	5	150	4.5	ITO-220AB
MBR10100CT		2 x 5	100	0.75	5	150	2.0	TO-220AB
MBRB20100CT		2 x 10	105	0.80	10	150	2.0	D ² PAK(TO-263)
MBRF20100CTP		2 x 10	105	0.80	10	150	3.5	ITO-220AB
MBR20100CTP		2 x 10	105	0.80	10	150	3.5	TO-220AB
MBRF30100CTP		2 x 15	133	0.70	15	150	2.0	ITO-220AB
MBR40100WT		2 x 20	135	0.74	20	150	2.0	TO-247AD

Traditional Schottky (MBR)

Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{JM}	R _{thJC}	Package
		d = 0.5		T _J = 125 °C				
	V	A	°C	V	A	°C	K/W	
MBRD10150CT	150	2 × 5	105	0.80	5	150	4.5	DPAK(TO-252)
MBRF10150CTL		2 × 5	100	0.73	5	150	4.5	ITO-220AB
MBR10150CT		2 × 5	105	0.73	5	150	4.5	TO-220AB
MBR20150CT		2 × 10	125	0.83	10	175	1.5	TO-220AB
MBRF20150CT		2 × 10	100	0.80	10	175	3.5	ITO-220AB
MBRF30150CT	200	2 × 15	133	0.80	15	150	2.0	ITO-220AB
MBRD10200CT		2 × 5	105	0.74	5	150	3.5	DPAK(TO-252)
MBRF10200CT		2 × 5	105	0.78	5	150	4.5	ITO-220AB
MBR10200CT		2 × 5	105	0.78	5	150	3.5	TO-220AB
MBRF20200CT		2 × 10	105	0.85	10	175	4.5	ITO-220AB
MBRF20200CTR		2 × 10	105	0.85	10	175	4.5	ITO-220AB
MBRF30200CT		2 × 15	109	0.75	15	150	3.3	ITO-220AB

Ultralow Trench Schottky (DST)



DSTB...



DSTF...



DST...A



DST...D



DSTD

Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{JM}	R _{thJC}	Package
		d = 0.5		T _J = 125 °C				
	V	A	°C	V	A	°C	K/W	
DST2045AX	45	20	25 ^b	0.50	20	150	—	P600
DSTB2045C		2 x 10	80	0.42	10	150	3.0	D ² PAK(TO-263)
DSTF2045C		2 x 10	80	0.52	10	150	6.0	ITO-220AB
DST2045C		2 x 10	80	0.52	10	150	3.0	TO-220AB
DSTF3045C		2 x 15	90	0.45 ^a	15	150	5.0	ITO-220AB
DSTF4045C	50	2 x 20	90	0.51 ^a	20	150	5.0	ITO-220AB
DSTF2050C		2 x 10	110	0.44 ^a	10	150	6.0	ITO-220AB
DSTF4050C		2 x 20	90	0.55	20	150	5.0	ITO-220AB
DST2060DJF	60	20	80	0.70	20	150	2.6	PDFNWB5x6-8L
DST2060C		2 x 10	125	0.59	10	150	3.0	TO-220AB
DSTF2060C		2 x 10	85	0.59	10	150	6.0	ITO-220AB
DST3060DJF		30	80	0.72	30	150	2.6	PDFNWB5x6-8L
DST3060LC		2 x 15	105	0.44 ^a	15	125	5.0	TO-220AB
DSTF3060C		2 x 15	60	0.65	15	150	6.0	ITO-220AB
DSTF3060CR		2 x 15	60	0.65	15	150	6.0	ITO-220AB
DSTF4060C	80	2 x 20	85	0.57	20	150	5.0	ITO-220AB
DSTF2080C		2 x 10	85	0.70	10	150	6.0	ITO-220AB
DST2080C		2 x 10	125	0.70	10	150	3.0	TO-220AB
DSTF3080C		2 x 15	60	0.70	15	150	6.0	ITO-220AB
DST3080C		2 x 15	100	0.70	15	150	2.5	TO-220AB
DSTF20100C	100	2 x 10	100	0.70	10	150	5.5	ITO-220AB
DSTF30100C		2 x 15	95	0.70	15	150	5.5	ITO-220AB
DSTF30100S		30	70	0.78	30	150	4.0	ITO-220AB
DST20100C		2 x 10	120	0.70	10	150	2.8	TO-220AB
DST30100C		2 x 15	115	0.70	15	150	2.5	TO-220AB
DSTF40100C		2 x 20	85	0.70	20	150	4.0	ITO-220AB
DST40100C		2 x 20	115	0.70	20	150	2.0	TO-220AB
DSTB60100C	120	2 x 30	105	0.80	30	150	2.0	D ² PAK(TO-263)
DSTF60100C		2 x 30	105	0.80	30	150	5.0	ITO-220AB
DSTF20120C		2 x 10	74	0.72	10	150	5.0	ITO-220AB
DSTF20120CR		2 x 10	74	0.72	10	150	5.0	ITO-220AB
DSTF30120C		2 x 15	80	0.76	15	150	4.5	ITO-220AB
DSTF30120CR	150	2 x 15	80	0.76	15	150	4.5	ITO-220AB
DSTF40120C		2 x 20	74	0.76	20	150	4.0	ITO-220AB
DSTF20150CR		2 x 10	80	0.80	10	150	5.0	ITO-220AB
DST20150C	200	2 x 10	105	0.80	10	150	2.8	TO-220AB
DSTF30150C		2 x 15	50	0.79	15	150	4.5	ITO-220AB
DSTF40150C		2 x 20	70	0.82	20	150	4.0	ITO-220AB
DST5200	200	5	100	0.73	5	150	3.5	TO-220AC
DSTD5200		5	100	0.73	5	150	2.4	DPAK(TO-252)
DSTF10200C		2 x 5	90	0.73	5	150	7.0	ITO-220AB
DSTB30200C		2 x 15	100	0.72	15	150	2.0	D ² PAK(TO-263)

Typical value

Ambient temperature



Ultralow Trench Schottky (DST, TO-277B)



Part Number	V _{RRM}	I _{FAV} @ T _L		V _F @ I _F		T _{JM}	R _{thJL}	Package
		d = 0.5		T _{VJ} = 25 °C				
	V	A	°C	V	A	°C	K/W	
DST1040S-A	40	10	125	0.50	10	150	3.5	TO-277B
DST1040S		10	125	0.41 ^a	10	150	3.5	TO-277B
DST1045S-A	45	10	125	0.50	10	150	3.5	TO-277B
DST1045S		10	125	0.50	10	150	3.5	TO-277B
DST1545S		15	125	0.51	15	150	3.5	TO-277B
DST1050S-A	50	10	125	0.49	10	150	3.5	TO-277B
DST1050S		10	125	0.49	10	150	3.5	TO-277B
DST1550S		15	125	0.50	15	150	3.5	TO-277B
DST2050S		20	125	0.60	20	150	3.5	TO-277B
DST560S-A	60	5	125	0.60	5	150	4.0	TO-277B
DST560S		5	125	0.60	5	150	4.0	TO-277B
DST860S-A		8	125	0.55	8	150	4.0	TO-277B
DST860S		8	125	0.55	8	150	4.0	TO-277B
DST580S-A	80	5	125	0.66	5	150	4.0	TO-277B
DST580S		5	125	0.66	5	150	4.0	TO-277B
DST2080S		20	85 ^b	0.65	20	150	–	TO-277B
DST5100S-A	100	5	125	0.70	5	150	4.0	TO-277B
DST5100S		5	125	0.70	5	150	4.0	TO-277B
DST8100S-A		8	125	0.62	8	150	4.0	TO-277B
DST8100S		8	125	0.62	8	150	4.0	TO-277B
DST10100S-A		10	125	0.65	10	150	3.5	TO-277B
DST10100S		10	125	0.65	10	150	3.5	TO-277B
DST12100S		12	125	0.64	12	150	3.5	TO-277B

^a Typical value
^b Ambient temperature

Ultrafast Diodes

Part Number	V _{RRM}	I _{FAV} @ T _L		V _F @ I _F		I _{FSM}	T _{rr}	T _{VJM}	R _{thJC}	Package
		d = 0.5		T _{VJ} = 25 °C		8.3 ms, 25 °C	I _F = 500 mA, I _R = 1 A, I _{rrm} = 250 mA			
	V	A	°C	V	A	A	nS	°C	K/W	
DURB2020CT	200	2 x 10	100	1.15	10	125	35	150	3.5	D2PAK(TO-263)
DURF1030CT	300	2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DURF1030CTR		2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DUR2030CT		2 x 10	100	1.3	10	125	45	150	5	TO-220AB
DUR6030WT		2 x 30	100	1.3	30	400	45	150	2	TO-247AD
DURB1640CT	400	2 x 8	105	1.3	8	80	45	150	5	TO-263
DURF1040CT		2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DURF1040CTR		2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DURF2040CT		2 x 10	100	1.3	10	125	45	150	5	ITO-220AB
DURF840		8	55	1.3	8	80	45	150	5	ITO-220AC
DUR1040CT		2 x 5	112	1.3	5	80	45	150	3.5	TO-220AB
DUR6040WT		2 x 30	100	1.41	30	360	45	150	0.95	TO-247AD
DURD560A	600	5	100	1.7	5	60	35	150	4.5	DPAK(TO-252)
DURF1060CT		2 x 5	100	1.55	5	60	50	150	5	ITO-220AB
DURF3060CT		2 x 15	105	2.03	15	110	50	150	1.6	ITO-220AB
DURF1060		10	105	2.2	10	100	32	150	6	ITO-220AC
DUR3060CT		2 x 15	105	2.03	15	110	50	150	1.6	TO-220AB
DUR6060W		60	70	2	60	600	50	150	0.75	TO-247AC
DUR30120		30	115	2.75	30	80	100	150	0.9	TO-220AC
DUR60120W	1200	60	90	3.5	60	280	100	150	0.65	TO-247AC
DUR75120W		75	90	3.5	60	500	100	150	0.65	TO-247AC

HiPerDyn™ FRED

Series connected diodes for high switching frequencies;
packages isolated (2500 V_{RMS})



DSEP 2x...-...C



DPH...IS...
DSEP/DSS...-...C

Part Number	V _{RRM}	I _{FAV}	T _C	V _F	@ T _{VJ}	t _{rr} typ.	I _{RM} typ.	@ -di/dt	T _{VJM}	R _{thJC}	Package
		d = 0.5		I _F = I _{FAV}		T _{VJ} = 25 °C					
	V	A	°C	V	°C	ns	A	A/μs	°C	K/W	
DSS17-06CR	600	17	95	2.71	125	45	2.0	100	175	1.40	ISOPLUS247™
DPH30IS600HI		30	140	1.89	150	35	3.0	200	175	0.55	ISOPLUS247™
DSEP15-12CR	1200	15	135	2.67	150	15	10.0	600	175	1.00	ISOPLUS247™
DSEP30-12CR		30	120	3.18	150	15	5.5	600	175	0.60	ISOPLUS247™
DSEP2x25-12C	1200	2 × 25	90	2.95	150	15	5.5	600	150	0.60	SOT-227B (miniBLOC)
DPJ50XS1800NA	1800	2 × 25	90	4.33	150	15	4.0	600	150	0.40	SOT-227B (miniBLOC)

Dual Ultrafast Diodes

Series connected diodes for high switching frequencies with middle connection; packages isolated (2500 V_{RMS})



DHH/DSEE
DPF/G... P..

Part Number	V _{RRM}	I _{FAV}	T _C	V _F	@ T _{VJ}	t _{rr} typ.	I _{RM} typ.	@ -di/dt	T _{VJM}	R _{thJC}	Package
		d = 0.5		I _F = I _{FAV}		T _{VJ} = 25 °C					
	V	A	°C	V	°C	ns	A	A/μs	°C	K/W	
DPG30P300PJ	2 × 300	30	135	0.99	150	35	3	200	175	1.05	ISOPLUS220™
DPG10P400PJ	2 × 400	10	145	1.03	150	45	4	200	175	2.5	ISOPLUS220™
DPG30P400PJ	2 × 400	30	135	1.05	30	45	4	200	175	1.05	ISOPLUS220™
DSEE15-12CC	2 × 600	15	100	1.50	125	35	4	100	175	1.6	ISOPLUS220™
DSEE29-12CC	2 × 600	30	90	1.75	125	30	4	100	175	0.9	ISOPLUS220™
DPF30P600HR	2 × 600	30	130	1.27	150	35	17	600	175	0.9	ISO247™
DSEE30-12A	2 × 600	30	90	1.78	125	30	4	100	175	0.9	TO-247AD
DSEE55-24N1F	2 × 1200	60	110	1.56	150	75	35	600	175	0.6	ISOPLUS i4-PAC™
DHH55-36N1F	2 × 1800	60	50	2.06	125	230	60	800	150	0.6	ISOPLUS i4-PAC™



HiPerFRED 2™ Diodes



DPF/G/H...I*...



DPG...P...



DPF/G...C...



DPF...XA...



DPF...X...



DPF...C...

Part Number	V_{RRM}	I_{FAV} d = 0.5	@ T_C	I_{FSM} 10 ms 45 °C	V_F	@ I_F	t_{rr}	I_{RM}	-di/dt	T_{VJM}	R_{thJC}	Package
	V	A	°C	A	$T_{VJ} = 150\text{ °C}$	°C	$typ. T_{VJ} = 25\text{ °C}$			°C	K/W	
					V		°C	ns	A			
DPG10I200PA	200	10	145	140	0.98	10	35	3	200	175	2.30	TO-220AC
DPG10I200PM		10	125	140	0.98	10	35	3	200	175	4.40	TO-220ACFP
DPG20C200PB	200	2 × 10	145	140	0.98	10	35	3	200	175	2.30	TO-220AB
DPG20C200PN		2 × 10	125	140	0.98	10	35	3	200	175	4.40	TO-220ABFP
DPG15I200PA	200	15	140	240	1.01	15	35	3	200	175	1.70	TO-220AC
DPG30C200PB		2 × 15	140	240	1.01	15	35	3	200	175	1.70	TO-220AB
DPG30C200PC		2 × 15	140	240	1.01	15	35	3	130	175	1.70	TO-263AB
DPG30C200HB	200	2 × 15	140	240	1.00	15	35	3	200	175	1.70	TO-247AD
DPF60C200HB		2 × 30	130	400	0.98	30	35	4	200	175	0.95	TO-247AD
DPF60C200HJ	200	2 × 30	130	560	0.88	30	35	4	200	175	1.05	ISOPLUS247™
DPG60C200HB		2 × 30	135	360	1.06	30	35	3	200	175	0.95	TO-247AD
DPG60C200QB		2 × 30	135	360	1.06	30	35	3	200	175	0.95	TO-3P
DPF80C200HB	200	2 × 40	140	560	0.95	40	35	4	200	175	0.70	TO-247AD
DPF100C1200HB	1200	2 × 50	125	400	4.41	50	60	18	400	175	0.75	TO-247AD
DPF120C600HB	600	60	95	500	1.30	50	40	20	800	175	0.25	TO-247AD
DPF60I200HA	200	60	135	650	0.98	60	35	4	200	175	0.55	TO-247AD
DPF240X200NA		2 × 120	120	1800	0.90	120	35	4	200	175	0.45	SOT-227B (miniBLOC)
DPG10I300PA	300	10	145	140	0.98	10	35	3	200	175	2.30	TO-220AC
DPG10IM300UC		10	150	140	0.98	10	35	3	200	175	2.30	TO-252AA
DPG20C300PB	300	2 × 10	145	140	0.98	10	35	3	200	175	2.30	TO-220AB
DPG20C300PN		2 × 10	125	140	0.98	10	35	3	200	175	4.40	TO-220ABFP
DPG15I300PA	300	15	140	240	1.01	15	35	3	200	175	1.70	TO-220AC
DPG30C300PB		2 × 15	140	240	1.01	15	35	3	200	175	1.70	TO-220AB
DPG30C300PC	300	2 × 15	140	240	1.01	15	35	3	200	175	1.70	TO-263AB
DPG30C300HB		2 × 15	140	240	1.00	15	35	3	200	175	1.70	TO-247AD
DPF30I300PA	300	30	145	390	0.98	30	55	6	200	175	0.85	TO-220AC
DPG30I300HA		30	135	360	1.06	30	35	3	200	175	0.95	TO-247AD
DPG30I300PA	300	30	140	360	1.08	30	35	3	200	175	0.85	TO-220AC
DPG30IM300PC		30	140	360	1.08	30	35	3	200	175	0.85	TO-263AB
DPG30P300PJ	2 × 300	30	135	450	0.99	30	35	3	200	175	1.05	ISOPLUS220™
DPF60C300HB	300	2 × 30	140	400	0.97	30	55	6	200	175	0.95	TO-247AD
DPG60C300HB		2 × 30	135	360	1.06	30	35	3	200	175	0.95	TO-247AD
DPG60C300HJ	300	2 × 30	135	450	0.96	30	35	3	200	175	1.05	ISOPLUS247™
DPG60C300PC		2 × 30	140	360	1.08	30	35	3	200	175	0.85	TO-263AB
DPG60C300QB	300	2 × 30	135	360	1.06	30	35	3	200	175	0.95	TO-3P
DPG80C300HB	300	2 × 40	135	450	1.07	40	35	3	200	175	0.70	TO-247AD
DPG60I300HA		60	125	450	1.10	60	35	3.5	200	175	0.55	TO-247AD

Part Number	V_{RRM}	I_{FAV} d = 0.5	@ T_c	I_{FSM} 10 ms 45 °C	V_F	@ I_F	t_{rr}	I_{RM}	-di/dt	T_{VJM}	R_{thJC}	Package
	V	A	°C	A	$T_{VJ} = 150\text{ °C}$	°C	ns	A	A/μs	°C	K/W	
					typ. $T_{VJ} = 25\text{ °C}$							
DPG60IM300PC	300	60	135	450	1.14	60	35	3.5	200	175	0.45	TO-263AB
DPG120C300QB		2 × 60	125	450	1.10	60	35	3.5	200	175	0.55	TO-3P
DPG10I400PA	400	10	145	150	1.03	10	45	4	200	175	2.30	TO-220AC
DPG10I400PM		10	120	150	1.03	10	45	4	200	175	4.40	TO-220ACFP
DPG10P400PJ	2 × 400	10	145	130	1.03	10	45	4	200	175	2.50	ISOPLUS220™
DPG20C400PB	400	2 × 10	145	150	1.03	10	45	4	200	175	2.30	TO-220AB
DPG20C400PC		2 × 10	145	150	1.03	10	45	4	200	175	2.30	TO-263AB
DPG20C400PN	400	2 × 10	120	150	1.03	10	45	4	200	175	4.40	TO-220ABFP
DPG15I400PM		15	90	190	1.14	15	45	4	200	175	4.20	TO-220ACFP
DPG30C400PB	400	2 × 15	140	190	1.14	15	45	4	200	175	1.70	TO-220AB
DPG30C400HB		2 × 15	140	190	1.13	15	45	4	200	175	1.70	TO-247AD
DPG30I400HA	400	30	135	360	1.13	30	45	4	200	175	0.95	TO-247AD
DPG30IM400PC		30	145	300	1.16	30	45	4	200	175	0.85	TO-263AB
DPG30P400PJ	2 × 400	10	135	400	1.05	30	45	4	200	175	1.05	ISOPLUS220™
DPG60C400HB	400	2 × 30	135	360	1.13	30	45	4	200	175	0.95	TO-247AD
DPG60C400QB		2 × 30	135	360	1.13	30	45	4	200	175	0.95	TO-3P
DPG80C400HB	400	2 × 40	135	400	1.14	40	45	4	200	175	0.70	TO-247AD
DPG60I400HA		60	120	450	1.22	60	45	4	200	175	0.55	TO-247AD
DPF60IM400HB	400	60	130	600	1.09	60	60	6	200	175	0.55	TO-247AD
DPG60IM400QB		60	120	450	1.22	60	45	4	200	175	0.55	TO-3P
DPF240X400NA	400	2 × 120	120	1100	0.95	120	60	6	200	175	0.45	SOT-227B (miniBLOC)
DPH30IS600HI	600	30	140	450	1.89	30	35	3	200	175	0.55	ISOPLUS247™





HiPerFRED™ Diodes



DSEP...



DSEC...



DSEP 2x...0-...



DSEP 2x...1-...




DSEC

Part Number	V _{RRM}	I _{FAV}	@ T _C	I _{FSM}	V _F	@ I _F	t _{rr}	I _{RM}	-di/dt typ.	T _{VJM}	R _{thJC}	Package	
		d = 0.5		10 ms 45 °C	T _{VJ} = 150 °C		typ. T _{VJ} = 25 °C						
	V	A	°C		V	°C	ns	A	A/μs	°C	K/W		
DSEP40-03AS	300	40	125	340	1.18	40	35	3.5	200	175	0.85	TO-263AB	
DSEP6-06AS	600	6	150	40	1.34	6	20	3.5	100	175	2.80	TO-252AA	
DSEP6-06BS		6	140	40	1.77	6	15	2.0	100	175	2.80	TO-252AA	
DSEP8-06A	600	10	145	50	1.42	10	35	3.5	100	175	2.50	TO-220AC	
DSEP8-06B		10	130	50	1.85	10	30	2.0	100	175	2.50	TO-220AC	
DSEP15-06A		15	140	110	1.35	15	35	4.0	100	175	1.60	TO-220AC	
DSEP15-06AS	600	15	140	110	1.35	15	35	4.0	100	175	1.60	TO-263AB	
DSEP15-06B		15	130	110	1.59	15	25	2.0	100	175	1.60	TO-220AC	
DSEP15-06BS		15	130	110	1.59	15	25	2.0	100	175	1.60	TO-263AB	
DSEP29-06A	600	30	135	250	1.26	30	35	5.5	100	175	0.90	TO-220AC	
DSEP29-06AS		30	135	250	1.26	30	35	5.5	100	175	0.90	TO-263AB	
DSEP29-06B		30	120	250	1.63	30	30	3.0	100	175	0.90	TO-220AC	
DPG30I600PM		15	95	250	1.63	30	25	4.5	200	175	3.50	TO-220ACFP	
DSEP30-06A	600	30	135	250	1.25	30	35	5.5	100	175	0.90	TO-247AD	
DSEP30-06B		30	120	250	1.61	30	30	3.0	100	175	0.90	TO-247AD	
DSEP30-06BR		30	100	250	1.61	30	30	3.0	100	175	1.10	ISOPLUS247™	
DSEP60-06A	600	60	110	600	1.39	60	35	5.5	100	175	0.65	TO-247AD	
DSEP60-06AT		60	110	600	1.39	60	35	5.5	100	175	0.65	TO-268AA	
DSEP75-06AR		75	115	1000	1.38	75	35	6.5	200	175	0.50	ISOPLUS247™	
DSEP8-12A	1200	10	130	40	1.96	10	40	4.0	100	175	2.50	TO-220AC	
DSEP12-12A		15	130	90	1.87	15	40	4.5	100	175	1.60	TO-220AC	
DSEP12-12AZ	1200	15	130	90	1.87	15	40	4.5	100	175	1.60	TO-263ABHV	
DSEP12-12B		15	130	90	2.06	15	35	3.0	100	175	1.60	TO-220AC	
DSEP12-12BZ	1200	15	130	90	2.06	15	35	3.0	100	175	1.60	TO-263ABHV	
DSEP29-12A		30	120	200	1.81	30	40	8.5	100	175	0.90	TO-220AC	
DSEP29-12B		30	100	200	2.31	30	35	5.0	100	175	0.90	TO-220AC	
DSEP30-12A	1200	30	115	200	1.79	30	40	8.5	100	175	0.90	TO-247AD	
DSEP30-12B		30	100	200	2.30	30	35	5.0	100	175	0.90	TO-247AD	
DSEP30-12AR	1200	30	100	200	1.79	30	40	8.5	100	175	1.10	ISOPLUS247™	
DSEP60-12A		60	85	500	1.81	60	40	8.5	100	175	0.65	TO-247AD	
DSEP60-12B		60	110	500	2.20	60	35	-	100	175	0.45	TO-247AD	
DSEP60-12AR		60	60	500	1.81	60	40	8.5	100	175	0.80	ISOPLUS247™	
DSEP60-12AZ	1200	60	115	500	1.81	60	40	8.5	100	175	0.45	TO-268AA	
DSEP90-12AZ		90	105	800	1.79	90	40	8.5	100	175	0.35	TO-268AA	
DSEC16-06A	600	2 × 10	145	50	1.42	10	35	3.5	100	175	2.50	TO-220AB	
DSEC16-06AC		2 × 8	85	50	1.20	10	35	3.5	100	175	3.00	ISOPLUS220™	
DSEC29-06AC		2 × 15	140	110	1.34	15	35	4.0	100	175	1.60	ISOPLUS220™	
DSEC30-06A	600	2 × 15	140	110	1.34	15	35	4.0	100	175	1.60	TO-247AD	
DSEC30-06B		2 × 15	130	110	1.58	15	25	2.0	100	175	1.60	TO-247AD	
DSEC59-06BC	600	2 × 30	105	200	1.56	30	30	4.0	100	175	1.10	ISOPLUS220™	
DSEC60-06A		2 × 30	135	250	1.25	30	35	5.5	100	175	0.90	TO-247AD	
DSEC60-06B		2 × 30	120	250	1.61	30	30	3.0	100	175	0.90	TO-247AD	
DSEC16-12A	1200	2 × 10	130	40	1.96	10	40	4.0	100	175	2.50	TO-220AB	
DSEC16-12AS		2 × 10	130	40	1.96	10	40	4.0	100	175	2.50	TO-263AB	
DSEC30-12A		2 × 15	115	90	1.86	15	40	4.5	100	175	1.60	TO-247AD	
DSEC60-12A		2 × 30	115	200	1.79	30	40	8.5	100	175	0.90	TO-247AD	
DSEC120-12AK	1200	2 × 60	85	500	1.81	60	40	7.0	100	175	0.65	TO-264	
DSEP2X31-03A		300	2 × 30	110	300	0.90	30	30	4.5	100	150	1.15	SOT-227B (miniBLOC)
DSEP2X61-03A			2 × 60	75	600	1.26	60	30	4.0	100	150	0.85	SOT-227B (miniBLOC)
DSEP2X91-03A	600	2 × 90	70	1000	1.10	90	30	4.5	100	150	0.60	SOT-227B (miniBLOC)	
DSEP2X31-06A		2 × 30	95	250	1.23	30	35	5.5	100	150	1.15	SOT-227B (miniBLOC)	
DSEP2X31-06B	600	2 × 30	75	250	1.59	30	30	3.0	100	150	1.15	SOT-227B (miniBLOC)	
DSEP2X61-06A		2 × 60	65	600	1.48	60	35	5.5	100	150	0.85	SOT-227B (miniBLOC)	
DSEP2X91-06A		2 × 90	55	1000	1.39	90	35	8.0	100	150	0.60	SOT-227B (miniBLOC)	
DSEP2X31-12A	1200	2 × 30	70	200	1.77	30	40	8.5	100	150	1.15	SOT-227B (miniBLOC)	
DSEP2X60-12A		2 × 60	80	800	1.52	60	40	8.0	100	150	0.60	SOT-227B (miniBLOC)	
DSEP2X61-12A	1200	2 × 60	80	800	1.52	60	40	8.0	100	150	0.60	SOT-227B (miniBLOC)	
DSEP2X101-04A	400	2 × 100	45	1000	1.22	125	30	5.5	100	150	0.60	SOT-227B (miniBLOC)	




SONIC-FRD™ Diodes


- Ultrasoft and fast recovery
- Very low temperature dependence




DH 2x...0-...




DHH



DHG... IM...



DHG... I...



DHG... X...

Part Number	V _{RRM} V	I _{FAV} d = 0.5		I _{FSM} 10 ms 45 °C	V _F @ I _F		t _{rr} ns	I _{RM} typ. typ. T _{VJ} = 25 °C		T _{VJM} °C	R _{thJC} K/W	Package
		A	°C		V	°C		A	A/μs			
DHG5I600PA	600	5	105	40	2.17	5	35	2	100	150	3.15	TO-220AC
DHG5I600PM		5	85	40	2.17	5		2	100		4.20	TO-220ACFP
DHG10C600PB	600	2 × 5	105	40	2.17	5	35	2	100	150	3.15	TO-220AB
DHG30I600PA	600	30	95	200	2.24	30	35	12	600	150	0.60	TO-220AC
DHG30IM600PC		30	95	200	2.22	30		12	600		0.60	TO-263AB
DHG30I600HA	600	30	85	200	2.21	30	35	12	600	150	0.70	TO-247AD
DHG60C600HB		2 × 30	85	200	2.21	30		12	600		0.70	TO-247AD
DHG60I600HA		60	95	430	2.10	60		24	1200		0.30	TO-247AD
DHG50X650NA	650	2 × 25	70	200	2.03	25	35	12	600	150	1.20	SOT-227B (miniBLOC)
DHG100X650NA		2 × 50	80	430	2.00	50		20	1200		0.60	SOT-227B (miniBLOC)
DHG10I1200PA	1200	10	95	65	2.13	10	75	8	350	150	1.80	TO-220AC
DHG10I1200PM		10	30	65	2.13	10		8	350		4.00	TO-220ACFP
DHG20C1200PB	1200	2 × 10	95	65	2.13	10	75	8	350	150	1.80	TO-220AB
DHG20I1200PA		20	105	135	2.16	20		19	750		0.80	TO-220AC
DHG20I1200HA	1200	20	95	135	2.14	20	75	19	750	150	0.90	TO-247AD
DHG40C1200HB		2 × 20	95	135	2.14	20		19	750		0.90	TO-247AD
DHG50X1200NA	1200	2 × 25	70	180	2.00	25	75	25	1000	150	1.20	SOT-227B (miniBLOC)
DHG30I1200HA		30	90	180	2.16	30		25	1000		0.70	TO-247AD
DHG100X1200NA	1200	2 × 50	65	430	2.05	50	75	50	2500	150	0.60	SOT-227B (miniBLOC)
DHG60I1200HA		60	95	430	2.22	60		50	2500		0.30	TO-247AD
DHG10I1800PA	1800	10	85	65	2.30	10	300	8	200	150	2.15	TO-220AC
DHG10IM1800UZ		10	100	60	2.33	10		13	250		1.50	TO252AA
DH20-18A	1800	20	95	150	2.35	20	300	22	400	150	0.90	TO-247AD
DH40-18A		40	100	400	2.08	40		50	750		0.45	TO-247AD
DH60-14A	1400	60	100	700	2.03	60	230	60	800	150	0.30	TO-247AD
DH60-16A	1600											TO-247AD
DH60-18A	1800											TO-247AD
DHH55-36N1F	2 × 1800	60	50	700	2.03	60	230	60	800	150	0.60	ISOPLUS i4-PAC™
DH2X60-18A	1800	2 × 60	55	700	2.02	60	230	60	800	150	0.60	SOT-227B (miniBLOC)
DH2X61-18A		2 × 60	55	700	2.02	60		60	800		0.60	SOT-227B (miniBLOC)
DHG55I3300FE	3300	50	80	600	3.40	60	1650	55	500	150	0.45	ISOPLUS i4-PAC™
DHG40I4500KO	4500	43	80	600	3.50	50	1450	80	800	150	0.50	ISOPLUS264

 iodes



X005b
TO-220AC



X007b
TO-220ABCP



X011b
TO-263AB



X011c
TO-263ABHV



X014a
TO-247AD



X014b
TO-247AD



X016a
ISOPLUS247™



X016b
ISOPLUS247™



X019a
TO-268HV



X027a
SOT-227B (miniBLOC)




X101
ECO-PAC 1




X102
ECO-PAC 2

FRED Diodes

Fast Recovery Epitaxial Diodes



DSEI... / DFE




DSEK


Part Number	V_{RRM}	I_{FAV} d = 0.5	@ T_C	I_{FRMS}	I_{FSM} 10 ms 45 °C	V_F $T_{VJ} = 150\text{ °C}$	@ I_F	t_{rr} typ. $T_{VJ} = 25\text{ °C}$	I_{RM} typ. $T_{VJ} = 100\text{ °C}$	-di/dt	R_{thJC}	Package
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	
DSEI8-06A	600	8	115	16	100	1.30	8	35	2.5	64	2.50	TO-220AC
DSEI8-06AS	600	8	115	16	100	1.30	8	35	2.5	64	2.50	TO-263AB
DFE10I600PM	600	10	100	16	100	1.30	10	35	2.5	64	4.20	TO-220ACFP
DSEI12-06A	600	14	100	25	100	1.50	16	35	4.0	100	2.00	TO-220AC
DSEI12-06AS	600	14	100	25	100	1.50	16	35	4.0	100	2.00	TO-263AB
DSEI12-10A	1000	12	100	25	75	2.10	12	50	6.5	100	1.60	TO-220AC
DSEI12-12A	1200	11	100	25	75	2.20	12	50	6.5	100	1.60	TO-220AC
DSEI12-12AZ	1200	11	100	25	75	2.20	12	50	6.5	100	1.60	TO-263ABHV
DSEI20-12A	1200	17	85	70	130	1.87	12	40	7.0	100	1.60	TO-220AC
DSEI25-06A	600	25	110	35	240	1.55	25	35	9.0	200	1.20	TO-220AC
DSEI19-06AS	600	20	65	25	100	1.50	16	35	4.0	100	2.00	TO-263AB
DSEI25-06AS	600	25	110	35	240	1.55	25	35	9.0	200	1.20	TO-263AB
DSEI36-06AS	600	37	85	70	300	1.40	37	35	10.0	240	1.00	TO-263AB
DFE25I600HA	600	25	110	70	240	1.52	25	35	9.0	200	1.20	TO-247AD
DSEI30-06A	600	37	85	70	300	1.40	37	35	10.0	240	1.00	TO-247AD
DSEI30-10A	1000	30	85	70	200	2.00	36	35	16.0	240	0.90	TO-247AD
DSEI30-10AR	1000	30	85	70	200	2.00	36	35	16.0	240	0.90	ISOPLUS247™
DSEI30-12A	1200	26	85	70	200	2.20	30	40	16.0	240	0.90	TO-247AD
DSEK60-02A	200	2 × 34	115	50	325	0.85	30	35	4.0	100	1.00	TO-247AD
DSEK60-02AR	200	2 × 34	115	50	325	0.85	30	35	4.0	100	1.00	ISOPLUS247™
DSEK60-06A	600	2 × 30	85	50	300	1.40	37	35	10.0	240	1.00	TO-247AD
DSEK60-12A	1200	2 × 26	85	50	200	2.20	30	40	16.0	240	0.90	TO-247AD
DSEI60-02A	200	69	85	98	600	0.88	60	35	8.0	200	0.75	TO-247AD
DSEI60-06A	600	60	70	100	550	1.50	70	35	19.0	480	0.75	TO-247AD
DSEI60-10A	1000	60	60	100	500	1.80	60	35	32.0	480	0.66	TO-247AD

FRED Diodes


Fast Recovery Epitaxial Diodes




DSEK



DSEI... 2x... 0-...





DSEI... 2x... 1-...



2x... 1-...

Part Number	V_{RRM}	I_{FAV} d = 0.5	@ T_C	I_{FRMS}	I_{FSM} 10 ms 45 °C	V_F $T_{VJ} = 150\text{ °C}$	@ I_F	t_{rr} typ. $T_{VJ} = 25\text{ °C}$	I_{RM} typ. $T_{VJ} = 100\text{ °C}$	-di/dt	R_{thJC}	Package
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	
DSEI60-12A	1200	52	60	100	500	2.00	60	40	32	480	0.66	TO-247AD
DSEI120-06A	600	126	70	100	600	1.12	70	35	17	200	0.35	TO-247AD
DSEI120-12A	1200	109	60	100	600	1.55	70	40	25	200	0.35	TO-247AD
DSEI120-12AZ	1200	109	60	100	600	1.55	70	40	25	200	0.35	TO-268HV
DSEI2x30-04C	400	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x30-06C	600	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x30-10B	1000	2 × 30	50	70	200	2.00	30	35	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x30-12B	1200	2 × 28	50	70	200	2.20	30	40	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-04C	400	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-06C	600	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-10B	1000	2 × 30	50	70	200	2.00	30	35	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-12B	1200	2 × 28	50	70	200	2.20	30	40	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x61-02A	200	2 × 71	85	100	950	0.88	60	35	8	200	0.80	SOT-227B (miniBLOC)
DSEI2x60-04C	400	2 × 60	70	100	550	1.50	60	35	19	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-04C	400	2 × 60	70	100	550	1.50	60	35	19	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-06C	600	2 × 60	70	100	550	1.50	60	35	19	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-10B	1000	2 × 60	50	100	500	1.80	60	35	32	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-12B	1200	2 × 52	50	100	450	2.15	60	40	32	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-06P	600	2 × 60	70	100	550	1.50	60	35	19	480	0.70	ECO-PAC 1
DSEI2x61-12P	1200	2 × 52	50	100	450	2.15	60	40	32	540	0.70	ECO-PAC 1
DSEI2x121-02A	200	2 × 123	70	150	1200	0.95	120	35	12	200	0.50	SOT-227B (miniBLOC)
DSEI2x101-06A	600	2 × 96	70	150	1200	1.17	100	35	19	200	0.50	SOT-227B (miniBLOC)
DFE240X600NA	600	2 × 120	80	150	1200	1.20	120	35	27	600	0.40	SOT-227B (miniBLOC)
DFE250X600NA	600	2 × 125	80	150	1300	1.16	125	35	27	600	0.40	SOT-227B (miniBLOC)
DSEI2x101-12A	1200	2 × 91	50	130	900	1.61	100	40	24	200	0.50	SOT-227B (miniBLOC)
DSEI2x101-06P	600	2 × 96	70	150	1200	1.17	100	40	19	200	0.50	ECO-PAC 2
DSEI2x161-12P	1200	2 × 91	50	130	900	1.61	100	40	24	200	0.50	ECO-PAC 2
DSEI2x161-02P	200	2 × 165	70	270	1200	1.05	200	35	20	200	0.29	ECO-PAC 2
DSEI2x161-06P	600	2 × 147	70	270	1200	1.40	200	35	45	200	0.29	ECO-PAC 2
DSEI2x161-12P	1200	2 × 128	70	270	1200	1.75	200	40	48	200	0.29	ECO-PAC 2



X005a
TO-220AB

X014a
TO-247AD

X019
TO-268AA

X126c
Y4

X014b
TO-247AD

X027a
SOT-227B (miniBLOC)

X126d
Y4


X011c
TO-263ABHV

X016c
ISO247™



X125e
TO-240

FRED & HiPerFRED™ Modules





Part Number	V _{RRM}	I _{FAV}	@ T _C	I _{FRMS}	I _{FSM} 10 ms 45 °C	V _F	@ I _F	t _r typ.	I _{RM} typ.	-di/dt	R _{thJC}	P _{tot}	Package
		d = 0.5				T _{VJ} = 125 °C		T _{VJ} = 25 °C		T _{VJ} = 100° C			
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	W	
FRED													
MEO550-02DA	200	582	75	822	4800	1.08	520	150	15	200	0.071	1750	Y4
MEO500-06DA	600	514		726		1.41		250	132	800			
MEO450-12DA	1200	453		640		1.76		450	165	800			
MEK75-12DA	1200	2 × 75	75	107	1200	1.85	100	250	33	200	0.45	280	TO-240
MEA75-12DA	1200	2 × 75											
MEE75-12DA	2 × 1200	75											
MEK95-06DA	600	2 × 95	75	142	1200	1.36	100	250	21	200	0.45	280	TO-240
MEA95-06DA	600	2 × 95											
MEE95-06DA	2 × 600	95											
MEK250-12DA	1200	2 × 260	75	367	2400	1.54	260	450	83	400	0.143	875	Y4
MEA250-12DA	1200	2 × 260											
MEE250-12DA	2 × 1200	260											
MEK300-06DA	600	2 × 304	75	430	2400	1.19	260	250	66	400	0.143	875	Y4
MEA300-06DA	600	2 × 304											
MEE300-06DA	2 × 600	304											
MEK350-02DA	200	2 × 356	75	503	2400	0.92	260	150	15	200	0.143	875	Y4
HiPerFRED™													
MEK150-04DA	400	2 × 150	100	200	1200	1.401	300	300	11	100	0.350	360	TO-240
MEK600-04DA	400	2 × 575	80	800	3000	1.1	400	220	80	900	0.110	1100	Y4
MPK95-06DA	600	2 × 95	110	200	1200	1.4	100	35	5.5	100	0.575	215	TO-240



Diode connections for Fig. X125 (TO-240)

**MEE****MEA**

Diode connections for Fig. X126 (Y4: 34 mm package)


**MEK/MPK****MEO****MEK****MEA**

SemiFast Diodes


**SDSI...**

Part Number	V _{RRM}	I _{FAV}	@ T _C	I _{FRMS}	I _{FSM} 10 ms 45 °C	V _F	@ I _F	t _r typ. T _{VJ} = 25 °C	I _{RM} typ. T _{VJ} = 100 °C	-di/dt	R _{thJC}	Package
		d = 0.5				T _{VJ} = 125 °C		T _{VJ} = 100 °C				
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	
DSDI60-14A	1400	63	60	100	500	4.1	70	300	60	500	0.4	TO-247AD
DSDI60-16A	1600	63	60	100	500	4.1	70	300	60	500	0.4	TO-247AD
DSDI60-18A	1800	63	60	100	500	4.1	70	300	60	500	0.4	TO-247AD

Silicon Carbide Schottky Diodes Discrete



DSSK...



DHG...I...


Part Number	V _{RRM}	I _{FAV}	@ T _C	V _F	Q _C	R _{thJC}	Package
		DC		DC @ 125 °C			
	V	A	°C	V	nC	K/W	
DCK10I650HA	650	10	152	1.37	25.5	1.3	TO247-2
DCK10I650PA	650	14.5	135	1.37	25.5	1.4	TO220-2
DCK20I650HA	650	20	144	1.45	47.9	0.85	TO247-2
LSIC2SD065D10A	650	10	147	27	30	1.5	TO-263ABHV
LSIC2SD065E40CCA	650	20/40 ¹	135	45/901	63	1.1/0.551	TO-247AD
DCK10I1200HA	1200	10	155	1.48	62	0.85	TO247-2
DCK10I1200PA	1200	10	153	1.48	62	0.98	TO220-2
DCK15I1200HA	1200	15	153	1.48	88	0.68	TO247-2
DCK20I1200HA	1200	20	151	1.48	107	0.55	TO220-2
DCK30I1200HA	1200	30	148	1.48	153	0.4	TO220-2
DCK40I1200HA	1200	40	142	1.48	192	0.35	TO220-2
LSIC2SD120D10A	1200	10	151	28	57	1.1	TO-263ABHV
LSIC2SD120D20A	1200	20	150	54.5	115	0.6	TO-263ABHV
LSIC2SB170B10A	1700	10	150	30	57	TBD	TO-247AD
LSIC2SB170B25A	1700	25	150	61	122	TBD	TO-247AD
Common Cathode							
DCK20C650HB	650	10/20	152	1.37	25.5/51	1.3/0.65	TO247-3
LSIC2SD065D40CC	650	22/44	135	1.5	63/126	1/0.5	TO263-2
DCK20C1200HB	1200	10/20	153	1.48	62/124	0.85/0.42	TO247-3
DCK30C1200HB	1200	15/30	153	1.48	88/176	0.68/0.34	TO247-3
DCK40C1200HB	1200	20/40	151	1.48	107/214	0.55/0.27	TO247-3

1 per leg/component


Silicon Carbide Schottky Diodes

No reverse recovery




DCG...C...







DCG...B.../FBS



Part Number	V _{RRM}	I _{F80} per diode	I _{FAV} d = 0.5	@ T _C	V _F	I _F	R _{thJC}	Package
					DC @ 125 °C			
	V	A	A	°C	V	A	K/W	
Dual								
LSIC2SD120N40PA	1200	33	2 × 50	80	2.10	20	0.95	SOT-227B (miniBLOC)
LSIC2SD120N80PA		60	2 × 90	80	2.10	20	0.58	SOT-227B (miniBLOC)
LSIC2SD120N120PA		96	2 × 146	80	2.10	20	0.34	SOT-227B (miniBLOC)

	X004 TO-252AA		X011c TO-263ABHV		X019 TO-268AA
	X004a TO-252		X014a TO-247AD		X019a TO-268HV
	X005b TO-220AC		X014b TO-247AD		X022f ISOPLUS264™
	X008b TO-262AA (I²-PAK)		X016a ISOPLUS247™		X027a SOT-227B (miniBLOC)
	X011a TO-263AA		X016b ISOPLUS247™		X201 FP-Case
	X011b TO-263AB		X016c ISO247™		

	DLA...IM... DMA...IM...		DNA...EM... DAA...EM...		DSP DMA...P.. DLA...P		DSP DMA...P.. DLA...P
	DS/DSA/DSI DMA... E/I... DLA...I...		DSIK...		DSI 2x... DA/MA...X...		DMA...XA... DAA...XA...

Rectifier Diodes

Part Number	V _{RRM}	I _{FAV}	@ T _C	P _{RSM}	I _{FRMS}	I _{FSM} 10 ms 45 °C	V ₁₀	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	kW	A	A	V	mΩ	°C	K/W	K/W	
DSA1-12D	1200	2.3	45	1.6	7	110	0.80	67	150	80.00	–	FP-Case
DSA1-16D	1600											
DSA1-18D	1800											
DLA5P800UC	2 × 800	5	140	–	20	40	0.74	44	175	5.50	0.50	TO-252AA
DSP8-08S	2 × 800	8	160	–	25	100	0.79	33	175	1.50	0.25	TO-263AB
DSP8-12S	2 × 1200											
DSP8-08A	2 × 800											
DSP8-12A	2 × 1200	8	160	–	25	100	0.79	33	175	1.50	0.25	TO-220AB
DSP8-08AS	2 × 800											
DSP8-12AS	2 × 1200											
DLA10IM800UC	800	10	100	–	20	80	0.80	22	175	3.15	0.50	TO-252AA
DLA20IM800PC	800	20	100	–	35	200	0.80	19	175	1.80	0.25	TO-263AB
DMA10IM1200UZ	1200	10	150	–	20	120	0.82	37	175	1.50	0.50	TO-252
DMA10IM1600UZ	1600											
DMA10P1200UZ	1200	10	140	–	20	100	0.90	37	175	2.00	0.50	TO-252
DMA10P1600UZ	1600											
DMA10I1600PA	1600	10	150	–	20	120	0.82	37	175	1.50	0.50	TO-220AC
DMA10IM1600PZ	1600	10	150	–	20	120	0.82	37	175	1.50	0.25	TO-263ABHV
DMA10P1600PZ	2 × 1600											
DMA10P1800PZ	2 × 1800											
DAA10EM1800PZ	1800	10	150	1.6	25	150	0.81	32	175	1.50	0.25	TO-263ABHV
DAA10P1800PZ	2 × 1800	10	150	1.6	25	150	0.82	37	175	1.50	0.25	

Rectifier Diodes

Part Number	V _{RRM}	I _{FAV}	@ T _C	P _{RSM}	I _{FRMS}	I _{FSM} 10 ms 45 °C	V ₁₀	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	kW	A	A	V	mΩ	°C	K/W	K/W	
DMA10P1200HR	2 × 1200	10	145	–	25	120	0.81	34	175	2.00	0.25	ISO247™
DMA10P1600HR	2 × 1600											
DSP25-12A	2 × 1200	25	135	–	70	300	0.81	13.8	175	0.90	0.25	TO-247AD
DSP25-16A	2 × 1600											
DSP25-12AT	2 × 1200	25	135	–	70	300	0.81	13.8	175	0.90	0.15	TO-268AA
DSP25-16AT	2 × 1600											
DSP25-16AR	2 × 1600	25	110	–	70	300	0.81	13.8	175	1.50	0.25	ISOPLUS247™
DSI30-08A	800	30	130	–	35	300	0.82	14.9	175	0.90	0.50	TO-220AC
DSI30-12A	1200											
DSI30-16A	1600											
DSI30-08AS	800	30	130	–	35	300	0.82	14.9	175	0.90	0.25	TO-263AB
DSI30-12AS	1200											
DSI30-16AS	1600											
DMA30IM1600PZ	1600	30	140	–	35	300	0.82	14.1	175	0.70	0.25	TO-263ABHV
DMA30E1800HA	1800	30	140	–	70	370	0.88	12.1	175	0.70	0.25	TO-247AD
DMA30P1200HB	2 × 1200	30	130	–	70	370	0.81	12.7	175	0.80	0.25	TO-247AD
DMA30P1600HB	2 × 1600											
DMA30P1600HR	2 × 1600	30	105	–	50	300	0.82	13.5	175	1.30	0.25	ISO247™
DNA30ER2200IY	2200	30	140	–	35	370	0.88	12.9	175	0.70	0.50	TO-262AA (I2-PAK)
DNA30E2200PA												TO-220AC
DNA30E2200PZ	2200	30	140	–	35	370	0.88	12.9	175	0.70	0.25	TO-263ABHV
DNA30EM2200PZ												
DNA30E2200FE	2200	30	100	–	70	370	0.88	12.2	175	1.35	0.20	ISOPLUS i4-PAC™
DLA40IM800PC	800	40	130	–	35	300	0.81	8	175	0.80	0.25	TO-263AB
DSI45-08A	800	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSI45-12A	1200	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSI45-16A	1600											
DSP45-12A	2 × 1200	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSP45-12AZ											0.15	TO-268HV
DSP45-16A	2 × 1600	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSP45-16AZ											0.15	TO-268HV
DSP45-18A	2 × 1800	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSI45-16AR	1600	45	100	–	70	480	0.81	9.1	175	0.90	0.25	ISOPLUS247™
DSIK45-16AR	1600	2 × 45										
DSP45-16AR	2 × 1600	45										



 **iodes**



SOD-123FL




**X014a
TO-247AD**



**X016c
ISO247™**




**X022f
ISOPLUS264™**



**X005a
TO-220AB**




**X014b
TO-247AD**




**X019a
TO-268HV**




**X027a
SOT-227B (miniBLOC)**




**DSI 2x...
DA/MA...X...**



**DSP
DMA...P...
DLA...P**



**DS/DSA/DSI
DLA...I...
DMI...E/I...
Dxx10/15/20/X7/01/02...**



**DMA...XA...
DAA...XA...**

Rectifier Diodes

Part Number	V _{RRM}	I _{FAV}	@ T _C	P _{RSM}	I _{FRMS}	I _{FSM} 10 ms 45 °C	V ₁₀	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	kW	A	A	V	mΩ	°C	K/W	K/W	
DMA50I800HA	800	50	130	–	70	500	0.81	8.6	175	0.45	0.25	TO-247AD
DMA50I1200HA	1200											
DMA50I1600HA	1600											
DMA50P1200HR	2 × 1200	50	130	–	70	500	0.81	8.6	175	0.45	0.25	TO-247AD
DMA50P1200HB	2 × 1200											
DMA50P1600HB	2 × 1600											
DLA60I1200HA	1200	60	125	–	70	850	0.82	4.8	175	0.35	0.25	TO-247AD
DMA80I1600HA	1600											
DMA80IM1600HB	1600											
DSI2x55-12A	1200	2 × 60	95	–	120	800	0.83	6.2	150	0.60	0.10	SOT-227B (miniBLOC)
DSI2x55-16A	1600											
DNA120E2200KO	2200	120	125	–	70	2000	0.75	3.8	175	0.25	0.15	ISOPLUS264™
DMA150E1600NA	1600	150	90	–	150	3000	0.83	2.0	150	0.25	0.10	SOT-227B (miniBLOC)
DMA200X1600NA	1600	2x100	100	–	150	1500	0.8	4.0	150	0.30	0.10	SOT-227B (miniBLOC)
DMA200XA1600NA												
DAA200X1800NA	1800	2x100	100	20	150	1500	0.8	4.0	150	0.30	0.10	SOT-227B (miniBLOC)
DAA200XA1800NA												

Rectifier Diodes

Part Number	V _{RRM}	I _{FAV} d = 0.5		I _{FRMS}	V _F @ I _F T _{VJ} = 25 °C		I _{FSM} 10 ms, 25 °C	T _{VJM}	R _{thJC}	Package
	V	A	°C	A	V	A	A	°C	K/W	
D4015LTP	400	9.5	90	15	1.6	30	188	125	2.60	TO-220AB
D4020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
D4025LTP		15.9	80	25	1.6	50	300	125	2.50	TO-220AB
D60X7S4ARP	600	0.7	135	–	1.1	0.7	21	150	20	SOD-123FL
D6001S4ARP		1	127	–	1.1	1	25	150	20	SOD-123FL
D6002S4ARP		2	107	–	1.1	2	42	150	20	SOD-123FL
D6015LTP		9.5	90	15	1.6	30	188	125	2.60	TO-220AB
D6020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
D6025LTP	800	15.9	80	25	1.6	50	300	125	2.50	TO-220AB
D8015LTP		9.5	90	15	1.6	30	188	125	2.60	TO-220AB
D8020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
D8025LTP	1000	15.9	80	25	1.6	50	300	125	2.50	TO-220AB
DK015LTP		9.5	90	15	1.6	30	188	125	2.60	TO-220AB
DK020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
DK025LTP		15.9	80	25	1.6	50	300	125	2.50	TO-220AB

Break-Over Diodes


Break-Over-Diodes Sets

We deliver the following:


- A special selection of more than 2 pieces IXBOD1-... for every break down voltage of $V_{BO} > 2000\text{ V}$
- Example type designations
 - IXBOD Set SA05/00
 - $V_{BO} = 4700\text{ V} \pm 100\text{ V}$
 - (we deliver 5 pieces of single-selected IXBOD1-... in one plastic bag)
 - Customers use these products on PCB connected in series with parallel resistor $R = 10\text{ MW}$ across each IXBOD.




X0201
FP-Case (oil-proof)



X202
BOD-Package



Version R



Version RD

Fast Break-Over Diodes

Part Number	V _{BO}		I _{BO}	I _H	V _H	I _D	I _{AVM} ¹	I _{SM}	dv/dt	R _{thJA}	Package
	T _{VJ} = 25 °C K _T = 2·10 ⁻³ K ⁻¹			T _{VJ} = 25 °C		T _{VJ} = 125 °C V _D = 0.8·V _{BO}	T _{amb} = 50 °C				
	V	mA		mA	V	μA	A	A			
IXBOD 1-06	600	±50	<15	30	4–8	20	0.9	200	>1000	60	FP-Case (oil proof)
IXBOD 1-08	800	±50	<15	30	4–8	20	0.9	200	>1000	60	FP-Case (oil proof)
IXBOD 1-09	900										
IXBOD 1-10	1000										
IXBOD 1-12R	1200	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-12RD											
IXBOD 1-13R	1300	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-13RD											
IXBOD 1-14R	1400	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-14RD											
IXBOD 1-15R	1500	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-15RD											
IXBOD 1-16R	1600	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-16RD											
IXBOD 1-17R	1700	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-17RD											
IXBOD 1-18R	1800	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-18RD											
IXBOD 1-19R	1900	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-19RD											
IXBOD 1-20R	2000	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-20RD											
IXBOD 1-21R	2100	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-21RD											
IXBOD 1-22R	2200	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-22RD											
IXBOD 1-23R	2300	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-23RD											
IXBOD 1-24R	2400	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-24RD											
IXBOD 1-25R	2500	±50	<15	30	4–8	100	0.9	200	>1500	20	BOD-Package
IXBOD 1-25RD											
IXBOD 1-26R	2600	±100	<15	30	4–8	100	0.9	200	>2500	20	BOD-Package
IXBOD 1-26RD											
IXBOD 1-28R	2800	±100	<15	30	4–8	100	0.9	200	>2500	20	BOD-Package
IXBOD 1-28RD											
IXBOD 1-30R	3000	±100	<15	30	4–8	100	0.9	200	>2500	20	BOD-Package
IXBOD 1-30RD											
IXBOD 1-32R	3200	±100	<15	30	4–8	100	0.9	200	>2500	20	BOD-Package
IXBOD 1-32RD											
IXBOD 1-34R	3400	±100	<15	30	4–8	100	0.9	200	>3500	20	BOD-Package
IXBOD 1-36R	3600										
IXBOD 1-38R	3800	±100	<15	30	4–8	100	0.9	200	>3500	20	BOD-Package
IXBOD 1-40R	4000										
IXBOD 1-42R	4200	±100	<15	30	4–8	100	0.9	200	>3500	20	BOD-Package

Breakover diodes

Advantages compared with IXBOD 1:


- Temperature coefficient K_T reduced by a factor of 3
 - Tighter definition of the break-over voltage V_{BO}
 - $V_{BO}(T_{VJ}) = V_{BO}, 25\text{ }^{\circ}\text{C} [1 + K_T (T_{VJ} - 25\text{ }^{\circ}\text{C})]$
 - More precise and controllable design due to smaller tolerances
- Significant reduction of switching-on time, now down to just a few nanoseconds

Applications:


- Protection circuits for thyristors in highly valuable designs
 - High-DC current power transmissions for long distances, such as for offshore windmills or hydroelectric dams
- High intensity discharge lighting (HID)

Part Number	V _{BO}		I _{BO}	I _H	V _H	I _D	I _{AVM} ¹	I _{SM}	dv/dt	R _{thJA}	Package										
	T _{VJ} = 25 °C KT = 0.7·10 ⁻³ K ⁻¹			T _{VJ} = 25 °C		T _{VJ} = 125 °C V _D = 0.8·V _{BO}	T _{amb} = 50 °C														
	V	mA	mA	V	μA		A	A	V/μs	K/W											
IXBOD 2-01	100	±10%·V _{BO}	15	20	4–8	200	0.90	250	>1000	60	FP-Case (oil proof)										
IXBOD 2-02	200																				
IXBOD 2-03	300																				
IXBOD 2-04	400																				
IXBOD 2-05	500	±50	15	20	4–8	200	0.90	250	>1000	60	FP-Case (oil proof)										
IXBOD 2-06	600																				
IXBOD 2-07	700																				
IXBOD 2-08	800																				
IXBOD 2-09	900	±50	15	20	4–8	200	0.90	250	>1000	60	FP-Case (oil proof)										
IXBOD 2-10	1000																				
IXBOD 2-11	1100																				
IXBOD 2-12	1200																				
IXBOD 2-13	1300	±50	15	20	4–8	200	0.90	250	>1000	60	FP-Case (oil proof)										
IXBOD 2-14	1400																				
IXBOD 2-15R	1500											±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package
IXBOD 2-15RD																					
IXBOD 2-16R	1600	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-16RD																					
IXBOD 2-17R	1700	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-17RD																					
IXBOD 2-18R	1800	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-18RD																					
IXBOD 2-19R	1900	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-19RD																					
IXBOD 2-20R	2000	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-20RD																					
IXBOD 2-21R	2100	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-21RD																					
IXBOD 2-22R	2200	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-22RD																					
IXBOD 2-23R	2300	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-23RD																					
IXBOD 2-24R	2400	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-24RD																					
IXBOD 2-25R	2500	±50	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-25RD																					
IXBOD 2-26R	2600	±100	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-26RD																					
IXBOD 2-27R	2700	±100	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-27RD																					
IXBOD 2-28R	2800	±100	15	20	4–8	200	0.90	250	>1500	20	BOD-Package										
IXBOD 2-28RD																					


Fast Break-Over Diodes



BOD-Package



Version R



Version RD

Part Number	V _{BO} T _{VJ} = 25 °C K _T = 0.7·10 ⁻³ K ⁻¹		I _{BO}	I _H	V _H	I _D T _{VJ} = 125 °C V _D = 0.8·V _{BO}	I _{AVM} ¹	I _{SM}	dv/dt	R _{th,JA}							
							T _{amb} = 50 °C										
	V						mA				mA		V		μA		A
IXBOD2-29R	2900	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-29RD																	
IXBOD2-30R	3000	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-30RD																	
IXBOD2-31R	3100	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-31RD																	
IXBOD2-32R	3200	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-32RD																	
IXBOD2-33R	3300	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-33RD																	
IXBOD2-34R	3400	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-34RD																	
IXBOD2-35R	3500	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-35RD																	
IXBOD2-36R	3600	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-36RD																	
IXBOD2-37R	3700	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-37RD																	
IXBOD2-38R	3800	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-38RD																	
IXBOD2-39R	3900	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-39RD																	
IXBOD2-40R	4000	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-40RD																	
IXBOD2-41R	4100	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-41RD																	
IXBOD2-42R	4200	±100	15	20	4–8	200	0.90	250	>2500	20							
IXBOD2-42RD																	
IXBOD2-43R	4300	±100	15	20	4–8	200	0.90	250	>3500	20							
IXBOD2-44R	4400																
IXBOD2-45R	4500	±100	15	20	4–8	200	0.90	250	>3500	20							
IXBOD2-46R	4600																
IXBOD2-47R	4700	±100	15	20	4–8	200	0.90	250	>3500	20							
IXBOD2-48R	4800																
IXBOD2-49R	4900	±100	15	20	4–8	200	0.90	250	>3500	20							
IXBOD2-50R	5000																
IXBOD2-51R	5100	±100	15	20	4–8	200	0.90	250	>3500	20							
IXBOD2-52R	5200																
IXBOD2-53R	5300	±100	15	20	4–8	200	0.90	250	>3500	20							
IXBOD2-54R	5400																
IXBOD2-55R	5500	±100	15	20	4–8	200	0.90	250	>3500	20							
IXBOD2-56R	5600																

1 Leads soldered on PCB board, 10 and 40 ... 25

TTTechsto



X004
TO-252AA



X005a
TO-220AB



X007a
TO-220ABFP



X011b
TO-263AB



X011c
TO-263ABHV



X014a
TO-247AD



X015a
PLUS247




X016a
ISOPLUS247™




X016c
ISO247™



X017a
TO-3P



X019
TO-268AA



X019a
TO-268HV




X020a
TO-264



X024a
ISOPLUS i4-PAC™



X024c
ISOPLUS i4-PAC™




X030a
SMPD-B

Compared to all other controlled semiconductor components, thyristors are very rugged devices. They feature the highest current capacity per chip area, especially at high voltages, and are mainly used as control devices in 50 Hz and 60 Hz AC main equipment


Principal applications include static converter circuits for the speed control of DC-drives, switching, and control functions for temperature, lighting, soft-start, etc. in single-phase and three-phase AC switch configurations. Phase control thyristors are designed for optimal forward conduction and reverse-blocking characteristics, as they have only moderate requirements for turn-on and turn-off parameters.

Phase Control Thyristors

$I_{TAV} = 5-30\text{ A}$



CLB...




CS.../CL/MA...E/I...


Part Number	V _{RRM} V _{DRM}	I _{TAV}	@ T _C	I _{T(RMS)}	I _{TSM} 45 °C 10 ms	(dv/dt) _{cr}	V _{TO}	r _T	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	A	V/μs	V	mΩ	°C	K/W	K/W	
CLA5E1200UC	1200	5	135	8	70	500	0.89	85.0	150	1.50	0.50	TO-252AA
CLA5E1200PZ											0.25	TO-263ABHV
CLA15E1200NPB	1200	15	120	33	170	500	0.89	30	150	0.95	0.50	TO-220AB
CLA15E1200NPZ											0.30	TO-263ABHV
CLA16E800PN	800	10	90	16	180	500	0.81	24	150	4.00	0.50	TO-220ABFP
CLA16E1200PN	1200											
CS19-08ho1	800	20	110	31	160	500	0.86	22	150	0.70	0.50	TO-220AB
CS19-12ho1	1200											
CS19-08ho1S	800	20	110	31	160	500	0.86	22	150	0.70	0.50	TO-263AB
CS19-12ho1S	1200											
CMA20E1600PB	1600	20	115	31	180	500	0.92	28	150	0.70	0.50	TO-220AB
CMA20E1600PZ											0.25	TO-263ABHV
CS20-12io1	1200	20	130	31	260	1000	0.87	17.3	150	0.60	0.25	TO-247AD
CS20-14io1	1400											
CS20-16io1	1600											
CS20-22moF1	2200	18	85	28	200	2500	0.97	17	125	0.92	0.15	ISOPLUS i4-PAC™
CS20-25mo1F												
CS20-25moT1	2500	18	85	28	200	5000	0.97	17	125	0.80	0.15	TO-268AA
CS22-08io1M	800	16	90	25	300	500	0.86	13.2	150	2.50	0.50	TO-220ABFP
CS22-12io1M	1200											
CLA30E1200PB	1200	30	115	47	300	500	0.86	13.2	150	0.50	0.50	TO-220AB
CLA30E1200PC	1200	30	115	47	300	500	0.86	13.2	150	0.50	0.25	TO-263AB
CLA30E1200NPZ											0.25	TO-263ABHV

Phase Control Thyristors


I_{TAV} = 30–100 A



CLB...



CS.../CL/MA...E/I...



CLA.CMA...P...


Part Number	V _{RRM} V _{DRM}	I _{TAV}	@ T _C	I _{T(RMS)}	I _{TSM} 45 °C 10 ms	(dv/dt) _{cr}	V _{TO}	r _T	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	A	V/μs	V	mΩ	°C	K/W	K/W	
CLB30I1200PZ	1200	30	115	47	300	500	0.86	13.2	150	0.50	0.25	TO-263ABHV
CLA30E1200HB	1200	30	120	47	300	500	0.86	12.5	150	0.50	0.25	TO-247AD
CLB30I1200HB ¹												TO-247AD
CMA30E1600PB	1600	30	115	47	260	500	0.92	18	150	0.75	0.50	TO-220AB
CMA30E1600PZ	1600	30	115	47	260	500	0.92	18	150	0.75	0.25	TO-263ABHV
CMA30E1600PN	1600	30	40	47	260	500	0.92	18	150	2.50	0.50	TO-220ABFP
CS30-12io1	1200	30	120	47	400	1000	0.87	14.2	150	0.50	0.25	TO-247AD
CS30-14io1	1400											
CS30-16io1	1600											
CMA30P1600FC	2 × 1600	30	90	47	400	1000	0.87	14.2	150	1.00	0.20	ISOPLUS i4-PAC™
CLA40E1200NPZ	1200	40	125	63	520	500	0.85	9.9	150	0.40	0.25	TO-263ABHV
CLA40E1200NHB	1200	40	120	63	520	500	0.85	9.2	150	0.50	0.25	TO-247AD
CLA40E1200HR	1200	40	95	63	650	1000	0.85	7.9	150	0.80	0.30	ISO247™
CLB40I1200PZ	1200	40	125	63	520	500	0.85	9.9	150	0.40	0.25	TO-263ABHV
CLA40P1200FC	2 × 1200	40	95	63	650	1000	0.86	7.9	150	0.80	0.20	ISOPLUS i4-PAC™
CMA40E1600HR	1600	40	90	63	550	1000	0.81	9.8	150	0.80	0.30	ISO247™
CS45-08io1	800	45	110	71	520	1000	0.88	11	150	0.40	0.25	TO-247AD
CS45-12io1	1200											
CS45-16io1	1600											
CS45-16io1R	1600	45	80	71	520	1000	0.88	11	150	0.80	0.25	ISOPLUS247™
CLA50E1200HB	1200	50	125	79	650	1000	0.88	7.7	150	0.25	0.25	TO-247AD
CLA50E1200TC											0.15	TO-268AA
CMA50E1600TZ	1600	50	110	79	550	1000	0.83	9.6	150	0.40	0.15	TO-268HV
CMA50E1600HB											0.25	TO-247AD
CMA50E1600QB											0.25	TO-3P
CMA50P1600FC	2 × 1600	50	90	79	720	1000	0.88	6.7	150	0.70	0.20	ISOPLUS i4-PAC™
CS60-12io1	1200	60	110	75	1400	1000	0.82	5.3	140	0.32	0.15	PLUS247
CS60-14io1	1400											
CS60-16io1	1600											
CS60-16io1R	1600	60	90	75	1400	1000	0.82	5.3	140	0.45	0.15	ISOPLUS247™
CLA80E1200HF	1200	80	115	126	900	1000	0.88	6.3	150	0.20	0.25	PLUS247
CMA80E1600HB	1600	80	115	126	720	1000	0.9	6.4				TO-247AD
CLA100E1200HB	1200	100	105	160	1100	1000	0.82	5.2	150	0.20	0.15	TO-247AD
CLA100E1200KB												TO-264
CLA100E1200TZ												TO-268HV
CLA120E1200HB												TO-247AD

¹ node-gated

Fast Phase Control Thyristors

Part Number	V _{RRM} V _{DRM}	I _{TAV}	@ T _C	I _{T(RMS)}	I _{TSM} 45 °C 10 ms	(dv/dt) _{cr}	V _{TO}	r _T	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	A	V/μs	V	mΩ	°C	K/W	K/W	
CLE20E1200PC	1200	20	115	31	160	500	0.92	24	150	0.7	0.25	TO-263AB
CME30E1600PZ	1600	30	105	47	280	500	0.96	25	150	0.5	0.25	TO-263ABHV
CLF20E1200PB	1200	20	110	31	150	500	0.96	26	150	0.7	0.50	TO-220AB
CLE30E1200PB	1200	30	115	47	270	500	0.92	14	150	0.5	0.50	TO-220AB
CNE60E2200TZ	2200	60	80	94	720	1000	1.90	12.6	150	0.3	0.15	TO-268AA
CLE90UH1200TLB	1200	90	90	—	350	500	0.92	13	150	0.9	0.40	SMPD-B

stosto

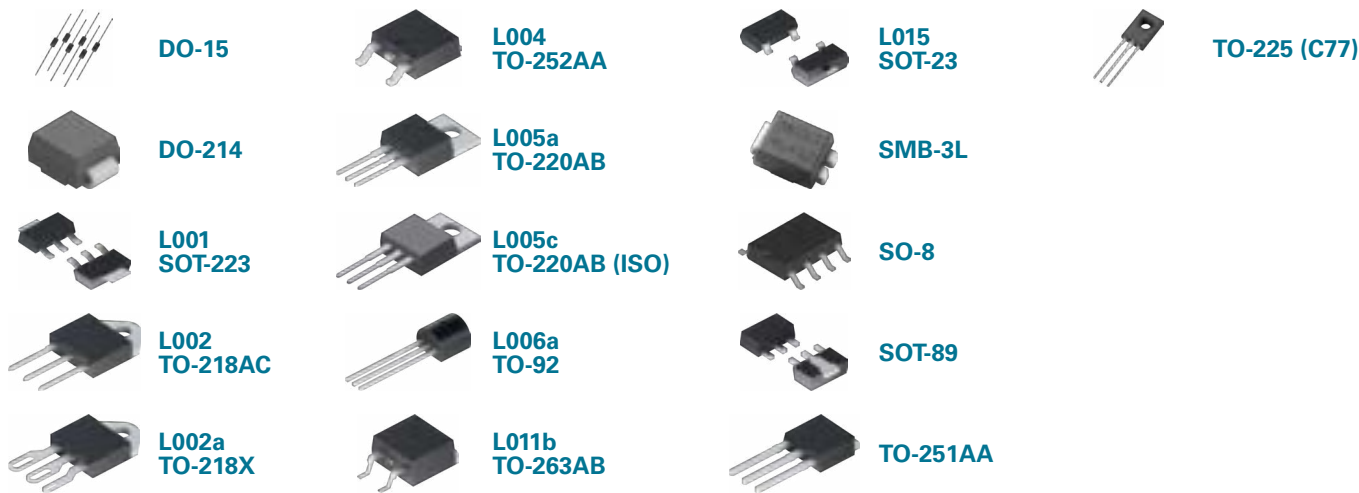

SCR

Littelfuse SCR products are half-wave, silicon-controlled rectifiers that represent the state of the art in design and performance. Because of its unidirectional switching capability, the SCR is used in circuits where high surge currents or latching actions are required. They may also be used for half-wave-type circuits where gate-controlled rectification action is required. Applications include crowbars in power supplies, camera flash units, smoke alarms, motor controls, battery chargers, and engine ignition.

Standard SCRs

Series Number	V _{DRM} V _{RRM}					I _{T(RMS)}	I _{GT} max	T _J	Package																
									Surface Mount							Through-hole									
	400	600	800	1000	1200				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
	V								A	mA	°C														
NYC0102B (200V)	–	–	–	–	–	0.25	0.2	125	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
S8X5ECSx	–	–	●	–	–	0.5	0.05, 0.1	125	–	–	–	–	–	–	–	●	–	–	–	–	–	–	–	–	
SxX8BBSx	–	●	–	–	–	0.8	0.2,0.45	125	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
SxX8xSx	●	●	●	–	–	0.8	0.005,0.05,0.2,0.45	125	–	–	●	–	–	–	–	–	●	–	–	–	–	–	–	–	
EC103x/SxSx	●	●	–	–	–	0.8	0.012,0.05,0.2,0.5	110	–	–	–	–	●	–	–	–	●	–	–	–	–	–	–	–	
Sx01E/SxN1	●	●	–	–	–	1	10	110	–	–	–	–	●	–	–	–	●	–	–	–	–	–	–	–	
S802CSx	–	–	●	–	–	1.25	0.05,0.1	110	–	–	–	–	●	–	–	–	–	–	–	–	–	–	–	–	
Sx02xSx	●	●	–	–	–	1.5	0.05,0.1,0.2	125	–	–	●	●	–	–	–	–	●	–	–	–	–	–	–	–	
TCR22-x	●	●	–	–	–	1.5	0.2	110	–	–	–	–	●	–	–	–	●	–	–	–	–	–	–	–	
S802xSx	–	–	●	–	–	1.5	0.1	125	–	–	–	●	–	–	–	–	●	–	–	–	–	–	–	–	
STx802U2Sx	–	–	●	–	–	1.5	0.1	125	–	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
S6002xS	–	●	–	–	–	2	0.2	125	–	–	–	●	●	–	–	–	●	–	–	–	–	–	–	–	
C106x,MCR106-x	●	●	–	–	–	4	0.2	125	–	–	–	–	–	–	–	–	●	–	–	–	–	–	–	–	
Sxx04xSx	●	●	–	–	–	4	0.05,0.2	125	–	–	–	–	–	●	–	–	–	●	–	–	–	–	–	–	
Sxx06xxx	●	●	●	●	–	6	0.2,0.5,15	125	–	–	–	–	–	●	●	–	–	–	●	●	–	–	–	–	
Sxx08xxx	●	●	●	●	–	8	0.05,0.1,0.2,0.5,15	125	–	–	–	–	–	●	●	–	–	–	●	●	–	–	–	–	
SRUK208x (1200V)	–	–	–	–	–	8	15	125	–	–	–	–	–	●	–	–	–	–	–	●	–	–	–	–	
Sxx10xxx	●	●	●	●	–	10	0.2,0.5,15	125	–	–	–	–	–	●	●	–	–	●	–	●	●	–	–	–	
Sxx12xx	●	●	●	●	–	12	20	125	–	–	–	–	–	●	●	–	–	●	–	●	●	–	–	–	
MCR12DSx	–	●	●	–	–	12	0.2	110	–	–	–	–	–	●	–	–	–	●	–	–	–	–	–	–	
Sxx16xx	●	●	●	●	–	16	30	125	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	–	
SK230	–	–	–	●	–	30	30	125	–	–	–	–	–	–	●	–	–	–	–	●	–	–	–	–	
Sxx20xx	●	●	●	●	–	20	30	125	–	–	–	–	–	–	–	–	–	–	●	–	–	–	–	–	
Sxx25xx	●	●	●	●	–	25	35	125	–	–	–	–	–	–	●	–	–	–	–	●	●	–	–	–	
SK230	–	–	–	–	●	30	30	125	–	–	–	–	–	–	●	–	–	–	–	●	–	–	–	–	

Standard SCRs

Series Number	V _{DRM} V _{RRM}					I _{T(RMS)}	I _{GT} max	T _J	Package																
									Surface Mount						Through-hole										
	400	600	800	1000	1200				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
V					A	mA	°C																		
Sxx35x	•	•	•	•		35	40	125	–	–	–	–	–	–	–	–	–	–	–	•	–	•	–		
Sxx40x	•	•	•	•		40	40	125	–	–	–	–	–	–	•	–	–	–	–	•	–	–	–		
S4040xQx	•	–	–	–		40	35,45,60	125	–	–	–	–	–	–	•	–	–	–	–	•	–	–	–		
Sxx55x	•	•	•	•		55	40	125	–	–	–	–	–	–	–	–	–	–	•	•	•	–	–		
Sxx65x	•	•	•	•		65	50	125	–	–	–	–	–	–	–	–	–	–	–	•	–	•	–		
Sxx70x	•	•	•	–		70	50	125	–	–	–	–	–	–	–	–	–	–	–	–	–	–	•		

High Temperature SCRs

Series Number	V _{DRM} V _{RRM}				I _{T(RMS)}	I _{GT} max	T _J	Package																
								Surface Mount						Through-hole										
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
V																								
SJxx04xSx	•	•	–	–	4	0.2	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx06xxx	•	•	–	–	6	0.2,6,15	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx08xxx	•	•	•	–	8	0.2,6,15	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx10xxx	•	•	–	–	10	0.2,6,15	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx12xx	•	•	–	–	12	6,10,20	150	–	–	–	–	–	•	–	–	–	•	–	•	•	–	–	–	–
SVxx12xx	•	•	•	–	12	6,10	150	–	–	–	–	–	•	•	–	–	–	–	•	•	–	–	–	–
SVxx12xxQ	•	•	–	–	12	6,10	150	–	–	–	–	–	•	–	–	–	–	–	•	•	–	–	–	–
SJxx16xx	•	•	–	–	16	6,10,30	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SVxx16xx	–	•	–	–	16	6,10	150	–	–	–	–	–	•	•	–	–	–	–	•	•	–	–	–	–
SVxx16xxQ	•	•	–	–	16	6,10	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SJxx20xx	•	•	–	–	20	6,10,35	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SVxx20xx	•	•	–	–	20	6,10	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SVxx20xxQ	•	•	–	–	20	6,10	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SJxx25xx	•	•	•	–	25	6,10,35	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SVxx25xx	•	•	–	–	25	6,10	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SVxx25xxQ	•	•	–	–	25	6,10	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SJxx32xx	•	•	–	–	32	15,40	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SJxx40xx	•	•	–	–	40	15,40	150	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–
SV6050xx	–	•	–	–	50	15	150	–	–	–	–	–	–	•	–	–	–	–	–	•	–	–	–	–

Automotive Grade AECQ101 Qualified SCRs

Series Number	V _{DRM} V _{RRM}				I _{T(RMS)}	I _{GT} max	T _J	Package																
								Surface Mount						Through-hole										
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
V				A	mA	°C																		
S8016xAx	–	–	•	–	16	50	125	–	–	–	–	–	–	–	•	–	–	–	–	–	•	–	–	–
SJxx20xxA	•	•	–	–	20	6,10,35	150	–	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–
SJxx25xxA	•	•	–	–	25	6,10,35	150	–	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–
SJxx32xxA	•	•	–	–	32	15,40	150	–	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–
SJxx40xxA	•	•	–	–	40	15,40	150	–	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–
HS4040xAQx	•	–	–	–	40	35,45,65	150	–	–	–	–	–	–	–	•	–	–	–	–	–	•	–	–	–
SV6050xAx	–	•	–	–	50	15	150	–	–	–	–	–	–	–	•	–	–	–	–	–	•	–	–	–



TRIAC

Switching Thyristors are solid state switches that are normally open circuits (very high impedance), capable of withstanding rated blocking/ off-state voltage until triggered to on state. Used for circuit control applications, Littelfuse offers Triac, QUADRAC® Semiconductors, SCRs, Rectifiers plus Alternistor Triacs for best commutating and noise immunity. Offered in various and other configurations for a wide range of currents blocking/off-state voltages, packages, and triggering.

TRIAC 1 Phase

I_{RMS} = 30–650 A



...MT...

Part Number	V _{RRM}	V _{VRMS}	I _{RMS}	@T _C	I _{TSM} 10 ms, 45 °C	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
CLA30MT1200NPB	1200	400	33	120	170	0.89	30.5	150	0.95	1.45	TO-220AB
CLA30MT1200NPZ	1200	400	33	120	170	0.89	30.5	150	0.95	1.20	TO-263ABHV
CLA40MT1200NPB	1200	400	44	110	180	0.89	27.9	150	0.80	1.30	TO-220AB
CLA40MT1200NPZ	1200	400	44	110	180	0.89	27.9	150	0.80	1.05	TO-263ABHV
CLA40MT1200NHB	1200	400	44	110	180	0.89	27.9	150	0.80	1.05	TO-247AD
CLA60MT1200NHB	1200	400	66	120	380	0.86	12.5	150	0.55	0.80	TO-247AD
CLA60MT1200NTZ	1200	400	66	120	380	0.86	12.5	150	0.55	0.70	TO-268AA
CLA60MT1200NHR	1200	400	66	100	380	0.86	12.5	150	0.90	1.15	ISO247™
CMA60MT1600NHB	1600	500	66	115	260	0.9	16.6	150	0.55	0.80	TO-247AD
CMA60MT1600NHR	1600	500	66	90	260	0.9	16.6	150	0.90	1.15	ISO247™
CLA80MT1200NHB	1200	400	88	120	480	0.85	9.2	150	0.40	0.65	TO-247AD
CLA80MT1200NHR	1200	400	88	100	480	0.85	9.2	150	0.65	0.90	ISO247™
CMA80MT1600NHB	1600	400	88	115	400	0.9	12	150	0.40	0.65	TO-247AD
CMA80MT1600NHR	1600	500	88	95	400	0.9	12	150	0.65	0.90	ISO247™
MCMA650MT1400NKD	1400	440	650	85	9600	0.81	0.68	140	0.12	0.04	Y1-2-Cu
MCMA650MT1800NKD	1800	575	650	400	9600	0.81	0.68	140	0.12	0.04	Y1-2-Cu

Standard TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package															
								Surface Mount							Through-hole								
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
V					°C	mA																	
LX507MBB	-	•	-	-	0.5	125	5	•	-	-	-	-	-	-	-	-	-	-	-	-	-		
LxX8Ex / LxXx/ QxX8Ex / QxXx	•	•	-	-	0.8	125	3,5,10,25	-	-	-	-	•	-	-	•	-	-	-	-	-	-		
LX8	•	•	-	-	0.8	125	3,5	-	-	•	•	-	-	-	•	-	-	-	-	-	-		
Lx01Ex / LxNx / Qx01Ex / QxNx	•	•	-	-	1	110	3,5,10,25	-	-	-	-	•	-	-	•	-	-	-	-	-	-		
L01	•	•	•	-	1	125	3,5,10	-	-	-	•	-	-	-	•	-	-	-	-	-	-		
T2322B (200V)	•	-	-	-	2.5	110	10	-	-	-	-	-	-	-	•	•	-	-	-	-	-		
2N607xA/B	•	•	-	-	4	110	3,5	-	-	-	-	-	-	-	•	•	-	-	-	-	-		
Lxx04xx / Qxx04xx	•	•	•	•	4	125	3,5,10,25	-	-	-	-	-	•	-	-	-	•	•	•	-	-		
Lxx06xx / Qxx06xx / Qxx06xHx	•	•	•	•	6	125	5,10,25,35,50	-	-	-	-	-	•	•	-	-	•	•	•	-	-		
Lxx08xx / Qxx08xx / Qxx08xHx	•	•	•	•	8	125	5,10,25,35,50	-	-	-	-	-	•	•	-	-	•	•	•	-	-		
Q6008xH1LED	•	•	-	-	8	125	10	-	-	-	-	-	•	-	-	-	-	•	•	-	-		
Qxx10xx / Qxx10xHx	•	•	•	•	10	125	5,25,50	-	-	-	-	-	-	•	-	-	-	•	•	-	-		
Qxx12xHx	•	•	•	•	12	125	10,50	-	-	-	-	-	-	•	-	-	-	•	•	-	-		
Q6012xH1LED	•	•	-	-	12	125	10	-	-	-	-	-	-	•	-	-	-	•	•	-	-		
Qxx15xx / Qxx16xHx	•	•	•	•	15	125	10,25,35,50,80	-	-	-	-	-	-	•	-	-	-	•	•	-	-		
Q6016LH1LED	-	•	-	-	16	125	5	-	-	-	-	-	-	-	-	-	-	•	-	-	-		
Qxx25xx / Qxx25xHx	•	•	•	•	25	125	50,80	-	-	-	-	-	-	•	-	-	-	•	•	•	-		
Q6035NAH5	-	•	-	-	35	125	50	-	-	-	-	-	-	•	-	-	-	-	•	-	-		
Qxx30xHx / Qxx35xHx	•	•	-	-	30	125	25,50	-	-	-	-	-	-	•	-	-	-	•	•	-	-		
Qxx40xx	•	•	•	•	40	125	35,50,80,100	-	-	-	-	-	-	-	-	-	-	-	•	•	•		
MS0690J-D1TE (SOT-227)	-	•	-	-	90	125	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-		

OV TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package															
								Surface Mount						Through-hole									
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
V																							
QSxx04xHx	-	-	●	-	4	125	10, 35	-	-	-	-	-	●	-	-	-	-	-	-	-			

Automotive Grade AECQ101 Qualified TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package															
								Surface Mount						Through-hole									
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
Q6035NAH5	-	•	-	-	35	125	50	-	-	-	-	-	-	•	-	-	-	-	-	-	-		





High Temperature TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package															
								Surface Mount						Through-hole									
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
V				A	°C	mA																	
LJxx04xx / QJxx04xx	●	●	—	—	4	150	10,25	—	—	—	—	—	—	●	—	—	—	●	—	—	—	—	
LJxx06xx / QJxx06xHx/QJxx06xx	●	●	●	—	6	150	10,20,35,50	—	—	—	—	—	—	●	●	—	—	●	●	—	—	—	
LJxx08xx / QJxx08xHx /QJxx08xx	●	●	●	—	8	150	10,20,35,50	—	—	—	—	—	—	●	●	—	—	●	●	—	—	—	
QJxx10xx / QJxx10xHx	—	●	●	—	10	150	10,25,35,50	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	
QJxx12xHx	—	—	●	—	12	150	35,50	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	
QVxx12xHx	—	●	●	—	12	150	20,35,50	—	—	—	—	—	—	●	●	—	—	●	●	—	—	—	
QJxx16xHx	—	●	●	—	16	150	10,20,35,50,80	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	
QVxx16xHx	—	●	●	—	16	150	10,20,35,50	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	
HQ6025xH5	—	●	—	—	25	150	50	—	—	—	—	—	—	—	●	—	—	—	●	●	—	—	
QJxx25xHx	●	●	●	—	25	150	35,50,80	—	—	—	—	—	—	—	●	—	—	—	●	●	—	—	
QVxx25xHx	—	●	●	—	25	150	35,50	—	—	—	—	—	—	—	●	—	—	—	●	●	—	—	
QJxx30LH4	—	●	●	—	30	150	35, 50	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	
QJxx35xHx	—	●	●	—	30	150	35, 50	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	
QJxx40xx	—	●	●	—	40	150	35,50,80,100	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	

Quadrac

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	V _{BO} max	I _H max	Package
	400	600	800	1000	A	°C	V	mA	
	V								
Qxx04LT	•	•	–	–	4	125	43	40	TO-220 Iso
Qxx06LT / Qxx06LTH	•	•	–	–	6	125	43	50	TO-220 Iso
Qxx08LT / Qxx08LTH	•	•	–	–	8	125	43	60	TO-220 Iso
Qxx10LT / Qxx10LTH	•	•	–	–	10	125	43	60	TO-220 Iso
Qxx15LT / Qxx15LTH	•	•	–	–	15	125	43	70	TO-220 Iso
Q6008LTH1LED	–	•	–	–	8	125	43	6	TO-220 Iso
Q6012LTH1LED	–	•	–	–	12	125	43	8	TO-220 Iso


SIDAC

Part Number	SIDAC Type	Nominal VBO																I _{TRM} @ 5 Hz	I _{TRM} @ 60 Hz	T _J Max	Package			
		82	90	105	110	120	130	140	150	180	200	220	230	240	250	300	360				SMA	SMB	DO-15	TO-92-2L
		V																						
Kxxx0yU	Unidirectional	•	•	•	•	•	•	•	•	•	•	•	•	•	•	–	–	160 / 280	80 / 120	125 / 150	•	–	•	–
Kxxxzy	Bidirectional	–	•	•	•	•	•	•	•	•	•	•	–	•	•	•	–	160	80	125	–	•	•	•
Kxxx0yH	Bidirectional	–	–	–	–	–	–	–	–	•	•	•	•	•	•	–	–	280	120	125	–	•	•	•
Kxxx1GL	Multipulse	–	–	–	–	–	–	–	–	–	•	•	•	•	•	•	–	n/a	n/a	125	–	–	•	–
K2xx0yHU	Unidirectional	–	–	–	–	–	–	–	–	•	•	•	•	•	•	–	–	280	120	125	–	•	•	–
Kxxx1G	Multipulse	–	–	–	–	–	–	–	–	–	•	•	•	•	•	–	•	n/a	n/a	125	–	–	•	–

IGBT Modules



X112
E2-Pack



X113/X113a
E3-Pack/PFP

Six-Pack IGBT Modules in E2 Housings

Part Number	V _{CES}	I _{C25} IGBT T _C = 25 °C	I _{C80} IGBT T _C = 80 °C	V _{CE(sat)} typ. IGBT T _J = 25 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	I _{F25} Diode T _C = 25 °C	I _{F80} Diode T _C = 80 °C	NTC	Layout	Package
	V	A	A	V	mJ	K/W	A	A			
1200 V XPT™ IGBT											
MIXA30W1200TED ¹	1200	43	30	1.8	3	0.84	44	29	•	B	E2-Pack
MIXA40W1200TED ¹		60	40	1.8	4.1	0.64	44	29	•	B	
MIXA41W1200ED ¹		60	40	1.8	4.1	0.64	44	29	-	A	
MIXA60W1200TED ¹		85	60	1.8	5.5	0.43	88	59	•	B	
MIXA80W1200TED ¹		120	84	1.8	8.3	0.32	135	90	•	B	
MIXA80W1200PTED ^{1,2}		120	84	1.8	8.3	0.32	135	90	•	B	E3-Pack/PFP

¹ Options: PressFit-Pin version and phase change material; please contact Littelfuse sales office for availability

² PressFit-Pins version

Six-Pack IGBT Modules in E3 Housings


Part Number	V _{CES}	I _{C25} IGBT T _C = 25 °C	I _{C80} IGBT T _C = 80 °C	V _{CE(sat)} typ. IGBT T _J = 25 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	I _{F25} Diode T _C = 25 °C	I _{F80} Diode T _C = 80 °C	NTC	Layout	Package
	V	A	A	V	mJ	K/W	A	A			
1200 V XPT™ IGBT											
MIXA80W1200TEH ¹	1200	120	84	1.8	8.3	0.32	135	90	•	C	E2-Pack
MIXA100W1200TEH ¹		155	108	1.8	11	0.25	135	90	•	C	
MIXA150W1200TEH ¹		220	150	1.8	16	0.18	190	130	•	C	
1200 V X2PT™ IGBT											
MIXG120W1200TEH ¹	1200	185	140	1.7	8.2 (150°C)	0.3	180	135	•	C	E2-Pack
MIXG180W1200TEH ¹		260	195	1.7	14.7 (150°C)	0.18	230	170	•	C	
MIXG180W1200PTEH ²		260	195	1.7	14.7 (150°C)	0.18	230	170	•	C	E3-Pack/PFP
MIXG240W1200TEH ¹		312	233	1.7	20.5 (150°C)	0.16	200	144	•	C	
1200 V X2PT™ IGBT and Shunt Resistor											
MIXG240W1200PZTEH ²	1200	312	233	1.7	20.5 (150°C)	0.16	189	136	•	D	E3-Pack/PFP
MIXG240W1200PZTEH-PC ^{2,3}		312	233	1.7	20.5 (150°C)	0.16	189	136	•	D	

¹ Options: PressFit-Pin version and phase change material; please contact Littelfuse sales office for availability


² PressFit-Pins version

³ Phase-change material (PCM)


Layout A

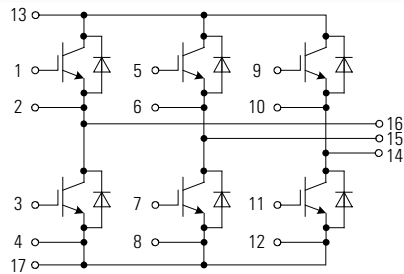


Layout B

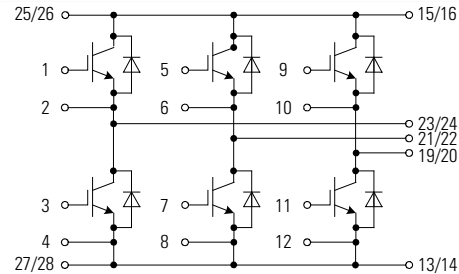

Layout C

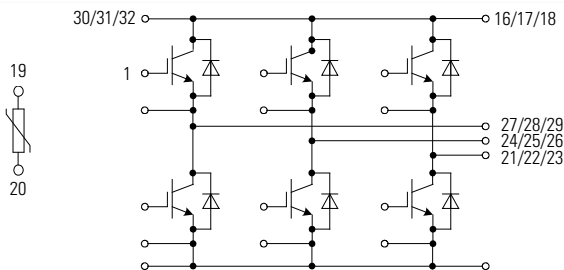


Layout D

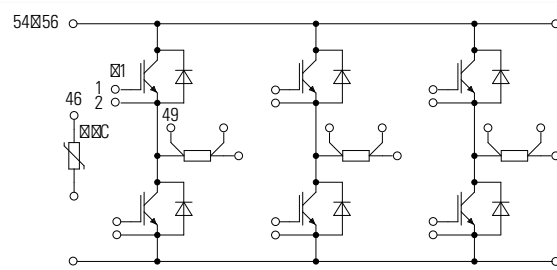

IGBT Modules



X112
E2-Pack



X113/X113a
E3-Pack/PFP

CBI IGBT Modules in E3-Pack

Part Number	Rectifier 3 Phase			Inverter 3 Phase					Brake chopper			Layout	Package
	V _{RRM}	I _{DAVM} T _C = 80 °C	R _{thJC} typ.	V _{CES}	I _C T _C = 25 °C	I _C T _C = 80 °C	V _{CE(sat)} typ.	R _{thJC} typ.	V _{CES}	I _C T _C = 80°C	R _{thJC} typ.		
	V	A	K/W	V	A	A	V	K/W	V	A	K/W		
1200 V XPT™ IGBT													
MIXA60WB1200TEH	1600	190	0.65	1200	85	60	1.8	0.43	1200	40	0.64	E	E3-Pack
MIXA60WH1200TEH ¹		135	0.65		85	60	1.8	0.43		40	0.64	G	E3-Pack
MIXA80WB1200TEH		265	0.5		120	84	1.8	0.32		40	0.64	E	E3-Pack
MIXA81WB1200TEH		290	0.45		120	84	1.8	0.32		60	0.43	F	E3-Pack
1700 V Trench IGBT													
MUBW50-17T8	2200	130	1.1	1700	74	53	2	0.49	1700	34	0.62	E	E3-Pack
MUBW50-17T8-PFPC ²		130	1.1		74	53	2	0.49		34	0.62	E	E3-Pack/PFP
MUBW75-17T8		155	0.95		113	80	2	0.28		34	0.62	E	E3-Pack
MUBW75-17T8-PFPC ²		155	0.95		113	80	2	0.28		34	0.62	E	E3-Pack/PFP


¹ Input rectifier half-controlled; ² with PressFit-Pins and pre-applied phase change material;

Options: PressFit-Pins version and phase change material; please contact the Littelfuse sales office for availability.


CBI IGBT Modules in E2-Pack

Part Number	Rectifier 3 Phase			Inverter 3 Phase					Brake Chopper			Layout	Package
	V_{RRM}	I_{DAVM} $T_c = 80^{\circ}C$	R_{thJC} typ.	V_{CES}	I_c $T_c = 25^{\circ}C$	I_c $T_c = 80^{\circ}C$	$V_{CE(sat)}$ typ.	R_{thJC} typ.	V_{CES}	I_c $T_c = 80^{\circ}C$	R_{thJC} typ.		
	V	A	K/W	V	A	A	V	K/W	V	A	K/W		
1200 V XPT™ IGBT													
MIXA10WB1200TED	1600	105	1.1	1200	17	12	1.8	2	1200	12	2	E	E2-Pack
MIXA20WB1200TED		105	1.1		28	20	1.8	1.26		12	2		
MIXA30WB1200TED		105	1.1		43	30	1.8	0.84		12	2		
MIXA40WB1200TED		105	1.1		50	40	1.8	0.64		20	1.26		


Layout E


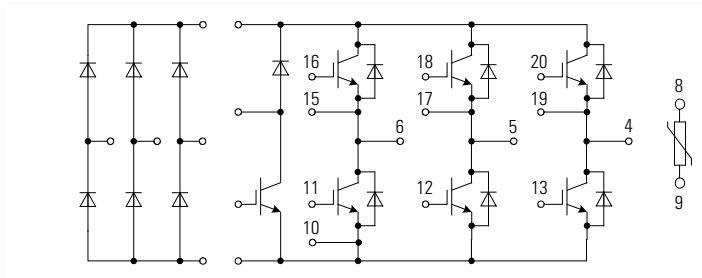


Layout F

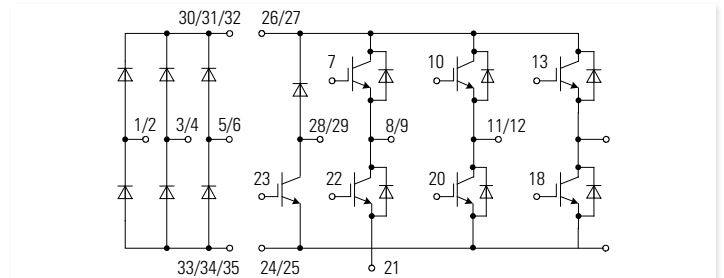

Layout G


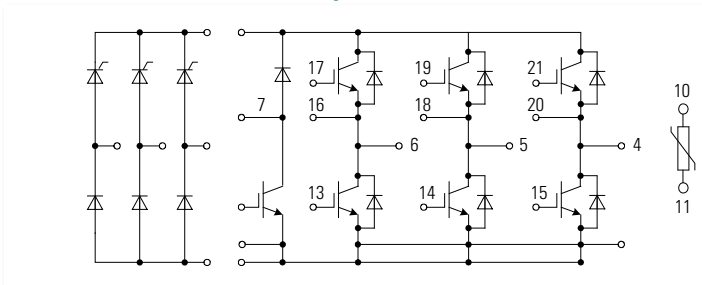



X143
Simbus F

X112
E2-Pack

X112a
E2-Pack PFP

X103
V1-A-Pack

IGBT XPT™ Modules in SimBus F Package





- Saves space
- Reduced protection circuits
- Package is designed for wave soldering
- PressFit-Pins version is available


...PF...
phase - leg

...RF...
brake boost

Part Number	V _{CES}	I _{C80} IGBT T _C = 80 °C	V _{CE(sat)} typ. IGBT T _J = 25 °C	E _{on} IGBT T _J = 125 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	I _{F80} Diode T _C = 80°C	R _{thJC} Diode	Package
	V	A	V	mJ	mJ	K/W	A	K/W	
XPT™ / X2PT™ IGBT Phase Leg									
MIXA225PF1200TSF	1200	250	1.8	20	27	0.115	185	0.145	Simbus F
MIXA300PF1200TSF		325	1.8	20	42	0.085	185	0.145	
MIXA450PF1200TSF		450	1.8	22	68	0.06	265	0.095	

Options: PressFit-Pins version and phase-change material; please contact the Littelfuse sales office for availability

Brake Buck Boost Chopper IGBT Modules


MIXA...HU...

MIXA...O...

MIXA...R...

...RF...

Part Number	V _{CES}	I _{C25} IGBT T _C = 25 °C	I _{C80} IGBT T _C = 80 °C	V _{CE(sat)} typ. IGBT T _J = 25 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	I _{F25} Diode T _C = 25 °C	I _{F80} Diode T _C = 80 °C	Package
	V	A	A	V	mJ	K/W	A	A	
X2PT™ IGBT Brake									
MIXG240RF1200TED ¹	1200	335	250	1.7	23 (150°C)	0.12	265	195	E2-Pack
MIXG240RF1200PTED ²		335	250	1.7	23 (150°C)	0.12	265	195	E2-Pack PFP
MIXG240RF1200PTED-PC ^{2,3}		335	250	1.7	23 (150°C)	0.12	265	195	
MIXG360RF1200TED ¹		532	400	1.7	30 (150°C)	0.08	390	285	E2-Pack
MIXG360RF1200PTED-PC ^{2,3}		532	400	1.7	30 (150°C)	0.08	390	285	E2-Pack PFP
Trench IGBT Brake									
MITA300RF1700PTED ²	1700	450	310	1.7	34	0.09	390	285	E2-Pack PFP
MITA300RF1700PTED-PC ^{2,3}		450	310	1.7	34	0.09	390	285	
XPT™ IGBT Brake Boost Chopper									
MIXA80R1200VA	1200	120	84	1.9	8,3	0.32	135	90	V1-A-Pack
MIXA150R1200VA		220	150	1.8	16	0.18	190	130	
XPT™ IGBT Buck Chopper									
MIXA150Q1200VA	1200	220	150	1.8	16	0.18	190	130	V1-A-Pack
XPT™ IGBT Buck Boost Switched Reluctance Chopper									
MIXA60HU1200VA	1200	85	60	1.8	5.5	0.43	88	59	V1-A-Pack

¹ Options: PressFit-Pins version and/or phase-change material; please contact the Littelfuse sales office for availability


² PressFit-Pins version

³ Phase-change material (PCM)


IGBT Modules



X143
Simbus F



X112
E2-Pack




X112a
E2-Pack PFP




X103
V1-A-Pack

IGBT XPT™ Modules in SimBus F Package

- Saves space
- Reduced protection circuits
- Package is designed for wave soldering
- PressFit-Pins version is available



...PF...
phase - leg




...RF...
brake boost


Part Number	V _{CES}	I _{C80} IGBT T _C = 80 °C	V _{CE(sat)} typ. IGBT T _J = 25 °C	E _{on} IGBT T _J = 125 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	I _{F80} Diode T _C = 80°C	R _{thJC} Diode	Package
	V	A	V	mJ	mJ	K/W	A	K/W	
XPT™ / X2PT™ IGBT Phase Leg									
MIXA225PF1200TSF	1200	250	1.8	20	27	0.115	185	0.145	Simbus F
MIXA300PF1200TSF		325	1.8	20	42	0.085	185	0.145	
MIXA450PF1200TSF		450	1.8	22	68	0.06	265	0.095	

Options: PressFit-Pins version and phase-change material; please contact the Littelfuse sales office for availability


Brake Buck Boost Chopper IGBT Modules




MIXA...HU...



MIXA...O...



MIXA...R...



...RF...

Part Number	V _{CES}	I _{C25} IGBT T _C = 25 °C	I _{C80} IGBT T _C = 80 °C	V _{CE(sat)} typ. IGBT T _J = 25 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	I _{F25} Diode T _C = 25 °C	I _{F80} Diode T _C = 80 °C	Package
	V	A	A	V	mJ	K/W	A	A	
X2PT™ IGBT Brake									
MIXG240RF1200TED ¹	1200	335	250	1.7	23 (150°C)	0.12	265	195	E2-Pack
MIXG240RF1200PTED ²		335	250	1.7	23 (150°C)	0.12	265	195	E2-Pack PFP
MIXG240RF1200PTED-PC ^{2,3}		335	250	1.7	23 (150°C)	0.12	265	195	
MIXG360RF1200TED ¹		532	400	1.7	30 (150°C)	0.08	390	285	E2-Pack
MIXG360RF1200PTED-PC ^{2,3}		532	400	1.7	30 (150°C)	0.08	390	285	E2-Pack PFP
Trench IGBT Brake									
MITA300RF1700PTED ²	1700	450	310	1.7	34	0.09	390	285	E2-Pack PFP
MITA300RF1700PTED-PC ^{2,3}		450	310	1.7	34	0.09	390	285	
XPT™ IGBT Brake Boost Chopper									
MIXA80R1200VA	1200	120	84	1.9	8,3	0.32	135	90	V1-A-Pack
MIXA150R1200VA		220	150	1.8	16	0.18	190	130	
XPT™ IGBT Buck Chopper									
MIXA150Q1200VA	1200	220	150	1.8	16	0.18	190	130	V1-A-Pack
XPT™ IGBT Buck Boost Switched Reluctance Chopper									
MIXA60HU1200VA	1200	85	60	1.8	5.5	0.43	88	59	V1-A-Pack

¹ Options: PressFit-Pins version and/or phase-change material; please contact the Littelfuse sales office for availability

² PressFit-Pins version

³ Phase-change material (PCM)

extreme Modules

One of the essential advantages of power semiconductor modules has over discrete designs is the electrical isolation between the baseplates of the module and the parts subject to voltage (3.6 - 4.8 kV_{RMS} tested). This makes the mount-down of any number of the same or different modules on a common heatsink possible. It is feasible to use standard housings with appropriate accessories for designing a compact power converter operating from AC mains up to 690 V.

Plastic Housing with DCB Substrate

Littelfuse has succeeded in simplifying the conventional multilayer module construction by applying the direct copper bonding (DCB) technique.

Other features include:

- Top-side electrical terminals with captured nuts;
- Series-connected diodes/diode, thyristor/diode, and thyristor/thyristor modules; and
- Easy assembly

All thyristor modules with DCB ceramic base contacts are available in volume with two standardized twin plugs (2.8 mm × 0.8 mm) for gate and auxiliary cathode control terminals (version 1). Modules in TO-240 housing of version 8 are delivered with gate plugs only (i.e., without auxiliary cathode terminal; mounting screws available on request). The module housing is designed for adequate clearance and creepage distance, resulting in  recognition by Underwriters Laboratories, Inc., USA for all types.


New Generation Silicon Chips

All chips are designed by applying separation diffusion processes such that the zones responsible for the surface field strength are located at the upper chip side. This results in the ability to solder the entire chip area onto the DCB ceramic substrate without a molybdenum strain buffer, which in turn leads to the effective stability of the chips as well as to large area heat dissipation if a load is applied. All zones at the edges decisive for blocking stability are coated with passivation glasses, the coefficient of expansion of which match that of silicon. Silicon chips have increasingly used planar technology with guard rings and channel stoppers to reduce electrical surface fields. This chip design supersedes the design of thyristor chips fabricated with passivation moats so that modules of the new series designed with the updated state-of-the-art use planar passivated chips processed by separation diffusion techniques. The contact areas of the chips possess physical vapor deposited metal layers. For the user, the improved properties are as follows:

- Excellent long-term stability of blocking currents and blocking voltages;
- Increased life time of the internal soldered connections; and
- High power cycling capability (> 50 000)

The thyristor/diode chips have been optimized in terms of their turn-off parameters: decreasing the carrier lifetime results in reduces stored charges QS, which in turn significantly reduces requirements for RC-snubbers for over-voltage protection. Cost reduction and improved efficiency are among the benefits of these characteristics. By redeveloping the silicon chips, improvements in the firing characteristics were achieved by specifying a higher "gate current not to fire" IGD, resulting in substantially less susceptibility to misfiring. This leads to improved safety of operation and higher equipment reliability.

Fig. 1: Principle Cross Section of an Littelfuse Module with DCB Technology

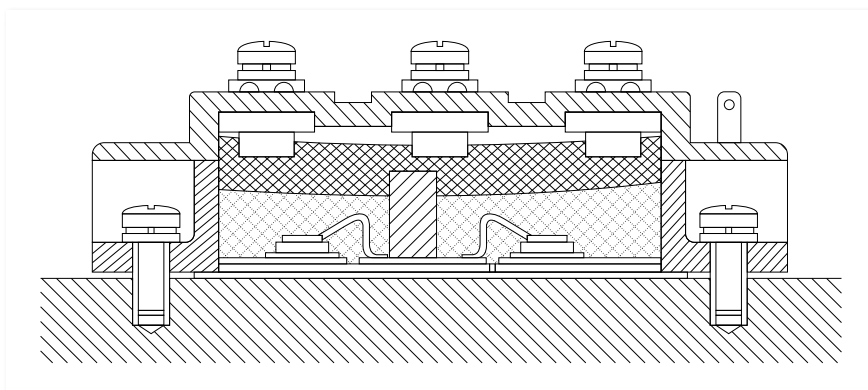

Modules



X125e
TO-240AA



X131c
Y1



X143a
SimBus A F PFP




X126c
Y4




X141c
SimBus A

Diodes Modules–Dual

$I_{FAV} = 25\text{--}85\text{ A}$



MDA



**MDD...
MDM/NA...P...**

Part Number	V_{RRM}	I_{FAV}	T_C	$I_{FSM}\text{ }45^{\circ}\text{C }10\text{ ms}$	V_{F0}	r_F	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^{\circ}\text{C}$	A	V	$m\Omega$	$^{\circ}\text{C}$	K/W	K/W	
MDMA25P1200TG	1200	25	100	320	0.85	11.10	150	1.10	0.20	TO-240AA (e)
MDMA25P1600TG	1600									
MDMA25P1800TG	1800									
MDNA25P2200TG	2200									TO-240AA (e)
MDD26-08N1B	800	36	100	650	0.80	6.10	150	1.00	0.20	To-240AA (e)
MDD26-12N1B	1200									
MDD26-14N1B	1400									
MDD26-16N1B	1600	36	100	650	0.80	6.10	150	1.00	0.20	TO-240AA (e)
MDD26-18N1B	1800									
MDMA35P1200TG	1200	35	100	500	0.83	7.30	150	0.90	0.20	TO-240AA (e)
MDMA35P1600TG	1600									
MDMA35P1800TG	1800									
MDNA35P2200TG	2200									TO-240AA (e)
MDD44-08N1B	800	59	100	1150	0.80	4.30	150	0.59	0.20	TO-240AA (e)
MDD44-12N1B	1200									
MDD44-14N1B	1400									
MDD44-16N1B	1600	59	100	1150	0.80	4.30	150	0.59	0.20	TO-240AA (e)
MDD44-18N1B	1800									
MDMA50P1200TG	1200	50	100	850	0.85	5.70	150	0.65	0.20	TO-240AA (e)
MDMA50P1600TG	1600									
MDMA50P1800TG	1800									
MDNA50P2200TG	2200									TO-240AA (e)
MDD56-08N1B	800	71	100	1400	0.80	3.00	150	0.51	0.20	TO-240AA (e)
MDD56-12N1B	1200									
MDD56-14N1B	1400									
MDD56-16N1B	1600	71	100	1400	0.80	3.00	150	0.51	0.20	TO-240AA (e)
MDD56-18N1B	1800									
MDMA65P1200TG	1200	65	100	1100	0.81	4.30	150	0.50	0.20	TO-240AA (e)
MDMA65P1600TG	1600									
MDMA65P1800TG	1800									
MDNA65P2200TG	2200									TO-240AA (e)
MDMA85P1200TG	1200	85	100	1500	0.79	3.50	150	0.35	0.20	TO-240AA (e)
MDMA85P1600TG	1600									
MDMA85P1800TG	1800									
MDNA85P2200TG	2200									TO-240AA (e)

Diodes Modules–Dual

I_{FAV} = 99–300 A

Part Number	V _{RRM}	I _{FAV}	T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	V	mΩ	°C	K/W	K/W	
MDD72-08N1B	800	99	100	1700	0.80	2.30	150	0.35	0.20	TO-240AA (e)
MDD72-12N1B	1200									
MDD72-14N1B	1400									
MDD72-16N1B	1600	99	100	1700	0.80	2.30	150	0.35	0.20	TO-240AA (e)
MDD72-18N1B	1800									
MDMA110P1200TG	1200									
MDMA110P1600TG	1600	110	100	2000	0.82	2.80	150	0.3	0.20	TO-240AA (e)
MDMA110P1800TG	1800									
MDNA110P2200TG	2200									
MDD95-08N1B	800	120	100	2800	0.75	1.95	150	0.26	0.20	TO-240AA (e)
MDD95-12N1B	1200									
MDD95-14N1B	1400									
MDD95-16N1B	1600	120	100	2800	0.75	1.95	150	0.26	0.20	TO-240AA (e)
MDD95-18N1B	1800									
MDD95-20N1B	2000									
MDD95-22N1B	2200	120	100	2800	0.75	1.95	150	0.26	0.20	TO-240AA (e)
MDA95-22N1B	2200									
MDMA140P1200TG	1200									
MDMA140P1600TG	1600	140	100	2800	0.78	2.20	150	0.23	0.20	TO-240AA (e)
MDMA140P1800TG	1800									
MDNA140P2200TG	2200									
MDD142-08N1	800	165	100	4700	0.80	1.30	150	0.21	0.10	Y4
MDD142-12N1	1200									
MDD142-14N1	1400									
MDD142-16N1	1600	165	100	4700	0.80	1.30	150	0.21	0.10	Y4
MDD142-18N1	1800									
MDMA180P1600YD	1600									
MDNA180P2200YD	2200	180	100	4400	0.77	1.40	150	0.2	0.11	Y4
MDD172-08N1	800									
MDD172-12N1	1200									
MDD172-14N1	1400	190	100	6600	0.80	0.80	150	0.21	0.10	Y4
MDD172-16N1	1600									
MDD172-18N1	1800									
MDMA210P1600YD	1600	210	100	6600	0.67	1.20	150	0.17	0.09	Y4
MDNA210P2200YD	2200									
MDD200-14N1	1400									
MDD200-16N1	1600	224	100	10500	0.8	0.60	150	0.13	0.10	Y4
MDD200-18N1	1800									
MDD200-22N1	2200									
MDMA200P1600SA	1600	200	110	6000	0.76	1.40	150	0.15	0.08	SimBus A
MDD175-28N1	2800	240	100	8500	0.74	1.27	150	0.14	0.04	Y1
MDD175-34N1	3400									
MDD255-12N1	1200									
MDD255-14N1	1400	270	100	9500	0.80	0.60	150	0.14	0.04	Y1
MDD255-16N1	1600									
MDD255-18N1	1800									
MDD255-20N1	2000	270	100	9500	0.80	0.60	150	0.14	0.04	Y1
MDD255-22N1	2200									
MDMA280P1600YD	1600									
MDNA280P2200YD	2200	280	100	10500	0.74	1.00	150	0.13	0.06	Y4
MDMA300P1600PTSF	1600									
MDNA300P2200PTSF	2200									

Modules



X027a
SOT-227B (miniBLOC)



X125b
TO-240AA



X125d
TO-240AA



X129c
Y2



X131c
Y1



X132b
Y1




X142c
ComPack




X143a
SimBus A F PFP

Diode Modules—Single and Dual

$I_{FAV} = 350\text{--}700\text{ A}$



MDO




MDD...
MDM/NA...P...


Part Number	V_{RRM}	I_{FAV}	T_C	$I_{FSM} 45^\circ\text{C } 10\text{ ms}$	V_{F0}	r_F	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MDD310-12N1	1200	305	100	11500	0.75	0.63	150	0.129	0.04	Y2
MDD310-14N1	1400									
MDD310-16N1	1600									
MDD310-18N1	1800									
MDD310-20N1	2000	305	100	11500	0.75	0.63	150	0.129	0.04	Y2
MDD310-22N1	2200									
MDD312-12N1	1200	310	100	10500	0.80	0.60	150	0.12	0.04	Y1
MDD312-14N1	1400									
MDD312-16N1	1600	310	100	10500	0.80	0.60	150	0.12	0.04	Y1
MDD312-18N1	1800									
MDD312-20N1	2000	310	100	10500	0.80	0.60	150	0.12	0.04	Y1
MDD312-22N1	2200									
MDMA380P1600KC	1600	380	100	11000	0.75	0.53	150	0.11	0.04	Y1
MDMA380P1800KC	1800									
MDNA380P2200KC	2200									
MDMA425P1600PTSF	1600	425	100	10000	0.77	1.01	150	0.07	0.04	SimBus F PFP
MDNA425P2200PTSF	2200									
MDO500-12N1	1200	560	85	15000	0.80	0.38	140	0.072	0.02	Y1
MDO500-14N1	1400									
MDO500-16N1	1600									
MDO500-18N1	1800									
MDO500-20N1	2000	560	85	15000	0.80	0.38	140	0.072	0.02	Y1
MDO500-22N1	2200									
MDMA600P1600PTSF	1600	600	100	15000	0.78	0.67	150	0.05	0.03	SimBus F PFP
MDNA600P2200PTSF	2200									
MDO600-16N1	1600	608	85	15000	0.76	0.32	140	0.072	0.02	Y1
MDMA700P1600CC	1600	700	100	20000	0.78	0.35	150	0.055	0.02	ComPack
MDMA700P1800CC	1800									
MDNA700P2200CC	2200									

Thyristor/Diode Modules

I_{TAV} = 25–85 A



MCD...io1
MCM/NA...PD...



MCD...io8/...io6
CLA/CMA...PD...

Part Number	V _{RRM} V _{DRM}	I _{TAV}	T _C	I _{T(RMS)}	I _{TSM} 45 °C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W	
MCMA25PD1200TB	1200	25	82	40	400	0.87	13.00	140	1.20	0.20	TO-240AA (b)
MCMA25PD1600TB	1600										
MCD26-08io1B	800	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (b)
MCD26-12io1B	1200										
MCD26-14io1B	1400	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (b)
MCD26-16io1B	1600										
MCD26-08io8B	800	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (d)
MCD26-12io8B	1200										
MCD26-14io8B	1400	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (d)
MCD26-16io8B	1600										
MCMA35PD1200TB	1200	35	85	55	520	0.87	9.80	140	0.90	0.20	TO-240AA (b)
MCMA35PD1600TB	1600										
MCD40-12io6	1200	40	85	63	500	0.87	10.50	150	0.70	0.10	SOT-227B (miniBLOC)
MCD40-16io6	1600										
MCD44-08io1B	800	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (b)
MCD44-12io1B	1200										
MCD44-14io1B	1400	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (b)
MCD44-16io1B	1200										
MCD44-18io1B	1600	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (d)
MCD44-08io8B	800										
MCD44-12io8B	1200	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (d)
MCD44-14io8B	1400										
MCD44-16io8B	1600	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (d)
MCD44-18io8B	1800										
MCNA40PD2200TB	2200	40	85	63	500	0.84	11.40	140	0.70	0.20	TO-240AA (b)
MCMA50PD1200TB	1200	50	85	79	800	0.89	5.30	140	0.70	0.20	TO-240AA (b)
MCMA50PD1600TB	1600										
CLA60PD1200NA	1200	60	100	94	1100	0.79	4.80	150	0.55	0.10	SOT-227B (miniBLOC)
MCD56-08io1B	800	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (b)
MCD56-12io1B	1200										
MCD56-14io1B	1400	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (b)
MCD56-16io1B	1600										
MCD56-18io1B	1800	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (d)
MCD56-08io8B	800										
MCD56-12io8B	1200	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (d)
MCD56-14io8B	1400										
MCD56-16io8B	1600	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (d)
MCD56-18io8B	1800										
MCNA55PD2200TB	2200	55	85	86	800	0.9	9.00	150	0.50	0.20	TO-240AA (b)
MCMA65PD1200TB	1200	65	85	105	1150	0.85	4.80	140	0.50	0.20	TO-240AA (b)
MCMA65PD1600TB	1600										
MCMA65PD1800TB	1800	80	80	126	1070	0.86	5.50	150	0.45	0.10	SOT-227B (miniBLOC)
CMA80PD1600NA	1600										
MCD72-08io1B	800	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (b)
MCD72-12io1B	1200										
MCD72-14io1B	1400	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (b)
MCD72-16io1B	1600										
MCD72-18io1B	1800	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (d)
MCD72-08io8B	800										
MCD72-12io8B	1200	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (d)
MCD72-14io8B	1400										
MCD72-16io8B	1600	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (d)
MCD72-18io8B	1800										

extremeModules



X125b
TO-240AA



X125d
TO-240AA



X125y
TO-240AA



X126b
Y4



X027a
SOT-227B (miniBLOC)



X129b
Y2




X132b
Y1



X141b
SimBus A




X142b
ComPack




X143a
SimBus A F PFP

Thyristor/Diode Modules

$I_{TAV} = 85-140\text{ A}$



MCD...io1
MCM/NA...PD...



MCD...io8/...io6
CLA/CMA...PD...

Part Number	$V_{RRM} V_{DRM}$	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^{\circ}C\ 10\ ms$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^{\circ}C$	A	A	V	m Ω	$^{\circ}C$	K/W	K/W	
MCNA75PD2200TB	2200	75	85	118	1050	0.90	6.50	140	0.38	0.20	TO-240AA (b)
MCMA85PD1200TB	1200	85	85	135	1500	0.85	3.90	140	0.38	0.20	TO-240AA (b)
MCMA85PD1600TB	1600										
MCMA85PD1800TB	1800										
CLA100PD1200NA	1200	100	85	150	1500	0.83	3.70	150	0.35	0.10	SOT-227B (miniBLOC)
MCD94-20io1B	2000	104	85	180	1700	0.85	3.20	125	0.22	0.20	TO-240AA (b)
MCD94-22io1B	2200										
MCD95-08io1B	800										
MCD95-12io1B	1200	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (b)
MCD95-14io1B	1400										
MCD95-16io1B	1600										
MCD95-18io1B	1800	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (y)
MCD95-16io1	1600										
MCD95-08io8B	800										
MCD95-12io8B	1200	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (d)
MCD95-14io8B	1400										
MCD95-16io8B	1600										
MCD95-18io8B	1800	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (d)
MCNA95PD2200TB	2200										
MCMA110PD1200TB	1200										
MCMA110PD1600TB	1600	110	85	170	1900	0.85	3.30	140	0.30	0.20	TO-240AA (b)
MCMA110PD1800TB	1800										
MCNA120PD2200TB	2200										
MCNA120PD2200TB-NI	2200	120	85	190	1700	0.90	3.70	140	0.22	0.20	TO-240AA (y)
MCD132-08io1	800	130	85	300	4750	0.80	1.50	125	0.23	0.10	Y4
MCD132-12io1	1200										
MCD132-14io1	1400										
MCD132-16io1	1600	130	85	300	4750	0.80	1.50	125	0.23	0.10	Y4
MCD132-18io1	1800										
MCMA140PD1200TB	1200										
MCMA140PD1600TB	1600	140	85	200	2400	0.85	2.80	140	0.22	0.20	TO-240AA (b)
MCMA140PD1800TB	1800										
MCMA140PD1600TB-NI	1600										

Thyristor/Diode Modules

I_{TAV} = 180–700 A

Part Number	V _{RRM} V _{DRM}	I _{TAV}	T _C	I _{T(RMS)}	I _{TSM} 45 °C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W	
MCNA150PD2200YB	2200	150	85	235	4300	0.86	2.10	140	0.210	0.11	Y4
MCD161-20io1	2000	165	85	300	6000	0.80	1.60	125	0.155	0.07	Y4
MCD161-22io1	2200										
MCD162-08io1	800	181	85	300	6000	0.88	1.15	125	0.155	0.07	Y4
MCD162-12io1	1200										
MCD162-14io1	1400	181	85	300	6000	0.88	1.15	125	0.155	0.07	Y4
MCD162-16io1	1600										
MCD162-18io1	1800										
MCNA180PD2200YB	2200										
MCMA200PD1600SA	1600	200	85	314	6000	0.81	1.60	140	0.150	0.08	SimBus A
MCD200-14io1	1400	216	85	340	8000	0.80	1.40	125	0.130	0.05	Y4
MCD200-16io1	1600										
MCD200-18io1	1800										
MCNA220PD2200YB	2200	220	85	345	7200	0.84	1.50	140	0.130	0.07	Y4
MCD224-20io1	2000	240	85	400	8000	0.80	0.76	130	0.139	0.04	Y1
MCD224-22io1	2200										
MCD225-12io1	1200	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCD225-14io1	1400										
MCD225-16io1	1600	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCD225-18io1	1800										
MCNA250PD2200PTSF	2200										
MCD255-12io1	1200	250	85	450	9000	0.80	0.68	130	0.140	0.04	Y1
MCD255-14io1	1400										
MCD255-16io1	1600										
MCD255-18io1	1800										
MCMA260PD1600YB	1600	260	85	408	8300	0.81	1.23	140	0.130	0.08	Y4
MCMA260PD1800YB	1800										
MCMA265PD1600KB	1600										
MCMA265PD1800KB	1800	260	85	408	8500	0.80	0.75	140	0.160	0.04	Y1
MCMA280PD1600PTSF	1600										
MCD310-08io1	800	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCD310-12io1	1200										
MCD310-14io1	1400										
MCD310-16io1	1600	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCD310-18io1	1800										
MCD310-20io1	2000										
MCD310-22io1	2200										
MCD312-12io1	1200	320	85	520	9200	0.80	0.68	140	0.120	0.04	Y1
MCD312-14io1	1400										
MCD312-16io1	1600										
MCD312-18io1	1800	320	85	520	9200	0.80	0.68	140	0.120	0.04	Y1
MCNA360PD2200PTSF	2200										
MCMA400PD1600PTSF	1600	400	85	630	10000	0.82	1.14	150	0.070	0.04	SimBUS F PFP
MCNA500PD2200PTSF	2200	500	85	790	11000	0.75	1.11	150	0.050	0.03	SimBUS F PFP
MCMA550PD1600PTSF	1600	550	85	864	13000	0.82	0.80	150	0.050	0.03	SimBUS F PFP
MCNA650PD2200CB	2200	700	85	1020	16000	0.75	0.63	140	0.045	0.02	ComPack
MCMA700PD1600CB	1600										
MCMA700PD1800CB	1800										

×e×ti×e×Modules



X103
V1-A-Pack



X125c
TO-240AA



X126a
Y4




X125a
TO-240AA




X125z
TO-240AA

Thyristor Modules – Dual

$I_{TAV} = 18 - 60\text{ A}$



MCC...io1B
MCM/NA...P...



MCC...io8B

Part Number	V_{RRM} V_{DRM}	I_{TAV}	T_C	$I_{T(RMS)}$	I_{TSM} 45 °C 10 ms	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W	
MCC19-08io1B	800	18	85	40	400	0.85	18	125	1.300	0.2	TO-240AA (a)
MCC19-12io1B	1200										
MCC19-14io1B	1400										TO-240AA (a)
MCC19-16io1B	1600										
MCC19-08io8B	800	18	85	40	400	0.85	18	125	1.300	0.2	TO-240AA (c)
MCC19-12io8B	1200										
MCC19-14io8B	1400										TO-240AA (c)
MCC19-16io8B	1600										
MCC21-08io8B	800	21	85	33	320	0.85	15	125	1.100	0.2	TO-240AA (c)
MCC21-12io8B	1200										
MCC21-14io8B	1400										TO-240AA (c)
MCC21-16io8B	1600										
MCMA25P1200TA	1200	25	85	40	400	0.87	13	140	1.200	0.2	TO-240AA (a)
MCMA25P1600TA	1600										
MCC26-08io1B	800										TO-240AA (a)
MCC26-12io1B	1200										
MCC26-14io1B	1400	27	85	50	520	0.85	11	125	0.880	0.2	TO-240AA (a)
MCC26-16io1B	1600										TO-240AA (a)
MCC26-14io1	1400										TO-240AA (z)
MCC26-08io8B	800										
MCC26-12io8B	1200	27	85	50	520	0.85	11	125	0.880	0.2	TO-240AA (c)
MCC26-14io8B	1400										TO-240AA (c)
MCC26-16io8B	1600										
MCMA35P1200TA	1200	35	85	55	520	0.87	9.8	140	0.900	0.2	TO-240AA (a)
MCMA35P1600TA	1600										
MCNA40P2200TA	2200										TO-240AA (a)
MCC44-08io1B	800	49	85	77	1150	0.85	5.3	125	0.530	0.2	TO-240AA (a)
MCC44-12io1B	1200										
MCC44-14io1B	1400										TO-240AA (a)
MCC44-16io1B	1600										
MCC44-18io1B	1800	49	85	77	1150	0.85	5.3	125	0.530	0.2	TO-240AA (c)
MCC44-08io8B	800										
MCC44-12io8B	1200										TO-240AA (c)
MCC44-14io8B	1400										
MCC44-16io8B	1600	49	85	77	1150	0.85	5.3	125	0.530	0.2	TO-240AA (c)
MCC44-18io8B	1800										
MCMA50P1200TA	1200										TO-240AA (a)
MCMA50P1600TA	1600										
MCNA55P2200TA	2200	55	85	86	800	0.9	9	140	0.500	0.2	TO-240AA (a)
MCC56-08io1B	800										TO-240AA (a)
MCC56-12io1B	1200										
MCC56-14io1B	1400										TO-240AA (a)
MCC56-16io1B	1600	60	85	100	1500	0.85	3.7	125	0.450	0.2	TO-240AA (a)
MCC56-18io1B	1800										
MCC56-14io1	1400										TO-240AA (z)

Thyristor Modules – Dual

 $I_{TAV} = 60 - 181 \text{ A}$ MCC...io1B
MCM/NA...P...

MCC...io8B

Part Number	$V_{RRM} V_{DRM}$	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10 \text{ ms}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	$m\Omega$	$^\circ\text{C}$	K/W	K/W	
MCC56-08io8B	800	60	85	100	1500	0.85	3.7	125	0.450	0.2	TO-240AA (c)
MCC56-12io8B	1200										
MCC56-14io8B	1400										
MCC56-16io8B	1600										
MCC56-18io8B	1800	60	85	100	1500	0.85	3.7	125	0.450	0.2	TO-240AA (c)
MCMA65P1200TA	1200										
MCMA65P1600TA	1600										
MCMA65P1800TA	1800										
MCC72-08io1B	800	85	85	180	1700	0.85	3.2	125	0.300	0.2	TO-240AA (a)
MCC72-12io1B	1200										
MCC72-14io1B	1400										
MCC72-16io1B	1600										
MCC72-18io1B	1800	85	85	180	1700	0.85	3.2	125	0.300	0.2	TO-240AA (a)
MCC72-08io8B	800										
MCC72-12io8B	1200										
MCC72-14io8B	1400										
MCC72-16io8B	1600	85	85	180	1700	0.85	3.2	125	0.300	0.2	TO-240AA (c)
MCC72-18io8B	1800										
MCNA75P2200TA	2200										
MCMA85P1200TA	1200										
MCMA85P1600TA	1600	85	85	135	1500	0.85	3.9	140	0.380	0.2	TO-240AA (a)
MCMA85P1800TA	1800										
MCC94-20io1B	2000										
MCC94-22io1B	2200										
MCC94-24io1B	2400	104	85	180	1700	0.85	3.2	125	0.220	0.2	TO-240AA (a)
MCC95-08io1B	800										
MCC95-12io1B	1200										
MCC95-14io1B	1400										
MCC95-16io1B	1600	116	85	180	2250	0.83	2.4	125	0.220	0.2	TO-240AA (a)
MCC95-18io1B	1800										
MCC95-14io1	1400										
MCC95-16io1	1600										
MCC95-08io8B	800	116	85	180	2250	0.85	2.4	125	0.220	0.2	TO-240AA (c)
MCC95-12io8B	1200										
MCC95-14io8B	1400										
MCC95-16io8B	1600										
MCC95-18io8B	1800	116	85	180	2250	0.85	2.4	125	0.220	0.2	TO-240AA (c)
MCNA95P2200TA	2200										
MCMA110P1200TA	1200										
MCMA110P1600TA	1600										
MCMA110P1800TA	1800	110	85	170	1900	0.85	3.3	140	0.300	0.2	TO-240AA (a)
MCMA110P1600VA	1600										
MCNA120P2200TA	2200										
MCMA140P1200TA	1200										
MCMA140P1400TA	1400	140	85	220	2400	0.85	2.8	140	0.220	0.2	TO-240AA (a)
MCMA140P1600TA	1600										
MCMA140P1800TA	1800										
MCC132-08io1	800										
MCC132-12io1	1200	130	85	300	4750	0.8	1.5	125	0.230	0.1	Y4
MCC132-14io1	1400										
MCC132-16io1	1600										
MCC132-18io1	1800										
MCNA150P2200YA	2200	150	85	235	4300	0.86	2.1	140	0.210	0.11	Y4
MCMA160P1600YA	1600										
MCMA160P1800YA-MI	1800										
MCC161-20io1	2000										
MCC161-22io1	2200	165	85	300	6000	0.80	1.6	125	0.155	0.07	Y4
MCC162-08io1	800										
MCC162-12io1	1200										
MCC162-14io1	1400										
MCC162-16io1	1600	181	85	300	6000	0.88	1.15	125	0.155	0.07	Y4
MCC162-18io1	1800										

×e×ti×e×Modules



X102
ECO-PAC 2



X027a
SOT-227B (miniBLOC)



X141a
SimBus A



X126a
Y4



X131a
Y1



X142a
ComPack



X129a
Y2




X132a
Y1-2-Cu




X143a
SimBus A F PFP

Thyristor Modules – Dual

$I_{TAV} = 180 - 700 \text{ A}$




MCC...io8B




MCC...io1B
MCM/NA...P...

Part Number	$V_{RRM} \ V_{DRM}$	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} \ 45^\circ\text{C} \ 10 \text{ ms}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MCNA180P2200YA	2200	180	85	280	5400	0.85	1.8	140	0.170	0.09	Y4
MCMA200P1600SA	1600	200	90	314	6000	0.81	1.6	140	0.150	0.08	SimBus A
MCMA200P1600YA	1600	200	85	315	6000	0.83	1.43	140	0.170	0.09	Y4
MCMA200P1800YA-MI	1800										
MCC200-14io1	1400	216	85	340	8000	0.80	1.4	125	0.130	0.05	Y4
MCC200-16io1	1600										
MCC200-18io1	1800										
MCK200-18io1	1800	216	85	340	8000	0.80	1.4	125	0.130	0.05	Y4
MCNA220P2200YA	2200	220	85	345	7200	0.84	1.5	140	0.130	0.07	Y4
MCC224-20io1	2000	240	85	400	8000	0.80	0.76	130	0.139	0.04	Y1
MCC224-22io1	2200										
MCC224-24io1	2400										
MCC225-12io1	1200	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCC225-14io1	1400										
MCC225-16io1	1600										
MCC225-18io1	1800	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCNA250P2200PTSF	2200	250	85	400	5900	0.76	2.2	150	0.100	0.05	SimBus F PFP
MCC255-12io1	1200	250	85	450	9000	0.80	0.68	130	0.140	0.04	Y1
MCC255-14io1	1400										
MCC255-16io1	1600										
MCC255-18io1	1800	250	85	450	9000	0.80	0.68	130	0.140	0.04	Y1
MCMA260P1600YA	1600	260	85	408	8300	0.81	1.23	140	0.130	0.08	Y4
MCMA260P1800YA	1800										
MCMA265P1600KA	1600										
MCMA265P1800KA	1800	260	85	408	8500	0.80	0.75	140	0.160	0.04	Y1
MCMA280P1600PTSF	1600	280	85	440	7000	0.83	1.57	150	0.100	0.05	SimBus F PFP
MCC310-08io1	800	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCC310-12io1	1200										
MCC310-14io1	1400										
MCC310-16io1	1600	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCC310-18io1	1800										
MCC312-12io1	1200										
MCC312-14io1	1400	320	85	520	9200	0.80	0.68	140	0.120	0.04	Y1
MCC312-16io1	1600										
MCC312-18io1	1800										
MCNA360P2200PTSF	2200	360	85	570	8400	0.74	1.57	150	0.070	0.04	SimBus F PFP
MCMA400P1600PTSF	1600	400	85	630	10000	0.82	1.14	150	0.070	0.04	SimBus F PFP
MCNA500P2200PTSF	2200	500	85	790	11000	0.75	1.11	150	0.050	0.03	SimBus F PFP
MCMA550P1600PTSF	1600	550	85	860	13000	0.82	0.8	150	0.050	0.03	SimBus F PFP
MCNA650P2200CA	2200	650	85	1020	16000	0.75	0.63	140	0.045	0.02	ComPack
MCMA700P1600CA	1600	700	85	1100	19000	0.82	0.4	140	0.050	0.02	ComPack
MCMA700P1800CA	1800										
MCMA700P1600NCA	1600										
MCMA700P1800NCA	1800	700	85	1100	19000	0.82	0.4	140	0.050	0.02	ComPack

Thyristor Modules – Single

 $I_{TAV} = 32 - 600 \text{ A}$


VCO...




MCO

Part Number	$V_{RRM} \ V_{DRM}$	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10 \text{ ms}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	$\text{m}\Omega$	$^\circ\text{C}$	K/W	K/W	
MCO25-12io1	1200	32	80	50	370	0.86	13.9	150	1.100	0.30	SOT-227B (miniBLOC)
MCO25-16io1	1600										
MCO50-12io1	1200	57	80	90	740	0.88	6.00	150	0.720	0.20	SOT-227B (miniBLOC)
MCO50-16io1	1600										
MCO75-12io1	1200	80	80	125	1070	0.85	5.50	150	0.450	0.10	SOT-227B (miniBLOC)
MCO75-16io1	1600										
MCO100-12io1	1200	101	80	160	1400	0.85	4.50	150	0.350	0.10	SOT-227B (miniBLOC)
MCO100-16io1	1600										
VCO132-12io7	1200	130	85	200	3600	0.80	1.65	150	0.250	0.10	ECO-PAC 2
VCO132-16io7	1600										
MCO150-12io1	1200	158	80	250	2000	0.84	3.50	150	0.200	0.10	SOT-227B (miniBLOC)
MCO150-16io1	1600										
VCO180-12io7	1200	180	90	280	4500	0.75	1.23	150	0.170	0.06	ECO-PAC 2
VCO180-16io7	1600										
MCO450-20io1	2000	464	85	750	15000	0.77	0.42	130	0.072	0.02	Y1-2-Cu
MCO450-22io1	2200										
MCO500-12io1	1200	560	85	880	17000	0.80	0.38	140	0.072	0.02	Y1-2-Cu
MCO500-14io1	1400										
MCO500-16io1	1600	560	85	880	17000	0.80	0.38	140	0.072	0.02	Y1-2-Cu
MCO500-18io1	1800										
MCO600-16io1	1600	600	85	940	15000	0.81	0.40	140	0.065	0.02	Y1-2-Cu
MCO600-18io1	1800										
MCO600-20io1	2000	600	85	940	15000	0.81	0.40	140	0.065	0.02	Y1-2-Cu
MCO600-22io1	2200										

extremeModules

Optional Accessories for Thyristor Diode Modules


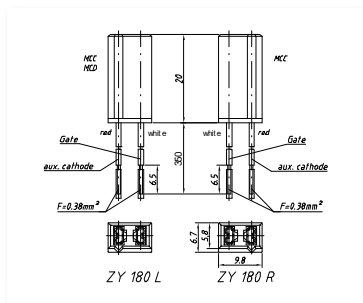


For module type Y1, Y2, Y4 and ComPACK MCC/MCD/MCO/MCMA/MCNA 132, 161 up to 700 (for MCD/MCO only Left-Type):

Keyed gate cathode twin plugs with wire length = 350/480 mm gate = white, cathode = red

Type ZY180Lx (L = left for pin pair 4/5)
Type ZY180Rx (R = right for pin pair 6/7)

Part Number	Description
ZY180L350	Left plug + cable – Length 350 mm
ZY180L480	Left plug + cable – length 480 mm
ZY180LM	Left plug only
ZY180R350	Right plug + cable – length 350 mm
ZY180R480	Right plug + cable – length 480 mm
ZY180RM	Right plug only

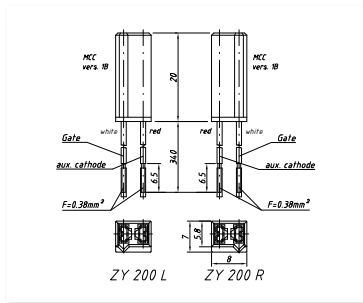

For module type TO-240 package MCC/MCD/CMA/MCNA 19 Up to 120 and 140 (version 1):

Keyed gate cathode twin plugs with wire length = 340/460 mm; gate = white, cathode = red

Type ZY200Lx (L = left for pin pair 4/5)
Type ZY200Rx (R = right for pin pair 6/7)

Part Number	Description
ZY200L340	Left plug + cable – length 340 mm
ZY200L460	Left plug + cable – length 460 mm
ZY200LM	Left plug only
ZY200R340	Right plug + cable – length 340 mm
ZY200R460	Right plug + cable – length 460 mm
ZY200RM	Right plug only

For ZY180 and ZY200: UL 758 Style 3751

Design Information

ForThyristors, Diodes, Thyristor Diode Modules, and Rectifier Bridges

Surge current

The 60 Hz value of I_{TSM} is 10% higher than the 50 Hz value. The I_{TSM} value at T_{VJM} is 10% to 15% lower than the 45 °C value.

Limiting I^2t

50 Hz: $I^2t [A^2s] = I_{TSM} [A] \cdot I_{TSM} [A] \cdot 0.005 [s]$; use rated I_{TSM} value (10 ms). 60 Hz: $I^2t [A^2s] = I_{TSM} [A] \cdot I_{TSM} [A] \cdot 0.0042 [s]$; use 60-Hz-value of I_{TSM} .

Forward current

The average current ratings in tables are mostly specified for temperature conditions of $T_A = 45\text{ °C}$, $T_C = 85\text{ °C}$, or $T_C = 100\text{ °C}$. For other temperature conditions, the current ratings can be calculated using the following formulas, which are applicable up to 400 Hz.

11

$$I_{TAV} = \frac{-V_{T0} = \sqrt{V_{T0}^2 + 4 \cdot k^2 \cdot r_T \cdot P}}{2 \cdot k^2 \cdot r_T} \quad \text{where} \quad P = \frac{T_{VJM} - T_C}{R_{thJC}} \quad \text{or} \quad P = \frac{T_{VJM} - T_A}{R_{thJA}}$$

$$I_{TAV} [A], P [W]; V_{T0} [V]; r_T [W], T_{VJM} [^{\circ}C], T_C [^{\circ}C], T_A [^{\circ}C], R_{thJC} [K/W], R_{thJA} [K/W]$$

- $k^2 = 1$ for DC current
- $k^2 = 2.5$ for sinusoidal half wave current
- $k^2 = 3$ for 120° rectangular current
- $k^2 = 6$ for 60° rectangular current

The average forward current is limited by the RMS current value $I_{T(RMS)}$. When the calculated value I_{TAV} is higher than $I_{T(RMS)} / k$, replace it with $I_{TAV} = I_{T(RMS)} / k$.



X101
ECO-PAC 1



X102
ECO-PAC 2



X103
V1-A-Pack




X024a
ISOPLUS i4-PAC™




X027a
SOT-227B (miniBLOC)



X030a
SMPD -B



1-phase, B2U



3-phase, B6U

Rectifier Bridges with Fast Diodes

Part Number	V _{RRM}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	V	mΩ	°C	K/W	K/W	
1-phase, B2U										
VBE17-06NO7	600	27	85	50	1.18	22.0	150	2.50	0.30	ECO-PAC 1
VBE17-12NO7	1200	19	85	40	1.32	30.0	150	2.50	0.30	ECO-PAC 1
VBE26-06NO7	600	44	85	110	1.13	13.0	150	1.60	0.30	ECO-PAC 1
VBE26-12NO7	1200	32	85	90	1.32	30.0	150	1.60	0.30	ECO-PAC 1
VBE55-06NO7	600	68	100	250	0.98	8.0	150	0.90	0.30	ECO-PAC 1
VBE55-12NO7	1200	59	85	200	1.31	15.0	150	0.90	0.30	ECO-PAC 1
VBE60-06A	600	60	100	250	0.98	8.20	150	1.15	0.10	SOT-227B (miniBLOC)
VBE60-12A	1200	60	70	200	1.31	14.0	150	1.15	0.10	SOT-227B (miniBLOC)
DHG40B1200LB	1200	34	80	150	1.35	42.0	175	1.50	0.50	SMPD-B
DPG60B600LB	600	60	100	250	0.85	17.0	175	1.10	0.40	SMPD-B
FBE22-06N1	600	22	115	50	1.04	24.0	175	3.00	0.20	ISOPLUS i4-PAC™
VBE100-06NO7	600	100	85	600	1.09	4.3.0	150	0.80	0.20	ECO-PAC 2
VBE100-12NO7	1200	100	70	500	1.07	8.20	150	0.80	0.20	ECO-PAC 2
DCG20B650LB *	650	21	80	250	0.74	118.0	175	2.10	0.70	SMPD-B
3-phase, B6U										
DHG60U1200LB	1200	60	80	200	1.35	2.90	150	1.20	0.40	SMPD-B
VUE50-12NO1	1200	50	85	200	1.65	18.20	150	1.20	0.30	V1-A-Pack
VUE22-06NO7	600	34	85	50	1.18	22.0	150	2.50	0.30	ECO-PAC 1
VUE22-12NO7	1200	24	85	40	1.39	55.0	150	2.50	0.30	ECO-PAC 1
VUE35-06NO7	600	56	85	110	1.13	13.0	150	1.60	0.30	ECO-PAC 1
VUE35-12NO7	1200	40	85	90	1.32	30.0	150	1.60	0.30	ECO-PAC 1
VUE75-06NO7	600	86	100	250	0.98	8.0	150	0.90	0.30	ECO-PAC 1
VUE75-12NO7	1200	74	85	200	1.31	15.0	150	0.90	0.30	ECO-PAC 1
FUE30-12N1	1200	30	120	90	0.97	48.0	175	2.30	0.20	ISOPLUS i4-PAC™
VUE130-06NO7	600	130	85	600	1.09	4.30	150	0.80	0.20	ECO-PAC 2
VUE130-12NO7	1200	130	70	500	1.07	8.20	150	0.80	0.20	ECO-PAC 2

ⓈⓈC-ⓈⓈdiodes

Rectifier Bridges Incorporating Fast Diodes

Power-switching semiconductors are used in inverter systems with DC-Link. Due to high switching frequencies, harmonics and line distortion may be generated. It is important that new designs reduce these influences and fulfill the EMI filtering requirements according to EMI/EMC VDE 0871 and other standards.

Noise level can be reduced by up to 10 dB when the input rectifier is equipped with semi-fast diodes and is therefore optimized for turn off, resulting in a lower peak recovery current compared to non-optimized and normal rectifier diodes. The noise level can be further reduced by another 5 dB when using rectifier bridges equipped with fast recovery epitaxial diodes (FRED) like module types VBE (single phase bridge) and VUE (three phase bridge). These are more expensive; however, they may be necessary in some applications to fulfill VDE and other standards.

This behavior has a direct influence on the design of the EMI filter networks with its capacitors and inductors, of which the size and costs can be reduced. More detailed information is available in the Littelfuse application note D98005E "Input Rectifiers with Semi-fast Diodes for DC Link" on www.littelfuse.com.


extremeModules



X024a
ISOPLUS i4-PAC™



X025a
GBFP



X030a
SMPD -B



X027a
SOT-227B (miniBLOC)



X101
ECO-PAC 1



X102
ECO-PAC 2




X116b
FO-B



X103
V1-A-Pack




X122b
PWS-D



X123e
PWS-E


Single-Phase Phase Rectifier Bridges



Single-Phase, B2U


Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@ T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	P _{RSM}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	kW	
1 Phase Rectifier Bridges with Standard Diodes, B2U												
FBO16-12N	1200	400	20	130	150	0.81	32.00	175	3.00	3.20	–	ISOPLUS i4-PAC™
VBO21-08NO7	800	250	20	115	120	0.84	28.80	150	2.50	2.90	–	ECO-PAC 1
VBO21-12NO7	1200	400										
VBO22-08NO8	800	250	14	85	380	0.77	14.20	150	8.00	9.00	–	FO-B
VBO22-12NO8	1200	400										
VBO22-16NO8	1600	500	14	85	380	0.77	14.20	150	8.00	9.00	–	FO-B
VBO22-18NO8	1800	575										
GBO25-12NO1	1200	400	25	105	370	0.74	16.30	175	4.30	4.80	–	GBFP
GBO25-16NO1	1600	500										
VBO36-08NO8	800	250	18	85	550	0.76	9.10	150	7.00	8.00	–	FO-B
VBO36-12NO8	1200	400										
VBO36-16NO8	1600	500	18	85	550	0.76	9.10	150	7.00	8.00	–	FO-B
VBO36-18NO8	1800	575										
FBO40-12N	1200	400	40	130	300	0.79	14.00	175	1.50	1.70	–	ISOPLUS i4-PAC™
VBO40-08NO6	800	250	40	115	320	0.81	12.10	150	1.30	1.40	–	SOT-227B (miniBLOC)
VBO40-12NO6	1200	400										
VBO40-16NO6	1600	500	60	115	550	0.78	8.10	150	1.10	1.50	–	PWS-D
VBO52-08NO7	800	250										
VBO52-12NO7	1200	400	60	115	550	0.78	8.10	150	1.10	1.50	–	PWS-D
VBO52-16NO7	1600	500										
VBO52-18NO7	1800	575	55	105	300	0.82	12.20	150	1.10	1.50	–	ECO-PAC 1
VBO54-08NO7	800	250										
VBO54-12NO7	1200	400	70	105	550	0.81	7.80	150	0.90	1.30	–	ECO-PAC 1
VBO54-16NO7	1600	500										
VBO68-08NO7	800	250	70	110	750	0.78	6.00	150	0.90	1.30	–	PWS-D
VBO68-12NO7	1200	400										
VBO68-16NO7	1600	500	70	110	750	0.78	6.00	150	0.90	1.30	–	PWS-D
VBO72-08NO7	800	250										
VBO72-12NO7	1200	400	70	110	750	0.78	6.00	150	0.90	1.30	–	PWS-D
VBO72-16NO7	1600	500										
VBO72-18NO7	1800	575										

Single-Phase Phase Rectifier Bridges




Single-Phase, B2U


Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
1 Phase Rectifier Bridges with Standard Diodes, B2U											
VBO78-08NO7	800	250	80	115	750	0.81	5.9	150	0.70	1.00	ECO-PAC 2
VBO78-12NO7	1200	400									
VBO78-16NO7	1600	500									
VBO88-08NO7	800	250	90	115	1000	0.80	4.6	150	0.60	0.90	ECO-PAC 2
VBO88-12NO7	1200	400									
VBO88-16NO7	1600	500									
DLA100B800LB	800	400	124	80	400	0.75	4.2	175	1.00	1.45	SMPD-B
DLA100B1200LB	1200										
DMA120B800LB	800	250	130	90	500	0.88	6.4	175	0.80	1.30	
VBO130-08NO7	800	250	130	110	1800	0.77	3.4	150	0.50	0.70	PWS-E
VBO130-12NO7	1200	400									
VBO130-16NO7	1600	500	130	110	1800	0.77	3.4	150	0.50	0.70	PWS-E
VBO130-18NO7	1800	575									
VBO160-08NO7	800	250	160	110	2800	0.74	2.4	150	0.40	0.55	PWS-E
VBO160-12NO7	1200	400									
VBO160-16NO7	1600	500	160	110	2800	0.74	2.4	150	0.40	0.55	PWS-E
VBO160-18NO7	1800	575									



VGO...



VHF



VHFD

Part Number	V _{RRM}	V _{vRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
1 Phase Half Controlled Rectifier Bridges with Freewheeling Diode, B2HKF											
VHF25-08io7	800	250	32	85	200	0.85	27	125	1.30	1.80	ECO-PAC 1
VHF25-12io7	1200	400									
VHFD37-08io1	800	250	36	85	320	0.85	13	125	1.20	1.55	V1-A-Pack
VHFD37-12io1	1200	400									
VHFD37-16io1	1600	500									
1 Phase Half Controlled Rectifier Bridge, B2HZ											
VGO36-16io7	1600	500	36	85	320	0.85	13	125	1.40	2.00	ECO-PAC 1


11eModules



X024a
ISOPLUS i4-PAC™



X025b
GUFP



X030a
SMPD -B



X101
ECO-PAC 1



X102
ECO-PAC 2



X103
V1-A-Pack



X116b
FO-B



X122a
PWS-D




X122c
PWS-D Flat



X123c
PWS-E

Three-Phase Rectifier Bridges

Three-Phase Rectifier Bridges With Standard Diodes, B6U




Three-Phase, B6U

Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
FPO											
FUO22-12N	1200	400	30	120	150	0.81	31.0	175	3.00	3.20	ISOPLUS i4-PAC™
FUO22-16N	1600	500									
VUO25-08NO8	800	250	20	85	380	0.77	14.2	150	8.00	9.00	FO-B
VUO25-12NO8	1200	400									
VUO25-14NO8	1400	440	20	85	380	0.77	14.2	150	8.00	9.00	FO-B
VUO25-16NO8	1600	500									
VUO25-18NO8	1800	575	30	105	120	0.84	28.8	150	2.50	2.90	ECO-PAC 1
VUO28-08NO7	800	250									
VUO28-12NO7	1200	400	27	85	550	0.76	9.1	150	7.00	8.00	FO-B
VUO36-08NO8	800	250									
VUO36-12NO8	1200	400	27	85	550	0.76	9.1	150	7.00	8.00	FO-B
VUO36-14NO8	1400	440									
VUO36-16NO8	1600	500	45	110	300	0.81	14.9	150	1.70	2.10	V1-A-Pack
VUO36-18NO8	1800	575									
VUO34-08NO1	800	250	45	110	300	0.81	14.9	150	1.70	2.10	V1-A-Pack
VUO34-12NO1	1200	400									
VUO34-16NO1	1600	500	40	90	370	0.74	16.3	175	4.30	4.80	GUFP
VUO34-18NO1	1800	575									
GUO40-08NO1	800	250	40	90	370	0.74	16.3	175	4.30	4.80	GUFP
GUO40-12NO1	1200	400									
GUO40-16NO1	1600	500	40	90	370	0.74	16.3	175	4.30	4.80	GUFP
DMA40U1800GU	1800	575									
DNA40U2200GU	2200	690	50	120	270	0.78	17.0	175	2.10	2.30	ISOPLUS i4-PAC™
FUO50-16N	1600	500									
VUO52-08NO1	800	250	60	110	350	0.83	11.5	150	1.30	1.60	V1-A-Pack
VUO52-12NO1	1200	400									
VUO52-16NO1	1600	500	60	110	350	0.83	11.5	150	1.30	1.60	V1-A-Pack
VUO52-18NO1	1800	500									
VUO52-20NO1	2000	575	60	110	350	0.83	11.5	150	1.30	1.60	V1-A-Pack
VUO52-22NO1	2200	690									
VUO62-08NO7	800	250	60	120	550	0.78	8.1	150	1.10	1.50	PWS-D
VUO62-12NO7	1200	400									

Three-Phase Rectifier Bridges

Three-Phase Rectifier Bridges With Standard Diodes, B6U



Three-Phase, B6U

Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
VUO62-14NO7	1400	440	60	120	550	0.78	8.1	150	1.10	1.50	PWS-D
VUO62-16NO7	1600	500									
VUO62-18NO7	1800	575									
VUO64-16NO7	1600	500	60	120	550	0.78	8.1	150	1.10	1.50	PWS-D Flat
VUO68-08NO7	800	250	70	105	300	0.82	12.2	150	1.10	1.50	ECO-PAC 1
VUO68-12NO7	1200	400									
VUO68-16NO7	1600	500									
VUO80-08NO1	800	250	80	110	600	0.81	7.8	150	1.10	1.40	V1-A-Pack
VUO80-12NO1	1200	400									
VUO80-16NO1	1600	500									
VUO80-18NO1	1800	575	80	110	600	0.81	7.8	150	1.10	1.40	V1-A-Pack
VUO82-08NO7	800	250									
VUO82-12NO7	1200	400									
VUO82-14NO7	1400	440	90	115	750	0.78	6.0	150	0.90	1.30	PWS-D
VUO82-16NO7	1600	500									
VUO82-18NO7	1800	575									
VUO84-16NO7	1600	500	90	115	750	0.78	6.0	150	0.90	1.30	PWS-D Flat
VUO86-08NO7	600	125	90	105	550	0.81	7.8	150	0.90	1.30	ECO-PAC 1
VUO86-12NO7	1200	400									
VUO86-16NO7	1600	500									
DMA90U1800LB	1800	575	90	110	350	0.81	12.7	175	1.10	1.50	SMPD-B
DNA90U2200LB	2200	690									
VUO98-08NO7	800	250	105	115	750	0.81	5.9	150	0.70	1.00	ECO-PAC 2
VUO98-12NO7	1200	400									
VUO98-16NO7	1600	500									
VUO105-18NO7	1800	575	120	105	1500	0.78	4.8	150	0.80	1.10	X121a
VUO110-08NO7	800	250	125	110	1200	0.79	4.5	150	0.70	1.00	PWS-E
VUO110-12NO7	1200	400									
VUO110-16NO7	1600	500	125	110	1200	0.79	4.5	150	0.70	1.00	PWS-E
VUO110-18NO7	1800	575									
MDMA120U1600VA	1600	500	120	110	850	0.79	5.9	150	0.65	0.85	V1-A-Pack
MDMA150U1600VA	1600	500	150	110	1100	0.83	4.7	150	0.50	0.70	V1-A-Pack
VUO121-16NO1	1600	500	120	105	700	0.80	7.6	150	0.65	0.75	E2-Pack
VUO122-08NO7	800	250	125	115	1000	0.80	4.6	150	0.60	0.90	ECO-PAC 2
VUO122-12NO7	1200	400									
VUO122-16NO7	1600	500									


×e×ti×e×Modules




X027a
SOT-227B (miniBLOC)



X103
V1-A-Pack




X104
V2-Pack



X112
E2-Pack



X112a
E2-Pack PFP



X113a
E3-Pack PFP




X123c
PWS-E




X123h
PWS-E Flat

Three-Phase Rectifier Bridges


Three-Phase Rectifier Bridges With Standard Diodes, B6U



DM/NA...YA...



DM/NA...YC...





VUO..DM/NA..U..
MDM/NA..U..

Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
DNA90YA2200NA	2200	690	90	85	370	0.86	11.4	150	1.20	1.30	SOT-227B (miniBLOC)
DNA90YC2200NA	2200	690									
DMA150YA1600NA	1600	500	150	95	700	0.82	6.3	150	0.60	0.70	SOT-227B (miniBLOC)
DMA150YC1600NA	1600	500									
DMA200YA1600NA	1600	500	200	100	1000	0.86	4.4	150	0.45	0.55	SOT-227B (miniBLOC)
DMA200YC1600NA	1600	500									
DMA240YA1600NA	1600	500	240	100	1300	0.86	4.0	150	0.35	0.45	SOT-227B (miniBLOC)
DMA240YC1600NA	1600	500									
VUO160-08NO7	800	250	175	110	1800	0.77	3.4	150	0.50	0.70	PWS-E
VUO160-12NO7	1200	400									
VUO160-16NO7	1600	500	175	110	1800	0.77	3.4	150	0.50	0.70	PWS-E
VUO160-18NO7	1800	575									
VUO162-16NO7	1600	500	175	110	1800	0.77	3.4	150	0.50	0.70	PWS-E FLat
VUO190-08NO7	800	250									
VUO190-12NO7	1200	400	240	110	2800	0.74	2.4	150	0.40	0.55	PWS-E
VUO190-16NO7	1600	500									
VUO190-18NO7	1800	575	240	110	2800	0.74	2.4	150	0.40	0.55	PWS-E
VUO192-16NO7	1600	500									
MDNA240U2200ED	2200	690	240	90	1500	0.79	5.1	150	0.35	0.45	E2-Pack
MDMA450U1600PTEH	1600	450	500	85	2400	0.82	2.7	150	0.20	0.10	E3-Pack PFP
MDMA660U1600PTEH	1600	500	660	85	5000	0.77	1.8	150	0.15	0.08	E3-Pack PFP
MDNA660U2200PTEH	2200	690									
MDMA900U1600PTEH	1600	500	900	85	8000	0.76	1.4	150	0.10	0.05	E3-Pack PFP

Three-Phase Rectifier Bridges



Three-Phase Rectifier Bridges With IGBT and Fast Diode for Brake Unit



Part Number	Rectifier			IGBT		Fast Diode			Package
	V_{RRM}	I_{dAV}	@ T_C	V_{CES}	I_{C80}	V_{RRM}	$I_{F(AV)}$	t_{rr}	
	V	A	°C	V	A	V	A	ns	
VUB72-12NOXT	1200	75	110	1200	40	1200	21	130	V1-A-Pack
VUB72-16NOXT	1600								
VUI72-16NOXT	1600	75	110	1200	40	—	—	—	V1-A-Pack
VUB116-16NOXT	1600	120	105	1200	84	1200	32	150	E2-Pack
VUB120-16NOX	1600	180	90	1200	140	1200	32	300	V2-Pack
VUB120-16NOXT	1600								
VUB135-22NO1	2200	150	105	1700	80	1700	33	900	E2-Pack
VUB145-16NOXT	1600	150	105	1200	140	1200	32	300	E2-Pack
VUB160-16NOX	1600	180	90	1200	175	1200	32	150	V2-Pack
VUB160-16NOXT	1600								
MDMA210UB1600PTED	1600	210	85	1200	84	1200	59	350	E2-Pack PFP
MDNA210UB2200PTED	2200	210	85	1700	100	1700	54	550	E2-Pack PFP
MDNA210UB2200TED	2200	210	85	1700	100	1700	54	550	E2-Pack
MDMA240UB1600ED	1600	240	85	1200	140	1200	59	350	E2-Pack
MDMA280UB1600PTED	1600	280	85	1200	140	1200	59	350	E2-Pack PFP
MDNA280UB2200PTED	2200	280	85	1700	100	1700	54	550	E2-Pack PFP
MDMA360UB1600PTED	1600	360	85	1200	175	1200	90	350	E2-Pack PFP
MDNA360UB2200PTED	2200	360	85	1700	145	1700	83	550	E2-Pack PFP
MDMA450UB1600PTED	1600	450	85	1200	175	1200	90	350	E2-Pack PFP
MDMA450UB1600PTEH	1600	450	85	1200	175	1200	90	350	E3-Pack PFP

Three-Phase Rectifier Bridges

With IGBT and Fast Diode for Brake Unit



Part Number	Rectifier			IGBT		Fast Diode			Package
	V_{RRM}	I_{dAV}	@ T_C	V_{CES}	I_{C80}	V_{RRM}	$I_{F(AV)}$	t_{rr}	
	V	A	°C	V	A	V	A	ns	
VVZB120-16ioX	1600	180	85	1200	140	1200	32	300	V2-Pack
MCNA120UI2200TED	2200	117	80	1700	80	1700	50	550	E2-Pack
MCNA120UI2200PED	2200	120	80	1700	80	1700	50	550	E2-Pack PFP
VVZB135-16ioXT	1600	150	85	1200	84	1200	32	150	E2-Pack
VVZB170-16ioXT	1600	180	85	1200	140	1200	32	300	E2-Pack
MCMA240UI1600ED	1600	240	80	1200	140	1200	59	350	E2-Pack
MCMA240UI1600PED	1600	240	80	1200	140	1200	59	350	E2-Pack PFP
MCMA245UI1600ED	1600	240	80	1200	175	1200	90	350	E2-Pack


×e×ti×e×Modules



X027a
SOT-227B (miniBLOC)




X103
V1-A-Pack



X113
E3-Pack




X253b
UGB



X030a
SMPD -B



X105a
V1-B-Pack



X123b
PWS-E




X254
VG-A



X101
ECO-PAC 1



X105c
V1-B-Pack



X251
UGE




X255
VG-B



X102
ECO-PAC 2




X112
E2-Pack




X253
UGD


Three-Phase Rectifier Bridges




...UC...
VUC



VVZ



VVZF
...UJ...




VTO


Part Number	V _{RRM}	V _{VRMS}	I _{dAVM}	@T _H	I _{FSM/TSM} 10 ms, 45 °C	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thJH}	Package	
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W		
3 Phase Rectifier Bridges with Standard or Fast Diodes (t _r = 1.5 ms) & Integrated Softstart Thyristor												
VUC36-12go2	1200	400	34	85	Dio.	300	1.20	16	125	1.40	2.00	V1-B-Pack (a)
					Thy.	400	0.85	10	125	0.90	1.10	
VUC36-16go2	1600	500	34	85	Dio.	300	1.20	16	125	1.40	2.00	
					Thy.	400	0.85	10	125	0.90	1.10	
MDMA60UC1600VC	1600	500	60	110	Dio.	350	0.83	11.5	150	1.30	1.60	V1-B-Pack (c)
					Thy.	800	0.89	5.3	140	0.70	0.90	
MDMA360UC1600TED	1600	500	360	85	Dio.	1900	0.82	3.4	150	0.25	0.35	E2-Pack
					Thy.	2400	0.84	3.1		0.17	0.25	

Part Number	V _{RRM}	V _{VRMS}	I _{dAVM}	@T _H	I _{FSM/TSM} 10 ms, 45 °C	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
3 Phase Half-Controlled Rectifier Bridges, B6HK											
VVZ39-08ho7	800	250	39	85	200	0.85	27.0	125	1.30	1.80	ECO-PAC 1
VVZ39-12ho7	1200	400									
VVZ40-12io1	1200	400	34	100	320	0.85	15.0	125	1.00	1.60	V1-B-Pack (a)
VVZ40-16io1	1600	500									
CLE90UH1200TLB	1200	400	90	90	350	0.92	13.0	150	0.90	1.30	SMPD-B
VVZ110-12io7	1200	400	110	85	1150	0.85	6.0	125	0.65	0.80	PWS-E
VVZ175-12io7	1200	400	167	85	1500	0.85	3.5	125	0.46	0.55	PWS-E
VVZ175-16io7	1600	500									
MCMA450UH1600TEH	1600	500	450	90	2400	0.84	3.1	150	0.17	0.25	E3-Pack
3 Phase Half-Controlled Rectifier Bridges with Freewheeling Diodes,B6HKF											
MCMA120UJ1800ED	1800	575	117	80	500	0.89	13.6	150	0.65	0.75	E2-Pack
3 Phase Full-Controlled Rectifier Bridges, B6C											
VTO39-08ho7	800	250	39	85	200	0.85	27.0	125	1.30	1.80	ECO-PAC 1
VTO39-12ho7	1200	400									


AC Controller–1, 2, & 3 Phase

 $I_{RMS} = 35\text{--}230\text{ A}$ 

MMO/CLA...MB..




VW 2x..




VWO

Part Number		V_{RRM}	V_{VRMS}	I_{RMS}	@ T_C	$I_{TSM}\ 10\text{ ms}, 45^\circ\text{C}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thJH}	Package
		V	V	A	$^\circ\text{C}$	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
1 Phase	MMO62-12io6	1200	400	66	95	400	0.87	13.6	150	0.90	1.10	SOT-227B (miniBLOC)
	MMO62-16io6	1600	500									
	MMO74-12io6	1200	400	88	95	600	0.87	10.5	150	0.70	0.80	SOT-227B (miniBLOC)
	MMO74-16io6	1600	500									
	MMO90-12io6	1200	400	110	95	800	0.88	6.0	150	0.60	0.70	SOT-227B (miniBLOC)
	MMO90-14io6	1400	440									
	MMO90-16io6	1600	500									
	CLA110MB1200NA	1200	400	110	110	1100	0.78	4.9	150	0.55	0.65	SOT-227B (miniBLOC)
	MMO110-12io7	1200	400	112	85	1000	0.85	5.6	150	0.80	0.92	ECO-PAC 1
	MMO110-14io7	1400	440									
	MMO140-12io7	1200	400	130	85	1150	0.85	5.2	150	0.70	0.82	ECO-PAC 1
	MMO140-16io7	1600	500									
	MMO175-12io7	1200	400	175	85	1500	0.85	3.7	150	0.50	0.62	ECO-PAC 1
	MMO175-16io7	1600	500									
2 Phase	MMO230-12io7	1200	400	230	85	2250	0.8	2.4	125	0.26	0.46	ECO-PAC 2
	MMO230-16io7	1600	500									
	VW2x60-12io1	1200	400	2×60	85	520	0.85	11.0	125	0.92	1.22	V1-A-Pack
	VW2x60-14io1	1400	440									
	VW2x60-16io1	1600	500									
3 Phase	VWO35-08ho7	800	250	3×35	85	200	0.85	27.0	125	1.30	1.80	ECO-PAC 1
	VWO35-12ho7	1200	400									


Single Phase and Three-Phase High Voltage Rectifier Modules



UGE



UGB




UGD


Part Number	V_{RRM}	$I_{dAV}^{1/2}$	$I_{FSM}\ 10\text{ ms}, 45^\circ\text{C}$	V_{F0}	r_F	T_{VJM}	R_{thJA1}^1	R_{thJA2}^2	Package
	V	V	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
UGE0421AY4	3200	23 / 7.4	300	1.70	16	150	1.9	7.1	UGE
UGE0221AY4	4800	10 / 3.8	180	2.55	90	150	1.7	8.0	UGE
UGE1112AY4	8000	4.2 / 2.0	120	4.25	215	150	4.2	10.0	UGE
UGE3126AY4	24000	2.0 / 0.8	70	12.00	1800	150	2.7	8.7	UGE
UGB3132AD	4800	1.3	60	—	—	150	—	—	UGB
UGB6124AG	10500	1.0	50	—	—	150	—	—	UGB
UGD6123AG	7200	1.8	50	—	—	150	—	—	UGD
UGD8124AG	10500	1.2	50	—	—	150	—	—	UGD

¹ for oil-cooling with cooling plate, Φ_{hole} 35 Φ ² for natural air cooling without cooling plate, Φ_{hole} 45 Φ


Braking Rectifier Assemblies



VGF 0136 AH



VGF 0136 AB




VGB 0124 AY7

Part Number	$V_{VRMS}\ \text{typ.}$	$V_{dAV}\ \text{typ.}$	$I_{dAVM}\ \text{typ.}$	$I_{dAVM}\ \text{max.}$	$V_{RRM}\ \text{max.}$	$I_{FSM}\ \text{max.}$	$I^2t\ \text{max.}$	Package
	V	V	A	A	V	A	A ^2s	
VGB0124AY7a	380	340	1.0	1.0	1400	60	28	VG-A
VGF0136AB	1000	440	1.2	1.5	2800	80	40	VG-B

Littelfuse

Capsule Devices – Excluding IGBT's

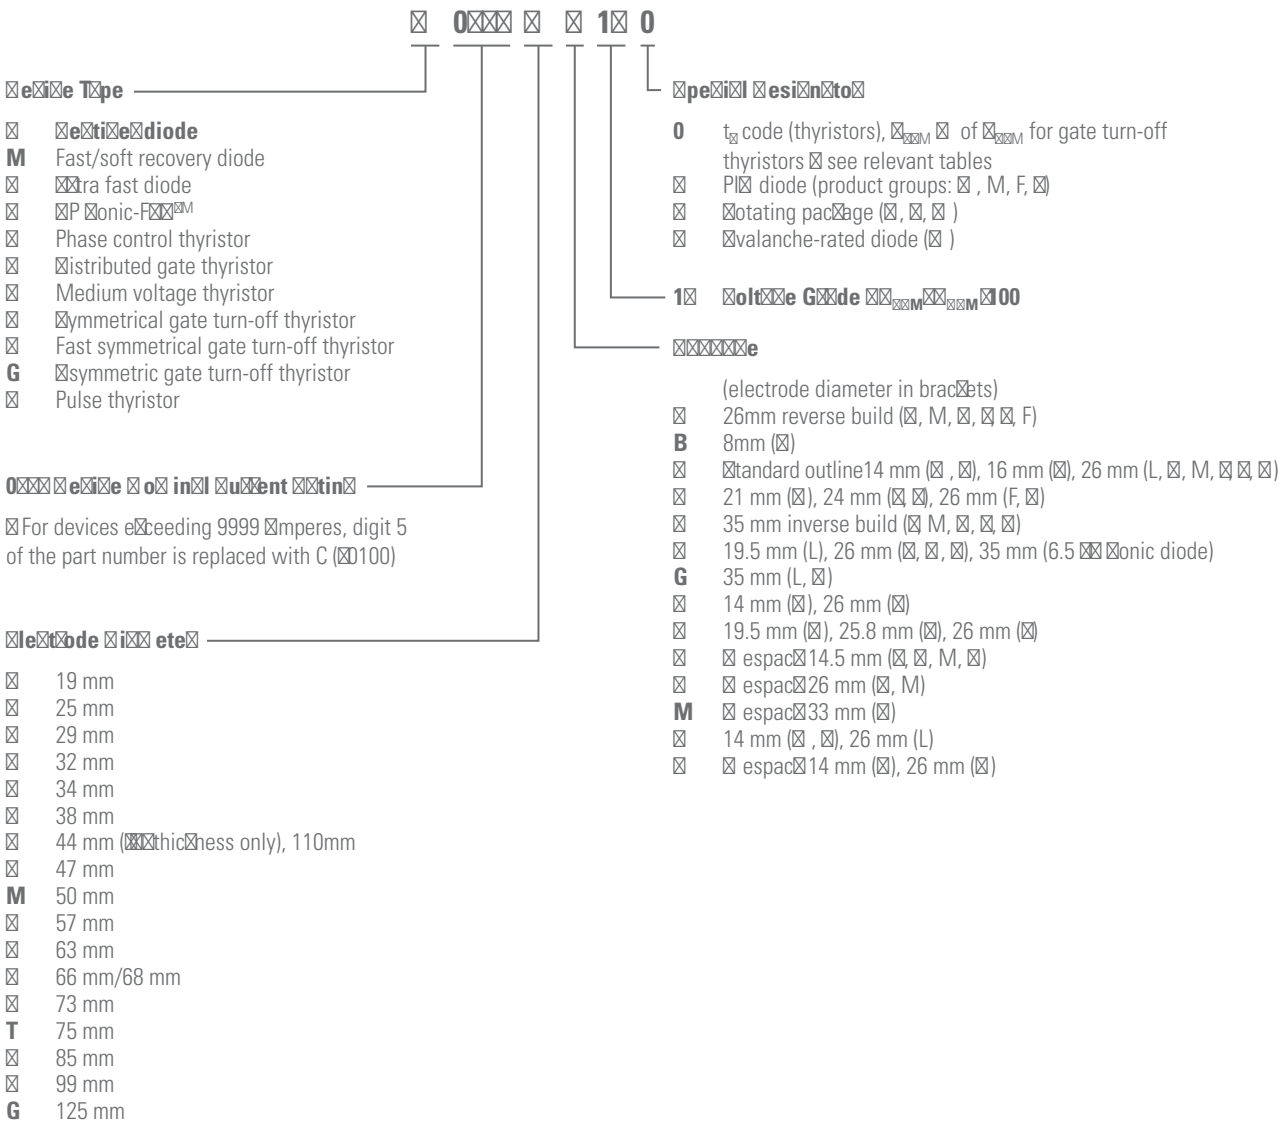

t _q Code			
v	No Code		
A	10	M	70
B	12	N	100
C	15	P	120
D	20	R	140
E	25	S	160
F	30	T	200
G	35	V	250
H	40	W	300
J	50	X	400
K	60	Y	500
L	65	Z	1000

V _{RRM} % of V _{DRM} for GTO's (S and H types only)	
0	100%
D	80%
Y	100 V

Rectifiers



W1
Weight 70 g



W2
Weight 80 g



W3
Weight 140 g



W4
Weight 340 g



W5
Weight 510 g



W6
Weight 1 kg



W37
Weight 510 g



W43
Weight 800 g



W54
Weight 530 g



W89
Weight 1.3 kg



W94
Weight 1.6 kg



W120
Weight 450 g



W121
Weight 330 g



W123
Weight 330 g

Rectifier Diodes—Capsule Types



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° Sine	120° Rect.	
	V	A	A	A²s	V	mΩ	°C	K/W	K/W	
W0507YH420	4200	505	7600	289 × 10³	0.970	0.880	160	0.1000	0.1170	W3
W0507YH450	4500	505	7600	289 × 10³	0.970	0.880	160	0.1000	0.1170	W3
W0642WC160	1600	680	5500	151 × 10³	1.070	0.676	190	0.0900	0.0980	W1
W0642WC200	2000	680	5500	151 × 10³	1.070	0.676	190	0.0900	0.0980	W1
W0642WC240	2400	680	5500	151 × 10³	1.070	0.676	190	0.0900	0.0980	W1
W0790LG650	6500	790	6000	180 × 10³	0.919	1.249	150	0.0394	0.0445	W120
W0880LC620	6200	880	6000	180 × 10³	0.919	1.249	150	0.033	0.04	W4
W0880LC650	6500	880	6000	180 × 10³	0.919	1.249	150	0.033	0.04	W4
W0880LC680	6800	880	6000	180 × 10³	0.919	1.249	150	0.033	0.04	W4
W0925LG500	5000	925	7200	259 × 10³	1.000	0.702	150	0.0394	0.0445	W120
W0925LG560	5600	925	7200	259 × 10³	1.000	0.702	150	0.0394	0.0445	W120
W0925LG600	6000	925	7200	259 × 10³	1.000	0.702	150	0.0394	0.0445	W120
W0944WC120	1200	944	9000	405 × 10³	0.790	0.342	190	0.0900	0.0980	W1
W0944WC150	1500	944	9000	405 × 10³	0.790	0.342	190	0.0900	0.0980	W1
W1032LC500	5000	1032	7200	259 × 10³	1.000	0.702	150	0.0330	0.0400	W4
W1032LC560	5600	1032	7200	259 × 10³	1.000	0.702	150	0.0330	0.0400	W4
W1032LC600	6000	1032	7200	259 × 10³	1.000	0.702	150	0.0330	0.0400	W4
W1060LG420	4200	1060	9200	423 × 10³	1.000	0.575	160	0.0394	0.0445	W120
W1060LG450	4500	1060	9200	423 × 10³	1.000	0.575	160	0.0394	0.0445	W120
W1074YC200	2000	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W2
W1074YC260	2600	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W2
W1074YC320	3200	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W2
W1074YH200	2000	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W3
W1074YH260	2600	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W3
W1074YH320	3200	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W3
W1185LC420	4200	1185	9200	423 × 10³	1.000	0.575	160	0.0330	0.0393	W4
W1185LC450	4500	1185	9200	423 × 10³	1.000	0.575	160	0.0330	0.0393	W4
W1260LG320	3200	1260	10600	562 × 10³	0.900	0.388	160	0.0394	0.0445	W120
W1260LG360	3600	1260	10600	562 × 10³	0.900	0.388	160	0.0394	0.0445	W120
W1263YC160	1600	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W2
W1263YC220	2200	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W2
W1263YC250	2500	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W2
W1263YH160	1600	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W3
W1263YH200	2000	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W3

Rectifier Diodes—Capsule Types

Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° Sine	120° Rect.	
	V	A	A	A ² s	V	mΩ	°C	K/W	K/W	
W1263YH250	2500	1263	11700	684 × 10 ³	0.870	0.330	175	0.0500	0.0610	W3
W1360LG240	2400	1360	12700	800 × 10 ³	0.870	0.323	160	0.0394	0.0445	W120
W1360LG300	3000	1360	12700	800 × 10 ³	0.870	0.323	160	0.0394	0.0445	W120
W1748LC180	1800	1748	15400	118 × 10 ³	0.870	0.280	175	0.0330	0.0393	W4
W1748LC250	2500	1748	15400	118 × 10 ³	0.870	0.280	175	0.0330	0.0393	W4
W1856NC400	4000	1856	16000	128 × 10 ³	0.975	0.348	160	0.0220	0.0255	W5
W1856NC500	5000	1856	16000	128 × 10 ³	0.975	0.348	160	0.0220	0.0255	W5
W1975MCG20	6200	1975	18000	1.62 × 10 ⁶	0.95	0.51	150	0.014	0.0158	W54
W1975MCG50	6500	1975	18000	1.62 × 10 ⁶	0.950	0.510	150	0.0140	0.0158	W54
W1975MCG80	6800	1975	18000	1.62 × 10 ⁶	0.950	0.510	150	0.0140	0.0158	W54
W2054NC420	4200	2054	19000	1.81 × 10 ⁶	0.800	0.300	160	0.0220	0.0274	W5
W2054NC450	4500	2054	19000	1.81 × 10 ⁶	0.800	0.300	160	0.0220	0.0274	W5
W2058LC100	1000	2058	19500	1.90 × 10 ⁶	0.790	0.192	175	0.0330	0.0393	W4
W2058LC120	1200	2058	19500	1.90 × 10 ⁶	0.790	0.192	175	0.0330	0.0393	W4
W2058LC140	1400	2058	19500	1.90 × 10 ⁶	0.790	0.192	175	0.0330	0.0393	W4
W2115MCG520	5200	2122	19000	1.81 × 10 ⁶	1.074	0.405	150	0.0140	0.0158	W54
W2115MCG560	5600	2122	19000	1.81 × 10 ⁶	1.074	0.405	150	0.0140	0.0158	W54
W2115MCG600	6000	2122	19000	1.81 × 10 ⁶	1.074	0.405	150	0.0140	0.0158	W54
W2134NC360	3600	2134	20000	2.00 × 10 ⁶	0.865	0.260	160	0.0220	0.0255	W5
W2134NC400	4000	2134	20000	2.00 × 10 ⁶	0.865	0.260	160	0.0220	0.0255	W5
W2624NC240	2400	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W5
W2624NC280	2800	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W5
W2624ND240	2400	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W37
W2624ND280	2800	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W37
W2820VC420	4200	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W6
W2820VC450	4500	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W6
W2820VF420	4200	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W43
W2820VF450	4500	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W43
W2830HE520	5200	2830	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0123	0.0133	W123
W2830HE560	5600	2830	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0123	0.0133	W123
W2830HE600	6000	2830	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0123	0.0133	W123
W2865HA620	6200	2862	32400	5.25 × 10 ⁶	0.982	0.308	150	0.0105	0.0116	W121
W2865HA650	6500	2862	32400	5.25 × 10 ⁶	0.982	0.308	150	0.0105	0.0116	W121
W2865HA680	6800	2862	32400	5.25 × 10 ⁶	0.982	0.308	150	0.0105	0.0116	W121
W2899MCG460	4600	2899	25400	3.23 × 10 ⁶	0.996	0.222	160	0.0140	0.0158	W54
W2899MCG480	4800	2899	25400	3.23 × 10 ⁶	0.996	0.222	160	0.0140	0.0158	W54
W3082MCG420	4200	3120	26000	3.23 × 10 ⁶	0.923	0.192	160	0.0140	0.0160	W54
W3082MCG450	4500	3120	26000	3.23 × 10 ⁶	0.923	0.192	160	0.0140	0.0160	W54
W3090HA520	5200	3110	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0105	0.0116	W121
W3090HA560	5600	3110	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0105	0.0116	W121
W3090HA600	6000	3110	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0105	0.0116	W121
W3128VC360	3600	3128	30000	5.12 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W6
W3128VC400	4000	3128	30000	5.12 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W6
W3128VF360	3600	3128	30000	4.50 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W43
W3128VF400	4000	3128	30000	4.50 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W43
W3270NC200	2000	3270	28000	3.92 × 10 ⁶	0.826	0.104	175	0.0220	0.0255	W5
W3270NC220	2200	3270	28000	3.92 × 10 ⁶	0.826	0.104	175	0.0220	0.0255	W5
W3270NC22A ¹	2200	3239	27600	3.81 × 10 ⁶	0.818	0.108	175	0.0220	0.0255	W5
W3455QK200	2000	3455	20000	2.00 × 10 ⁶	0.940	0.139	180	0.0170	0.0207	WD2
W3455QK220	2200	3455	20000	2.00 × 10 ⁶	0.940	0.139	180	0.0170	0.0207	WD2
W3477MCG360	3600	3470	28200	3.98 × 10 ⁶	0.908	0.146	160	0.0140	0.0158	W54
W3477MCG400	4000	3470	28200	3.98 × 10 ⁶	0.908	0.146	160	0.0140	0.0158	W54
W3630TJ650	6500	3630	35000	6.125 × 10 ⁶	0.916	0.262	150	0.0080	0.0085	W89
W3630TE650	6500	3630	35000	6.125 × 10 ⁶	0.916	0.262	150	0.0080	0.0085	W94
W3697VC220	2200	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W6
W3697VC280	2800	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W6
W3697VF220	2200	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W43
W3697VF280	2800	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W43
W3708MCG320	3200	3753	30000	4.50 × 10 ⁶	0.958	0.112	160	0.0140	0.0158	W54

Microelectronics



W5
Weight 510 g



W42
Weight 1.2 kg



W94
Weight 1.6 kg



WD7
Weight 200 g



W6
Weight 1 kg



W43
Weight 800 g



WD2
Weight 200 g



W111
Weight 1.6 kg



W7
Weight 1.7 kg



W54
Weight 530 g



WD3
Weight 270 g



W112
Weight 2.1 kg



W37
Weight 510 g



W89
Weight 1.3 kg



WD5
Weight 1.2 kg



WD6
Weight 1.5 kg

Rectifier Diodes—Capsule Types



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{TO}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° Sine	120° Rect.	
			A	A²s	V	mΩ		K/W	K/W	
W3708MC350	3500	3753	30000	4.50 × 10 ⁶	0.958	0.112	160	0.0140	0.0158	W54
W3743ZC400	4000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W7
W3743ZC450	4500	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W7
W3743ZC500	5000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W7
W3743ZD400	4000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W42
W3743ZD450	4500	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W42
W3743ZD500	5000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W42
W3841VC300	3000	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W6
W3841VC340	3400	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W6
W3841VF300	3000	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W43
W3841VF340	3400	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W43
W3842MC240	2400	3842	35100	6.16 × 10 ⁶	0.831	0.118	160	0.0140	0.0158	W54
W3842MC280	2800	3842	35100	6.16 × 10 ⁶	0.831	0.118	160	0.0140	0.0158	W54
W3842MC28A ¹	2800	3842	35100	6.16 × 10 ⁶	0.831	0.118	160	0.0140	0.0158	W54
W3864QK120	1200	3864	22200	2.46 × 10 ⁶	0.861	0.109	180	0.0170	0.0210	WD2
W3864QK150	1500	3864	22200	2.46 × 10 ⁶	0.861	0.109	180	0.0170	0.0210	WD2
W3864QK180	1800	3864	22200	2.46 × 10 ⁶	0.861	0.109	180	0.0170	0.0210	WD2
W4096ZC420	4200	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W7
W4096ZC450	4500	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W7
W4096ZD420	4200	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W42
W4096ZD450	4500	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W42
W4205TJ520	5200	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W89
W4205TJ560	5600	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W89
W4205TJ600	6000	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W89
W4205TE520	5200	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W94
W4205TE560	5600	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W94
W4205TE600	6000	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W94
W4534NC030	300	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W5
W4534NC060	600	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W5
W4534ND030	300	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W37
W4534ND060	600	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W37
W4693QK050	500	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD2
W4693QK080	800	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD2
W4693QR050	500	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD7
W4693QR080	800	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD7

¹ Avalanche Rated Diode

Rectifier Diodes—Capsule Types

Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@ T _{JM}			180° Sine	120° Rect.	
	V	A	A	A ² s	V	mΩ	°C	K/W	K/W	
W4713HL300	3000	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD5
W4713HL350	3500	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD5
W4713HM300	3000	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD6
W4713HM350	3500	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD6
W4767MC180	1800	4755	38000	7.22 × 10 ⁶	0.827	0.083	175	0.0140	0.0158	W54
W4767MC220	2200	4755	38000	7.22 × 10 ⁶	0.827	0.083	175	0.0140	0.0158	W54
W5092ZC320	3200	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W7
W5092ZC350	3500	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W7
W5092ZD320	3200	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W42
W5092ZD350	3500	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W42
W5130MK240	2400	5130	42000	8.82 × 10 ⁶	0.910	0.070	175	0.0130	0.0149	WD3
W5130MK280	2800	5130	42000	8.82 × 10 ⁶	0.910	0.070	175	0.0130	0.0149	WD3
W5139TJ450	4500	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W89
W5139TJ480	4800	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W89
W5139TE450	4500	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W94
W5139TE480	4800	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W94
W5282ZC240	2400	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W7
W5282ZC300	3000	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W7
W5282ZD240	2400	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W42
W5282ZD300	3000	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W42
W5334MK200	2000	5334	46800	10.95 × 10 ⁶	0.892	0.069	180	0.0130	0.0149	WD3
W5334MK220	2200	5334	46800	10.95 × 10 ⁶	0.892	0.069	180	0.0130	0.0149	WD3
W5636MC120	1200	5636	46000	10.58 × 10 ⁶	0.698	0.059	175	0.0140	0.0160	W54
W5636MC150	1500	5636	46000	10.58 × 10 ⁶	0.698	0.059	175	0.0140	0.0160	W54
W5696VC100	1000	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W6
W5696VC140	1400	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W6
W5696VF100	1000	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W43
W5696VF140	1400	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W43
W5715ED520	5200	5715	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0060	0.0063	W112
W5715ED560	5600	5715	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0060	0.0063	W112
W5715ED600	6000	5715	66000	18.36 × 10 ⁶	0.863	0.135	150	0.0060	0.0063	W112
W5838ZC180	1800	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W7
W5838ZC220	2200	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W7
W5838ZD180	1800	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W42
W5838ZD220	2200	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W42
W5984TJ360	3600	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W89
W5984TJ400	4000	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W89
W5984TE360	3600	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W94
W5984TE400	4000	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W94
W6262ZC200	2000	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W7
W6262ZC240	2400	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W7
W6262ZD200	2000	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W42
W6262ZD240	2400	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W42
W6360EC520	5200	6360	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0050	0.0054	W111
W6360EC560	5600	6360	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0050	0.0054	W111
W6360EC600	6000	6360	66000	18.36 × 10 ⁶	0.863	0.135	150	0.0050	0.0054	W111
W6672TE320	3200	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W94
W6672TE350	3500	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W94
W6672TJ320	3200	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W89
W6672TJ350	3500	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W89
W7045MC030	300	7045	54000	14.60 × 10 ⁶	0.793	0.033	190	0.0140	0.0158	W54
W7045MC060	600	7045	54000	14.60 × 10 ⁶	0.793	0.033	190	0.0140	0.0158	W54
W8405ZC100	1000	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W7
W8405ZC140	1400	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W7
W8405ZD100	1000	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W42
W8405ZD140	1400	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W42
W8570TJ180	1800	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W89
W8570TJ220	2200	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W89

W Series



W2
Weight 80 g



W3
Weight 140 g



W4
Weight 340 g



W5
Weight 510 g



W6
Weight 1 kg



W7
Weight 1.7 kg



W37
Weight 510 g




W42
Weight 1.2 kg



W43
Weight 800 g



W89
Weight 1.3 kg



W94
Weight 1.6 kg



W111
Weight 1.6 kg



W112
Weight 2.1 kg



W121
Weight 330 g

Rectifier Diodes—Capsule Types



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@ T _{JM}			180° Sine	120° Rect.	
			A	A²s	V	mΩ		K/W	K/W	
W8570TE180	1800	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W94
W8570TE220	2200	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W94
W9830TJ120	1200	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W89
W9830TJ150	1500	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W89
W9830TE120	1200	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W94
W9830TE150	1500	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W94
W106CEC240	2400	10650	92000	42.32 × 10 ⁶	0.734	0.047	160	0.0050	0.0054	W111
W106CEC280	2800	10650	92000	42.32 × 10 ⁶	0.734	0.047	160	0.0050	0.0054	W111
W108CED180	1800	11300	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0060	0.0063	W112
W108CED220	2200	11300	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0060	0.0063	W112
W121CEC180	1800	12650	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0050	0.0054	W111
W121CEC220	2200	12650	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0050	0.0054	W111

Fast Recovery Diodes

Fast recovery diodes are an essential component of any switching device and are frequently the limiting factor in the design and performance of modern power converters. To address the needs of our customers, we have developed an unparalleled range of fast recovery diodes. These diodes are available with blocking voltages of up to 6.5 kV, making them suitable for operation with DC link voltages up to 3.3 kV and average current ratings to 4305 A, depending upon type. The devices use both alloyed and floating silicon technologies to deliver robust devices that can be relied upon in demanding applications. This range has been subclassified as follows to facilitate appropriate device selection: Fast Recovery, Soft Recovery, Extra Fast Recovery Diodes, and HP Sonic-FRDs.

Standard Fast Recovery—Capsule Types

These parts are particularly suitable for use as anti-parallel diodes in Gate Turn-Off thyristors, Fast Thyristor inverters, and diodes for choppers.



Part Number	V _{RRM}	I _{FAV}	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{TO}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
		T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}		T _J = 150 °C				@T _{JM} = 150 °C				
					t _{rr}	Q _{rr}	@I _{FM}	@-di/dt					
	V	A	A	A ² s	µs	µC	A	A/µs	V	mΩ	°C	K/W	
M0588LC400	4000	588	3955	78.2 × 10 ³	3.50	450	1000	60	2.320	1.770	150	0.0330	W4
M0588LC450	4500	588	3955	78.2 × 10 ³	3.50	450	1000	60	2.320	1.770	150	0.0330	W4
M0790YC200	2000	790	9000	405 × 10 ³	4.00	425	1000	60	1.272	0.584	150	0.0500	W2
M0790YC250	2500	790	9000	405 × 10 ³	4.00	425	1000	60	1.272	0.584	150	0.0500	W2
M0790YH200	2000	790	9000	405 × 10 ³	4.00	425	1000	60	1.272	0.584	150	0.0500	W3
M0790YH250	2500	790	9000	405 × 10 ³	4.00	425	1000	60	1.272	0.584	150	0.0500	W3
M0914LC200	2000	914	8500	361 × 10 ³	3.20	300	1000	60	1.768	0.653	150	0.0320	W4
M0914LC250	2500	914	8500	361 × 10 ³	3.20	300	1000	60	1.768	0.653	150	0.0320	W4
M1010NC400	4000	1010	9600	461 × 10 ³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W5
M1010NC450	4500	1010	9600	461 × 10 ³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W5
M1010ND400	4000	1010	9600	461 × 10 ³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W37
M1010ND450	4500	1010	9600	461 × 10 ³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W37
M1163NC400	4000	1163	10800	583 × 10 ³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W5
M1163NC450	4500	1163	10800	583 × 10 ³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W5
M1163ND400	4000	1163	10800	583 × 10 ³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W37
M1163ND450	4500	1163	10800	583 × 10 ³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W37
M1502NC200	2000	1502	17000	1.45 × 10 ⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W5
M1502NC250	2500	1502	17000	1.45 × 10 ⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W5
M1502ND200	2000	1502	17000	1.45 × 10 ⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W37
M1502ND250	2500	1502	17000	1.45 × 10 ⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W37
M1583VC400	4000	1583	24800	3.08 × 10 ⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W6
M1583VC450	4500	1583	24800	3.08 × 10 ⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W6
M1583VF400	4000	1583	24800	3.08 × 10 ⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W43
M1583VF450	4500	1583	24800	3.08 × 10 ⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W43
M1609NC200	2000	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W5
M1609NC260	2600	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W5
M1609ND200	2000	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W37
M1609ND260	2600	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W37
M2273VC300	3000	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W6
M2273VC360	3600	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W6
M2273VF300	3000	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W43
M2273VF360	3600	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W43
M2325HA400	4000	2325	28000	3.92 × 10 ⁶	5.40	2300	1000	200	1.581	0.402	150	0.0105	W121
M2325HA450	4500	2325	28000	3.92 × 10 ⁶	5.40	2300	1000	200	1.581	0.402	150	0.0105	W121
M2408NC020	200	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W5
M2408NC060	600	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W5
M2408ND020	200	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W37
M2408ND060	600	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W37
M2639ZC360	3600	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W7
M2639ZC420	4200	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W7
M2639ZD360	3600	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W42
M2639ZD420	4200	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W42
M2698ZC250	2500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W7

Microelectronics



W6
Weight 1 kg



W7
Weight 1.7 kg



W42
Weight 1.2 kg



W43
Weight 800 g



W20
Weight 85 g



W21
Weight 85 g



W22
Weight 200 g



W23
Weight 250 g



W24
Weight 250 g

Standard Fast Recovery—Capsule Types

These parts are particularly suitable for use as anti-parallel diodes in Gate Turn-Off thyristors, Fast Thyristor inverters, and diodes for choppers.



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.		
			10 ms ½ sine V _R - ≤60% V _{RRM}				T _J = 150 °C							@T _{JM} = 150 °C	
							t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt					
	V	A	A	A ² s	µs	µC	A	A/µs	V	mΩ	°C	K/W			
M2698ZC280	2800	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W7		
M2698ZC350	3500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W7		
M2698ZD250	2500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W42		
M2698ZD280	2800	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W42		
M2698ZD350	3500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W42		
M2837VC180	1800	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W6		
M2837VC250	2500	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W6		
M2837VF180	1800	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W43		
M2837VF250	2500	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W43		
M3770ZC200	2000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7		
M3770ZC240	2400	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7		
M3770ZC300	3000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7		
M3770ZD200	2000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7		
M3770ZD240	2400	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W42		
M3770ZD300	3000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W42		

Soft Recovery Diodes

Our soft recovery diodes are available in a range of reverse recovery characteristics tailored to meet the requirements of both freewheeling and snubber applications. These devices are available with blocking voltages up to 6 kV and average currents up to 4305 A 24 mm to 75 mm diameter silicon slices. These parts are particularly suitable where soft recovery is required, such as in RCD snubbers, voltage clamping, and snubberless applications.

Soft Recovery Diodes—Stud Types



S



R

Part Number	V _{RRM}	I _{FAV} T _C = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
			10 ms ½ sine V _R ≤ 60% V _{RRM}		T _J = 150 °C				@ T _{JM}				
					t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt					
	V	A	A	A ² s	μs	μC	A	A/μs	V	mΩ	°C	K/W	
M0130RL200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130RL250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130SL200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130SL250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130RM200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0130RM250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0130SM200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0130SM250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0139RL120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139RL180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139SL120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139SL180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139RM120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0139RM180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0139SM120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0139SM180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0268RC200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268RC250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268SC200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268SC250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268RJ200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0268RJ250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0268SJ200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0268SJ250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0280RC200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280RC250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280SC200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280SC250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280RJ200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0280RJ250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0280SJ200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0280SJ250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0334RC120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334RC200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334SC120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334SC200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334RJ120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0334RJ200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0334SJ120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0334SJ200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0336RA120	1200	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23
M0336RA140	1400	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23
M0336SA120	1200	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23
M0336SA140	1400	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23

elexes



W1
Weight 70 g



W5
Weight 510 g



W42
Weight 1.2 kg



WD8
Weight 250 g



W2
Weight 80 g



W6
Weight 1 kg



W43
Weight 800 g



W3
Weight 140 g



W7
Weight 1.7 kg



W54
Weight 530 g



W4
Weight 340 g



W37
Weight 510 g



W89
Weight 1.3 kg

Standard Fast Recovery—Capsule Types



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		T _{JM}				@T _{JM}				
					t _{rr}	Q _{rr}	@I _{FM}	@ -di _r /dt					
V	A	A	A ² s	µs	µC	A	A/µs	V	mΩ	°C	K/W		
M0225YH300	3000	225	2000	20 × 10 ³	3.00	220	550	40	1.900	4.160	150	0.1000	W3
M0225YH360	3600	225	2000	20 × 10 ³	3.00	220	550	40	1.900	4.160	150	0.1000	W3
M0225YH450	4500	225	2000	20 × 10 ³	3.00	220	550	40	1.900	4.160	150	0.1000	W3
M0310YH300	3000	310	4590	105 × 10 ³	2.80	275	1000	100	1.490	2.060	150	0.1000	W3
M0310YH350	3500	310	4590	105 × 10 ³	2.80	275	1000	100	1.490	2.060	150	0.1000	W3
M0347WC160	1600	347	4250	90.3 × 10 ³	2.80	210	550	40	1.210	1.200	125	0.0900	W1
M0347WC200	2000	347	4250	90.3 × 10 ³	2.80	210	550	40	1.210	1.200	125	0.0900	W1
M0347WC250	2500	347	4250	90.3 × 10 ³	2.80	210	550	40	1.210	1.200	125	0.0900	W1
M0358WC120	1200	358	2450	30 × 10 ³	1.40	125	1000	100	1.460	0.800	125	0.0900	W1
M0358WC180	1800	358	2450	30 × 10 ³	1.40	125	1000	100	1.460	0.800	125	0.0900	W1
M0367WC140	1400	367	4500	101 × 10 ³	3.30	300	550	40	1.280	0.920	125	0.0900	W1
M0367WC220	2200	367	4500	101 × 10 ³	3.30	300	550	40	1.280	0.920	125	0.0900	W1
M0367WC280	2800	367	4500	101 × 10 ³	3.30	300	550	40	1.280	0.920	125	0.0900	W1
M0371YH350	3500	371	4900	120 × 10 ³	3.20	1260	1000	200	1.050	1.650	150	0.1000	W3
M0371YH450	4500	371	4900	120 × 10 ³	3.20	1260	1000	200	1.050	1.650	150	0.1000	W3
M0433WC120	1200	433	4500	101 × 10 ³	3.50	270	550	40	1.000	0.740	125	0.0900	W1
M0433WC160	1600	433	4500	101 × 10 ³	3.50	270	550	40	1.000	0.740	125	0.0900	W1
M0433WC200	2000	433	4500	101 × 10 ³	3.50	270	550	40	1.000	0.740	125	0.0900	W1
M0437WC080	800	437	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.0900	W1
M0437WC140	1400	437	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.0900	W1
M0451YC120	1200	451	4500	101 × 10 ³	2.80	120	550	40	1.000	0.740	125	0.0850	W2
M0451YC160	1600	451	4500	101 × 10 ³	2.80	120	550	40	1.000	0.740	125	0.0850	W2
M0451YC200	2000	451	4500	101 × 10 ³	2.80	120	550	40	1.000	0.740	125	0.0850	W2
M0659LC400	4000	659	7620	290 × 10 ³	4.20	800	1000	60	1.710	0.925	125	0.0330	W4
M0659LC450	4500	659	7620	290 × 10 ³	4.20	800	1000	60	1.710	0.925	125	0.0330	W4
M0710LC560	5600	710	8400	353 × 10 ³	4.00	2100	1000	200	1.450	0.875	125	0.0330	W4
M0710LC600	6000	710	8400	353 × 10 ³	4.00	2100	1000	200	1.450	0.875	125	0.0330	W4
M0736LC400	4000	736	9000	405 × 10 ³	5.20	1250	1000	60	1.606	0.700	125	0.0330	W4
M0736LC450	4500	736	9000	405 × 10 ³	5.20	1250	1000	60	1.606	0.700	125	0.0330	W4
M0759YC120	1200	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W2
M0759YC160	1600	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W2
M0759YH120	1200	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W3
M0759YH160	1600	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W3
M0859LC140	1400	859	10000	500 × 10 ³	3.00	280	800	50	1.170	0.320	125	0.0440	W4
M0859LC160	1600	859	10000	500 × 10 ³	3.00	280	800	50	1.170	0.320	125	0.0440	W4
M0859LC180	1800	859	10000	500 × 10 ³	3.00	280	800	50	1.170	0.320	125	0.0440	W4

Standard Fast Recovery—Capsule Types



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		T _{JM}			@T _{JM}					
					t _{rr}	Q _{rr}	@ I _{FM} -di _F /dt						
			V	A	A	A ² s	μs	μC	A	A/μs			
M0863LC260	2600	863	10000	500 × 10 ³	4.80	950	1000	60	1.308	0.538	125	0.0330	W4
M0863LC300	3000	863	10000	500 × 10 ³	4.80	950	1000	60	1.308	0.538	125	0.0330	W4
M0863LC360	3600	863	10000	500 × 10 ³	4.80	950	1000	60	1.308	0.538	125	0.0330	W4
M0872LC140	1400	872	10000	500 × 10 ³	4.00	700	1000	60	1.090	0.340	125	0.0440	W4
M0872LC180	1800	872	10000	500 × 10 ³	4.00	700	1000	60	1.090	0.340	125	0.0440	W4
M0872LC210	2100	872	10000	500 × 10 ³	4.00	700	1000	60	1.090	0.340	125	0.0440	W4
M0955LC200	2000	955	11700	684 × 10 ³	3.40	500	1000	60	1.440	0.330	125	0.0330	W4
M0955LC250	2500	955	11700	684 × 10 ³	3.40	500	1000	60	1.440	0.330	125	0.0330	W4
M1022LC120	1200	1022	14000	980 × 10 ³	3.00	375	1000	60	1.240	0.330	125	0.0330	W4
M1022LC160	1600	1022	14000	980 × 10 ³	3.00	375	1000	60	1.240	0.330	125	0.0330	W4
M1022LC200	2000	1022	14000	980 × 10 ³	3.00	375	1000	60	1.240	0.330	125	0.0330	W4
M1080LC100	1000	1080	13500	910 × 10 ³	1.90	85	1000	60	1.125	0.314	125	0.0330	W4
M1080LC120	1200	1080	13500	910 × 10 ³	1.90	85	1000	60	1.125	0.314	125	0.0330	W4
M1102NC500	5000	1102	13000	845 × 10 ³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W5
M1102NC600	6000	1102	13000	845 × 10 ³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W5
M1102ND500	5000	1102	13000	845 × 10 ³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W37
M1102ND600	6000	1102	13000	845 × 10 ³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W37
M1104NC400	4000	1104	13000	845 × 10 ³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W5
M1104NC450	4500	1104	13000	845 × 10 ³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W5
M1104ND400	4000	1104	13000	845 × 10 ³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W37
M1104ND450	4500	1104	13000	845 × 10 ³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W37
M1242NC260	2600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W5
M1242NC360	3600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W5
M1242ND260	2600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W37
M1242ND360	3600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W37
M1494NC160	1600	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W5
M1494NC250	2500	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W5
M1494ND160	1600	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W37
M1494ND250	2500	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W37
M1494NK160	1600	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0145	WD8
M1494NK250	2500	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0145	WD8
M1565VC400	4000	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W6
M1565VC450	4500	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W6
M1565VF400	4000	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W43
M1565VF450	4500	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W43
M1858NC100	1000	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W5
M1858NC120	1200	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W5
M1858ND120	1200	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W37
M1858ND100	1000	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W37
M2322ZC300	3000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W7
M2322ZC400	4000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W7
M2322ZD300	3000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W42
M2322ZD400	4000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W42
M2413VC200	2000	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W6
M2413VC250	2500	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W6
M2413VF200	2000	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W43
M2413VF250	2500	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W43
M2505MC220	2200	2505	27000	3.65 × 10 ⁶	7.60	1950	2000	60	0.991	0.162	125	0.0140	W54
M2505MC250	2500	2505	27000	3.65 × 10 ⁶	7.60	1950	2000	60	0.991	0.162	125	0.0140	W54
M3560TJ420	4200	3560	36000	6.48 × 10 ⁶	7.00	4100	1000	150	1.253	0.137	125	0.0080	W89
M3560TJ450	4500	3560	36000	6.48 × 10 ⁶	7.00	4100	1000	150	1.253	0.137	125	0.0080	W89
M4305TJ240	2400	4305	49000	12.0 × 10 ⁶	5.00	2500	1000	150	1.104	0.087	125	0.0080	W89
M4305TJ280	2800	4305	49000	12.0 × 10 ⁶	5.00	2500	1000	150	1.104	0.087	125	0.0080	W89

Extra Fast Recovery Diodes

These products are designed to offer the lowest practical values of reverse recovery current while offering the wide safe operating area and high di/dt capability required by modern switching parts.



W1
Weight 70 g



W6
Weight 1 kg



W89
Weight 1.3 kg



W2
Weight 80 g



W43
Weight 800 g



W111
Weight 1.6 kg



W3
Weight 140 g



W47
Weight 250 g



W117
Weight 330 g



W4
Weight 340 g



W54
Weight 530 g



W122
Weight 1.2 kg



W5
Weight 510 g



W59
Weight 2.25 kg



W126
Weight 1.15 kg

Extra Fast Recovery Diodes—Capsule Types

Part Number	V _{RRM}	I _{FAV}	I _{FSM}	I ² t	Typ. Reverse Recovery					V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
		T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	T _{JM}					@ T _{JM}					
				I _{rr}	t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt						
	V	A	A	A ² s	A	μs	μC	A	A/μs	V	mΩ	°C	K/W	
F0240YC250	2500	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W2
F0240YC300	3000	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W2
F0240YH250	2500	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W3
F0240YH300	3000	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W3
F0300WC140	1400	240	2700	36.5 × 10 ³	530	3.00	70	550	40	1.760	2.210	125	0.0950	W1
F0300WC180	1800	240	2700	36.5 × 10 ³	530	3.00	70	550	40	1.760	2.210	125	0.0950	W1
F0800LC140	1400	775	7630	291 × 10 ³	380	1.10	200	1000	200	1.494	0.692	125	0.0320	W4
F0800LC180	1800	775	7630	291 × 10 ³	380	1.10	200	1000	200	1.494	0.692	125	0.0320	W4
F0900VC450	4500	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W6
F0900VC520	5200	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W6
F0900VF450	4500	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W43
F0900VF520	5200	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W43
F1000LC080	800	826	8500	361 × 10 ³	320	1.60	250	1000	800	1.530	0.547	125	0.0320	W4
F1000LC120	1200	826	8500	361 × 10 ³	320	1.60	250	1000	800	1.530	0.547	125	0.0320	W4
F1300NC45P	4500	1346	20800	2.16 × 10 ⁶	470	4.30	2150	1000	200	1.569	0.318	140	0.0240	W5
F1300NC50P	5000	1346	20800	2.16 × 10 ⁶	470	4.30	2150	1000	200	1.569	0.318	140	0.0240	W5
F1300NC55P	5500	1346	20800	2.16 × 10 ⁶	470	4.30	2150	1000	200	1.569	0.318	140	0.0240	W5
F1400NC140	1400	1093	17250	1.49 × 10 ⁶	800	1.50	1000	1400	1000	1.618	0.388	125	0.0240	W5
F1400NC180	1800	1093	17250	1.49 × 10 ⁶	800	1.50	1000	1400	1000	1.618	0.388	125	0.0240	W5
F1500NC200	2000	1054	13750	950 × 10 ³	1065	1.50	1500	1500	2000	1.372	0.535	125	0.0240	W5
F1500NC250	2500	1054	13750	950 × 10 ³	1065	1.50	1500	1500	2000	1.372	0.535	125	0.0240	W5
F1600NC080	800	1326	20000	2.0 × 10 ⁶	480	2.30	700	1600	800	1.320	0.268	125	0.0240	W5
F1600NC120	1200	1326	20000	2.0 × 10 ⁶	480	2.30	700	1600	800	1.320	0.268	125	0.0240	W5

High-Power Sonic FRDs

Littelfuse brings you a world-leading class of ultra fast and ultra soft recovery diode available from 3.3 kV to 6.5 kV in current ratings from 500 A to 4000 A. These diodes incorporate a unique manufacturing process and lifetime control to offer a class-leading trade-off between conduction and switching losses. The wide safe operating area (SOA) makes them ideal as freewheeling diodes for snubberless IGBT and IGCT applications or any application that requires a fast, low loss diode (e.g., traction, medium voltage drives, induction heating, and pulsed power applications).

High-Power Sonic FRD's – Capsule Type

Part Number	V _{RRM}	I _{FAV}	I _{FSM}	I ² t	Typ. Reverse Recovery					V _{T0}	r _T	T _{JM}	R _{thJK} 180° sine	Fig. No.
		T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	T _{JM}					@ T _{JM}					
				I _{rm}	t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt						
											V			
E0460QC45E	4500	533	6800	231 × 10 ³	460	1.15	685	500	1000	2.246	2.716	140	0.0274	W117
E0660NC45E	4500	760	9160	420 × 10 ³	700	1.10	1050	660	1500	2.194	1.814	140	0.0200	W5
E0660NH45E	4500	760	9160	420 × 10 ³	700	1.10	1050	660	1500	2.194	1.814	140	0.0200	W47
E1250HC45E	4500	1355	20500	2.11 × 10 ⁶	1000	1.20	1850	1250	2000	2.072	1.166	140	0.0105	W122
E1500NC42P	4200	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W5
E1500NC48P	4800	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W5
E1500NH42P	4200	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W47
E1500NH48P	4800	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W47
E1780TG65E	6500	1780	25600	3.29 × 10 ⁶	1590	1.22	3500	1375	3500	2.200	0.917	140	0.0770	W126
E1800TC45E	4500	2215	29050	4.22 × 10 ⁶	1490	1.15	2800	1800	3000	2.171	0.634	140	0.0068	W89
E2400EC45E	4500	2490	32100	5.15 × 10 ⁶	2130	1.22	3900	2400	4000	2.114	0.646	140	0.0056	W111
E3000EC45E	4500	3410	45700	10.5 × 10 ⁶	3050	1.25	5000	3000	5000	2.124	0.339	140	0.0050	W111
E4000FD45E	4500	4210	54800	15.0 × 10 ⁶	3650	1.50	5750	4000	5000	2.117	0.351	140	0.0035	W59

13 e³es

Phase Control Thyristors

Littelfuse provides one of the most comprehensive ranges of standard phase control thyristors in the industry. Devices with voltage ranges from 200 V to 5200 V are available, making them suitable for applications with line voltages from 230 V to over 1000 V (higher voltage applications are now served by our range of medium voltage thyristors). Littelfuse is a leading supplier of phase control products for markets such as demanding industrial DC drives, controlled rectifiers, marine/rail propulsion systems, wind power converters, electrochemical power supplies, and soft starters. These devices are optimized to generate low conduction losses and are primarily intended for applications with line frequencies of up to 400 Hz.

The Wespack outline (WPxx) is an innovative concept in phase control thyristors for applications requiring devices rated to 2200 V. It gives the maximum power rating for weight and volume without compromising on quality and reliability. It also gives the maximum current rating and lowest thermal resistance for the package size.

The newest additions to phase control thyristor range from Littelfuse are the 96 mm diameter die capsules. These devices are constructed using low temperature sintering technology offering better thermal and electromechanical capability and are available with current ratings up to 6405 A and voltage ratings up to 4500 V.



W8
Weight 70 g



W12
Weight 1 kg



W70
Weight 550 g



WP6
Weight 330 g



W10
Weight 340 g



W58
Weight 90 g



WP1
Weight 180 g



W17
Weight 130 g



W11
Weight 510 g



W62
Weight 1 kg



WP2
Weight 200 g



W18
Weight 280 g

Phase Control Thyristors—Stud Types

Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	V_{TO}	r_T	T_{JM}	R_{thJC}		Fig. No.
		$T_C = 55\text{ }^{\circ}\text{C}$	10 ms $\frac{1}{2}$ sine $V_R \leq 60\% V_{RRM}$		@ T_{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
	N0180SH120	1200	180	2450	30.0×10^3	0.900	1.790	125	0.2300	
N0180SH160	1600	180	2450	30.0×10^3	0.900	1.790	125	0.2300	0.2800	W17
N0335SC120	1200	335	4650	108×10^3	0.920	0.990	125	0.1200	0.1400	W18
N0335SC160	1600	335	4650	108×10^3	0.920	0.990	125	0.1200	0.1400	W18
N0416SC040	400	416	6000	180×10^3	0.850	0.535	125	0.1200	0.1400	W18
N0416SC080	800	416	6000	180×10^3	0.850	0.535	125	0.1200	0.1400	W18

Phase Control Thyristors—Capsule Types



Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N0392WC120	1200	392	4650	108 × 10 ³	0.920	0.990	125	0.0950	0.1100	W8
N0392WC160	1600	392	4650	108 × 10 ³	0.920	0.990	125	0.0950	0.1100	W8
N0606YC200	2000	606	7100	252 × 10 ³	1.103	0.804	125	0.0500	0.0580	W58
N0606YC250	2500	606	7100	252 × 10 ³	1.103	0.804	125	0.0500	0.0580	W58
N0616LC400	4000	616	5250	138 × 10 ³	1.220	1.530	125	0.0320	0.0393	W10
N0616LC450	4500	616	5250	138 × 10 ³	1.220	1.530	125	0.0320	0.0393	W10
N0634LC380	3800	634	7000	245 × 10 ³	1.100	1.500	125	0.0320	0.0393	W10
N0634LC420	4200	634	7000	245 × 10 ³	1.100	1.500	125	0.0320	0.0393	W10
N0646LC300	3000	646	5700	162 × 10 ³	1.210	1.360	125	0.0320	0.0393	W10
N0646LC360	3600	646	5700	162 × 10 ³	1.210	1.360	125	0.0320	0.0393	W10

Phase Control Thyristors—Capsule Types



Part Number	V_{DRM}	I_{TAV}	I_{TSM}	P_t	V_{T0}	r_T	T_{JM}	R_{thJC}		Fig. No.
	V_{RRM}	$T_k = 55\text{ }^{\circ}\text{C}$	10 ms $\frac{1}{2}$ sine $V_R - \leq 60\% V_{RRM}$		@ T_{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ		°C	K/W	
N0676YC120	1200	676	7500	281×10^3	1.090	0.587	125	0.0500	0.0580	W58
N0676YC180	1800	676	7500	281×10^3	1.090	0.587	125	0.0500	0.0580	W58
N0734YC120	1200	734	8400	353×10^3	1.03	0.483	125	0.0500	0.0580	W58
N0734YC160	1600	734	8400	353×10^3	1.03	0.483	125	0.0500	0.0580	W58
N0882NC400	4000	882	7700	296×10^3	1.300	0.920	125	0.0240	0.0273	W11
N0882NC450	4500	882	7700	296×10^3	1.300	0.920	125	0.0240	0.0273	W11
N0910LC200	2000	910	9200	423×10^3	1.040	0.606	125	0.0320	0.0393	W10
N0910LC260	2600	910	9200	423×10^3	1.040	0.606	125	0.0320	0.0393	W10
N0910LC280	2800	910	9200	423×10^3	1.040	0.606	125	0.0320	0.0393	W10
N1010NC300	3000	1010	12100	732×10^3	1.170	0.687	125	0.0240	0.0273	W11
N1010NC380	3800	1010	12100	732×10^3	1.170	0.687	125	0.0240	0.0273	W11
N1052LC200	2000	1052	13200	870×10^3	1.000	0.416	125	0.0320	0.0393	W10
N1052LC220	2200	1052	13200	870×10^3	1.000	0.416	125	0.0320	0.0393	W10
N1114LC120	1200	1114	12700	806×10^3	1.000	0.349	125	0.0320	0.0393	W10
N1114LC180	1800	1114	12700	806×10^3	1.000	0.349	125	0.0320	0.0393	W10
N1132NC300	3000	1132	14300	1.02×10^6	1.150	0.510	125	0.0240	0.0271	W11
N1132NC340	3400	1132	14300	1.02×10^6	1.150	0.510	125	0.0240	0.0271	W11
N1132NC360	3600	1132	14300	1.02×10^6	1.150	0.510	125	0.0240	0.0271	W11
N1159NC380	3800	1159	14500	1.05×10^6	1.100	0.574	125	0.0220	0.0255	W11
N1159NC420	4200	1159	14500	1.05×10^6	1.100	0.574	125	0.0220	0.0255	W11
N1174JK200	2000	1174	13200	870×10^3	1.000	0.416	125	0.0270	0.0314	WP1
N1174JK220	2200	1174	13200	870×10^3	1.000	0.416	125	0.0270	0.0314	WP1
N1263JK160	1600	1263	15000	1.13×10^6	1.015	0.332	125	0.0270	0.0314	WP1
N1263JK180	1800	1263	15000	1.13×10^6	1.015	0.332	125	0.0270	0.0314	WP1
N1351VC400	4000	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W12
N1351VC450	4500	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W12
N1351VF400	4000	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W62
N1351VF450	4500	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W62
N1366JK080	800	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1
N1366JK120	1200	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1
N1366JK140	1400	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1
N1449QL200	2000	1410	17300	1.50×10^6	1.060	0.317	125	0.0230	0.0272	WP6
N1467NC200	2000	1467	21500	2.31×10^6	1.000	0.272	125	0.0240	0.0271	W11
N1467NC220	2200	1410	17300	1.50×10^6	1.060	0.317	125	0.0230	0.0272	WP6
N1467NC260	2600	1467	21500	2.31×10^6	1.000	0.272	125	0.0240	0.0271	W11
N1547NC160	1600	1547	23300	2.71×10^6	0.920	0.252	125	0.0240	0.0271	W11
N1547NC200	2000	1547	23300	2.71×10^6	0.920	0.252	125	0.0240	0.0271	W11
N1581QL160	1600	1535	19100	1.82×10^6	1.022	0.253	125	0.0230	0.0270	WP6
N1581QL180	1800	1535	19100	1.82×10^6	1.022	0.253	125	0.0230	0.0270	WP6
N1651QK200	2000	1651	17300	1.50×10^6	1.060	0.317	125	0.0180	0.0217	WP2
N1651QK220	2200	1651	17300	1.50×10^6	1.060	0.317	125	0.0180	0.0217	WP2
N1661VC300	3000	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W12
N1661VC360	3600	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W12
N1661VF300	3000	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W62
N1661VF360	3600	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W62
N1718NC120	1200	1718	27200	3.70×10^6	0.979	0.169	125	0.0240	0.0271	W11
N1718NC180	1800	1718	27200	3.70×10^6	0.979	0.169	125	0.0240	0.0271	W11
N1718NC200	2000	1718	27200	3.70×10^6	0.979	0.169	125	0.0240	0.0271	W11
N1725MC320	3200	1725	20000	2.00×10^6	1.022	0.396	125	0.0150	0.0165	W70

Microelectronics



W11
Weight 510 g



W62
Weight 1 kg



W81
Weight 1.2 kg



WP3
Weight 260 g



W12
Weight 1 kg



W70
Weight 550 g



W82
Weight 1.65 kg



WP5
Weight 500 g



W13
Weight 1.7 kg



W79
Weight 890 g



WP1
Weight 180 g



WP6
Weight 330 g



W46
Weight 1.2 kg



W80
Weight 1.2 kg



WP2
Weight 200 g

Phase Control Thyristors—Capsule Types



Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ		°C	K/W	
N1725MC360	3600	1725	20000	2.00 × 10 ⁶	1.022	0.396	125	0.0150	0.0165	W70
N1802NC120	1200	1802	29600	4.38 × 10 ⁶	0.855	0.171	125	0.0240	0.0271	W11
N1802NC160	1600	1802	29600	4.38 × 10 ⁶	0.855	0.171	125	0.0240	0.0271	W11
N1806QK160	1600	1806	19100	1.82 × 10 ⁶	1.022	0.253	125	0.0180	0.0217	WP2
N1806QK180	1800	1806	19100	1.82 × 10 ⁶	1.022	0.253	125	0.0180	0.0217	WP2
N1817QL080	800	1760	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0230	0.0272	WP6
N1817QL120	1200	1760	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0230	0.0272	WP6
N1817QL140	1400	1760	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0230	0.0272	WP6
N2015ML200	2000	2015	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0180	0.0201	WP5
N2015ML220	2200	2015	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0180	0.0201	WP5
N2055MC260	2600	2105	25800	3.33 × 10 ⁶	0.970	0.240	125	0.0150	0.0165	W70
N2055MC280	2800	2105	25800	3.33 × 10 ⁶	0.970	0.240	125	0.0150	0.0165	W70
N2055HE420	4200	2055	24000	2.88 × 10 ⁶	0.977	0.342	125	0.0125	0.0138	W80
N2055HE450	4500	2055	24000	2.88 × 10 ⁶	0.977	0.342	125	0.0125	0.0138	W80
N2083QK080	800	2083	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0180	0.0217	WP2
N2083QK120	1200	2083	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0180	0.0217	WP2
N2083QK140	1400	2083	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0180	0.0217	WP2
N2086NC060	600	2086	35000	6.13 × 10 ⁶	0.840	0.108	125	0.0240	0.0271	W11
N2086NC100	1000	2086	35000	6.13 × 10 ⁶	0.840	0.108	125	0.0240	0.0271	W11
N2154JK020	200	2154	22700	2.58 × 10 ⁶	0.890	0.107	140	0.0270	0.0314	WP1
N2154JK040	400	2154	22700	2.58 × 10 ⁶	0.890	0.107	140	0.0270	0.0314	WP1
N2154JK060	600	2154	22700	2.58 × 10 ⁶	0.890	0.107	140	0.0270	0.0314	WP1
N2172ZC420	4200	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W13
N2172ZC450	4500	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W13
N2172ZD420	4200	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W46
N2172ZD450	4500	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W46
N2191ML160	1600	2191	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0180	0.0201	WP5
N2191ML180	1800	2191	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0180	0.0201	WP5
N2293VC180	1800	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
N2293VC220	2200	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
N2293VF180	1800	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
N2293VF220	2200	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
N2367MK200	2000	2367	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0140	0.0157	WP3
N2367MK220	2200	2367	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0140	0.0157	WP3
N2418ZC300	3000	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W13
N2418ZC360	3600	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W13
N2418ZD300	3000	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W46
N2418ZD360	3600	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W46

Phase Control Thyristors—Capsule Types



Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{TO}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R ≤ 60% V _{RRM}		@ T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N2500VC120	1200	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W12
N2500VC160	1600	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W12
N2500VF120	1200	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W62
N2500VF160	1600	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W62
N2520ML080	800	2520	38200	7.30 × 10 ⁶	0.980	0.090	125	0.0180	0.0201	WP5
N2520ML120	1200	2520	38200	7.30 × 10 ⁶	0.980	0.090	125	0.0180	0.0201	WP5
N2520ML140	1400	2520	38200	7.30 × 10 ⁶	0.980	0.090	125	0.0180	0.0201	WP5
N2543ZC240	2400	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W13
N2543ZC300	3000	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W13
N2543ZD240	2400	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W46
N2543ZD300	3000	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W46
N2593MK160	1600	2593	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0140	0.0157	WP3
N2593MK180	1800	2593	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0140	0.0157	WP3
N2600MC160	1600	2600	30000	4.50 × 10 ⁶	0.950	0.130	125	0.0150	0.0165	W70
N2600MC180	1800	2600	30000	4.50 × 10 ⁶	0.950	0.130	125	0.0150	0.0165	W70
N2825TE420	4200	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W82
N2825TE450	4500	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W82
N2825TJ420	4200	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W81
N2825TJ450	4500	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W81
N2830HE260	2600	2830	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0125	0.0138	W80
N2830HE280	2800	2830	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0125	0.0138	W80
N2900QL020	200	2900	28000	3.92 × 10 ⁶	0.850	0.080	150	0.0230	0.0272	WP6
N2900QL040	400	2900	28000	3.92 × 10 ⁶	0.850	0.080	150	0.0230	0.0272	WP6
N2900QL060	600	2900	28000	3.92 × 10 ⁶	0.850	0.080	150	0.0230	0.0272	WP6
N3012ZC200	2000	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W13
N3012ZC260	2600	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W13
N3012ZD200	2000	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W46
N3012ZD260	2600	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W46
N3022MK080	800	3022	38200	7.30 × 10 ⁶	0.981	0.090	125	0.0140	0.0157	WP3
N3022MK120	1200	3022	38200	7.30 × 10 ⁶	0.981	0.090	125	0.0140	0.0157	WP3
N3022MK140	1400	3022	38200	7.30 × 10 ⁶	0.981	0.090	125	0.0140	0.0157	WP3
N3029ZC240	2400	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W13
N3029ZC280	2800	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W13
N3029ZD240	2400	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W46
N3029ZD280	2800	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W46
N3165HA260	2600	3165	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0105	0.0118	W79
N3165HA280	2800	3165	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0105	0.0118	W79
N3175HE160	1600	3175	45500	10.40 × 10 ⁶	0.900	0.110	125	0.0125	0.0138	W80
N3175HE180	1800	3175	45500	10.40 × 10 ⁶	0.900	0.110	125	0.0125	0.0138	W80
N3229QK020	200	3229	28000	3.92 × 10 ⁶	0.926	0.067	140	0.0180	0.0217	WP2
N3229QK040	400	3229	28000	3.92 × 10 ⁶	0.926	0.067	140	0.0180	0.0217	WP2
N3229QK060	600	3229	28000	3.92 × 10 ⁶	0.926	0.067	140	0.0180	0.0217	WP2
N3533ZC140	1400	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W13
N3533ZC180	1800	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W13
N3533ZC220	2200	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W13
N3533ZD140	1400	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W46
N3533ZD180	1800	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W46
N3533ZD220	2200	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W46
N3565HA160	1600	3565	45500	10.4 × 10 ⁶	0.900	0.110	125	0.0105	0.0118	W79
N3565HA180	1800	3565	45500	10.4 × 10 ⁶	0.900	0.110	125	0.0105	0.0118	W79
N3597ML020	200	3597	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0180	0.0201	WP5
N3597ML040	400	3597	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0180	0.0201	WP5
N3597ML060	600	3597	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0180	0.0201	WP5
N3620TE320	3200	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W82
N3620TE360	3600	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W82
N3620TJ320	3200	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W81
N3620TJ360	3600	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W81
N3790TE240	2400	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W82
N3790TE280	2800	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W82

Micro eases



W13
Weight 1.7 kg



W82
Weight 1.65 kg



W118
Weight 2.2 kg



WP3
Weight 260 g



W46
Weight 1.2 kg



W107
Weight 1.6 kg



W119
Weight 2.9 kg



WP4
Weight 550 g



W81
Weight 1.2 kg



W108
Weight 2.1 kg

Phase Control Thyristors—Capsule Types



Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R ≤ 60% V _{RRM}		@T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N3790TJ240	2400	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W81
N3790TJ280	2800	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W81
N3880ZD160	1600	3880	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0110	0.0119	W46
N3880ZD180	1800	3880	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0110	0.0119	W46
N3904HK200	2000	3904	50900	12.95 × 10 ⁶	0.920	0.111	125	0.0090	0.0099	WP4
N3904HK220	2200	3904	50900	12.95 × 10 ⁶	0.920	0.111	125	0.0090	0.0099	WP4
N3930ZC120	1200	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W13
N3930ZC160	1600	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W13
N3930ZD120	1200	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W46
N3930ZD160	1600	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W46
N4085ZC080	800	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W13
N4085ZC120	1200	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W13
N4085ZD080	800	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W46
N4085ZD120	1200	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W46
N4165EE420	4200	4165	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0060	0.0064	W108
N4165EE450	4500	4165	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0060	0.0064	W108
N4316MK020	200	4316	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0140	0.0157	WP3
N4316MK040	400	4316	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0140	0.0157	WP3
N4316MK060	600	4316	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0140	0.0157	WP3
N4340TE180	1800	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W82
N4340TE220	2200	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W82
N4340TJ180	1800	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W81
N4340TJ220	2200	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W81
N4472HK160	1600	4472	59000	17.40 × 10 ⁶	0.986	0.068	125	0.0090	0.0099	WP4
N4472HK180	1800	4472	59000	17.40 × 10 ⁶	0.986	0.068	125	0.0090	0.0099	WP4
N4650EA420	4200	4650	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0050	0.0054	W107
N4650EA450	4500	4650	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0050	0.0054	W107
N4845EE320	3200	4845	65000	21.1 × 10 ⁶	0.913	0.125	125	0.0060	0.0065	W108
N4845EE360	3600	4845	65000	21.1 × 10 ⁶	0.913	0.125	125	0.0060	0.0065	W108
N4940HK120	1200	4940	62000	19.0 × 10 ⁶	0.939	0.520	125	0.0090	0.0099	WP4
N4940HK140	1400	4940	62000	19.0 × 10 ⁶	0.939	0.520	125	0.0090	0.0099	WP4
N5320FE420	4200	5320	78000	30.42 × 10 ⁶	1.060	0.130	125	0.0048	0.0051	W119
N5320FE450	4500	5320	78000	30.42 × 10 ⁶	1.060	0.130	125	0.0048	0.0051	W119

Phase Control Thyristors—Capsule Types

Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	V_{T0}	r_{T}	T_{JM}	R_{thJC}		Fig. No.
	V	$T_{\text{k}} = 55^{\circ}\text{C}$	10 ms $\frac{1}{2}$ sine $V_{\text{R}} \leq 60\% V_{\text{RRM}}$		@ T_{JM}			d.c. 180° sine	120° Rect.	
		A	A	A ² S	V	mΩ		K/W	K/W	
N5715EE240	2400	5715	80000	32.0×10^6	0.840	0.085	125	0.0060	0.0065	W108
N5715EE280	2800	5715	80000	32.0×10^6	0.840	0.085	125	0.0060	0.0065	W108
N5910FA420	4200	5910	78000	30.42×10^6	1.060	0.130	125	0.0040	0.0044	W118
N5910FA450	4500	5910	78000	30.42×10^6	1.060	0.130	125	0.0040	0.0044	W118
N6012ZD020	200	6012	65000	21.13×10^6	0.853	0.029	140	0.0110	0.0119	W46
N6012ZD040	400	6012	65000	21.13×10^6	0.853	0.029	140	0.0110	0.0119	W46
N6012ZD060	600	6012	65000	21.13×10^6	0.853	0.029	140	0.0110	0.0119	W46
N6405EA240	2400	6405	80000	32.0×10^6	0.840	0.085	125	0.0050	0.0054	W107
N6405EA280	2800	6405	80000	32.0×10^6	0.840	0.085	125	0.0050	0.0054	W107
N6974HK020	200	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4
N6974HK040	400	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4
N6974HK060	600	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4
N7585FE240	2400	7535	110000	60.50×10^6	0.780	0.062	125	0.0048	0.0051	W119
N7585FE280	2800	7535	110000	60.50×10^6	0.780	0.062	125	0.0048	0.0051	W119
N7905FE180	1800	7905	117000	68.44×10^6	0.770	0.056	125	0.0048	0.0051	W119
N7905FE220	2200	7905	117000	68.44×10^6	0.770	0.056	125	0.0048	0.0051	W119
N8440FA240	2400	8440	110000	60.50×10^6	0.780	0.062	125	0.0040	0.0044	W118
N8440FA280	2800	8440	110000	60.50×10^6	0.780	0.062	125	0.0040	0.0044	W118
N8800FA180	1800	8800	117000	68.44×10^6	0.770	0.056	125	0.0040	0.0044	W118
N8800FA220	2200	8800	117000	68.44×10^6	0.770	0.056	125	0.0040	0.0044	W118

IXYS UK eXtreme



W8
Weight 70 g



W12
Weight 1 kg



W58
Weight 90 g



WP4
Weight 550 g



W10
Weight 340 g



W13
Weight 1.7 kg



W79
Weight 890 g



W11
Weight 510 g



W46
Weight 1.2 kg



WP1
Weight 180 g

Phase Control Thyristors—Capsule Types, B-Series

IXYS UK Littelfuse presents the new family of phase control thyristors for industrial application. Devices with voltage ranges from 400V to 2500V are available, making them suitable for applications with line voltages from 230V to over 600V.



Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
B0470WC120	1200	470	4650	108 x 10 ³	0.92	0.99	125	0.0722	0.0891	W8
B0470WC160	1600	470	4650	108 x 10 ³	0.92	0.99	125	0.0722	0.0891	W8
B0713YC200	2000	713	7100	252 x 10 ³	1.103	0.804	125	0.039	0.046	W58
B0713YC220	2200	713	7100	252 x 10 ³	1.103	0.804	125	0.039	0.046	W58
B0713YC240	2400	713	7100	252 x 10 ³	1.103	0.804	125	0.039	0.046	W58
B0713YC250	2500	713	7100	252 x 10 ³	1.103	0.804	125	0.039	0.046	W58
B0800YC120	1200	800	7500	281 x 10 ³	1.08	0.596	125	0.0389	0.046	W58
B0800YC140	1400	800	7500	281 x 10 ³	1.08	0.596	125	0.0389	0.046	W58
B0800YC160	1600	800	7500	281 x 10 ³	1.08	0.596	125	0.0389	0.046	W58
B0800YC180	1800	800	7500	281 x 10 ³	1.08	0.596	125	0.0389	0.046	W58
B0870YC120	1200	870	8400	353 x 10 ³	1.03	0.48	125	0.0389	0.0461	W58
B0870YC140	1400	870	8400	353 x 10 ³	1.03	0.48	125	0.0389	0.0461	W58
B0870YC160	1600	870	8400	353 x 10 ³	1.03	0.48	125	0.0389	0.0461	W58
B1050LC180	1800	1050	13200	870 x 10 ³	1	0.416	125	0.032	0.0388	W10
B1050LC220	2200	1050	13200	870 x 10 ³	1	0.416	125	0.032	0.0388	W10
B1115LC160	1600	1157	12700	806 x 10 ³	0.973	0.369	125	0.032	0.0388	W10
B1115LC180	1800	1157	12700	806 x 10 ³	0.973	0.369	125	0.032	0.0388	W10
B1175JK200	2000	1175	13200	806 x 10 ³	1	0.416	125	0.0278	0.0314	WP1
B1175JK220	2200	1175	13200	806 x 10 ³	1	0.416	125	0.0278	0.0314	WP1
B1230LC120	1200	1226	15000	1.125 x 10 ⁶	0.883	0.297	125	0.032	0.0388	W10
B1230LC140	1400	1226	15000	1.125 x 10 ⁶	0.883	0.297	125	0.032	0.0388	W10
B1230LC160	1600	1226	15000	1.125 x 10 ⁶	0.883	0.297	125	0.032	0.0388	W10
B1265JK160	1600	1263	15000	1.13 x 10 ⁶	1.015	0.332	125	0.0278	0.0314	WP1
B1265JK180	1800	1263	15000	1.13 x 10 ⁶	1.015	0.332	125	0.0278	0.0314	WP1
B1370JK120	1200	1366	15900	1.26 x 10 ⁶	0.985	0.27	125	0.0278	0.0314	WP1
B1370JK140	1400	1366	15900	1.26 x 10 ⁶	0.985	0.27	125	0.0278	0.0314	WP1
B1370JK160	1600	1366	15900	1.26 x 10 ⁶	0.985	0.27	125	0.0278	0.0314	WP1
B1545NC160	1600	1545	23300	2.71 x 10 ⁶	0.92	0.252	125	0.0248	0.0271	W11
B1545NC180	1800	1545	23300	2.71 x 10 ⁶	0.92	0.252	125	0.0248	0.0271	W11
B1545NC200	2000	1545	23300	2.71 x 10 ⁶	0.92	0.252	125	0.0248	0.0271	W11
B1725NC120	1200	1725	27200	3.70 x 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11
B1725NC140	1400	1725	27200	3.70 x 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11
B1725NC160	1600	1725	27200	3.70 x 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11
B1725NC180	1800	1725	27200	3.70 x 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11

Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	V_{T0}	r_{T}	T_{JM}	R_{thJC}		Fig. No.
		$T_{\text{k}} = 55^{\circ}\text{C}$	10 ms $\frac{1}{2}$ sine $V_{\text{R}} \leq 60\% V_{\text{RRM}}$		@ T_{JM}			180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
B1815NC120	1200	1815	29600	4.38 × 10 ⁶	0.847	0.17	125	0.0248	0.0271	W11
B1815NC140	1400	1815	29600	4.38 × 10 ⁶	0.847	0.17	125	0.0248	0.0271	W11
B1815NC160	1600	1815	29600	4.38 × 10 ⁶	0.847	0.17	125	0.0248	0.0271	W11
B2295VC180	1800	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
B2295VC200	2000	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
B2295VC220	2200	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
B2295VF180	1800	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
B2295VF200	2000	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
B2295VF220	2200	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
B2505VC140	1400	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W12
B2505VC160	1600	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W12
B2505VF140	1400	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W62
B2505VF160	1600	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W62
B3420ZC180	1800	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W13
B3420ZC200	2000	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W13
B3420ZC220	2200	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W13
B3420ZD180	1800	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W46
B3420ZD200	2000	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W46
B3420ZD220	2200	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W46
B3570HA160	1600	3570	45500	10.4 × 10 ⁶	0.9	0.11	125	0.0108	0.0118	W79
B3570HA180	1800	3570	45500	10.4 × 10 ⁶	0.9	0.11	125	0.0108	0.0118	W79
B3885ZC160	1600	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W13
B3885ZC180	1800	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W13
B3885ZD160	1600	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W46
B3885ZD180	1800	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W46
B3910HK180	1800	3910	50900	12.95 × 10 ⁶	0.92	0.111	125	0.0091	0.0099	WP4
B3910HK200	2000	3910	50900	12.95 × 10 ⁶	0.92	0.111	125	0.0091	0.0099	WP4
B3910HK220	2200	3910	50900	12.95 × 10 ⁶	0.92	0.111	125	0.0091	0.0099	WP4
B3935ZC120	1200	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W13
B3935ZC140	1400	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W13
B3935ZC160	1600	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W13
B3935ZD120	1200	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W46
B3935ZD140	1400	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W46
B3935ZD160	1600	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W46
B4475HK160	1600	4475	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0091	0.0099	WP4
B4475HK180	1800	4475	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0091	0.0099	WP4
B4945HK120	1200	4945	62000	19 × 10 ⁶	0.939	0.052	125	0.0091	0.0099	WP4
B4945HK140	1400	4945	62000	19 × 10 ⁶	0.939	0.052	125	0.0091	0.0099	WP4
B6975HK040	400	6975	65000	21.13 × 10 ⁶	0.853	0.029	125	0.0091	0.0099	WP4
B6975HK060	600	6975	65000	21.13 × 10 ⁶	0.853	0.029	125	0.0091	0.0099	WP4

Medium Voltage Thyristors

Medium voltage applications place additional demands on phase-controlled thyristors. To meet these demands, we have developed a comprehensive range of thyristors optimized for medium voltage applications and series operation. As voltages increase, so do switching losses and turn-off time, to a point where they become significant in line-frequency applications. Our patented distributed gate architecture ensures excellent switching performance over a wide range of voltage, current, and di/dt. Device lifetime is also engineered to achieve an optimum balance between conduction losses, commutation losses, and turn-off time to give maximum power handling from line frequency to 400 Hz. This also gives significant benefits when series or parallel connection of devices is required. Medium voltage thyristors are available from 2.8 kV up to 6.5 kV with silicon diameters from 38 mm to 96 mm making them particularly suitable for high-power converters such as medium voltage DC drives, medium voltage soft starts, and utility applications such as HVDC, static VAR compensators, excitation, and transfer switches.

We recognize the importance of reliability in these large, capital intensive applications and, as a result, we subject these parts to extended levels of both routine and type testing to ensure that investments provide years of trouble-free service.



W10
Weight 340 g



W62
Weight 1 kg



W82
Weight 1.65 kg



W11
Weight 510 g



W79
Weight 890 g



W107
Weight 1.6 kg



W13
Weight 1.7 kg



W80
Weight 1.2 kg



W46
Weight 1.2 kg



W81
Weight 1.2 kg

Medium Voltage Thyristors—Capsule Types



Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge			V _{TO}	r _T	T _{JM}	R _{thJK}		Fig. No.
		T _K = 55°C	10 ms ½ sine V _R - ≤60% V _{RRM}	μs		T _{JM}			@ T _{JM}			180° sine	120° Rect.	
	Q _{rr}				@ I _{TM}	@ -di/dt								
	V				A	A	A ² S	μC	A	A/μs	V			
K0443LC600	6000	443	4800	115 × 10 ³	1100	3100	1000	10	1.57	2.43	125	0.032	0.039	W10
K0443LC650	6500	443	4800	115×10 ³	1100	3100	1000	10	1.57	2.43	125	0.032	0.039	W10
K0769NC600	6000	769	8600	370×10 ³	1200	3100	1000	10	1.57	1.77	125	0.025	0.027	W11
K0769NC650	6500	769	8600	370×10 ³	1200	3100	1000	10	1.57	1.77	125	0.025	0.027	W11
K0890NC360	3600	890	10900	594 × 10 ³	350-550	4000	1000	10	1.516	0.800	125	0.0240	0.0270	W11
K0890NC420	4200	890	10900	594 × 10 ³	350-550	4000	1000	10	1.516	0.800	125	0.0240	0.0270	W11
K1121NC320	3200	1121	15000	1.13 × 10 ⁶	200-300	2000	1000	10	1.098	0.542	125	0.0240	0.0270	W11
K1121NC360	3600	1121	15000	1.13 × 10 ⁶	200-300	2000	1000	10	1.098	0.542	125	0.0240	0.0270	W11
K1197NC280	2800	1197	10650	567 × 10 ³	200-300	2700	1000	10	1.335	0.372	125	0.0240	0.0270	W11
K1197NC320	3200	1197	10650	567 × 10 ³	200-300	2700	1000	10	1.335	0.372	125	0.0240	0.0270	W11
K1351VF600	6000	1351	14300	1.02 × 10 ⁶	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1351VF620	6200	1351	14300	1.02 × 10 ⁶	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1351VF640	6400	1351	14300	1.02 × 10 ⁶	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1351VF650	6500	1351	14300	1.02 × 10 ⁶	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1947ZC400	4000	1947	25000	3.13 × 10 ⁶	600-700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W13

Medium Voltage Thyristors—Capsule Types



Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	t_q @ 200 V/ μ s	Typ. Reverse Recovery Charge			V_{TO}	r_T	T_{JM}	R_{thJK}		Fig. No.
		$T_K = 55^\circ\text{C}$	10 ms $\frac{1}{2}$ sine $V_R - \leq 60\% V_{\text{RRM}}$			T_{JM}			@ T_{JM}			180° sine	120° Rect.	
	Q_{rr}				@ I_{TM}	@ -di/dt								
	V	A	A	A ² S	μ s	μ C	A	A/ μ s	V	m Ω	°C	K/W	K/W	
K1947ZC450	4500	1947	25000	3.13×10^6	600-700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W13
K1947ZD400	4000	1947	25000	3.13×10^6	600-700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W46
K1947ZD450	4500	1947	25000	3.13×10^6	600-700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W46
K2095ZC360	3600	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W13
K2095ZC420	4200	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W13
K2095ZD360	3600	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W46
K2095ZD420	4200	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W46

Distributed Gate Thyristors

Littelfuse is recognized as the world leader in distributed gate technology. These devices are available with blocking voltages of up to 4.5 kV and average currents in excess of 5 kA, with t_q ratings from 10 μ s. This unique distributed gate design and these lifetime control features give these devices both high di/dt capability and fast, low-recovery turn-off while maintaining a low on-state voltage drop. They are ideally suited to applications such as: induction power supplies, high frequency inverters/converters, UPS, and pulse power.



W10
Weight 340 g



W11
Weight 510 g



W58
Weight 90 g

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.
			T _K = 55 °C	10 ms ½ sine V _R ≤ 60% V _{RRM}			Q _{rr}	@ I _{TM}	@ -di/dt	@ T _{JM}			
	V	V	A	A	A ² S	μs	μC	A	A/μs	V	mΩ	K/W	
R0472YC12E	1200	1200	472	4300	92.5 × 10 ³	25	155	550	40	1.648	1.125	0.0500	W58
R0472YC12F	1200	1200	472	4300	92.5 × 10 ³	30	155	550	40	1.648	1.125	0.0500	W58
R0472YC16E	1600	1600	472	4300	92.5 × 10 ³	25	155	550	40	1.648	1.125	0.0500	W58
R0472YC16F	1600	1600	472	4300	92.5 × 10 ³	30	155	550	40	1.648	1.125	0.0500	W58
R0487YC12D	1200	1200	487	4300	92.5 × 10 ³	20	90	550	40	1.738	0.943	0.0500	W58
R0487YC12E	1200	1200	487	4300	92.5 × 10 ³	25	90	550	40	1.738	0.943	0.0500	W58
R0487YC14D	1400	1400	487	4300	92.5 × 10 ³	20	90	550	40	1.738	0.943	0.0500	W58
R0487YC14E	1400	1400	487	4300	92.5 × 10 ³	25	90	550	40	1.738	0.943	0.0500	W58
R0577YC12C	1200	1200	577	6000	180 × 10 ³	15	150	550	40	1.510	0.640	0.0500	W58
R0577YC12D	1200	1200	577	6000	180 × 10 ³	20	150	550	40	1.510	0.640	0.0500	W58
R0577YC12E	1200	1200	577	6000	180 × 10 ³	25	150	550	40	1.510	0.640	0.0500	W58
R0633YC12D	1200	1200	633	6300	200 × 10 ³	20	125	550	40	1.250	0.614	0.0500	W58
R0633YC12E	1200	1200	633	6300	200 × 10 ³	25	125	550	40	1.250	0.614	0.0500	W58
R0633YC12F	1200	1200	633	6300	200 × 10 ³	30	125	550	40	1.250	0.614	0.0500	W58
R0717LC14G	1400	1400	717	7050	248.5 × 10 ³	35	425	1000	60	1.752	0.732	0.0320	W10
R0717LC14H	1400	1400	717	7050	248.5 × 10 ³	40	425	1000	60	1.752	0.732	0.0320	W10
R0717LC16G	1600	1600	717	7050	248.5 × 10 ³	35	425	1000	60	1.752	0.732	0.0320	W10
R0717LC16H	1600	1600	717	7050	248.5 × 10 ³	40	425	1000	60	1.752	0.732	0.0320	W10
R0736LC20J	2000	2000	736	6800	231 × 10 ³	50	640	1000	60	1.842	0.619	0.0320	W10
R0736LC20K	2000	2000	736	6800	231 × 10 ³	60	640	1000	60	1.842	0.619	0.0320	W10
R0736LC22J	2200	2000	736	6800	231 × 10 ³	50	640	1000	60	1.842	0.619	0.0320	W10
R0736LC22K	2200	2000	736	6800	231 × 10 ³	60	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25J	2500	2000	736	6800	231 × 10 ³	50	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25K	2500	2000	736	6800	231 × 10 ³	60	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25L	2500	2000	736	6800	231 × 10 ³	65	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25M	2500	2000	736	6800	231 × 10 ³	70	640	1000	60	1.842	0.619	0.0320	W10
R0809LC10A	1000	1000	809	8000	320 × 10 ³	10	120	1000	60	2.100	0.300	0.0320	W10
R0809LC10B	1000	1000	809	8000	320 × 10 ³	12	120	1000	60	2.100	0.300	0.0320	W10
R0830LC12C	1200	1200	830	8500	361 × 10 ³	15	285	1000	60	1.900	0.357	0.0320	W10
R0830LC12D	1200	1200	830	8500	361 × 10 ³	20	285	1000	60	1.900	0.357	0.0320	W10
R0830LC12E	1200	1200	830	8500	361 × 10 ³	25	285	1000	60	1.900	0.357	0.0320	W10
R0830LC12F	1200	1200	830	8500	361 × 10 ³	30	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14C	1400	1400	830	8500	361 × 10 ³	15	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14D	1400	1400	830	8500	361 × 10 ³	20	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14E	1400	1400	830	8500	361 × 10 ³	25	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14F	1400	1400	830	8500	361 × 10 ³	30	285	1000	60	1.900	0.357	0.0320	W10
R0878LC18K	1800	1800	878	7500	281 × 10 ³	60	720	1000	60	1.447	0.480	0.0320	W10
R0878LC18L	1800	1800	878	7500	281 × 10 ³	65	720	1000	60	1.447	0.480	0.0320	W10
R0878LC18M	1800	1800	878	7500	281 × 10 ³	70	720	1000	60	1.447	0.480	0.0320	W10
R0878LC20K	2000	1800	878	7500	281 × 10 ³	60	720	1000	60	1.447	0.480	0.0320	W10
R0878LC20L	2000	1800	878	7500	281 × 10 ³	65	720	1000	60	1.447	0.480	0.0320	W10
R0878LC20M	2000	1800	878	7500	281 × 10 ³	70	720	1000	60	1.447	0.480	0.0320	W10
R0878LC21K	2100	1800	878	7500	281 × 10 ³	60	720	1000	60	1.447	0.480	0.0320	W10
R0878LC21L	2100	1800	878	7500	281 × 10 ³	65	720	1000	60	1.447	0.480	0.0320	W10
R0878LC21M	2100	1800	878	7500	281 × 10 ³	70	720	1000	60	1.447	0.480	0.0320	W10
R0929LC12A	1200	1200	929	9000	405 × 10 ³	10	150	1000	60	1.549	0.350	0.0320	W10
R0929LC12B	1200	1200	929	9000	405 × 10 ³	12	150	1000	60	1.549	0.350	0.0320	W10
R0929LC12C	1200	1200	929	9000	405 × 10 ³	15	150	1000	60	1.549	0.350	0.0320	W10

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.	
			T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	A ² S		Q _{rr}	@ I _{TM}	@ -di/dt	@ T _{JM}				
V	V	A	A	A ² S	μs	μC	A	A/μs	V	mΩ	K/W			
R0964LC10C	1000	1000	964	9400	442 × 10 ³	15	170	1000	60	1.530	0.309	0.0320	W10	
R0964LC10D	1000	1000	964	9400	442 × 10 ³	20	170	1000	60	1.530	0.309	0.0320	W10	
R0964LC10E	1000	1000	964	9400	442 × 10 ³	25	170	1000	60	1.530	0.309	0.0320	W10	
R0964LC12C	1200	1200	964	9400	442 × 10 ³	15	170	1000	60	1.530	0.309	0.0320	W10	
R0964LC12D	1200	1200	964	9400	442 × 10 ³	20	170	1000	60	1.530	0.309	0.0320	W10	
R0964LC12E	1200	1200	964	9400	442 × 10 ³	25	170	1000	60	1.530	0.309	0.0320	W10	
R0990LC08A	800	800	990	11000	605 × 10 ³	10	90	1000	60	1.350	0.350	0.0320	W10	
R0990LC08B	800	800	990	11000	605 × 10 ³	12	90	1000	60	1.350	0.350	0.0320	W10	
R0990LC08C	800	800	990	11000	605 × 10 ³	15	90	1000	60	1.350	0.350	0.0320	W10	
R1045NC28L	2800	2800	1055	12500	781 × 10 ³	60	950	1000	60	1.640	0.430	0.0240	W11	
R1045NC28M	2800	2800	1055	12500	781 × 10 ³	70	950	1000	60	1.640	0.430	0.0240	W11	
R1045NC32L	3200	3200	1055	12500	781 × 10 ³	60	950	1000	60	1.640	0.430	0.0240	W11	
R1045NC32M	3200	3200	1055	12500	781 × 10 ³	70	950	1000	60	1.640	0.430	0.0240	W11	
R1124NC18J	1800	1800	1124	13500	0.91 × 10 ⁶	50	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC18K	1800	1800	1124	13500	0.91 × 10 ⁶	60	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC18L	1800	1800	1124	13500	0.91 × 10 ⁶	65	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC18M	1800	1800	1124	13500	0.91 × 10 ⁶	70	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC20J	2000	1800	1124	13500	0.91 × 10 ⁶	50	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC20K	2000	1800	1124	13500	0.91 × 10 ⁶	60	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC20L	2000	1800	1124	13500	0.91 × 10 ⁶	65	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC20M	2000	1800	1124	13500	0.91 × 10 ⁶	70	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC21J	2100	1800	1124	13500	0.91 × 10 ⁶	50	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC21K	2100	1800	1124	13500	0.91 × 10 ⁶	60	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC21L	2100	1800	1124	13500	0.91 × 10 ⁶	65	640	1000	60	1.540	0.379	0.0240	W11	
R1124NC21M	2100	1800	1124	13500	0.91 × 10 ⁶	70	640	1000	60	1.540	0.379	0.0240	W11	
R1127NC32P	3200	3200	1127	12800	819 × 10 ³	120	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC32R	3200	3200	1127	12800	819 × 10 ³	140	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC32S	3200	3200	1127	12800	819 × 10 ³	160	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC32T	3200	3200	1127	12800	819 × 10 ³	200	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC34R	3400	3400	1127	12800	819 × 10 ³	140	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC34S	3400	3400	1127	12800	819 × 10 ³	160	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC34T	3400	3400	1127	12800	819 × 10 ³	200	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC36R	3600	3600	1127	12800	819 × 10 ³	140	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC36S	3600	3600	1127	12800	819 × 10 ³	160	3500	1000	60	1.500	0.474	0.0220	W11	
R1127NC36T	3600	3600	1127	12800	819 × 10 ³	200	3500	1000	60	1.500	0.474	0.0220	W11	
R1158NC26N	2600	2600	1158	14500	1.05 × 10 ⁶	100	1600	1000	60	1.600	0.400	0.0220	W11	
R1158NC26P	2600	2600	1158	14500	1.05 × 10 ⁶	120	1600	1000	60	1.600	0.400	0.0220	W11	
R1158NC26T	2600	2600	1158	14500	1.05 × 10 ⁶	200	1600	1000	60	1.600	0.400	0.0220	W11	
R1178NC14E	1400	1400	1178	17000	1.45 × 10 ⁶	25	320	1000	60	1.600	0.300	0.0240	W11	
R1178NC14F	1400	1400	1178	17000	1.45 × 10 ⁶	30	320	1000	60	1.600	0.300	0.0240	W11	
R1178NC14G	1400	1400	1178	17000	1.45 × 10 ⁶	35	320	1000	60	1.600	0.300	0.0240	W11	
R1211NC12C	1200	1200	1211	17600	1.548 × 10 ⁶	15	230	1000	60	1.720	0.230	0.0240	W11	
R1211NC12D	1200	1200	1211	17600	1.548 × 10 ⁶	20	230	1000	60	1.720	0.230	0.0240	W11	
R1211NC12E	1200	1200	1211	17600	1.548 × 10 ⁶	25	230	1000	60	1.720	0.230	0.0240	W11	
R1271NC12B	1200	1200	1271	18000	1.62 × 10 ⁶	12	200	1000	60	1.547	0.237	0.0240	W11	
R1271NC12C	1200	1200	1271	18000	1.62 × 10 ⁶	15	200	1000	60	1.547	0.237	0.0240	W11	
R1271NC12D	1200	1200	1271	18000	1.62 × 10 ⁶	20	200	1000	60	1.547	0.237	0.0240	W11	
R1271NC12E	1200	1200	1271	18000	1.62 × 10 ⁶	25	200	1000	60	1.547	0.237	0.0240	W11	
R1275NC18L	1800	1800	1275	15500	1.20 × 10 ⁶	65	940	1000	60	1.207	0.342	0.0240	W11	
R1275NC18M	1800	1800	1275	15500	1.20 × 10 ⁶	70	940	1000	60	1.207	0.342	0.0240	W11	
R1275NC20L	2000	1800	1275	15500	1.20 × 10 ⁶	65	940	1000	60	1.207	0.342	0.0240	W11	
R1275NC20M	2000	1800	1275	15500	1.20 × 10 ⁶	70	940	1000	60	1.207	0.342	0.0240	W11	
R1275NC21L	2100	1800	1275	15500	1.20 × 10 ⁶	65	940	1000	60	1.207	0.342	0.0240	W11	
R1275NC21M	2100	1800	1275	15500	1.20 × 10 ⁶	70	940	1000	60	1.207	0.342	0.0240	W11	
R1279NC22J	2200	2200	1279	14800	1.10 × 10 ⁶	50	1250	1000	60	1.440	0.330	0.0220	W11	
R1279NC22K	2200	2200	1279	14800	1.10 × 10 ⁶	60	1250	1000	60	1.440	0.330	0.0220	W11	
R1279NC22L	2200	2200	1279	14800	1.10 × 10 ⁶	65	1250	1000	60	1.440	0.330	0.0220	W11	
R1279NC22M	2200	2200	1279	14800	1.10 × 10 ⁶	70	1250	1000	60	1.440	0.330	0.0220	W11	
R1279NC25J	2500	2500	1279	14800	1.10 × 10 ⁶	50	1250	1000	60	1.440	0.330	0.0220	W11	
R1279NC25K	2500	2500	1279	14800	1.10 × 10 ⁶	60	1250	1000	60	1.440	0.330	0.0220	W11	
R1279NC25L	2500	2500	1279	14800	1.10 × 10 ⁶	65	1250	1000	60	1.440	0.330	0.0220	W11	
R1279NC25M	2500	2500	1279	14800	1.10 × 10 ⁶	70	1250	1000	60	1.440	0.330	0.0220	W11	
R1280NC21J	2100	2100	1280	14800	1.10 × 10 ⁶	50	1200	1000	60	1.440	0.330	0.0220	W11	
R1280NC21K	2100	2100	1280	14800	1.10 × 10 ⁶	60	1200	1000	60	1.440	0.330	0.0220	W11	

littelfuse

W11
Weight 510 g

W46
Weight 1.2 kg

W79
Weight 890 g

W13
Weight 1.7 kg

W70
Weight 550 g

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.
			T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}			Q _{rr}	@ I _{TM}	@ -di/dt	@ T _{JM}			
				A	A ² S					V	mΩ		
R1280NC21L	2100	2100	1280	14800	1.10 × 10 ⁶	65	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC21M	2100	2100	1280	14800	1.10 × 10 ⁶	70	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22J	2200	2100	1280	14800	1.10 × 10 ⁶	50	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22K	2200	2100	1280	14800	1.10 × 10 ⁶	60	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22L	2200	2100	1280	14800	1.10 × 10 ⁶	65	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22M	2200	2100	1280	14800	1.10 × 10 ⁶	70	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25J	2500	2100	1280	14800	1.10 × 10 ⁶	50	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25K	2500	2100	1280	14800	1.10 × 10 ⁶	60	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25L	2500	2100	1280	14800	1.10 × 10 ⁶	65	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25M	2500	2100	1280	14800	1.10 × 10 ⁶	70	1200	1000	60	1.440	0.330	0.0220	W11
R1331NC10B	1000	1000	1331	18200	1.66 × 10 ⁶	12	200	1000	60	1.450	0.285	0.0220	W11
R1331NC10C	1000	1000	1331	18200	1.66 × 10 ⁶	15	200	1000	60	1.450	0.285	0.0220	W11
R1331NC10D	1000	1000	1331	18200	1.66 × 10 ⁶	20	200	1000	60	1.450	0.285	0.0220	W11
R1331NC12B	1200	1200	1331	18200	1.66 × 10 ⁶	12	200	1000	60	1.450	0.285	0.0220	W11
R1331NC12C	1200	1200	1331	18200	1.66 × 10 ⁶	15	200	1000	60	1.450	0.285	0.0220	W11
R1331NC12D	1200	1200	1331	18200	1.66 × 10 ⁶	20	200	1000	60	1.450	0.285	0.0220	W11
R1446NC12C	1200	1200	1446	19500	1.90 × 10 ⁶	15	300	1000	60	1.304	0.199	0.0240	W11
R1446NC12D	1200	1200	1446	19500	1.90 × 10 ⁶	20	300	1000	60	1.304	0.199	0.0240	W11
R1446NC12E	1200	1200	1446	19500	1.90 × 10 ⁶	25	300	1000	60	1.304	0.199	0.0240	W11
R1446NC12F	1200	1200	1446	19500	1.90 × 10 ⁶	30	300	1000	60	1.304	0.199	0.0240	W11
R1448NC14H	1400	1400	1448	15500	1.20 × 10 ⁶	40	950	1000	60	1.300	0.250	0.0220	W11
R1448NC14J	1400	1400	1448	15500	1.20 × 10 ⁶	50	950	1000	60	1.300	0.250	0.0220	W11
R1448NC18H	1800	1800	1448	15500	1.20 × 10 ⁶	40	950	1000	60	1.300	0.250	0.0220	W11
R1448NC18J	1800	1800	1448	15500	1.20 × 10 ⁶	50	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20H	2000	2000	1448	15500	1.20 × 10 ⁶	40	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20J	2000	2000	1448	15500	1.20 × 10 ⁶	50	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20K	2000	2000	1448	15500	1.20 × 10 ⁶	60	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20L	2000	2000	1448	15500	1.20 × 10 ⁶	65	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20M	2000	2000	1448	15500	1.20 × 10 ⁶	70	950	1000	60	1.300	0.250	0.0220	W11
R1605MC20E	2000	2000	1605	20700	2.14 × 10 ⁶	25	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20F	2000	2000	1605	20700	2.14 × 10 ⁶	30	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20G	2000	2000	1605	20700	2.14 × 10 ⁶	35	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20H	2000	2000	1605	20700	2.14 × 10 ⁶	40	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20J	2000	2000	1605	20700	2.14 × 10 ⁶	50	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22E	2200	2200	1605	20700	2.14 × 10 ⁶	25	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22F	2200	2200	1605	20700	2.14 × 10 ⁶	30	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22G	2200	2200	1605	20700	2.14 × 10 ⁶	35	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22H	2200	2200	1605	20700	2.14 × 10 ⁶	40	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22J	2200	2200	1605	20700	2.14 × 10 ⁶	50	900	1000	60	2.100	0.200	0.0150	W70
R1700MC18E	1800	1800	1700	20000	2.0 × 10 ⁶	25	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18F	1800	1800	1700	20000	2.0 × 10 ⁶	30	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18G	1800	1800	1700	20000	2.0 × 10 ⁶	35	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18H	1800	1800	1700	20000	2.0 × 10 ⁶	40	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18J	1800	1800	1700	20000	2.0 × 10 ⁶	50	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC21E	2100	1800	1700	20000	2.0 × 10 ⁶	25	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC21F	2100	1800	1700	20000	2.0 × 10 ⁶	30	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC21G	2100	1800	1700	20000	2.0 × 10 ⁶	35	1400	1000	60	1.600	0.250	0.0150	W70

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.	
			T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	A ² S		Q _{rr}	@ I _{TM}	@ -di/dt	@ T _{JM}				
V	V	A	A	A ² S	μs	μC	A	A/μs	V	mΩ	K/W			
R1700MC21H	2100	1800	1700	20000	2.0 × 10 ⁶	40	1400	1000	60	1.600	0.250	0.0150	W70	
R1700MC21J	2100	1800	1700	20000	2.0 × 10 ⁶	50	1400	1000	60	1.600	0.250	0.0150	W70	
R1955MC14D	1400	1400	1955	26500	3.51 × 10 ⁶	20	1000	1000	60	1.460	0.910	0.0150	W70	
R1955MC14E	1400	1400	1955	26500	3.51 × 10 ⁶	25	1000	1000	60	1.460	0.910	0.0150	W70	
R1955MC14F	1400	1400	1955	26500	3.51 × 10 ⁶	30	1000	1000	60	1.460	0.910	0.0150	W70	
R1955MC16D	1600	1600	1955	26500	3.51 × 10 ⁶	20	1000	1000	60	1.460	0.910	0.0150	W70	
R1955MC16E	1600	1600	1955	26500	3.51 × 10 ⁶	25	1000	1000	60	1.460	0.910	0.0150	W70	
R1955MC16F	1600	1600	1955	26500	3.51 × 10 ⁶	30	1000	1000	60	1.460	0.910	0.0150	W70	
R2075MC12A	1200	1200	2075	29000	4.21 × 10 ⁶	10	300	1000	60	1.390	0.167	0.0150	W70	
R2075MC12B	1200	1200	2075	29000	4.21 × 10 ⁶	12	300	1000	60	1.390	0.167	0.0150	W70	
R2075MC12C	1200	1200	2075	29000	4.21 × 10 ⁶	15	300	1000	60	1.390	0.167	0.0150	W70	
R2295HA22F	2200	2200	2295	30000	4.50 × 10 ⁶	30	875	1000	60	1.690	0.190	0.0110	W79	
R2295HA22H	2200	2200	2295	30000	4.50 × 10 ⁶	40	875	1000	60	1.690	0.190	0.0110	W79	
R2475ZC28M	2800	2800	2475	31000	4.81 × 10 ⁶	70	3900	4000	60	1.504	0.174	0.0110	W13	
R2475ZC28N	2800	2800	2475	31000	4.81 × 10 ⁶	100	3900	4000	60	1.504	0.174	0.0110	W13	
R2475ZC28R	2800	2800	2475	31000	4.81 × 10 ⁶	140	3900	4000	60	1.504	0.174	0.0110	W13	
R2475ZD28M	2800	2800	2475	31000	4.81 × 10 ⁶	70	3900	4000	60	1.504	0.174	0.0110	W46	
R2475ZD28N	2800	2800	2475	31000	4.81 × 10 ⁶	100	3900	4000	60	1.504	0.174	0.0110	W46	
R2475ZD28R	2800	2800	2475	31000	4.81 × 10 ⁶	140	3900	4000	60	1.504	0.174	0.0110	W46	
R2619ZC18J	1800	1800	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC18K	1800	1800	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC18L	1800	1800	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC20J	2000	2000	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC20K	2000	2000	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC20L	2000	2000	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC21J	2100	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC21K	2100	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC21L	2100	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC25J	2500	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC25K	2500	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZC25L	2500	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13	
R2619ZD18J	1800	1800	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD18K	1800	1800	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD18L	1800	1800	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD20J	2000	2000	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD20K	2000	2000	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD20L	2000	2000	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD21J	2100	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD21K	2100	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD21L	2100	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD25J	2500	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD25K	2500	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46	
R2619ZD25L	2500	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46	
R2620ZC22J	2200	2200	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W13	
R2620ZC22K	2200	2200	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W13	
R2620ZC22L	2200	2200	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W13	
R2620ZC25J	2500	2500	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W13	
R2620ZC25K	2500	2500	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W13	
R2620ZC25L	2500	2500	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W13	
R2620ZD22J	2200	2200	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W46	
R2620ZD22K	2200	2200	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W46	
R2620ZD22L	2200	2200	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W46	
R2620ZD25J	2500	2500	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W46	
R2620ZD25K	2500	2500	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W46	
R2620ZD25L	2500	2500	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W46	
R2714ZC14H	1400	1400	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W13	
R2714ZC14J	1400	1400	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W13	
R2714ZC14K	1400	1400	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W13	
R2714ZC18H	1800	1800	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W13	
R2714ZC18J	1800	1800	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W13	
R2714ZC18K	1800	1800	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W13	
R2714ZD14H	1400	1400	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W46	
R2714ZD14J	1400	1400	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W46	
R2714ZD14K	1400	1400	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W46	

Micro eases



W11
Weight 510 g



W36
Weight 500 g



W81
Weight 1.2 kg



W13
Weight 1.7 kg



W46
Weight 1.2 kg



W107
Weight 1.6 kg



W34
Weight 120 g



W58
Weight 90 g



W118
Weight 2.2 kg

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.	
			T _K = 55 °C	10 ms ½ sine V _R ≤ 60% V _{RRM}			Q _{rr}	@I _{TM}	@-di/dt	@ T _{JM}				
				A	A					A ² S	μC			A
R2714ZD18H	1800	1800	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W46	
R2714ZD18J	1800	1800	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W46	
R2714ZD18K	1800	1800	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W46	
R3115TJ24J	2400	2400	3115	56000	15.68 × 10 ⁶	50	3350	2000	60	1.884	0.120	0.0080	W81	
R3115TJ24K	2400	2400	3115	56000	15.68 × 10 ⁶	60	3350	2000	60	1.884	0.120	0.0080	W81	
R3115TJ28J	2800	2800	3115	56000	15.68 × 10 ⁶	50	3350	2000	60	1.884	0.120	0.0080	W81	
R3115TJ28K	2800	2800	3115	56000	15.68 × 10 ⁶	60	3350	2000	60	1.884	0.120	0.0080	W81	
R3370ZC12C	1200	1200	3370	43900	9.64 × 10 ⁶	15	600	4000	60	1.353	0.064	0.0110	W13	
R3370ZC12D	1200	1200	3370	43900	9.64 × 10 ⁶	20	600	4000	60	1.353	0.064	0.0110	W13	
R3370ZC12E	1200	1200	3370	43900	9.64 × 10 ⁶	25	600	4000	60	1.353	0.064	0.0110	W13	
R3370ZD12C	1200	1200	3370	43900	9.64 × 10 ⁶	15	600	4000	60	1.353	0.064	0.0110	W46	
R3370ZD12D	1200	1200	3370	43900	9.64 × 10 ⁶	20	600	4000	60	1.353	0.064	0.0110	W46	
R3370ZD12E	1200	1200	3370	43900	9.64 × 10 ⁶	25	600	4000	60	1.353	0.064	0.0110	W46	
R4680EA24K	2400	2400	4680	67000	22.40 × 10 ⁶	60	3000	1000	60	1.509	0.128	0.0050	W107	
R4680EA24L	2400	2400	4680	67000	22.40 × 10 ⁶	65	3000	1000	60	1.509	0.128	0.0050	W107	
R4680EA24M	2400	2400	4680	67000	22.40 × 10 ⁶	70	3000	1000	60	1.509	0.128	0.0050	W107	
R4680EA28K	2800	2800	4680	67000	22.40 × 10 ⁶	60	3000	1000	60	1.509	0.128	0.0050	W107	
R4680EA28L	2800	2800	4680	67000	22.40 × 10 ⁶	65	3000	1000	60	1.509	0.128	0.0050	W107	
R4680EA28M	2800	2800	4680	67000	22.40 × 10 ⁶	70	3000	1000	60	1.509	0.128	0.0050	W107	
R5145FA42V	4200	4500	5145	66000	21.78 × 10 ⁶	250	12000	4000	60	1.659	0.107	0.0045	W118	
R5145FA42W	4200	4500	5145	66000	21.78 × 10 ⁶	300	12000	4000	60	1.659	0.107	0.0045	W118	
R5145FA45V	4500	4500	5145	66000	21.78 × 10 ⁶	250	12000	4000	60	1.659	0.107	0.0045	W118	
R5145FA45W	4500	4500	5145	66000	21.78 × 10 ⁶	300	12000	4000	60	1.659	0.107	0.0045	W118	
R5370EA18J	1800	1800	5370	70000	24.5 × 10 ⁶	50	3000	1000	60	1.661	0.071	0.0050	W107	
R5370EA18K	1800	1800	5370	70000	24.5 × 10 ⁶	60	3000	1000	60	1.661	0.071	0.0050	W107	
R5370EA22J	2200	2200	5370	70000	24.5 × 10 ⁶	50	3000	1000	60	1.661	0.071	0.0050	W107	
R5370EA22K	2200	2200	5370	70000	24.5 × 10 ⁶	60	3000	1000	60	1.661	0.071	0.0050	W107	

Insulated Gate Bi-polar Transistors

As a pioneer of Press-Pack IGBT technology, we are able to offer a range of class-leading devices with voltage ratings of 4.5 kV (2.8 kV DC link), and 6.5 kV (3.6 kV DC link). The construction of these devices is totally free from wires and solder bonds, which all but eliminates the problems of mechanical fatigue associated with conventional modules. Internal stray inductance in both the gate connections and emitter connections is vastly reduced when compared to conventional modules, leading to improved ruggedness and short circuit behavior, which is further enhanced by the direct cooling of the emitter side of the chip.

These devices are based on a state-of-the-art soft punch through (SPT++) process, which yields exceptional values of $V_{CE(sat)}$ and soft switching behavior despite the high voltage ratings. The devices feature a positive temperature coefficient, making them suitable for reliable parallel operation. Devices are available with or without integral anti-parallel diode; a range of complimentary high-power sonic diodes optimized for use with these IGBTs is now accessible, with a new generation using improved technology currently in development. Please contact your representative for more information.

Press-pack IGBTs exhibit exceptional power cycling performance that is typically an order of magnitude better than other modules, making them highly suited to applications in which there are repeated cyclic power demands, such as in metals and traction drive systems. Press-pack IGBTs have a stable short circuit failure mode which, given its safety benefits, make them an ideal choice for medium- and high-voltage applications in which series connection is required. Stable short circuit failure mode allows for the design in of n+ redundancy without additional bypass switches and costly explosion proof enclosures. Typical examples include HVDC, FACTS, Active VAr controllers/compensators, and medium-voltage drives. In applications above 4 MW, press-pack IGBTs offer exceptional power density that far exceeds that which is achievable with comparable modules in multi-level/MMC-based converters.

These PPIGBT are largely backward-compatible with standard 4.5 kV GTOs in many applications, such as AC drives. Thus, these parts are a simple and economical path to upgrade or refurbish equipment that previously used GTOs, such as locomotives or medium-voltage drives.

They are suitable for all cooling options, including direct liquid immersion. Complementary gate drives, mounting clamps, and passive components are all available.

IXYS eXtreme



W40
Weight 430 g



W45
Weight 2 kg



W96
Weight 1.5 kg



W109
Weight 360 g



W41
Weight 1.2 kg



W67
Weight 650 g



W98
Weight 1.7 kg



W110
Weight 2.8 kg



W44
Weight 1.2 kg



W95
Weight 825 g



W103
Weight 3.2 kg

IGBTs—Capsule Types

Part Number	V _{CES} V	I _C A	I _{CM} A	V _{CE(sat)} @ I _C V	IGBT Switching Typical		V _F I _F = I _C V	Diode Recovery Typical			T _{JM} °C	R _{thJK}		Fig. No.
					E _{ON} J	E _{OFF} J		I _{rrm} A	t _{rr} µs	Q _r µC		IGBT K/W	Diode K/W	
T0115QB45G	4500	115	230	3.65	0.80	0.62	3.7	120	1.5	145	125	0.1080	0.172	W109
T0240NB45E	4500	240	480	3.6	1.50	1.00	N/A	N/A	N/A	N/A	125	0.0546	N/A	W40
T0340VB45G	4500	340	680	3.5	2.20	1.30	3.45	220	3.2	500	125	0.0364	0.0576	W67
T0510VB45E	4500	510	1020	3.5	3.30	2.20	N/A	N/A	N/A	N/A	125	0.0243	N/A	W67
T0600TB45A	4500	600	1200	3.7	3.60	2.50	3.7	640	1.2	700	125	0.0218	0.0432	W41
T0800TB45E	4500	800	1600	3.5	5.00	3.50	N/A	N/A	N/A	N/A	125	0.0156	N/A	W41
T0800EB45G	4500	800	1600	3.5	5.00	3.50	3.5	550	1.7	1020	125	0.0156	0.0247	W44
T0900EB45A	4500	900	1800	3.6	5.40	3.80	3.9	800	1.6	1000	125	0.0146	0.0288	W44
T1200EB45E	4500	1200	2400	3.6	7.00	5.50	N/A	N/A	N/A	N/A	125	0.0104	N/A	W44
T1600GB45G	4500	1600	3200	3.5	12.00	8.70	3.45	1270	1.75	1960	125	0.0078	0.0123	W45
T1800GB45A	4500	1800	3600	3.6	11.00	10.50	3.9	1600	1.6	2000	125	0.0073	0.0115	W45
T2000BB45G	4500	2000	4000	3.5	14.00	12.50	3.55	2050	1.6	2450	125	0.0064	0.0096	W110
T2400GB45E	4500	2400	4800	3.6	14.00	13.00	N/A	N/A	N/A	N/A	125	0.0052	N/A	W45
T2960BB45E	4500	3000	6000	3.6	11.50	17.50	N/A	N/A	N/A	N/A	125	0.0042	N/A	W110
T0258HF65G	6500	258	516	4.8	1.80	1.45	3.450	300	1.0	410	125	0.0328	0.0567	W95
T0385HF65E	6500	385	770	4.8	2.70	2.20	N/A	N/A	N/A	N/A	125	0.0219	N/A	W95
T0900AF65E	6500	900	1800	4.8	6.3	5.1	N/A	N/A	N/A	N/A	125	0.0094	N/A	W98
T0900DF65A	6500	900	1800	4.8	6.30	5.10	3.400	1050	1.0	1450	125	0.0094	0.0155	W96
T1290BF65A	6500	1290	2580	4.8	9.00	7.30	3.600	1400	1.0	1900	125	0.0066	0.0122	W103
T1375DF65E	6500	1375	2750	4.8	9.60	7.80	N/A	N/A	N/A	N/A	125	0.0062	N/A	W96
T1890BF65E	6500	1890	3780	4.8	13.20	10.60	N/A	N/A	N/A	N/A	125	0.0045	N/A	W103

Press-Pack IGBT Gate Drive Units

The C044BG400 IGBT Gate Driver is a low-power consumption driver with on board VCE desaturation detection for high-reliability applications.

The driver features a fibre-optic communication interface for drive, status, and switching feedback signals. A fully supervised DC/DC converter with EMI filtering, low coupling capacitance, and high partial discharge level is integrated into the board. The high-voltage collector sense and gate interface are implemented on a separate card to allow close coupling to the IGBT. A range of pre-configured boards is available to complement the range of press-pack IGBTs — other applications upon request.

Gate Drive Part Number	IGBT Type
C0044BG400SBX	T0115QB45G
C0044BG400SBL	T0240NB45E
C0044BG400SBQ	T0340VB45G
C0044BG400SBE	T0510VB45E
C0044BG400SBM	T0600TB45A
C0044BG400SBG	T0800EB45G
C0044BG400SBN	T0800TB45E
C0044BG400SBP	T0900EB45A
C0044BG400SBR	T1200EB45E
C0044BG400SBJ	T1600GB45G
C0044BG400SBS	T1800GB45A
C0044BG400SBZ	T2000BB45G
C0044BG400SBT	T2400GB45E
C0044BG400SBW	T2960BB45E

Features

- High reliability topology
- Designed for ultra low-power consumption
- Build-in DC/DC-converter with soft start
- Integrated input filter for low EMI
- Separate low-impedance path for parasitic EMI currents
- PD-Voltage levels available up to 11 kV on request.
- Low impedance from gate to emitter at start-up and power fail
- Monitoring of all secondary supply voltages
- Monitoring of IGBT switching status (VCE-de-sat detection)
- Soft switch-OFF at VCE-de-sat fault condition
- Fiber-optic links for switching commands and status control
- Low-light protection for input signals
- Short-pulse suppression (configurable)
- Balanced propagation delay time
- Gate current up to 44 A
- Optional gate-speed-up capacitors

Application

- Large and medium drives
- Renewable generation
- Utilities; scale converters



Littelfuse



W116

Single Pre-Mounted Thyristors


Part Number	V_{RRM} V_{DRM}	I_{TAV}	@ T_C	I_{TRMS}	I_{TRMS} 125 °C 10 ms	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Isolation Voltage AC RMS, 50 Hz, 1 min	Package
	per Die											
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W	V	
N4340TJ180MBR	1800	1110	85	3500	55000	0.886	0.105	125	0.031	0.0035	3000	W116
N4340TJ220MBR	2200	1110	85	3500	55000	0.886	0.105	125	0.031	0.0035	3000	W116

Single Pre-Mounted Diodes

Part Number	V_{RRM} V_{DRM}	I_{TAV}	@ T_C	I_{TRMS}	I_{TRMS} 150 °C 10 ms	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Isolation Voltage AC RMS, 50 Hz, 1 min	Package
	per Die											
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W	V	
W8570TJ180MBR	1800	2830	85	6435	70200	0.69	0.050	175	0.031	0.0035	3000	W116
W8570TJ220MBR	2200	2830	85	6435	70200	0.69	0.050	175	0.031	0.0035	3000	W116
W9830TJ120MBR	1200	3345	85	7280	72000	0.67	0.043	190	0.031	0.0035	3000	W116
W9830TJ150MBR	1500	3345	85	7280	72000	0.67	0.043	190	0.031	0.0035	3000	W116

Power Semiconductor Chips

Bipolar Chips	V_{RRM}/V_{DRM}	$I_{F(AV)M}/I_{T(AV)M}$	t_r
	V	A	ns
Schottky Diodes	8 – 200	5 – 300	–
HiPerFRED™ (Low Leakage)	200 – 1200	10 – 150	30 – 40
Sonic™ Fast Recovery Diodes	600 – 1800	5 – 150	30 – 60
FRED™ (Low Forward Voltage Drop)	200 – 1200	10 – 150	40 – 60
Semi-Fast Diodes	1200 – 1600	15 – 60	60 – 100
Rectifier Diodes	1200 – 2200	10 – 400	–
Phase Control Thyristors	800 – 2200	5 – 300	–

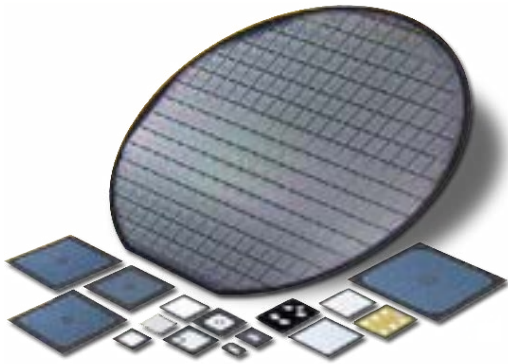

Mode of Shipment

- in wafer form, unsawn, electrically tested, rejects are inked
- sawn wafer on foil, electrically tested, rejects are inked
- known good die in tray (Waffle Pack)
- customized die sizes / geometry on request

For chip sales please see:

<https://www.littelfuse.com/products/power-semiconductors>

Stacks and Accessories

Power Semiconductor Accessories

With over 80 years of experience, our dedicated team of talented engineers delivers a wide variety of industry leading solutions ranging from simple standard sub-assemblies to complicated, multi-megawatt power systems.

The Power Electronic Stacks group has been an integral part of our core business since the early 1920s, when we began production on the first commercially available solid-state rectifiers.

Our dedicated global team of highly experienced specialists are on hand to provide our customers with first-class support on everything from a simple air-cooled

rectifiers to highly integrated custom power converters.

Using the latest 3D modeling and simulation techniques, we can significantly reduce the cycle time from concept to fully developed design, minimizing risk and identifying opportunities for optimization early on in the project.

Our 300m² dedicated production facility in the UK is complemented by a well-equipped power lab and similar production facilities in Long Beach, California. These facilities are supported by an expanded team of engineers and technicians as well as continued investment and growth in this strategic area of our business.



IGBT Assemblies

Our catalogue of standard press-pack IGBT assemblies include a range of 3-level inverters. Three separate designs are available: a totally independent 3.3 kV system, a 6.6 kV system, and a 10 kV system. The 6.6 kV and 10 kV systems are based on the combination of two IGBT stacks and one diode stack. Each system benefits from direct water cooling to provide highly effective heat dissipation away from the devices and pre-loaded disc

spring clamping to evenly distribute the applied force across the entire surface area of the device.

Also designed into each system are an integrated snubber circuit design and an isolated clamping rod system to limit the occurrence of Eddy currents within the unit.

Pulsed Power

As a pioneer in the development of solid-state pulsed power components and systems, we deliver anything from discrete components to fully integrated energy transfer switches. With systems successfully delivering voltage ratings of over 50kV and pulsed currents of up to 140kA, we have a wealth of experience at your disposal. Our modular design solutions based on either pulse thyristor or press-pack IGBT technology. Our integration of control and protection functions provides you with

a flexible “black-box” approach to energy transfer problems.

We are involved with pulsed power on a global basis, working with prestigious research organizations such as CERN, Switzerland as well as medium-voltage manufacturers for emerging commercial applications such as laser supplies, PUV and PEF sterilization, magnetization, and metal forming.



Traction Applications

With over 40 years of experience, our dedicated team of engineers provides solutions to a wide range of design problems, ranging from simple trackside rectifiers to complex propulsion converters.

The Power Electronic Stacks group pioneered the early development of solid-state converters for traction systems in the late 1950s as part of the Westinghouse Brake & Signal Company. Over the years, we have gained an enviable reputation within the rail sector as a solution provider.

By leveraging our experience and broad network of contacts within the industry, we can offer assistance in tackling issues such as component obsolescence, improving power equipment reliability, contract maintenance of power modules, refurbishment of power electronics, upgrades to existing systems and, of course, subcontracting manufacturers for new projects.

Working systematically to the highest international standards, we can give your equipment a new lease on life and help protect your investments in these valuable assets.

Component obsolescence is becoming a significant problem for the rail sector, as equipment design life invariably exceeds that of the modern power electronics components. Our highly skilled team of engineers can re-engineer older equipment to incorporate the latest technology whilst maintaining compatibility.

As equipment reaches its half-life, many of its major power components will reach the end of their useful life, resulting in a sharp decline in its reliability and availability. In these circumstances, we can offer a full overhaul and refurbishment program for your power electronics, from engineering analyses, tests, and measurements through to delivery and validation of refurbished equipment.

For larger projects such as fleet-wide refits, we can work within a consortium of specialist international companies to ensure that you have the right skills on hand to deliver turnkey solutions to your requirements. This may include system analysis, project management, risk assessment, and safety cases.



Custom Assemblies—Our Design Philosophy

From concept through development and manufacturing to after sales support, we strongly believe in working closely with our customer every step of the way—extending our philosophy of teamwork beyond our own organization.

We understand that good communication and close collaboration help us provide the very best services to our customers.

Using the latest 3D modeling techniques, we can visualize concepts and check form, fit, and function with virtual prototypes. In addition, by utilizing advanced

software packages, we can carry out simulation modeling to model pressure drops through coolers/manifolds and heat flows through heatsinks.

Whether finding solutions to complex engineering problems or simply manufacturing to your designs, you will find the Power Electronic Stacks Group offers outstanding value for money, excellent quality, and first-class customer service.

By working closely together from the very start of our projects, we aim to provide the best solutions on time and within budget.




Silicon Assemblies

A wide range of units is available, incorporating international-standard outline silicon semiconductor devices. Our products have gained a global reputation for quality in military, industrial, and domestic applications.

Standard extruded aluminum heatsink profiles are used for mounting discrete semiconductor devices in various configurations, for example:

• Single-phase diode bridges with current ratings	from	70	to	5710	Amps DC
• Single-phase half or fully controlled bridges	from	35	to	2200	Amps DC
• Three-phase diode bridges with current ratings	from	100	to	7190	Amps DC
• Three-phase half or fully controlled bridges	from	45	to	3790	Amps DC
• Hexaphase single way diode assemblies	from	200	to	14380	Amps DC
• Hexaphase single way thyristor assemblies	from	90	to	7580	Amps DC
• AC regulators, single and three-phase	from	40	to	2940	Amps RMS

Included in our standard range are solid-state, water-cooled AC regulators for resistance welding, with ratings from 315 to 3020 Amps RMS. Also available are water-cooled, single and three-phase assemblies from 1200 to 6000 Amps RMS. All the above ranges are suitable for 440VRMS, 50Hz mains operation.



Beyond Semiconductors

Our flexible manufacturing facility can readily adapt to our customers' needs. In addition to power semiconductor assembly, we offer complementary sub-assemblies tailored to our customers' requirements, such as fuse panels and capacitor banks. Lastly, we can also contract manufacturers for your designs.



Products and Accessories

Application and engineering support

Our highly experienced technical team is on hand to provide our customers with first-class support for everything from the applications of our range of discrete devices to the design and development of complex systems. We can help you from concept through design, to manufacturing and tests, working closely with you every step of the way.

Components

To complement our range of power semiconductors and assemblies, we offer a range of supporting components, including:

- Heatsinks
- Coolers
- Mounting clamps
- Ultra-rapid semiconductor protection fuses
- Capacitors
 - Snubbers
 - Rectification
 - Specialist DC link
- Gate drive units



Westack—Modular Solutions

Assembly Part Number	I _{DC} amps Air Forced 2.5m/s			I _{FSM} amps I _{TSM} amps	P _t A ² s	Dimensions (mm)				Mass kg	Device Type and Quantity	Heat Sink Type		
	T _a = 25°C	T _a = 35°C	T _a = 45°C			Fig.	W	H	D					
Single-Phase Diode Bridges						Approx. Total Loss 2 × I _{DC} @ 25°C								
SXB1375B	1375	1303	1230	19500	1.9 × 10 ⁶	1	382	325	405	20	W2058LC (4)	B(2 × 83.1 × 180)		
SXB2096B	2096	1987	1874	33000	5.45 × 10 ⁶	1	382	325	405	20	W3270NC (4)	B(2 × 83.1 × 180)		
SXB3442B	3442	3277	3109	53000	13.5 × 10 ⁶	2	382	593	405	40	W5696VC (4)	B(2 × 180)		
SXB4264B	4264	4051	3835	72000	22.5 × 10 ⁶	2	382	593	405	40	W8405ZC (4)	B(2 × 180)		
Three-Phase Diode Bridges						Approx. Total Loss 2.5 × I _{DC} @ 25°C								
SXB1920G	1920	1822	1721	19500	1.9 × 10 ⁶	3	548	325	405	30	W2058LC (6)	B(2 × 83.1 × 180)		
SXB2939G	2939	2788	2634	33000	5.45 × 10 ⁶	3	548	325	405	30	W3270NC (6)	B(2 × 83.1 × 180)		
SXB4869G	4869	4640	4407	53000	13.5 × 10 ⁶	4	548	593	405	60	W5696VC (6)	B(2 × 180)		
SXB5993G	5993	5701	5402	72000	22.5 × 10 ⁶	4	548	593	405	60	W8405ZC (6)	B(2 × 180)		
Six-Phase Diode. Single Way With IPT						Approx. Total Loss 1.25 × I _{DC} @ 25°C								
SXB3840HEX	3840	3644	3442	19500	1.9 × 10 ⁶	5	548	325	395	30	W2058LC (6)	B(2 × 83.1 × 180)		
SXB5877HEX	5877	5576	5268	33000	5.45 × 10 ⁶	5	548	325	395	30	W3270NC (6)	B(2 × 83.1 × 180)		
SXB9737HEX	9737	9281	8813	53000	13.5 × 10 ⁶	6	548	593	395	60	W5696VC (6)	B(2 × 180)		
SXB11987HEX	11987	11401	10804	72000	22.5 × 10 ⁶	6	548	593	395	60	W8405ZC (6)	B(2 × 180)		
Six-Phase Thyristor. Single Way With IPT						Approx. Total Loss 1.5 × I _{DC} @ 25°C								
SXB3529HEXT	3529	3244	2949	29600	4.38 × 10 ⁶	5	548	325	395	30	N1802LC (6)	B(2 × 83.1 × 180)		
SXB4649HEXT	4649	4270	3878	37000	6.85 × 10 ⁶	6	548	593	395	60	N2500VC (6)	B(2 × 180)		
SXB6240HEXT	6240	5714	5173	64000	20.5 × 10 ⁶	6	548	593	395	60	N4085ZC (6)	B(2 × 180)		
Single-Phase Fully Controlled Bridges						Approx. Total Loss 2.5 × I _{DC} @ 25°C								
SXB1265FB	1265	1161	1054	29600	4.38 × 10 ⁶	1	382	325	405	20	N1802NC (4)	B(2 × 83.1 × 180)		
SXB1645FB	1645	1508	1367	37000	6.85 × 10 ⁶	2	382	593	405	40	N2500VC (4)	B(2 × 180)		
SXB2167FB	2167	1981	1790	64000	20.5 × 10 ⁶	2	382	593	405	40	N4085ZC (4)	B(2 × 180)		
Three-Phase Fully Controlled Bridges						Approx. Total Loss 3 × I _{DC} @ 25°C								
SXB1764FG	1764	1622	1475	29600	4.38 × 10 ⁶	3	548	325	405	30	N1802NC (6)	B(2 × 83.1 × 180)		
SXB2324FG	2324	2135	1939	37000	6.85 × 10 ⁶	4	548	593	405	60	N2500VC (6)	B(2 × 180)		
SXB3120FG	3120	2857	2586	64000	20.5 × 10 ⁶	4	548	593	405	60	N4085ZC (6)	B(2 × 180)		

Westack—Modular Solutions

Cooling for each module section is provided using a low noise 115/230 V AC fan that is protected against overloading by an integral thermal cut-out.

Surge suppression and fusing provide reliable and safe operation. Surge suppression (which protects devices from voltage transients) and high-speed fuses (which protect against short circuits) are available. Contact IXYS UK for details.

All plastic components are UL-recognized and meet the requirements of the European Union Directive 2002/95/EC covering the restricted use of certain hazardous substances in electrical and electronic equipment.

ISO 9000 provides the standard against which all our products and services are measured.



Westack—Modular Solutions are available in six standard configurations; others by request.

Figure 1
Weight 20 kg



Figure 2
Weight 40 kg



Figure 3
Weight 20 kg



Figure 4
Weight 60 kg



Figure 5
Weight 30 kg



Figure 6
Weight 60 kg



Stacks and Accessories

WestackLITE–Modular Solutions

A simple but highly efficient range of stacks incorporating the WESPACK range of phase control thyristors.

Currently available in three standard configurations:

- AC voltage regulators
- Single-phase bridges
- Three-phase bridges

These stacks can easily be modified to meet individual customer requirements. Fully dimensioned drawings are available upon request from the Chippenham Factory.



Features and Benefits

WESPACK devices provide a maximum power rating for weight and volume without compromising on quality and reliability.

Cooling is provided by means of a low-noise, dual-voltage (230V/115V) AC fan that is protected against overloading by an integral thermal cut-out.

Surge suppression and fusing can be added to protect the devices from voltage transients and short circuits.

ISO 9000 2000 provides the standard against which all our products and services are measured.

Figure 1
Weight 10 kg

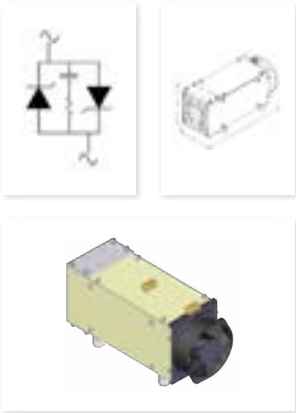


Figure 2
Weight 20 kg


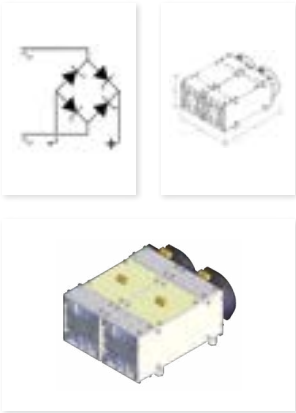


Figure 3
Weight 30 kg

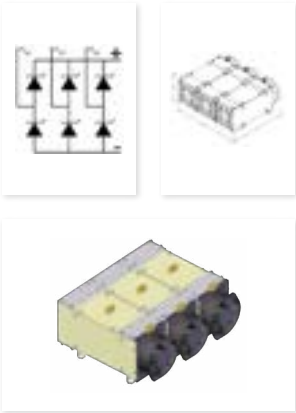

WestackLITE–Modular Solutions

Assembly Part Number	I _{DC} amps Air Forced 2.5m/s			I _{FSM} amps I _{TSM} amps	I ² t A ² s	Dimensions (mm)				Mass kg	Device Type and Quantity	Heat Sink Type		
	T _a = 25°C	T _a = 35°C	T _a = 45°C			Fig.	W	H	D					
AC Regulators						Approx. Total Loss 1.3·I _{RMS}						Figure 1		
SXC1195FR	1195	1098	997	19100	1.82 × 10 ⁶	1	168	415	212	10	N1806QK (2)	(2 × 150. 1 × 330)		
SXC1464FR	1464	1348	1227	32400	5.25 × 10 ⁶	1	168	415	212	10	N2367MK (2)	(2 × 150. 1 × 330)		
SXC1788FR	1788	1636	1480	50900	12.95 × 10 ⁶	1	168	415	212	10	N3904HK (2)	(2 × 150. 1 × 330)		
Single Phase Fully Controlled Bridges						Approx. Total Loss 2.5 × I _{DC}						Figure 2		
SXC1076FB	1076	988	897	19100	1.82 × 10 ⁶	2	330	415	212	20	N1806QK (4)	(2 × 150. 1 × 330)		
SXC1318FB	1318	1213	1104	32400	5.25 × 10 ⁶	2	330	415	212	20	N2367MK (4)	(2 × 150. 1 × 330)		
SXC1609FB	1609	1473	1332	50900	12.95 × 10 ⁶	2	330	415	212	20	N3904HK (4)	(2 × 150. 1 × 330)		
Three Phase Fully Controlled Bridges						Approx. Total Loss 3 × I _{DC}						Figure 3		
SXC1517FG	1517	1396	1270	19100	1.82 × 10 ⁶	3	492	415	212	30	N1806QK (6)	(2 × 150. 1 × 330)		
SXC1871FG	1871	1725	1573	32400	5.25 × 10 ⁶	3	492	415	212	30	N2367MK (6)	(2 × 150. 1 × 330)		
SXC2319FG	2319	2125	1926	50900	12.95 × 10 ⁶	3	492	415	212	30	N3904HK (6)	(2 × 150. 1 × 330)		

Power Semiconductor Accessories

As part of our continuing commitment to meet our customers' demands, we offer a range of products to support our high-power semiconductor devices and our silicon assembly business.

The following pages show a selection of accessories available to our customers, from heatsinks and coolers, to bar or box clamps, to mounting grease:

Part Number	Old Part Number	Accessory
XST1000M08P	PTFE1000M8	M8 PTFE tube × 1 m length insulation
XST1000M10P	PTFE1000M10	M10 PTFE tube × 1 m length insulation
XST1000M12P	PTFE1000M12	M12 PTFE tube × 1 m length insulation
XST1000M16P	PTFE1000M16	M16 PTFE tube × 1 m length insulation
L0001YC600XXX	n/a	30mm diameter electrode Insulator Capsule
L0001QC600XXX	n/a	38mm diameter electrode Insulator Capsule
L0001NC600XXX	n/a	47mm diameter electrode Insulator Capsule
L0001HC600XXX	n/a	66mm diameter electrode Insulator Capsule
L0001ZF600XXX	n/a	73mm diameter electrode Insulator Capsule
L0001TC600XXX	n/a	75mm diameter electrode Insulator Capsule

Part Number	Old Part Number	Accessory	Type
XSL200D8WRC	U9948	200mm long single Co-Axial cable, Red / White, M5 ring terminal for Ø75 IGBT & below	IGBT
XSL200D8WRCP	U9947	200mm long double Co-Axial cable, Red / White, M5 ring terminal for Ø85 IGBT & above	IGBT
XSL220C2WRT	–	220mm long twisted pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL300C2WRP	U9900	300mm long pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL300C2WS	U9900 (Gate Only)	300mm long gate wire, Silicone sleeve cable 16/0,2, White, M4 ring terminal	Thyristor
XSL350C2WRP	U9723	350mm long pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL400C2WRP	U9860	400mm long pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL500C2WRP	U9855	500mm long pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL600C2WRP	U9775	600mm long pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL1000C2WRP	U9734/U9801/U9849	1000mm long pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL1000C2WRT	U9952	1000mm long twisted pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor
XSL1100C2WRT	U9779	1100mm long twisted pair, Silicone sleeve cable 16/0,2, Red / White, M4 ring terminal	Thyristor

Mounting Hardware



WC18



WC45



WC48/49



WC50

Standard Bar Clamps

Part Number	Fixing Centers	Rod Size	Outline	Mounting Surface Diameter	Nominal Thickness	T _J Max. °C	Outline No.
	mm			mm			
XK0450DA056M	65	M8	DO-200AA/TO-200AB	19.0	13.8	190	WC2
XK0450DT056M	65	M8	DO-200AA/TO-200AB	19.0	13.8	190	WC3
XK0450SA056M	65	M8	DO-200AA/TO-200AB	19.0	13.8	190	WC1
XK0550DA056M	65	M8	GTO	29.5	16	190	WC5
XK0550SA056M	65	M8	GTO	29.5	16	190	WC4
XK0900DA056M	65	M8	Diode/Thyristor	25.1	14.6	190	WC7
XK0900DT056M	65	M8	Diode/Thyristor	25.1	14.6	190	WC8
XK0900SA056M	65	M8	Diode/Thyristor	25.1	14.6	190	WC6
XK0600DA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC10
XK0600SA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC9
XK1000DA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC12
XK1000SA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC11
XK1100DA076M	89	M10	DO-200AB/TO-200AC	34.0	26.2	190	WC13
XK1130DA076M	89	M10	DO-200AB/TO-200AC	34.0	26.2	190	WC15
XK1130DT076M	89	M10	DO-200AB/TO-200AC	34.0	26.2	190	WC16
XK1130SA076M	89	M10	DO-200AB/TO-200AC	34.0	26.2	190	WC14
XK1800DA076M	89	M10	Wespack PCT	38.0	14	190	WC18
XK1800DT076M	89	M10	Wespack PCT	38.0	14	190	WC19
XK1800SA076M	89	M10	Wespack PCT	38.0	14	190	WC17
XK2100DA076M	89	M10	GTO	47.0	27	190	WC21
XK2100DA076ML	89	M10	GTO	47.0	27	125	WC21
XK2100SA076M	89	M10	GTO	47.0	27	190	WC20
XK2100SA076ML	89	M10	GTO	47.0	27	125	WC20
XK2140DA076M	89	M10	DO-200	47.0	26.8	190	WC23
XK2140DA076ML	89	M10	DO-200/Thyristor	47.0	26.8	125	WC23
XK2140DT076M	89	M10	DO-200	47.0	26.8	190	WC24
XK2140DT076ML	89	M10	DO-200/Thyristor	47.0	26.8	125	WC24
XK2140SA076M	89	M10	DO-200	47.0	26.8	190	WC22
XK2140SA076ML	89	M10	DO-200/Thyristor	47.0	26.8	125	WC22
XK2700DA076M	89	M10	Wespack PCT	50.0	14	190	WC26
XK2700DT076M	89	M10	Wespack PCT	50.0	14	190	WC27
XK2700SA076M	89	M10	Wespack PCT	50.0	14	190	WC25

Standard Bar Clamps

Part Number	Fixing Centers	Rod Size	Outline	Mounting Surface Diameter	Nominal Thickness	T _J Max. °C	Outline No.
	mm			mm			
XK2000DA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC29
XK2000SA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC28
XK2500DA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC31
XK2500SA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC30
XK2500DA116M	132	M12	GTO	63.0	26	190	WC33
XK2500DA116ML	132	M12	GTO	63.0	26	125	WC33
XK2500SA116M	132	M12	GTO	63.0	26	190	WC32
XK2500SA116ML	132	M12	GTO	63.0	26	125	WC32
XK3000DA116M	132	M12	DO-200AD	63.0	33	190	WC35
XK3000DA116ML	132	M12	DO-200AD/Thyristor	63.0	33	125	WC35
XK3000SA116M	132	M12	DO-200AD	63.0	33	190	WC34
XK3000SA116ML	132	M12	DO-200AD/Thyristor	63.0	33	125	WC34
XK3500DA116M	132	M12	GTO	75.0	26	190	WC37
XK3500DA116ML	132	M12	GTO	75.0	26	125	WC37
XK3500SA116M	132	M12	GTO	75.0	26	190	WC36
XK3500SA116ML	132	M12	GTO	75.0	26	125	WC36
XK4000DA116M	132	M12	Diode/Thyristor	73.0	36.8	190	WC39
XK4000DA116ML	132	M12	Thyristor	73.0	36.8	125	WC39
XK4000SA116M	132	M12	Diode/Thyristor	73.0	36.8	190	WC38
XK4000SA116ML	132	M12	Thyristor	73.0	36.8	125	WC38
XK5000DA128M	146	M16	GTO	75.0	26	190	WC40
XK5000DA128ML	146	M16	GTO	75.0	26	125	WC40
XK7000DA128M	146	M16	Diode/Thyristor	75.0	26.6	190	WC41
XK7000DA128ML	146	M16	Thyristor	75.0	26.6	125	WC41
XK3060DA140ML	154	M12	Press-Pack IGBTs	85.1	26	125	WC43
XK3060SA140ML	154	M12	Press-Pack IGBTs	85.1	26	125	WC42
XK9000SA160M	180	M16	Diode/Thyristor	99.3	35.8	190	WC44
XK9000SA160ML	180	M16	Thyristor	99.3	35.8	125	WC44
XK9000DA160M	180	M16	Diode/Thyristor	99.3	35.8	190	WC45
XK9000DA160ML	180	M16	Thyristor	99.3	35.8	125	WC45
XK6120DA180ML	196	M16	Press-Pack IGBTs	125.0	26	125	WC46
XK6120SA180ML	196	M16	Press-Pack IGBTs	125.0	26	125	WC47
XK8000DA180ML	196	M16	Press-Pack IGBTs	132.0	26	125	WC67
XK8000SA180ML	196	M16	Press-Pack IGBTs	132.0	26	125	WC68

Standard Bar Clamp Kits

for rectifier diodes & phase control thyristors

These single-side cooled square base mounting clamps are suitable for 34 mm to 50 mm diameter electrode devices with clamping forces that range from 1130 Kgf to 2140 Kgf. They are suitable for devices with blocking voltages from 400 volts up to 6 KV.

Part Number	Electrode Diameter	Outline
XK1500CB034M	34-38	WC64
XK1130SB076M	34-38	WC65
XK2140SB076M	47-50	WC66

Standard part replacements for the obsolete flat-base power silicon diodes types KBN/R, KCN/R, and KDN/R. For other voltages and thyristor options, please consult the factory.

✂✂✂✂s And ✂✂✂✂ssories



WC58



WC60



WC62



WC59




WC61



WC63

Standard Bar Clamps

Range	Part Number	#### = Force	Max cell dia.	T _J MAX	xxx = max Z - dim range	Outline No.
		kgf	mm	°C	mm	
XSK042	XSK####DA042xxx	0500/0900	42	190	025-076*	WC58
	XSK####DT042xxx	0500/0900	42	190	025-076*	WC59
	XSK####DF042xxx	0500/0900	42	190	025-076*	WC60
XSK054	XSK####DA054xxx	900	54	190	025-076*	WC58
	XSK####DT054xxx	900	54	190	025-076*	WC59
	XSK####DF054xxx	900	54	190	025-076*	WC60
XSK056	XSK####DA056xxx	0500/0900	56	190	038-120*	WC58
	XSK####DT056xxx	0500/0900	56	190	038-120*	WC59
	XSK####DF056xxx	0500/0900	56	190	038-120*	WC60
	XSK####DA056xxx	1500	56	190	038-120*	WC58/SP
	XSK####DT056xxx	1500	56	190	038-120*	WC59/SP
	XSK####DF056xxx	1500	56	190	038-120*	WC60/SP
XSK065	XSK####DA065xxx	0500/0900	65	190	038-120*	WC58
	XSK####DT065xxx	0500/0900	65	190	038-120*	WC59
	XSK####DF065xxx	0500/0900	65	190	038-120*	WC60
	XSK####DA065xxx	1500	65	190	038-120*	WC58/SP
	XSK####DT065xxx	1500	65	190	038-120*	WC59/SP
	XSK####DF065xxx	1500	65	190	038-120*	WC60/SP
XSK075	XSK####DA075xxx	0900/1500	75	190	038-120*	WC58
	XSK####DT075xxx	0900/1500	75	190	038-120*	WC59
	XSK####DF075xxx	0900/1500	75	190	038-120*	WC60
	XSK####DA075xxx	2200	75	190	038-120*	WC61
	XSK####DT075xxx	2200	75	190	038-120*	WC62
	XSK####DF075xxx	2200	75	190	038-120*	WC63
XSK087	XSK####DA087xxx	1500/2200	87	190	038-120*	WC61
	XSK####DT087xxx	1500/2200	87	190	038-120*	WC62
	XSK####DF087xxx	1500/2200	87	190	038-120*	WC63
	XSK####DA087xxx	3000	87	190	038-120*	WC61/SP
	XSK####DT087xxx	3000	87	190	038-120*	WC62/SP
	XSK####DF087xxx	3000	87	190	038-120*	WC63/SP
XSK103	XSK####DA103xxx	2200	103	190	038-120*	WC58/SP
	XSK####DF103xxx	2200	103	190	038-120*	WC60/SP
	XSK####DA103xxx	3200	103	190	038-120*	WC61/SP
	XSK####DF103xxx	3200	103	190	038-120*	WC63/SP
	XSK####DA103xxx	4000	103	190	038-120*	WC61/SP
	XSK####DF103xxx	4000	103	190	038-120*	WC63/SP
XSK112	XSK####DA112xxx	2800/3200/3800/4500	112	190	038-120*	WC61/SP
	XSK####DF112xxx	2800/3200/3800/4500	112	190	038-120*	WC63/SP
XSK120	XSK####DA120xxx	3800/4500/5000	120	190	050-120*	WC61/SP
	XSK####DF120xxx	3800/4500/5000	120	190	050-120*	WC63/SP
XSK126	XSK####DA126xxx	3800/4500/5000	126	190	050-120*	WC61/SP
	XSK####DF126xxx	3800/4500/5000	126	190	050-120*	WC63/SP
XSK160	XSK####DA160xxx	8000/9000	160	190	050-120*	WC61/SP
	XSK####DF160xxx	8000/9000	160	190	050-120*	WC63/SP



WH1



WH5



WC48/49



WC52



WC55



WH2



WH6



WC50



WC53



WC56



WH3



WH7



WC51



WC54



WC57



WH4



WH8

Bar Clamps

Range	A	A1	B	C	C1	D	E	F	G	H	Fixing
XSK042	69.85	74.89	54.00	15.88	21.04	42.00	8.64	PCF	PCF	12.70	M6
XSK054	82.55	86.04	65.00	15.88	21.04	54.00	8.62	34.93	PCF	12.70	M6
XSK056	95.25	–	70.00	25.40	–	56.00	12.19	PCF	PCF	9.53	M8
XSK065	104.39	–	79.00	25.40	–	65.00	12.19	PCF	PCF	12.70	M8
XSK075	112.78	–	89.00	25.40	–	75.00	12.19	PCF	PCF	12.70	M8
XSK087	127.00	–	102.00	25.40	–	87.00	12.19	PCF	PCF	19.05	M8
XSK103 (2200/3200)	144.78	–	118.00	25.40	36.00	103.00	12.19	PCF	PCF	19.05	M8
XSK103 (4000)	144.78	154.11	118.00	25.40	36.00	103.00	16.56	PCF	PCF	19.05	M10
XSK112	165.02	–	132.00	25.40	36.00	112.00	16.56	PCF	PCF	25.40	M10
XSK120	172.72	–	140.00	25.40	36.00	120.00	16.56	PCF	PCF	25.40	M10
XSK126	181.1	–	146	25.4	36	126	16.56	PCF	PCF	25.4	M10
XSK160	216.07	–	180	38.1	–	160	16.56	PCF	PCF	38.1	M12

Notes:
PCF dimension is dependent on clamp force and cell height. Please consult the factory.
Dimension only shown where is larger than
Dimension only shown where is larger than
All dimensions in mm.

Attachments and Accessories

Bar Clamps for WESPACK™ and GTO range

Part Number	Rod Size & Length	Insulator Size & Length	Fixing Centers	Electrode Diameter	Clamp Forces	"Z"	"D"	Fig. No.
	mm	mm				mm	mm	
XSK1500DA076038	M8 × 90	M8 × 60	89.0	32	10kN to 20kN	38	27.5	WC51
XSK1500DA076076	M8 × 130	M8 × 95	89.0	32	10kN to 20kN	76	62.5	WC51
XSK1500DA076101	M8 × 160	M8 × 120	89.0	32	10kN to 20kN	101	87.6	WC51
XSK2000DA076038	M8 × 95	M8 × 60	89.0	38	13kN to 20kN	38	25.9	WC52
XSK2000DA076076	M8 × 130	M8 × 95	89.0	38	13kN to 20kN	76	61.0	WC52
XSK2000DA076101	M8 × 160	M8 × 120	89.0	38	13kN to 20kN	101	85.9	WC52
XSK3000DA076038	M8 × 100	M8 × 65	89.0	50	25kN to 31kN	38	26.2	WC53
XSK3000DA076076	M8 × 130	M8 × 100	89.0	50	25kN to 31kN	76	56.1	WC53
XSK3000DA076101	M8 × 160	M8 × 125	89.0	50	25kN to 31kN	101	86.1	WC53
XSK3400DA076038	M8 × 100	M8 × 65	89.0	50	27kN to 34kN	38	24.6	WC54
XSK3400DA076076	M8 × 140	M8 × 105	89.0	50	27kN to 34kN	76	64.5	WC54
XSK3400DA076101	M8 × 160	M8 × 130	89.0	50	27kN to 34kN	101	89.7	WC54
XSK3800DA116M076	M10 × 150	M12 × 100	132.0	66	32kN to 38kN	76	59.7	WC55
XSK3800DA116M101	M10 × 180	M12 × 125	132.0	66	32kN to 38kN	101	84.6	WC55
XSK4400DA116M076	M10 × 150	M12 × 105	132.0	68	36kN to 44kN	76	63.0	WC56
XSK4400DA116M101	M10 × 180	M12 × 130	132.0	68	36kN to 44kN	101	87.9	WC56
XSK6000DA116M076	M10 × 150	M12 × 105	132.0	75	50kN to 60kN	76	59.9	WC57
XSK6000DA116M101	M10 × 180	M12 × 130	132.0	75	50kN to 60kN	101	84.8	WC57

Notes: 1 kgf ≈ 9.8 newtons 1 lb ≈ 190 N

Box Clamps

Part Number	Moulded Box Style	Fixing Centers	Rod Size	Capsule Device			Outline Ref.
				Outline	Mounting Surface Ø	Normal Thickness	
					mm	mm	
XK0450BA019M	Injection	50 PCD	M5x50 Bolts	W1 / W8 / W90	19.0	13.8	WC48
XK0450BA025M	Injection	50 PCD	M5x50 Bolts	W2 / W58	25.1	14.6	WC49
XK1000BA025M	Injection	50 PCD	M5x50 Bolts	W91	25.1	14.0	WC49
XK1500BA034M	Injection	70 PCD	M6x50 Bolts	W4 / W10 / W92	34.0	26.2	WC50

Heatsinks

Part Number	Weight	Periphery	Area	Fig.
	kg/m	mm	mm²	
XSFGxxxxAN	8.1	1059	2979	WH1
XSFGAxxxxAN	15.6	1682	5867	WH2
XSFHxxxxAN	12.7	1684	4655	WH3
XSFTxxxxAN	20	2065	7573	WH4
XSFTBxxxxAN	29	2467	10905	WH5
XSFTCxxxxAN	28	2544	10561	WH6
XSFLPxxxxAN	30	6620	11172	WH7
XSF46xxxxAN	20	2822	7411	WH8
XSF30xxxxAN	Dimensions 125 mm × 125 mm × 4 vanes			




Coolers

Part Number	Weight	Cooler Thickness	Busbar Thickness	Description	Fig. No.
	kg	mm	mm		
XW076NC16A	0.418	16	N/A	47 mm WC Cu	WCL2
XW076NC16B	0.612	16	6,4	47 mm WC Cu with Busbar (10 mm Hose)	WCL1
XW076NC16BS	0.612	16	6,4	47 mm WC Cu with Busbar + spirol pins fitted (10 mm Hose)	WCL1
XW076NC16BT	0.612	16	6,4	47 mm WC Cu with Busbar + thermostat hole (10 mm Hose)	WCL1
XW076NC16C	0.612	16	6,4	47 mm WC Cu with Busbar (½" Hose)	WCL1
XW076NC16CT	0.612	16	6,4	47 mm WC Cu with Busbar + thermostat hole (½" Hose)	WCL1
XW076NC16R	0.581	16	6,35	47 mm WC Cu reversed with Busbar	WCL12
XW076NC16V	0.400	16	N/A	47 mm WC Cu reversed	WCL13
XW116ZC20A	1.300	20	N/A	73 mm WC Cu	WCL4
XW116ZC20B	1.750	20	10	73 mm WC Cu with Busbar	WCL3
XW116ZC20C	2.120	20	10	73 mm WC Cu with alt, Busbar	WCL5
XW116ZC20R	1.672	20	10	73 mm WC Cu reversed with Busbar	WCL14
XW116ZC20W	1.119	20	N/A	73 mm WC Cu reversed	WCL15
XW127EC25A	1.650	25	N/A	85 mm WC Cu Helix	WCL16
XW127EC25B	2.200	25	8	85 mm WC Cu with Busbar Helix	WCL17
XW127EA25A	0.500	25	N/A	85 mm WC Al Helix	WCL16
XW127EA25B	0.650	25	8	85 mm WC Al with Busbar Helix	WCL17
XW160FC25A	3.620	25	N/A	100 mm WC Cu	WCL6
XW160FC25B	4.520	25	10	100 mm WC Cu with Busbar	WCL7
XW180GC34A	4.920	34	N/A	125 mm WC Cu Helix	WCL11
XW180GC34B	5.950	34	10	125 mm WC Cu with Busbar Helix	WCL10
XW180GA34A	1.500	34	N/A	125 mm WC Al Helix	WCL11
XW180GA34B	1.800	34	10	125 mm WC Al with Busbar Helix	WCL10
XW180BA34E	1.550	34	N/A	132 mm WC Al Helix	WCL19
XW180BA34F	1.850	34	10	132 mm WC Al with Busbar Helix	WCL20
XW270QA25A	2.941	25	N/A	270 × 190 mm WC Al Cold Plate	WCL9


Part Number	Cooler Accessories
XSNM12H10S	M12 Cooler Connection, 10mm Hose & Stainless Steel material
XSNM12H12S	M12 Cooler Connection, 12mm Hose & Stainless Steel material

Outline in's


W1 - 100A241

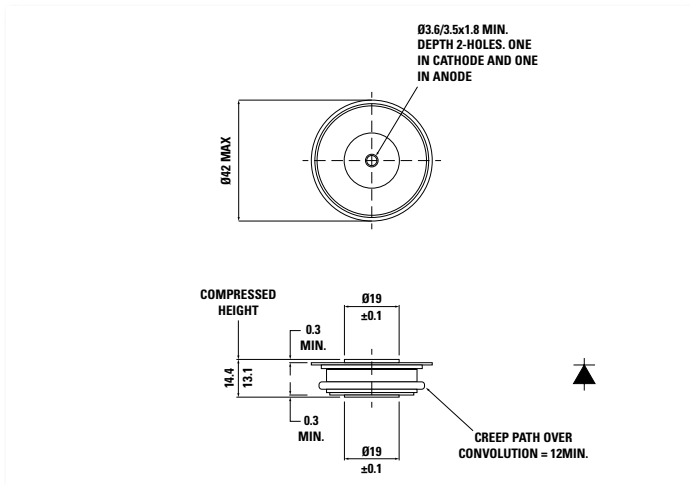


W2 - 100A291

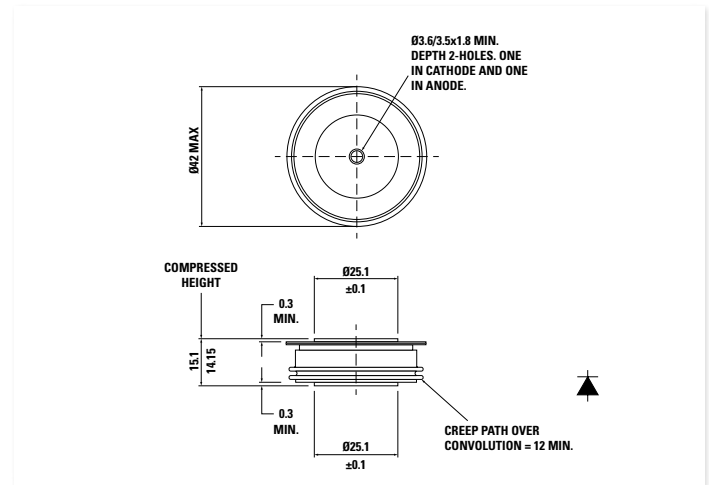


W3 - 100A317

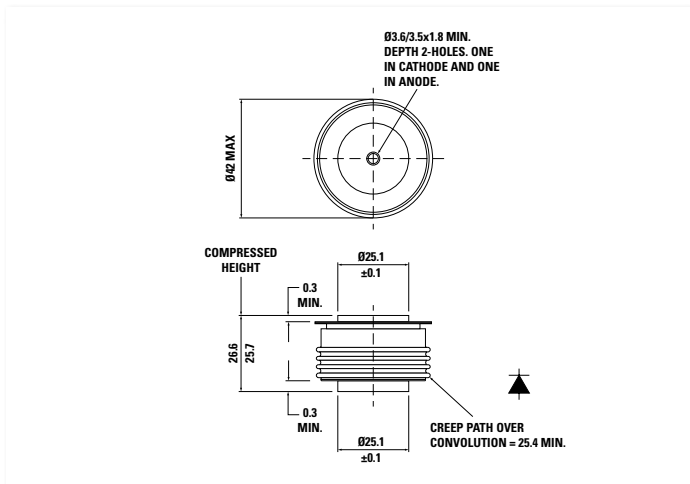


W4 - 100A243

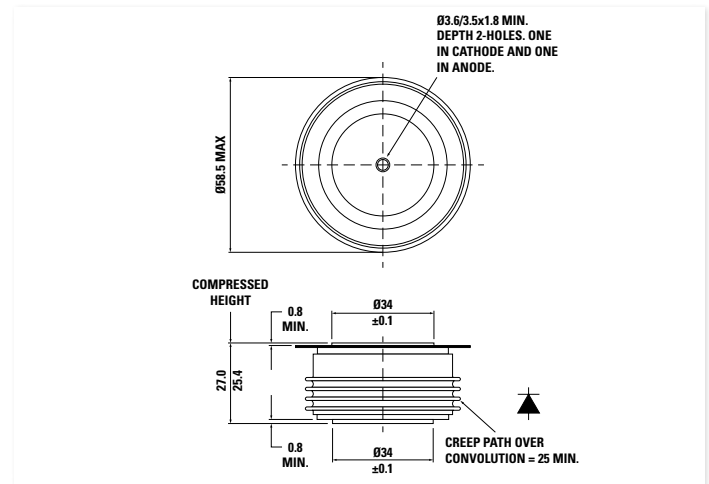


W5 - 100A249

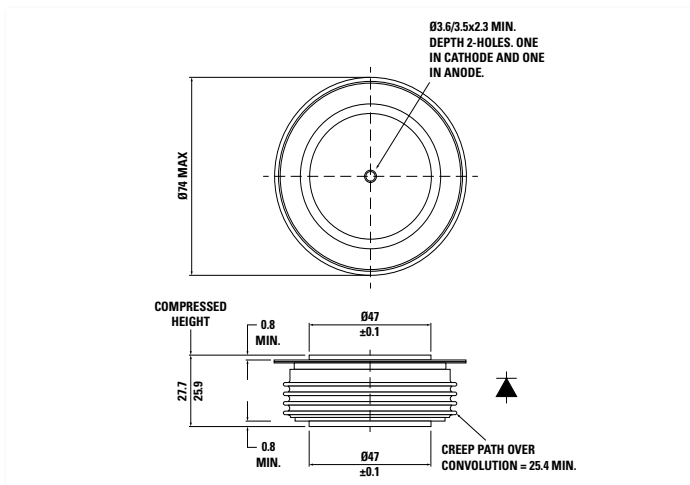


W6 - 100A270

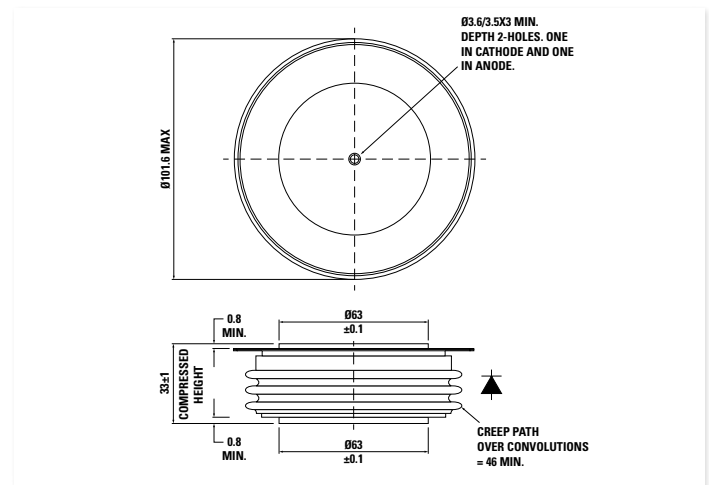


W7 - 100A293

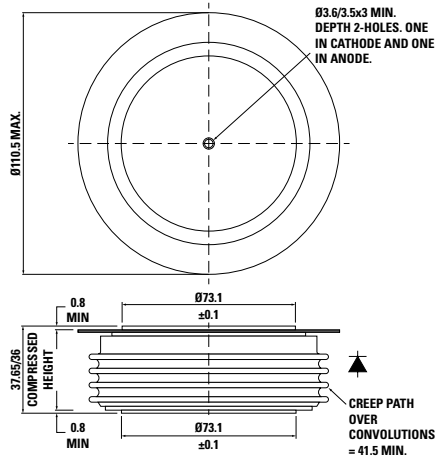


W8 - 101A212

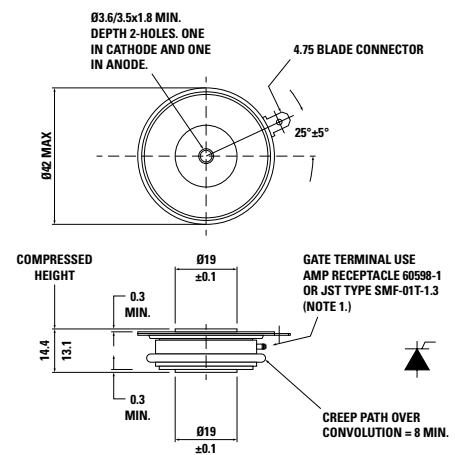


W10 - 101A216

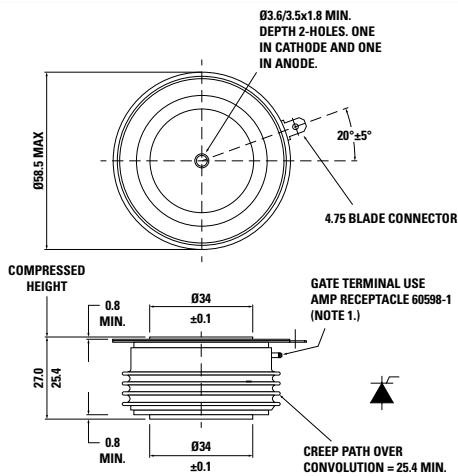


W11 - 101A223

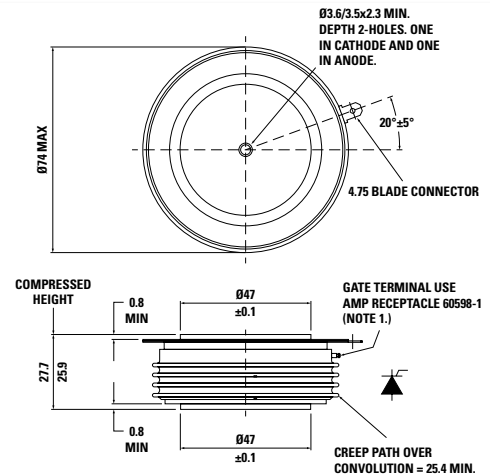


W12 - 101A232

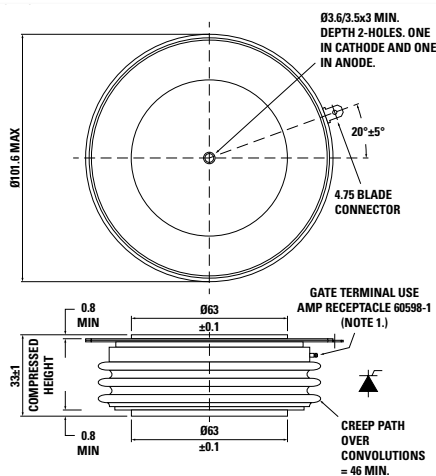


W13 - 101A281

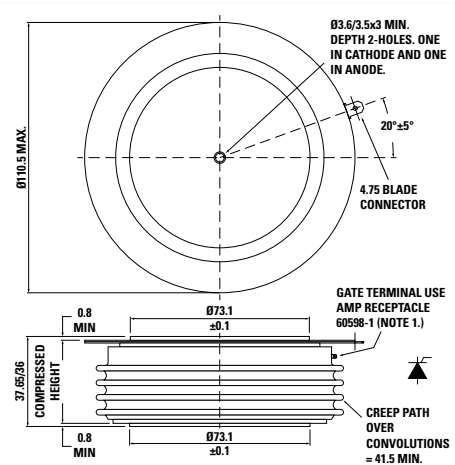


W16 - 101A235

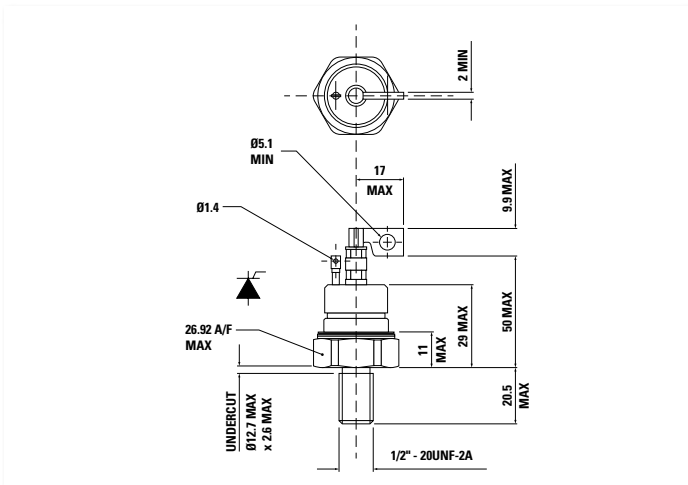


W17 - 101A231

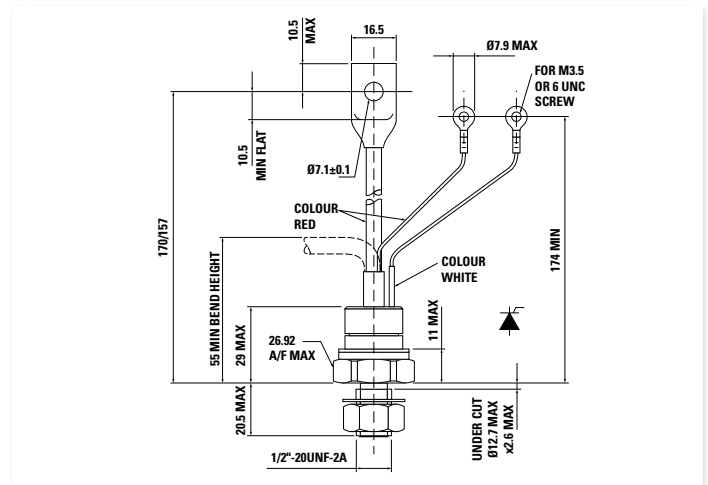


W18 - 101A225

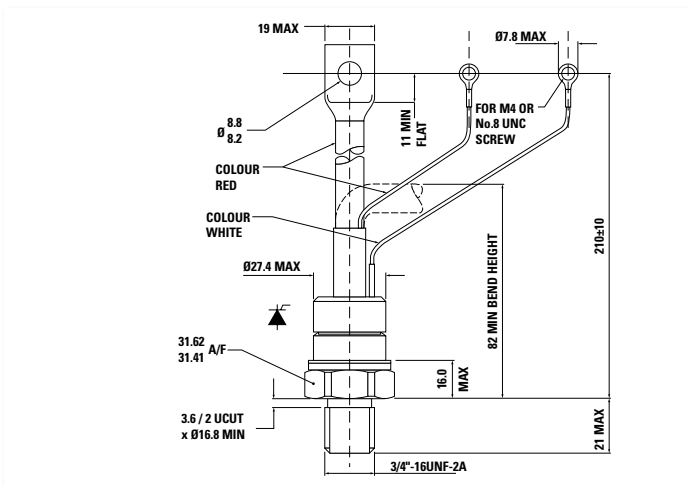


W20 - 100A303

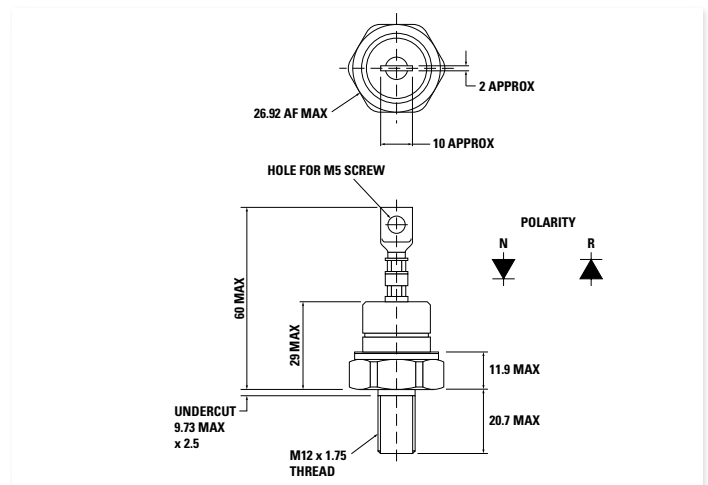


W21 - 100A294

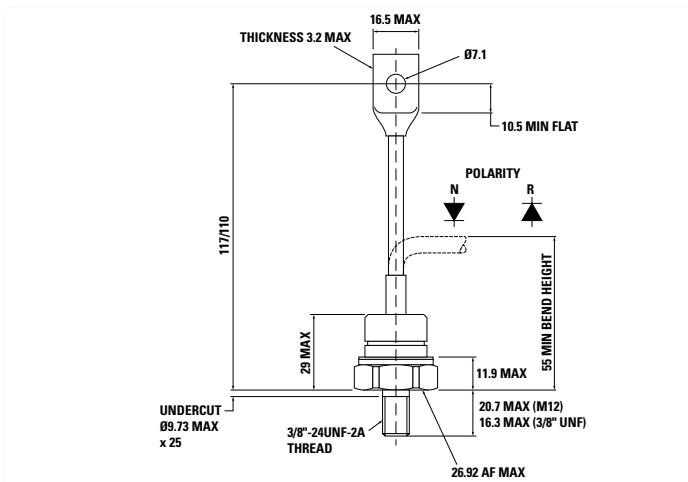


W22 - 100A297

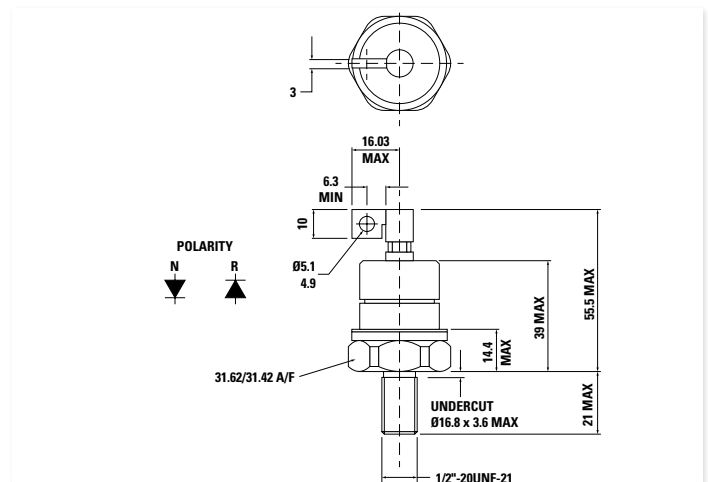


W23 - 100A281

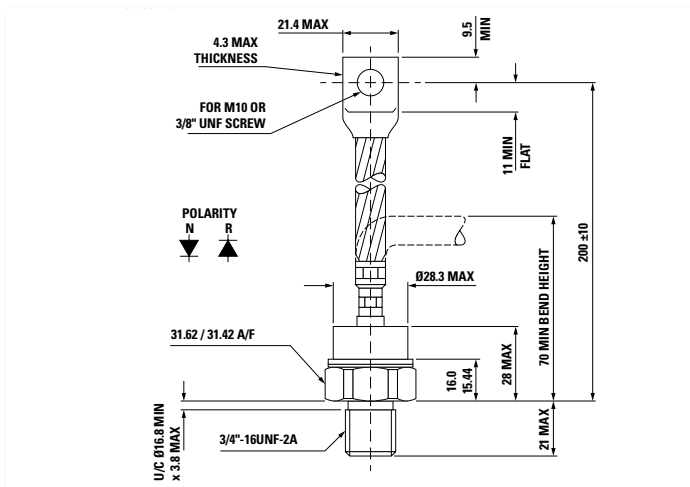


W24 - 100A280

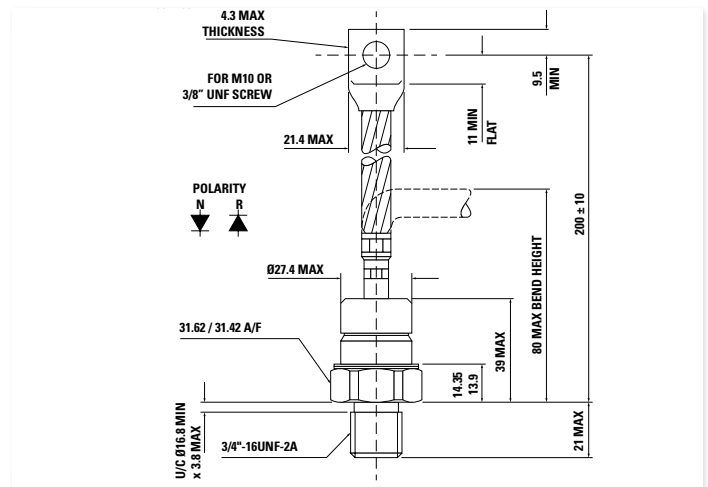


W33 - 101A346

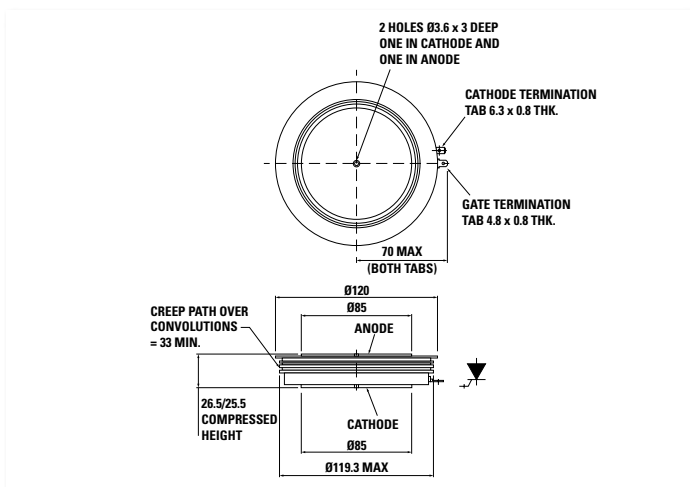


W34 - 101A287

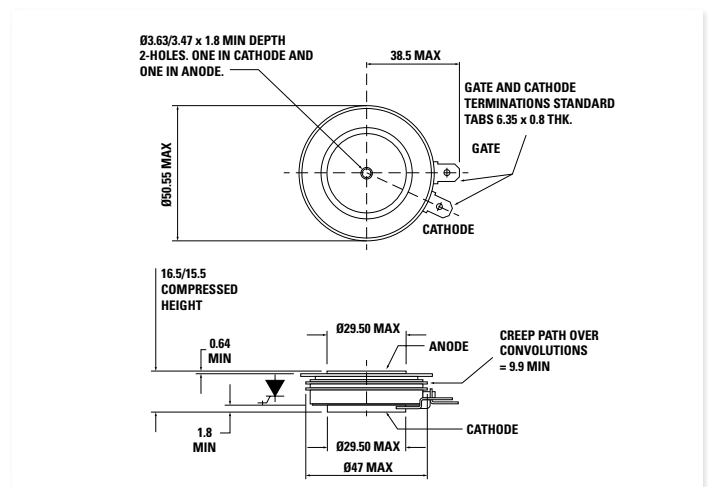

W35 - 101A358

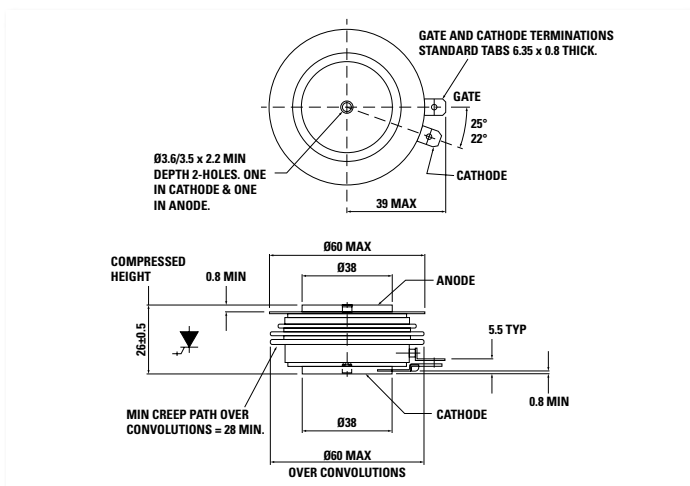


W36 - 101A288

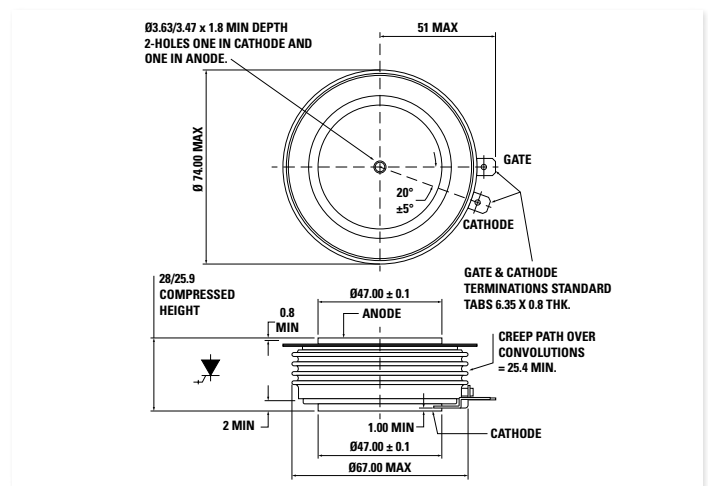


Outline in's


W37 - 100A325

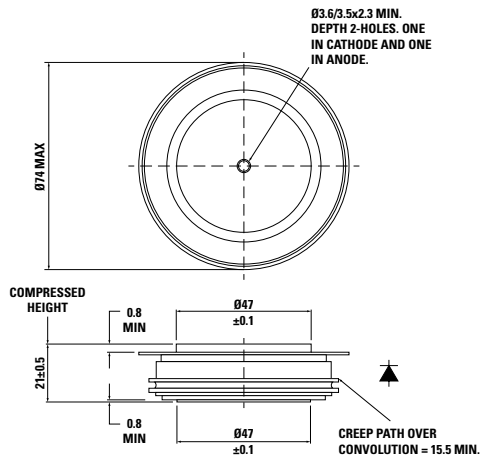


W39 - 100A338

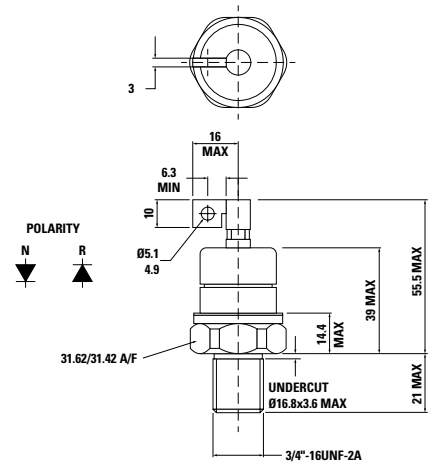


W40 - 171A107

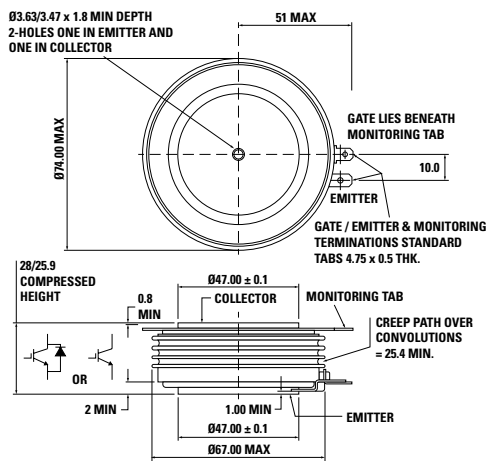


W41 - 171A108

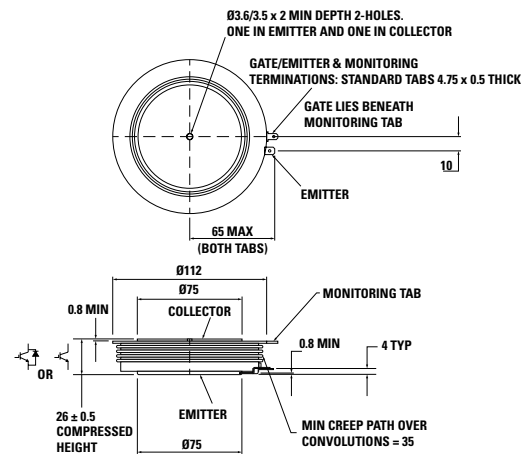


W42- 100A310

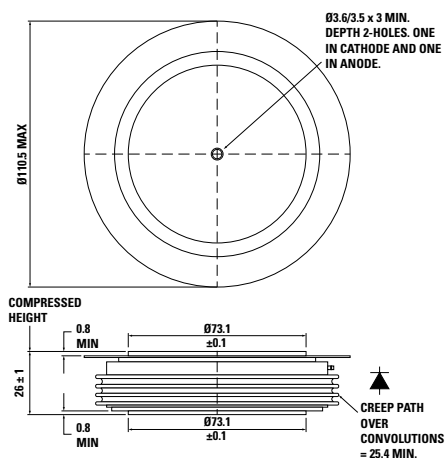


W43 - 100A320

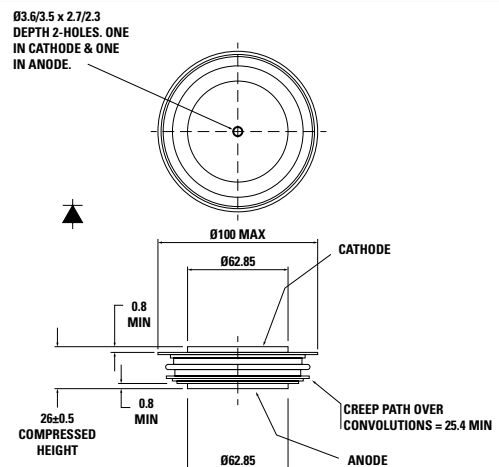


W44 - 101A340

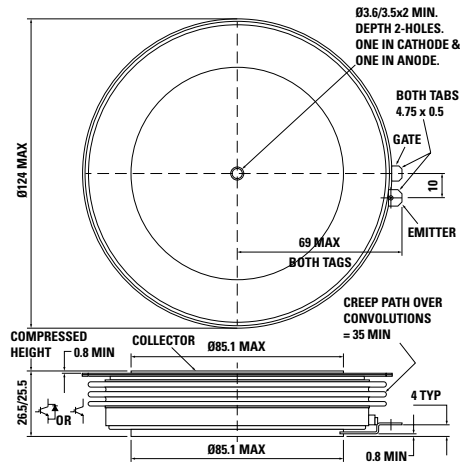


W45 - 101A359

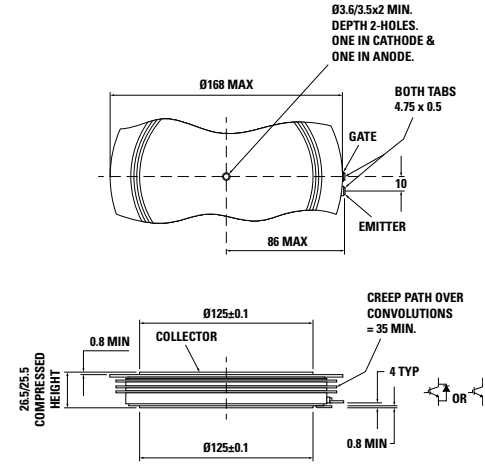


W46 - 101A305

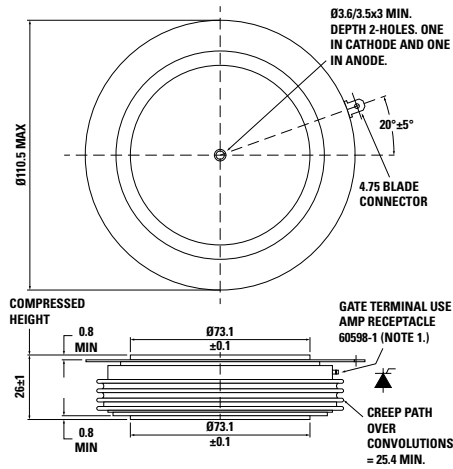


W47 - 100A322

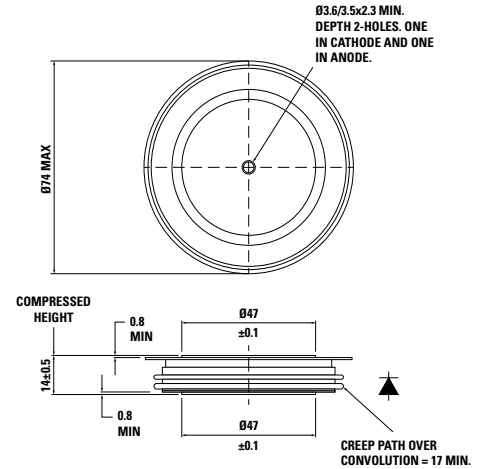

W48 - 101A347

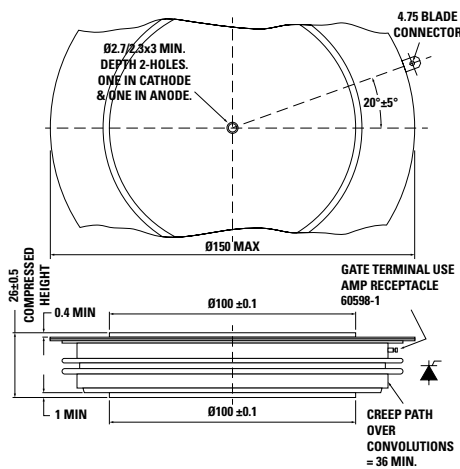


W51 - 101A334

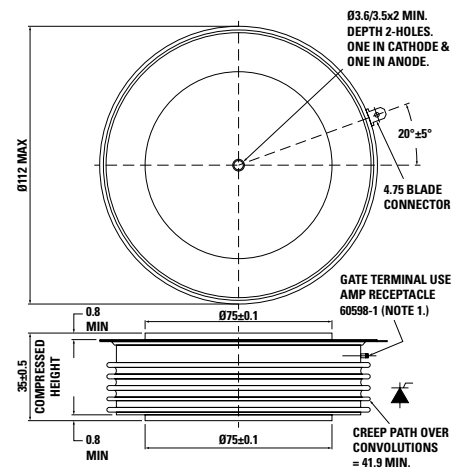


Outline in's


W52 - 100A328

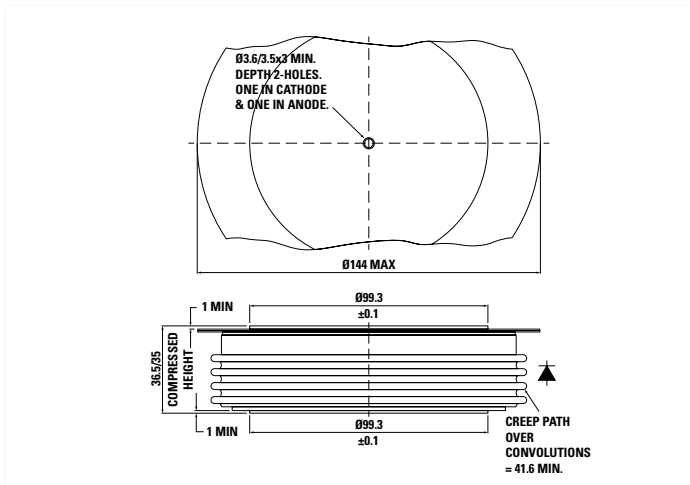


W54 - 100A353

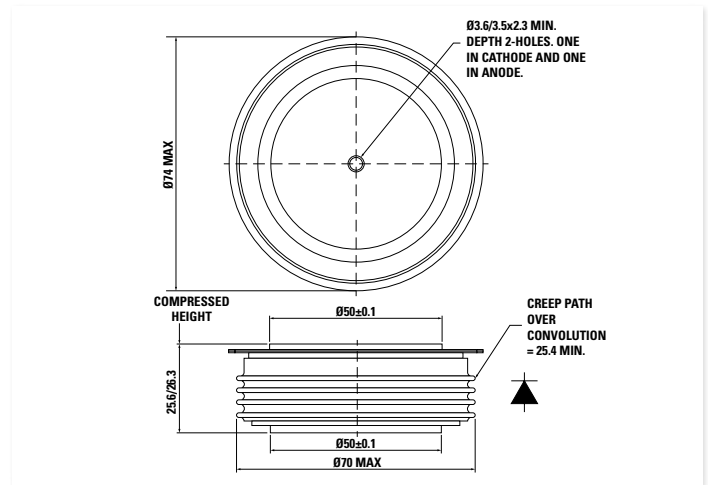


W55 - 101A352

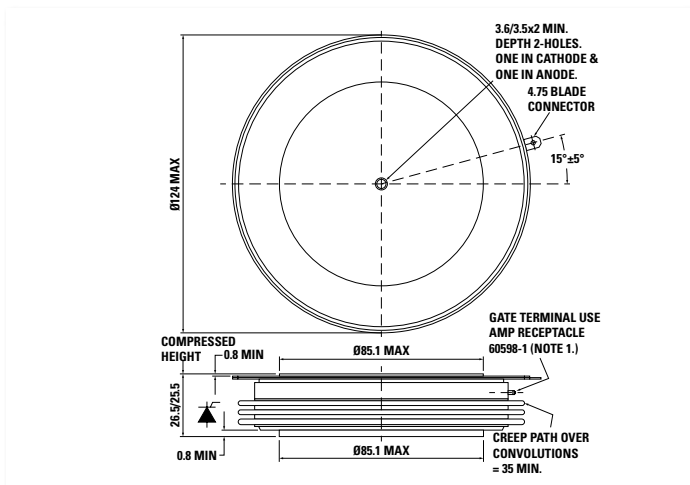


W56 - 101A365

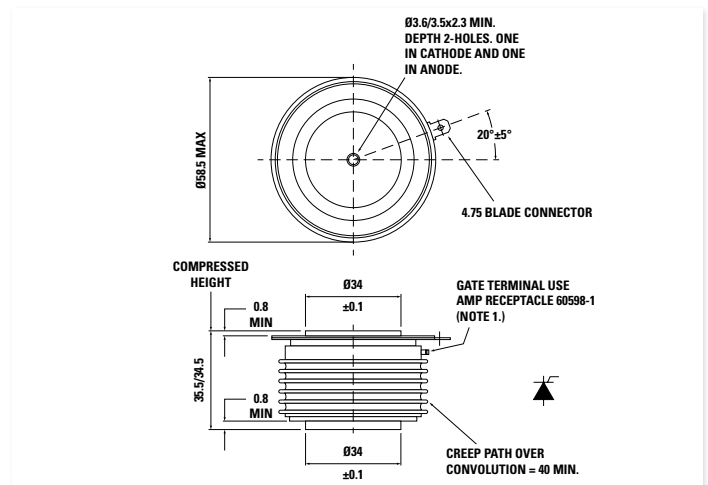


W57 - 101A363

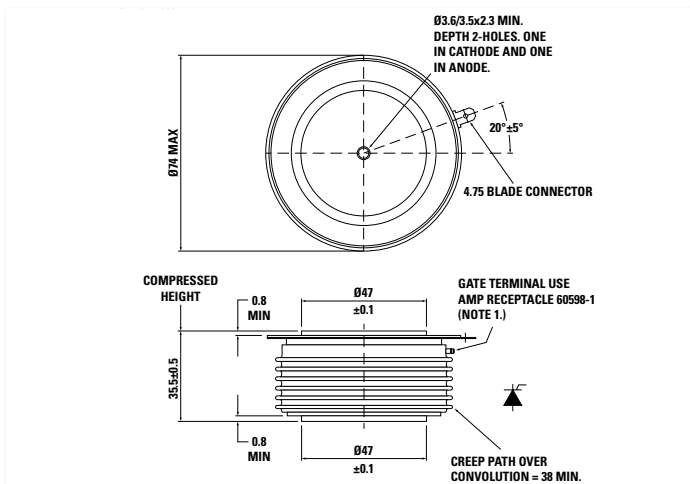


W58 - 101A237

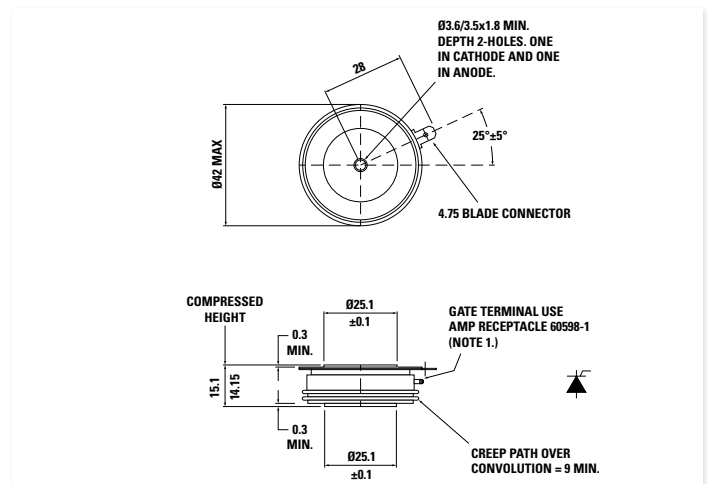


W59 - 100A359

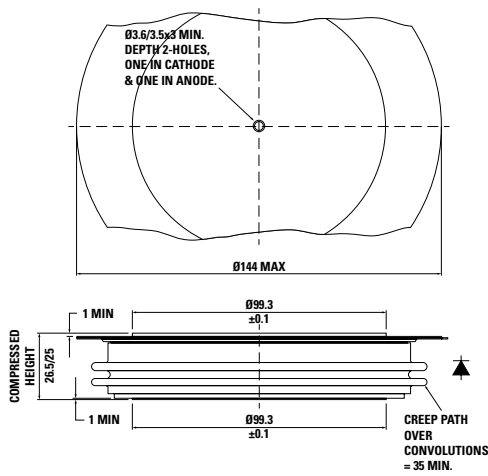


W62 - 101A314

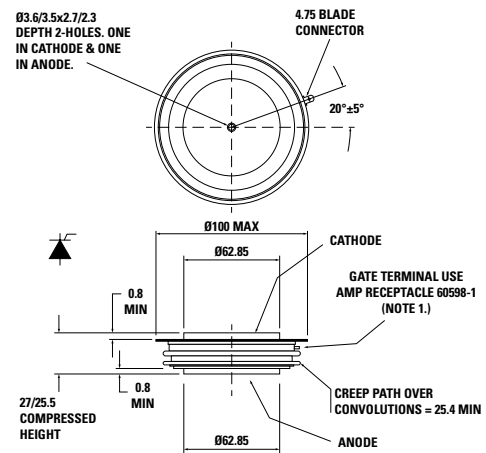


W67 - 101A366

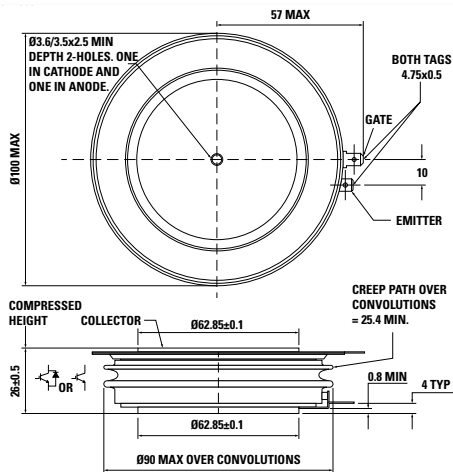


W68 - 100A367

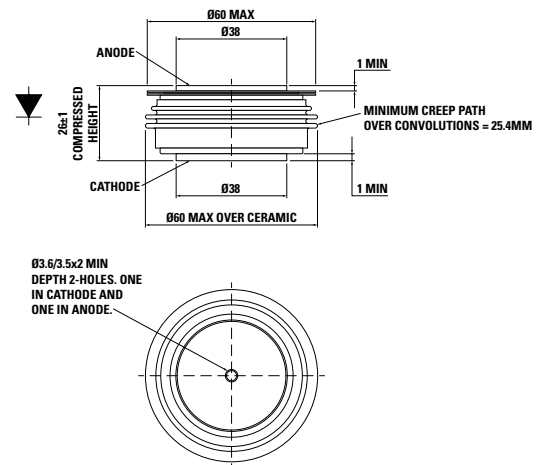

W70 - 101A357

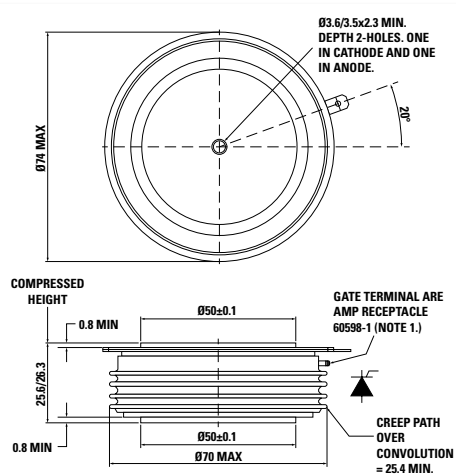


W71 - 101A375

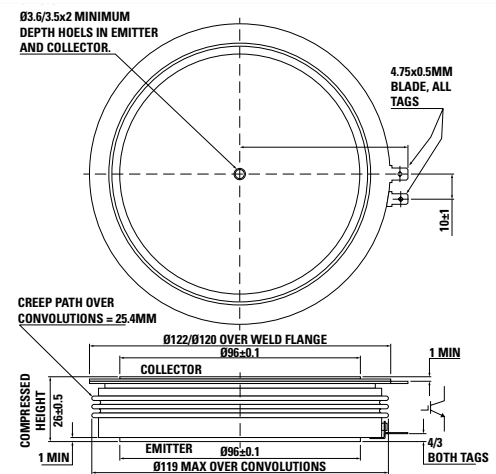


Outline in's


W75 - 101A377

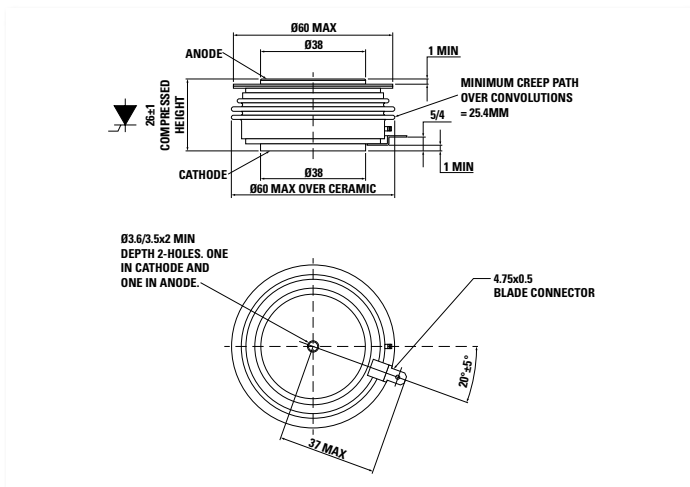


W76 - 101A392

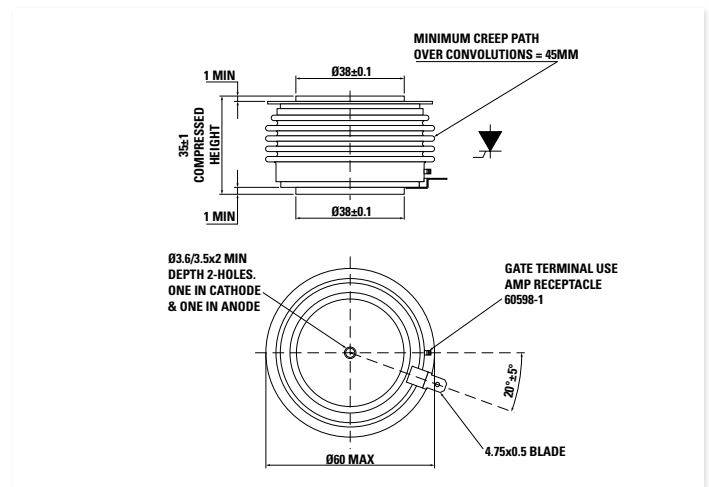


W77 - 101A372

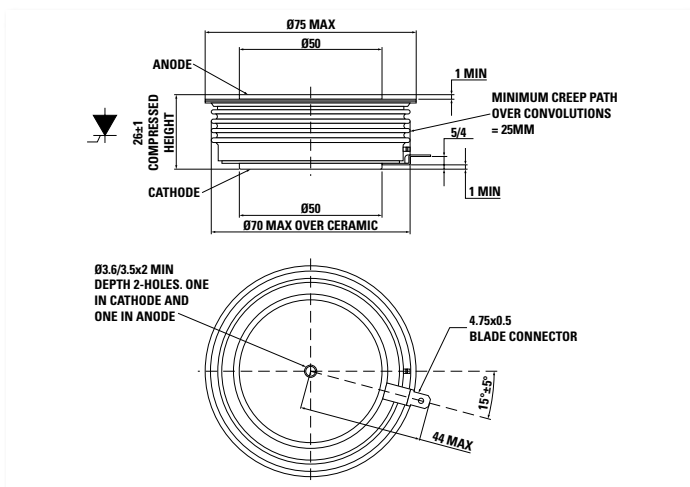


W78 - 101A393

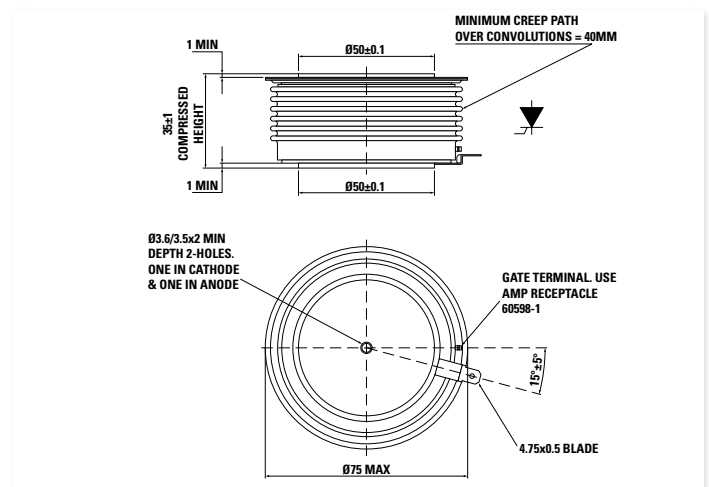


W79 - 101A391

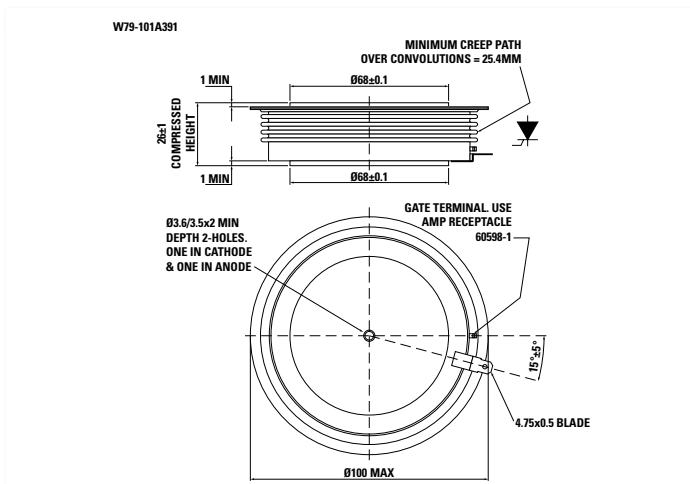


W80 - 101A394

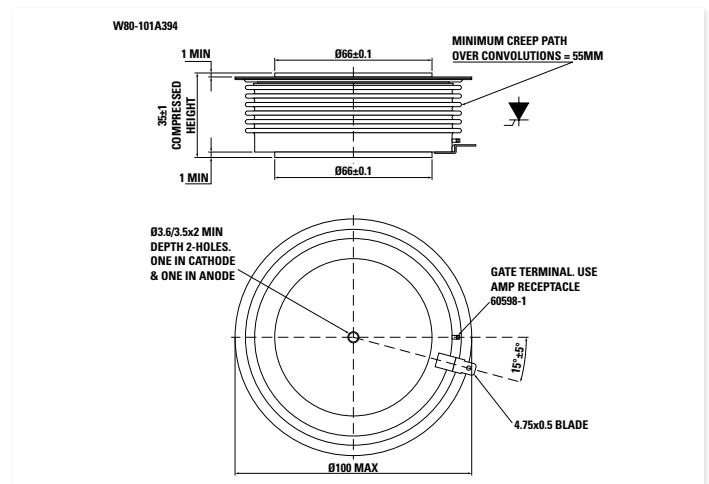


W81 - 101A373

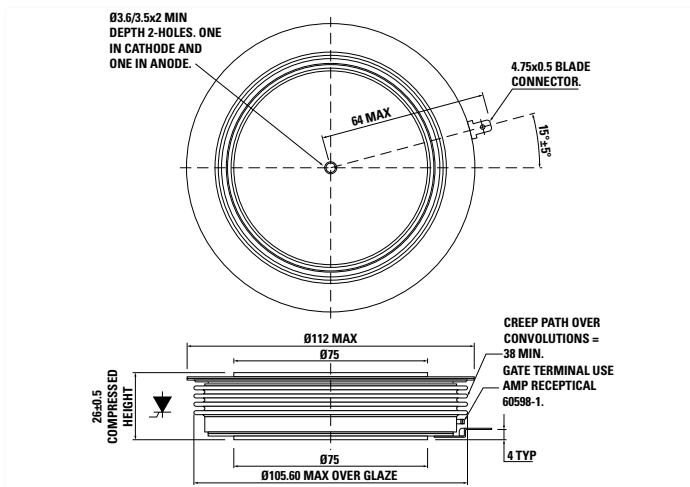


W82 - 101A395

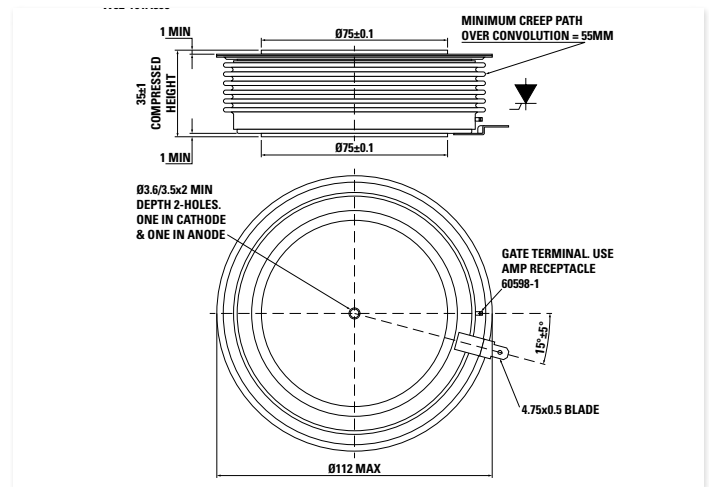


W85 - 101A388

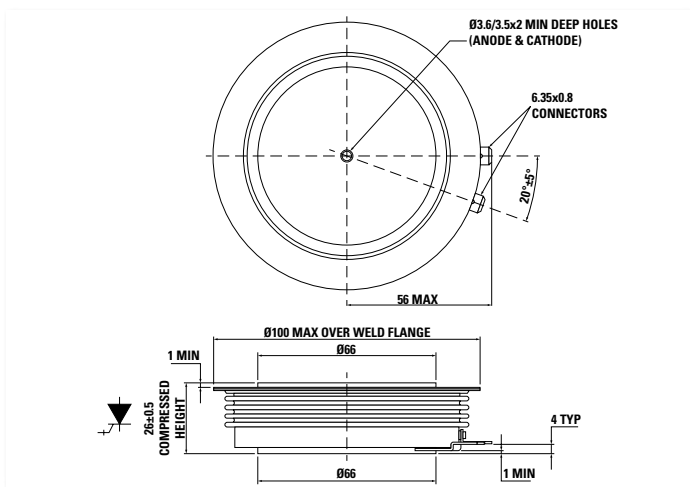


W86 - 101A408

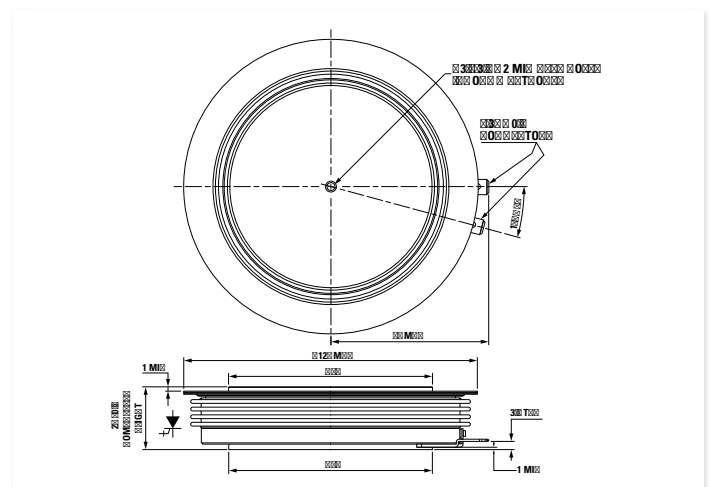

W71 - 101A375

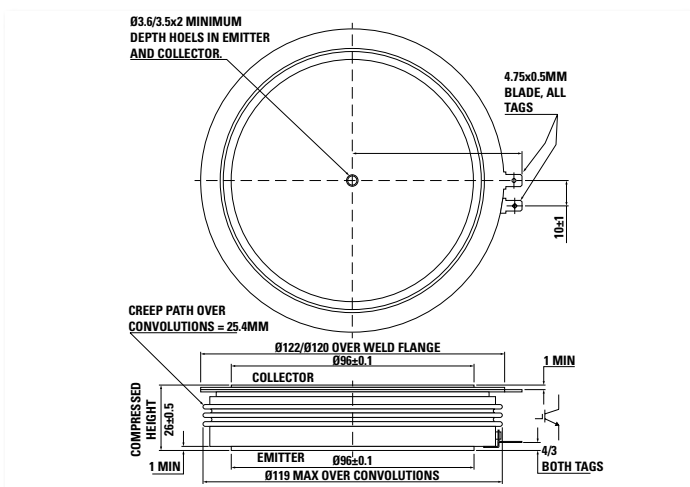


W87 101A376

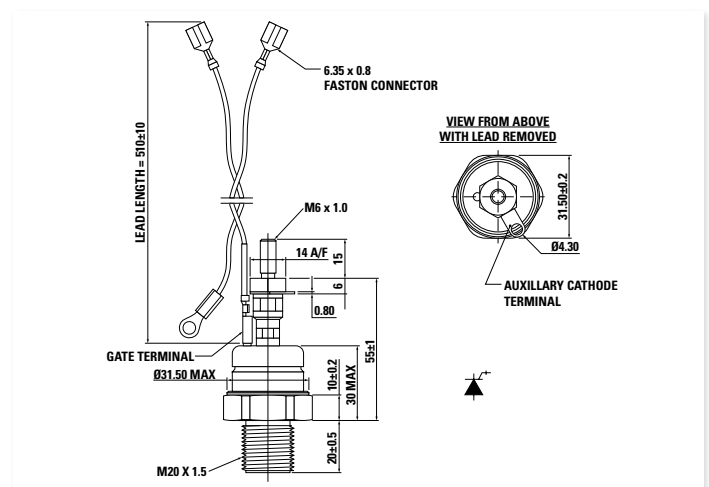


Outline in


W89 - 100A368

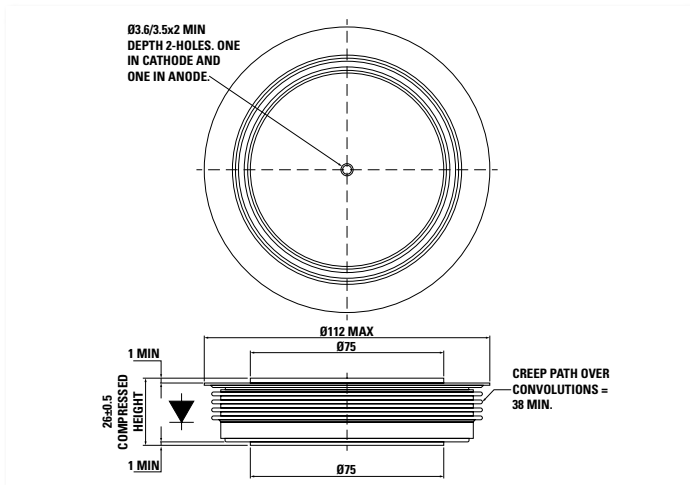


W93 - 101A404

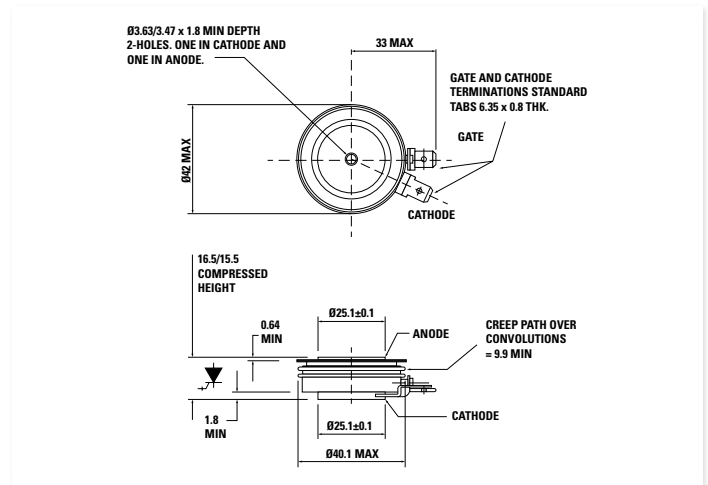


W94 - 100A372

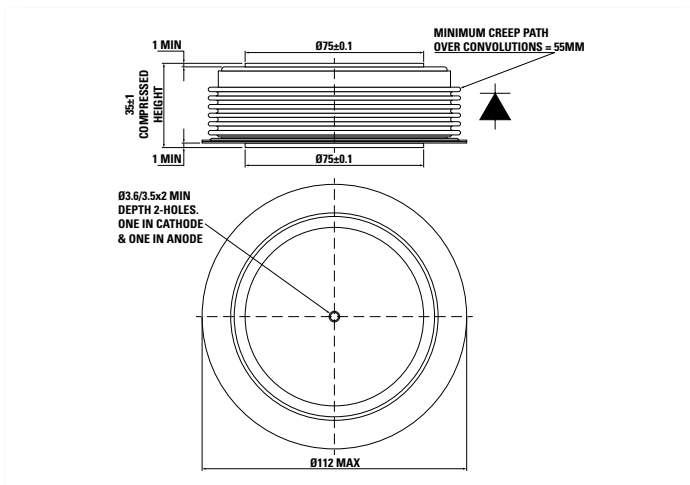


W95 - 101A403

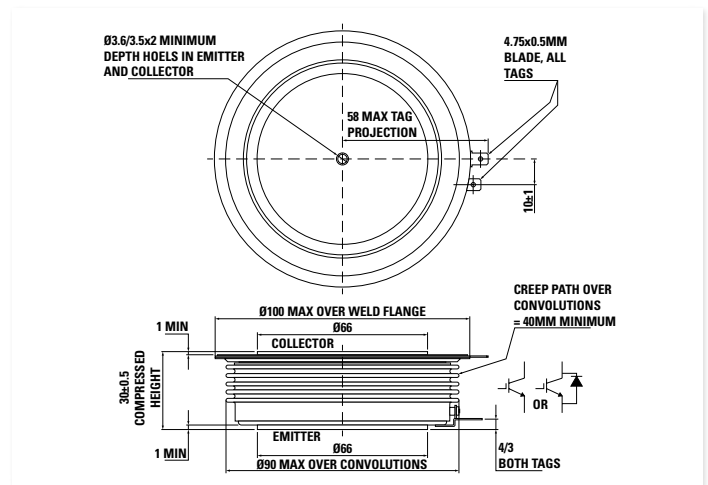


W96 - 101A409

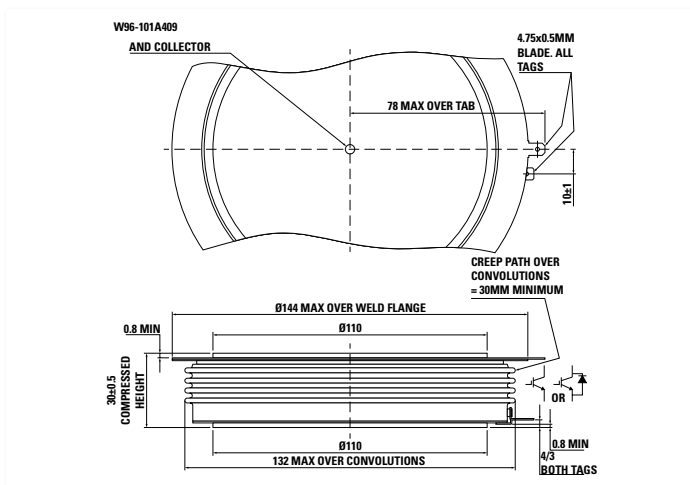


W97 - 100A379

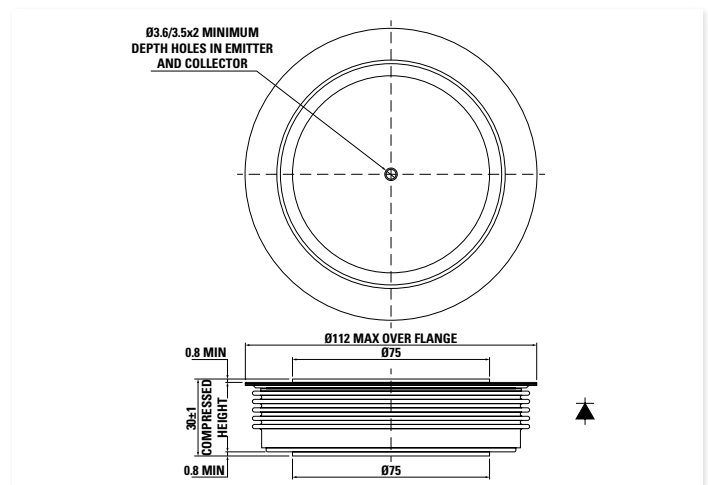


W98 - 101A413

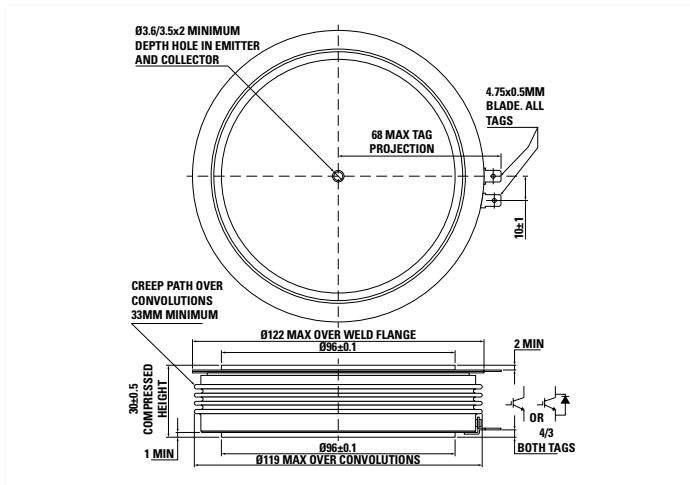


W99 - 100A383

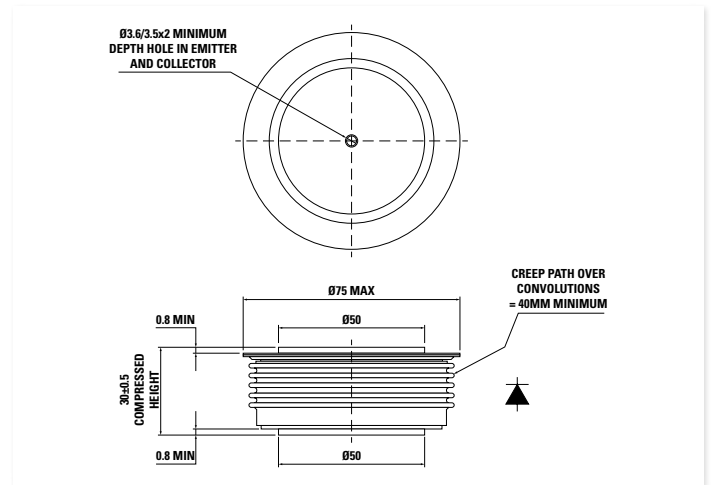


W100 - 100A384

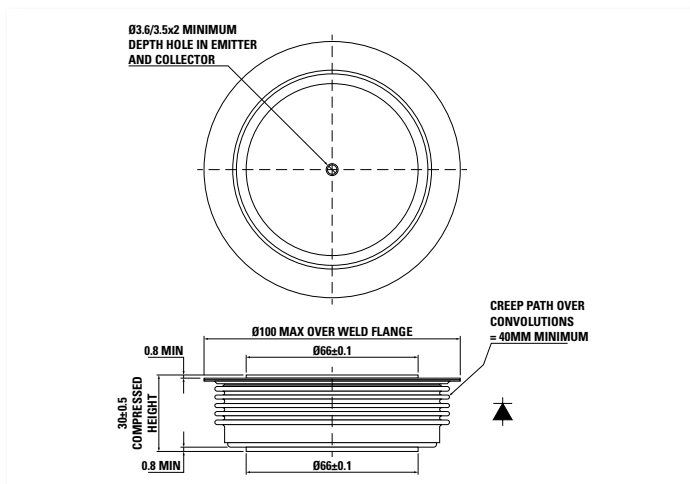


W101 - 100A380

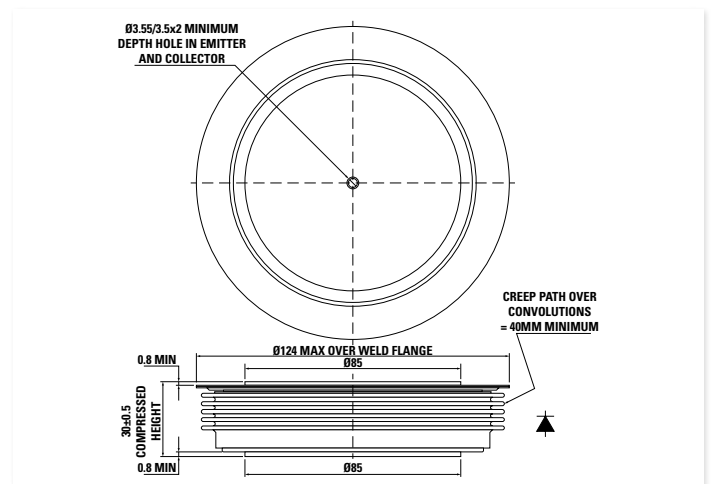


W103 - 101A401

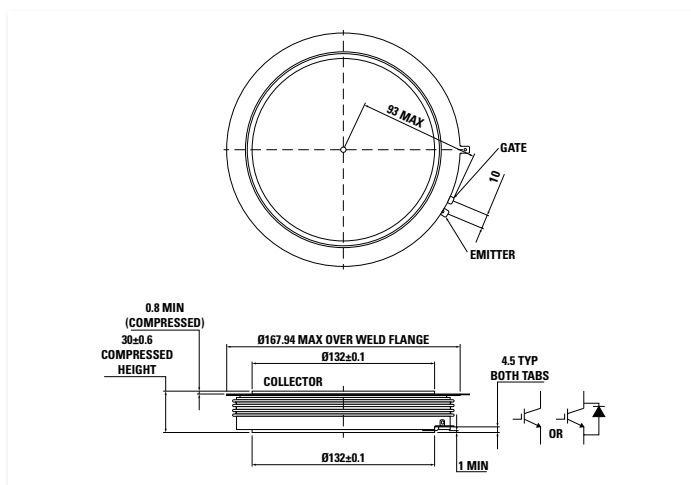


W104 - 101A408

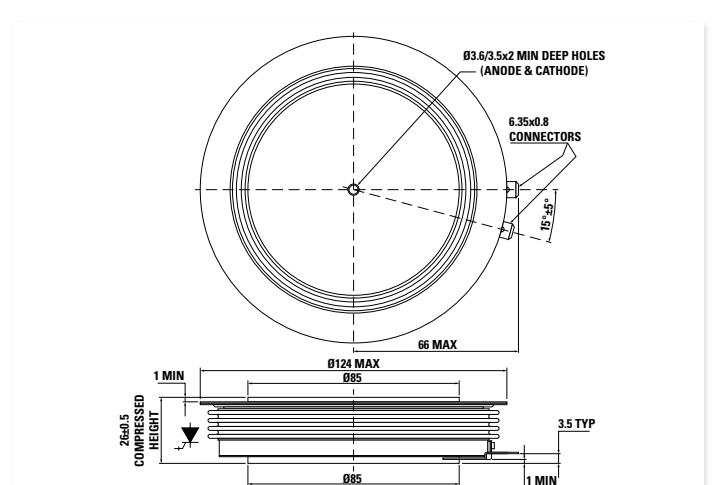


W105 - 100A385

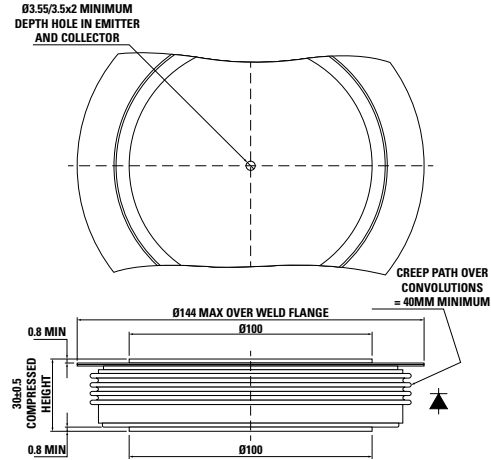


W106 - 101A420

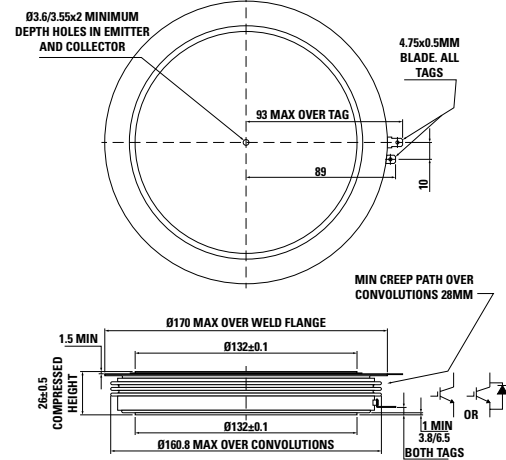


W107 - 101A411

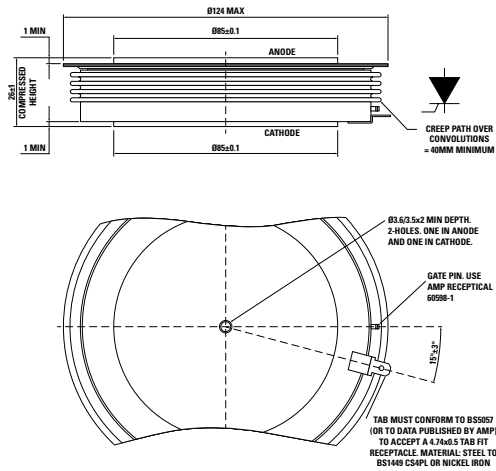


W108 - 101A410

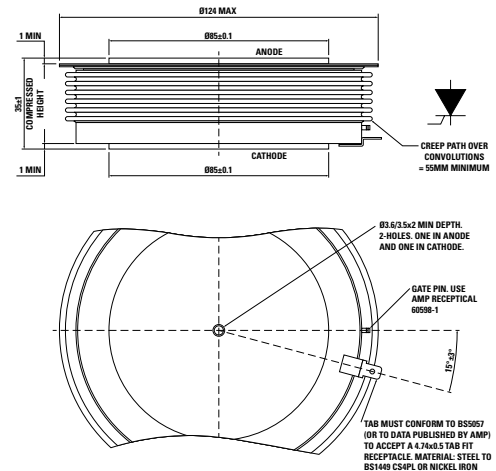


W109 - 101A425

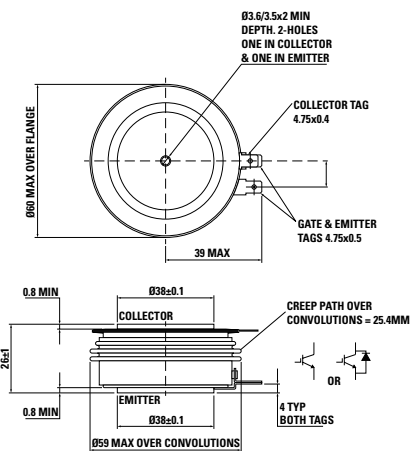


W110 - 101A418

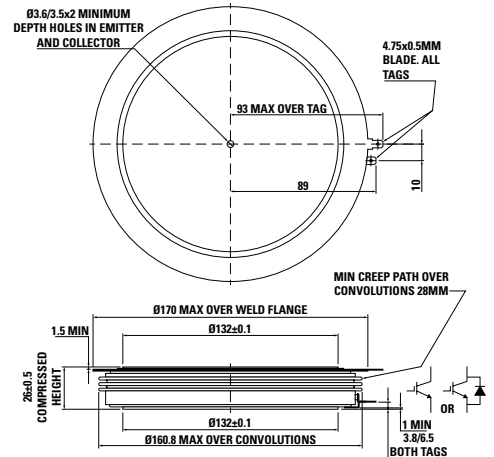


W111 - 100A378

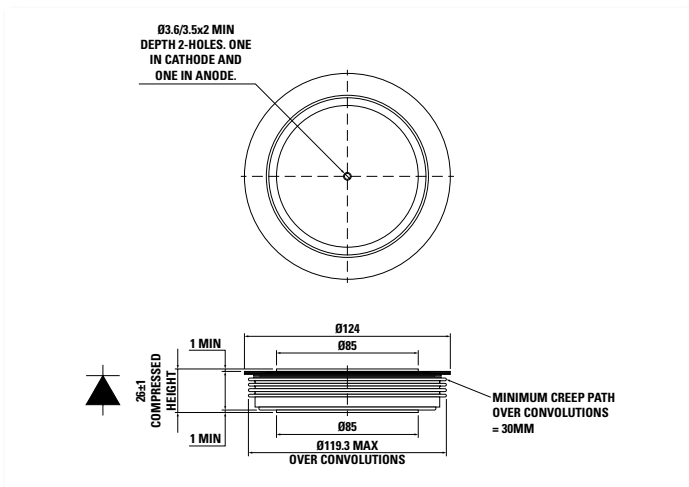


W112 - 100A377

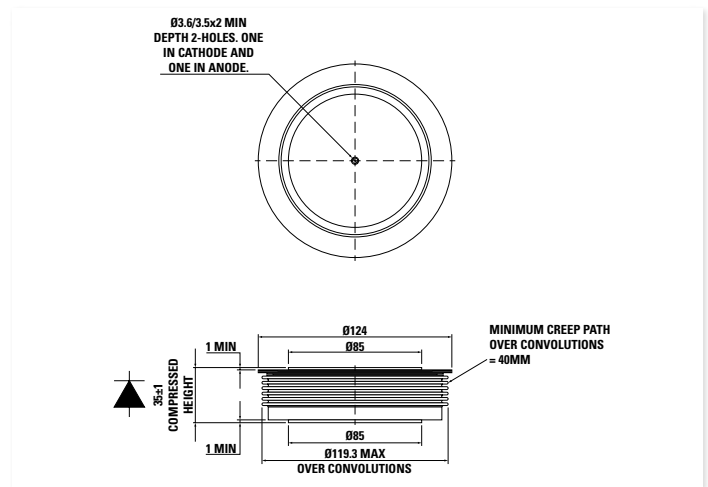


W113 - 100A393

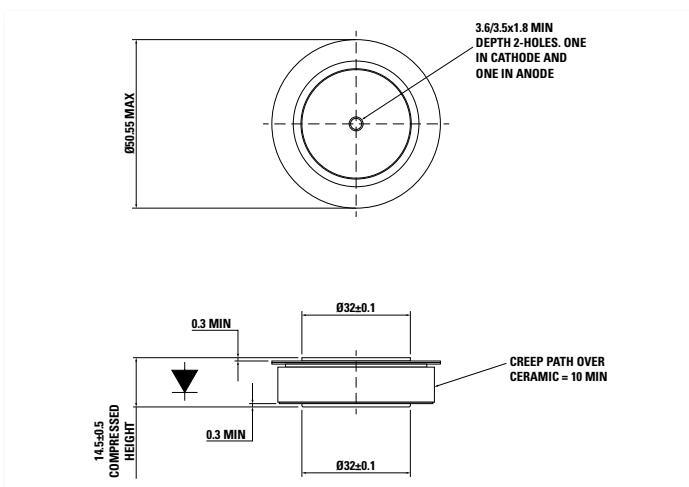


W114 - 100A394

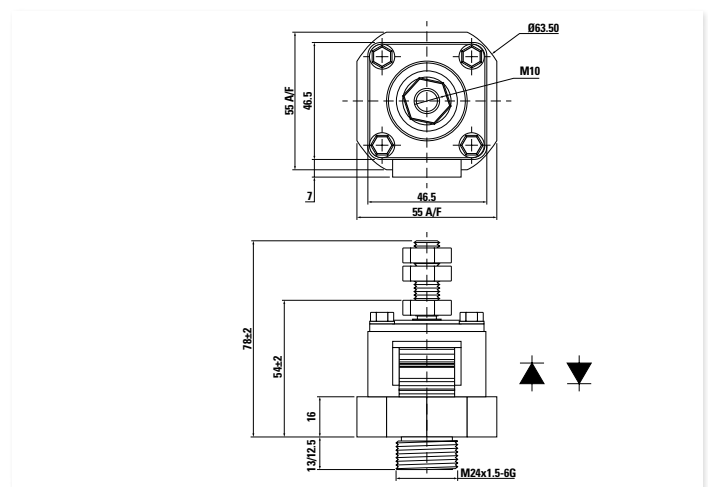

W115 - 101A427

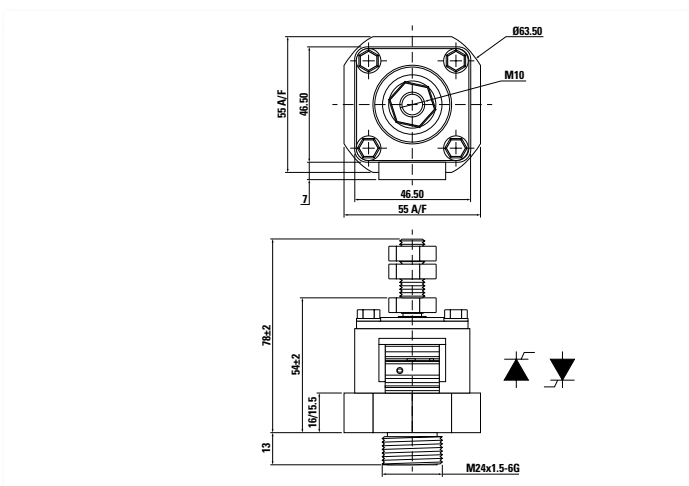


W116 - 150A132

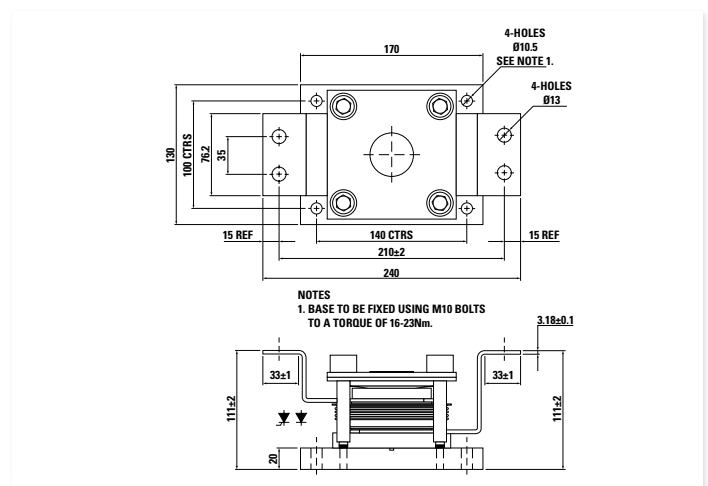


Outline in@s


W117 - 100A375

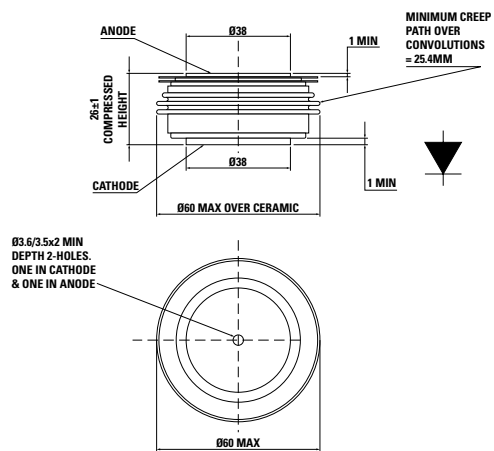


W118 - 101A428

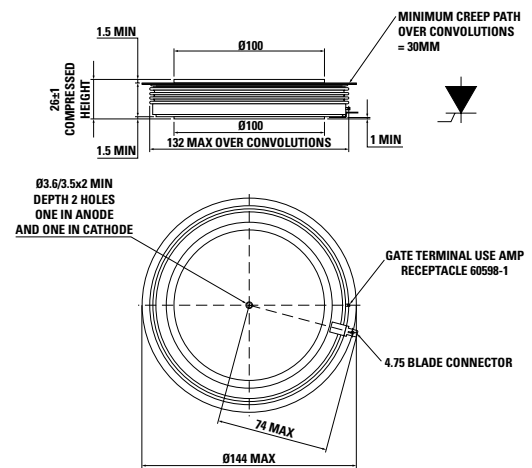


W119 - 101A421

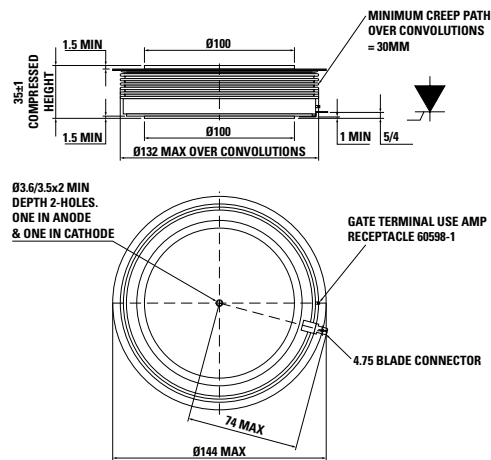


W120 - 100A395

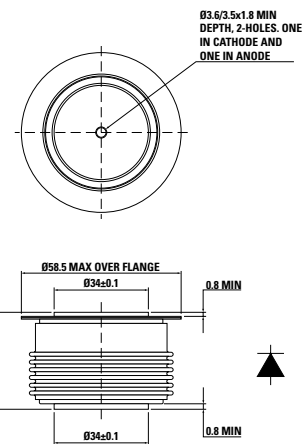


W121 - 100A381

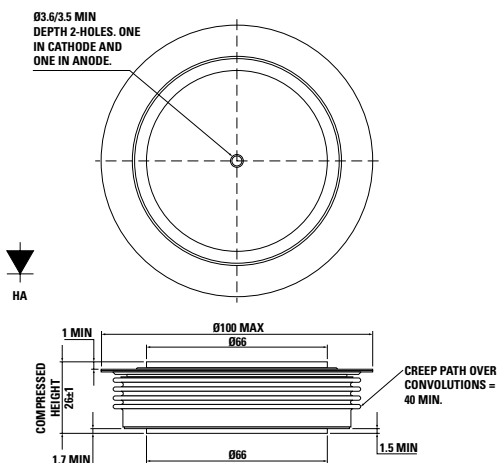


W122 - 100A396

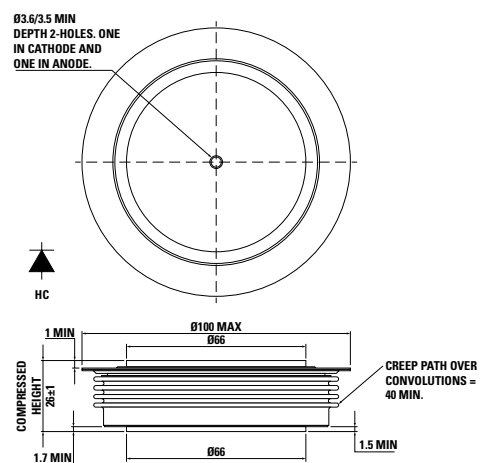


W123 - 100A382

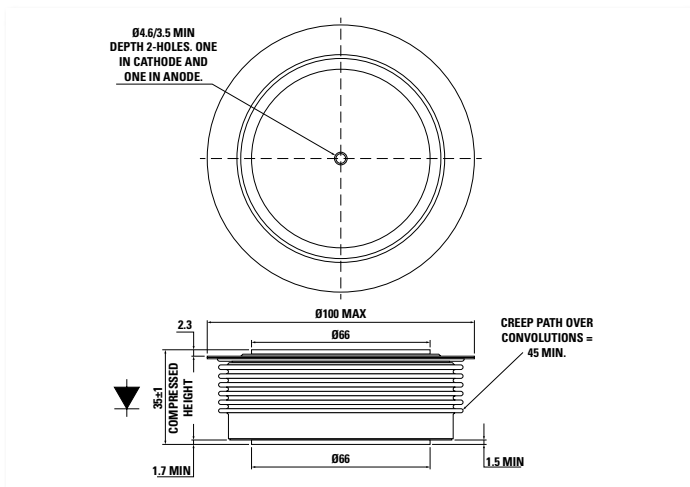


W124 - 100A397

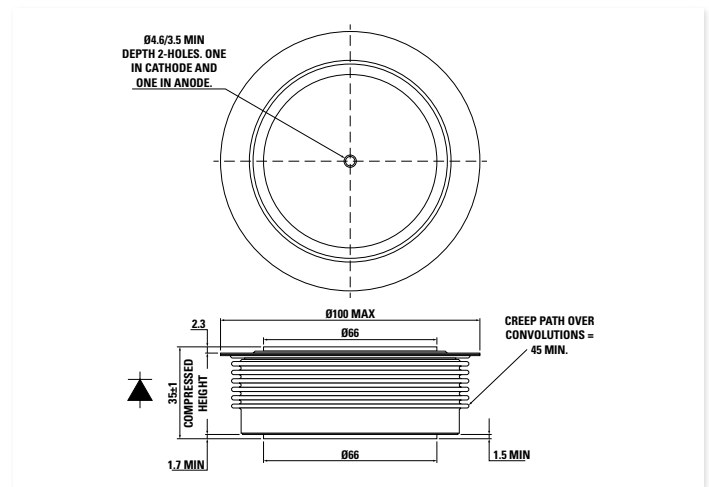


W126 - 100A368

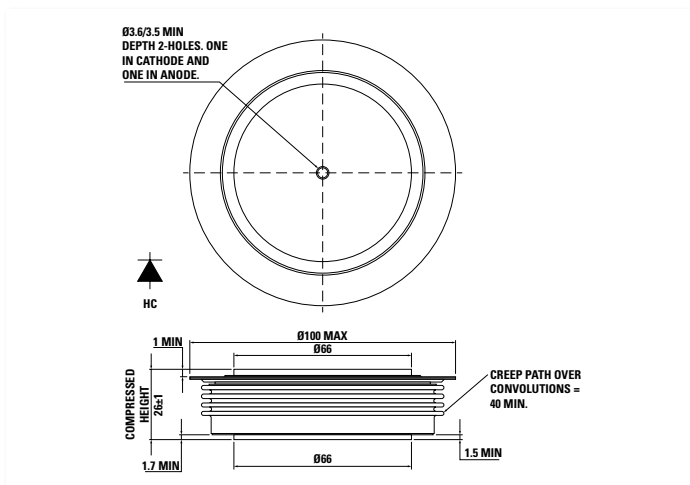


W127 - 100A368

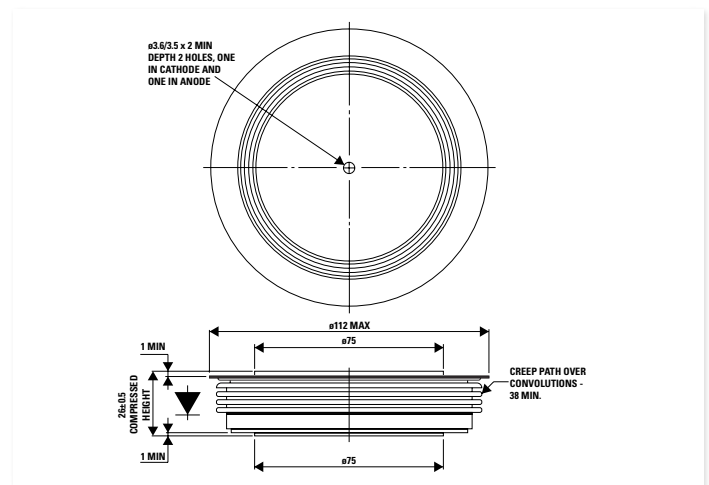

WD2 - 100A325

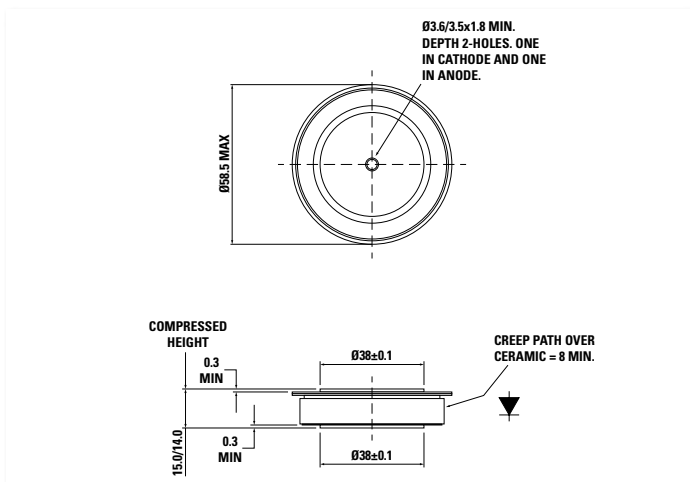


WD3 - 100A356

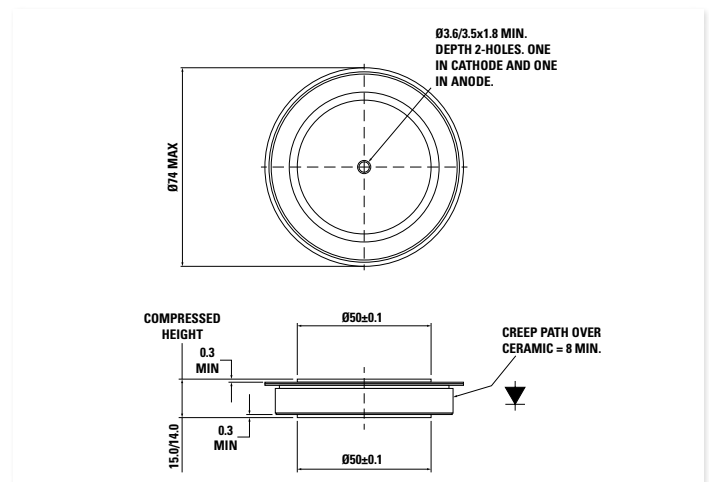


Outline in's


WD5 - 100A361 - 26 mm thick

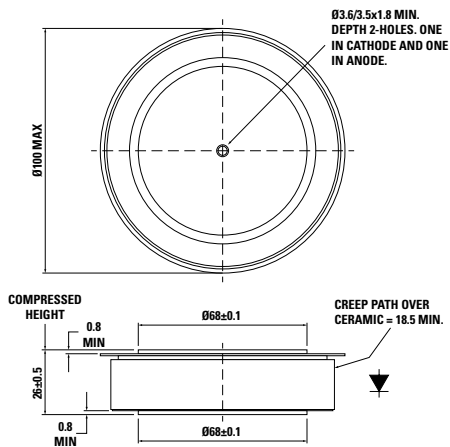


WD6 - 100A360 - 33 mm thick

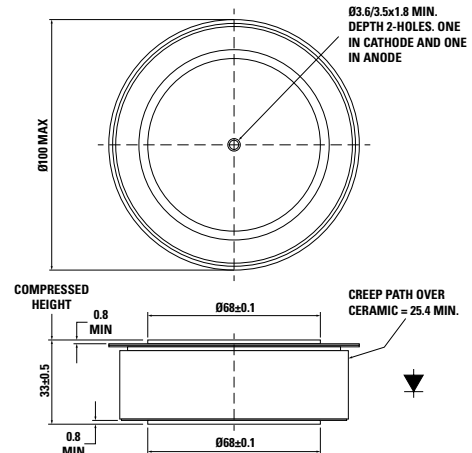


WD7 - 100A363

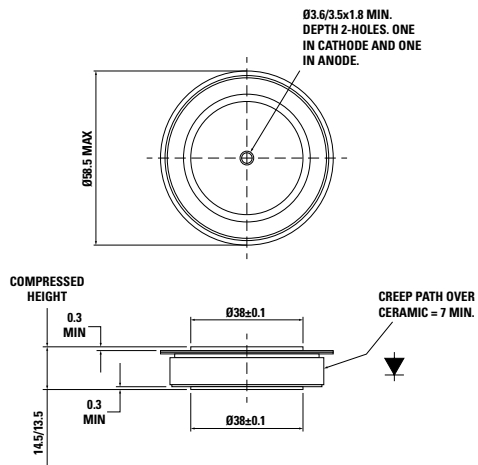


WD8 - 100A392

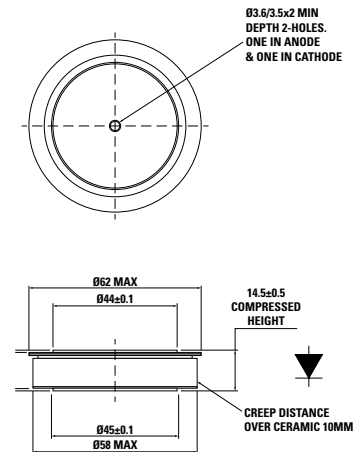


WP1 - 101A361

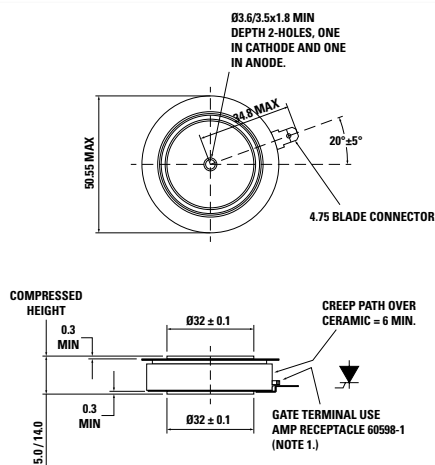


WP2 - 101A354

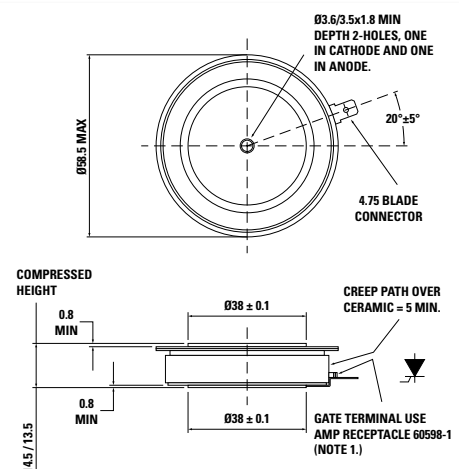


WP3 - 101A353

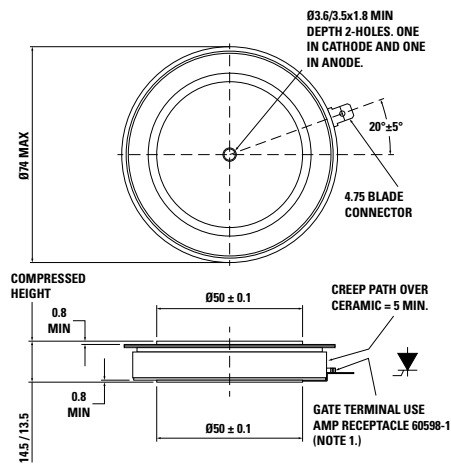


WP4 - 101A355

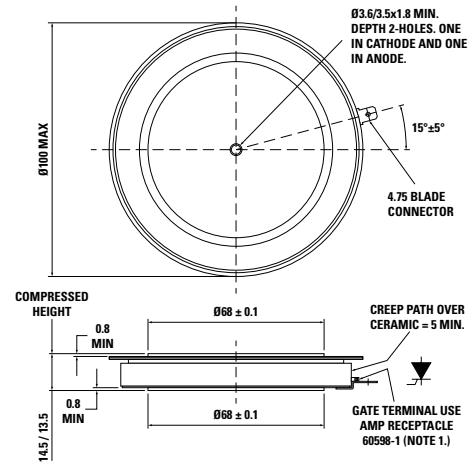


WP5 - 101A356

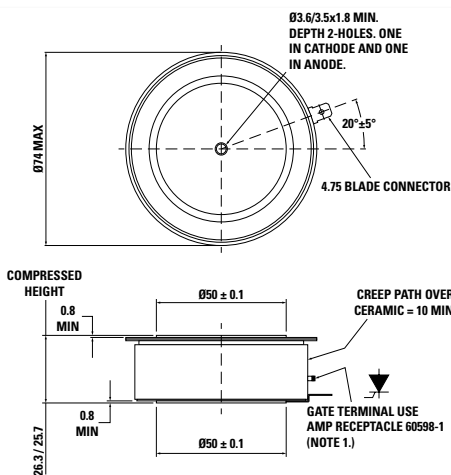


WP6 - 101A389

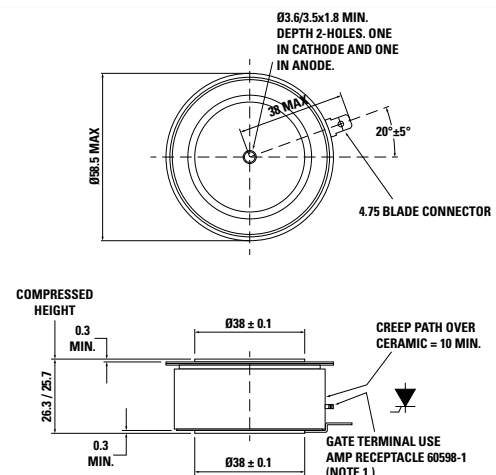

WC1 - XK0450SA056M

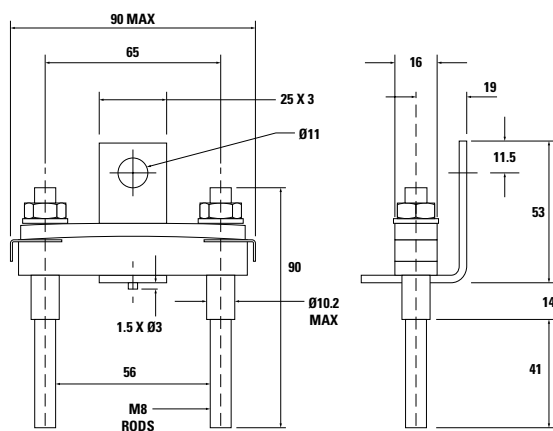


WC2 - XK0450DA056M

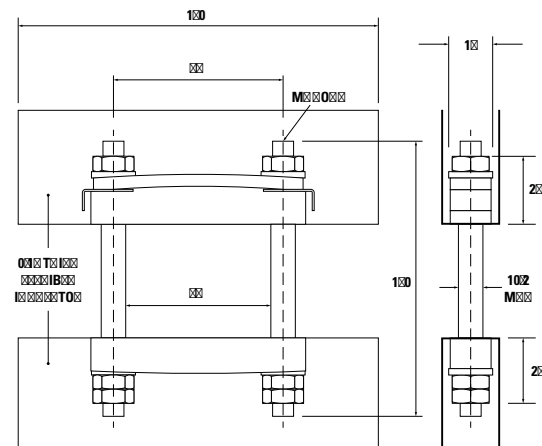


Outline in^s


WC3 - XK0450DT056M

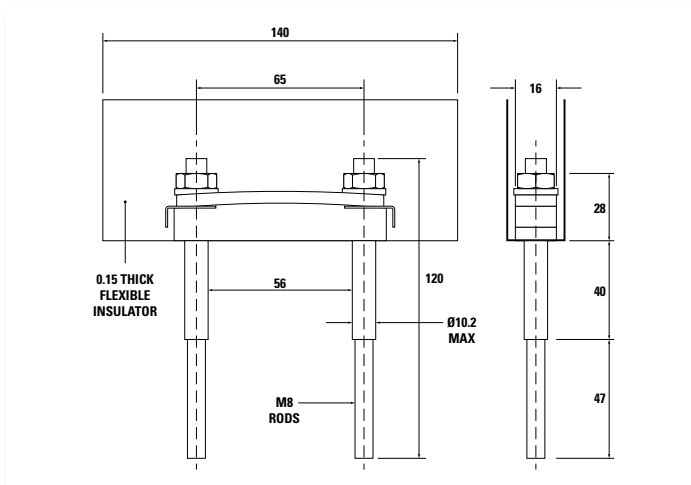


WC4 - XK0550SA056M

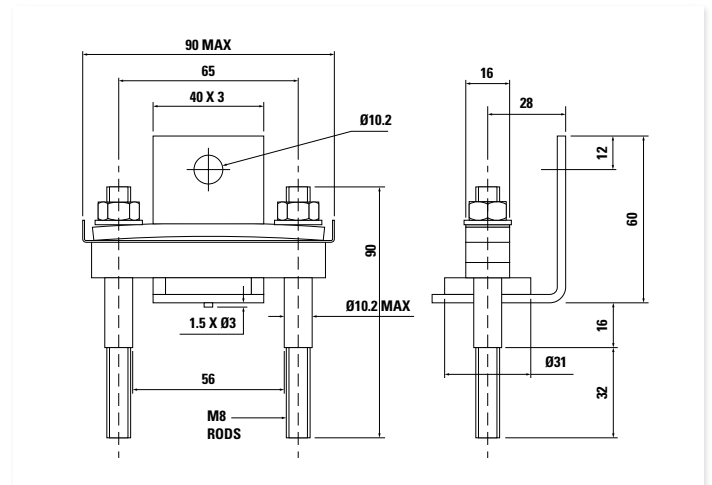


WC5 - XK0550DA056M

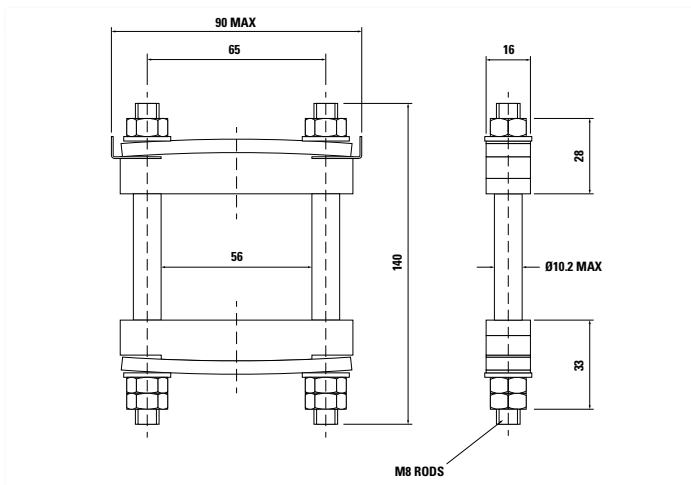


WC6 - XK0900SA056M

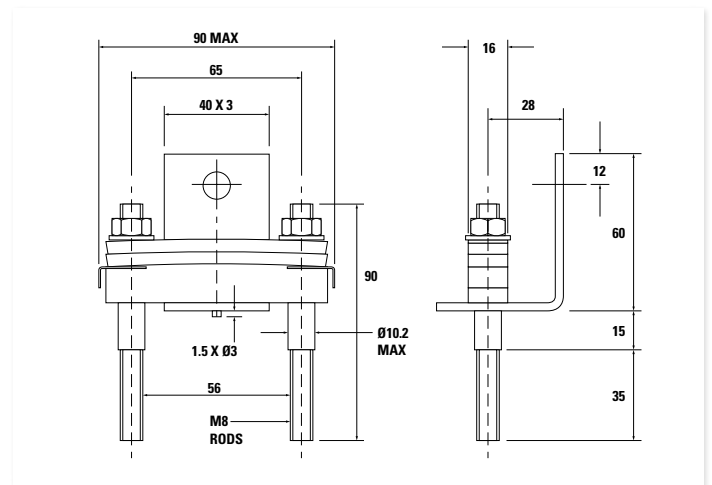


WC7 - XK0900DA056M

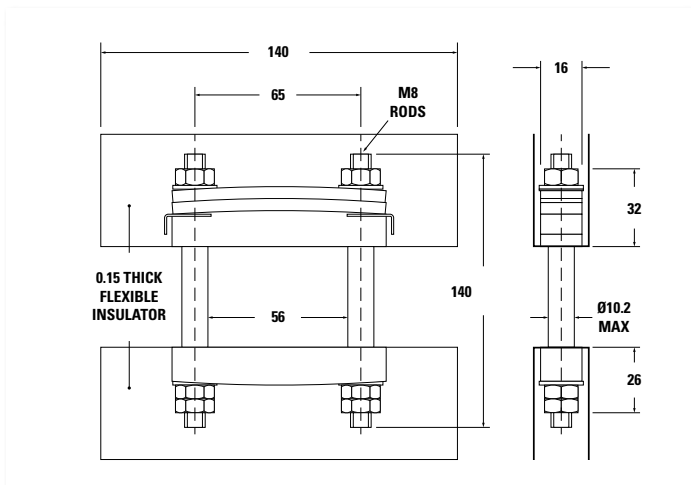


WC8 - XK0900DT056M

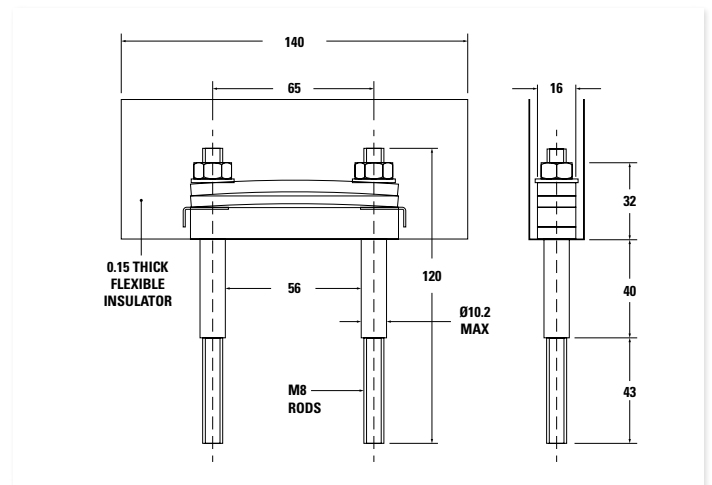


WC9 - XK0600SA074M

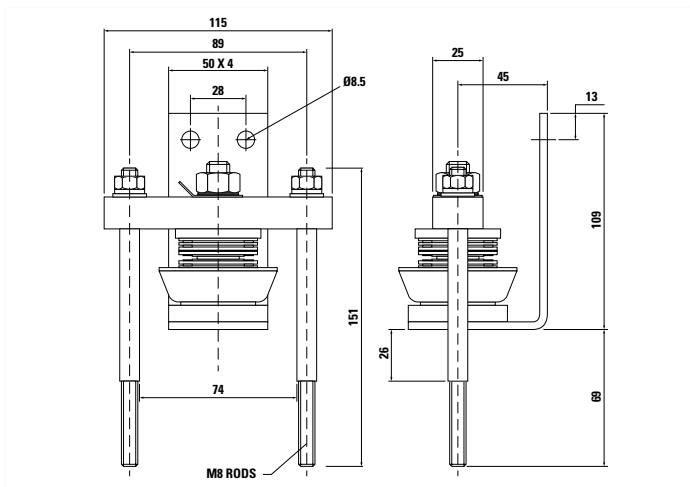


WC12 - XK1000DA074M

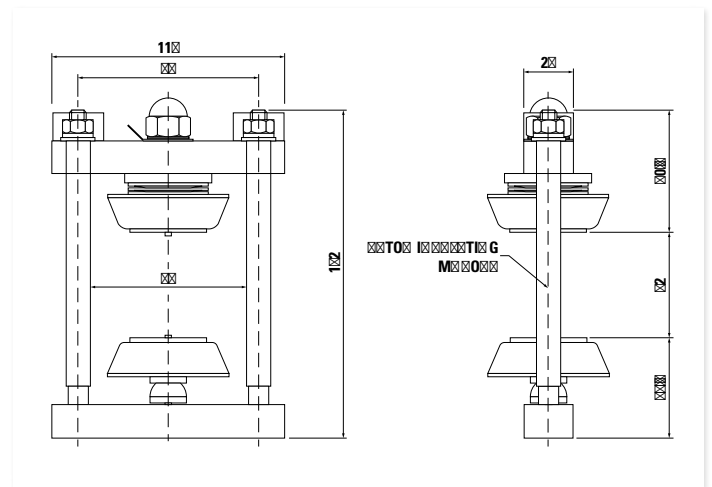


WC10 - XK0600DA074M

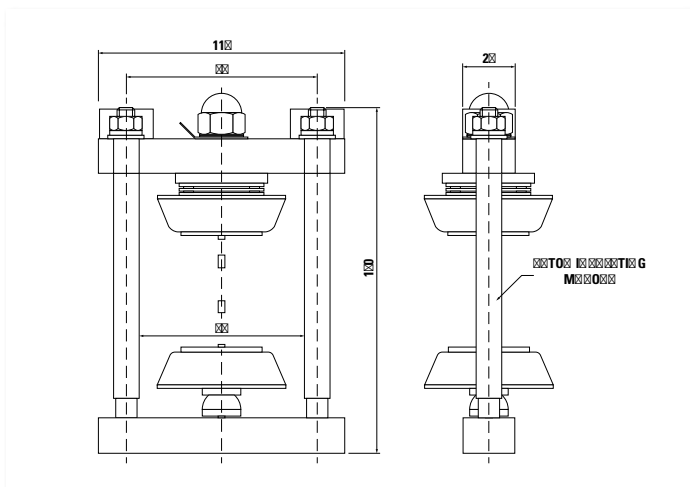


WC13 - XK1100DA076M

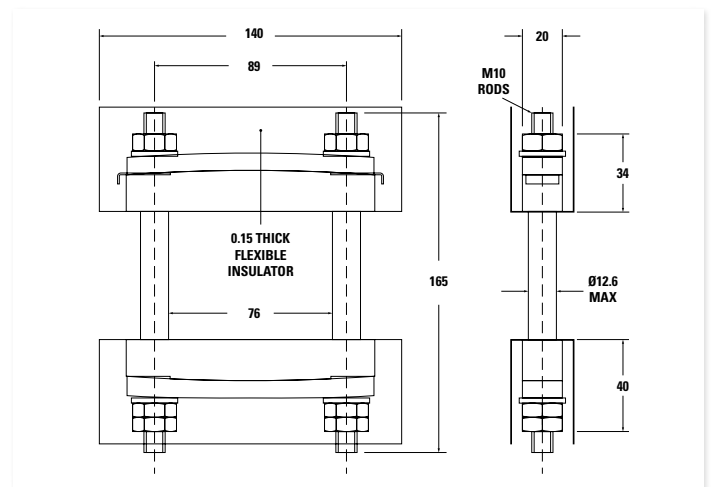

WC11 - XK1000SA074M

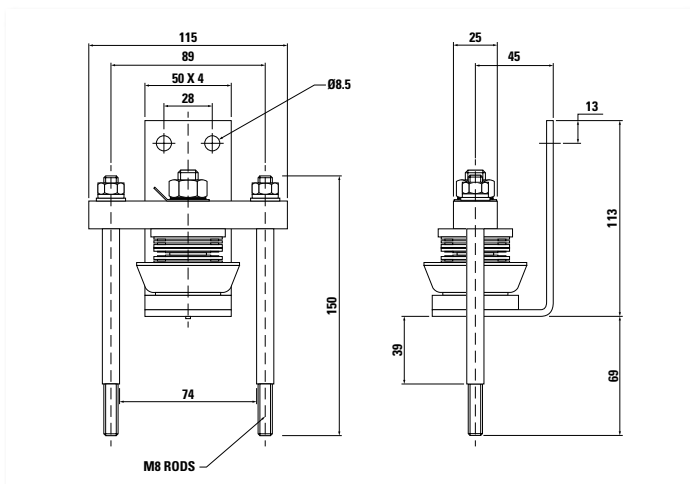


WC14 - XK1130SA076M

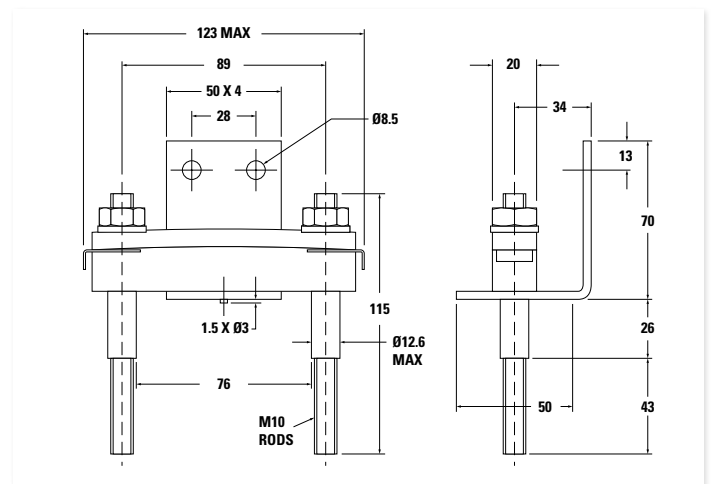


Outline in


WC15 - XK1130DA076M

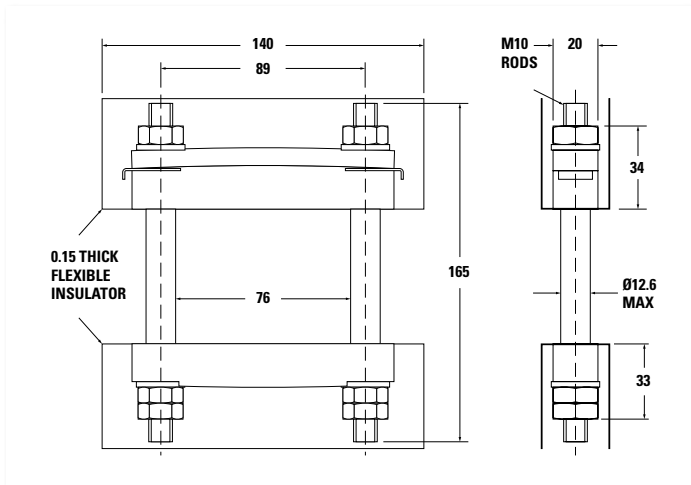


WC16 - XK1130DT076M

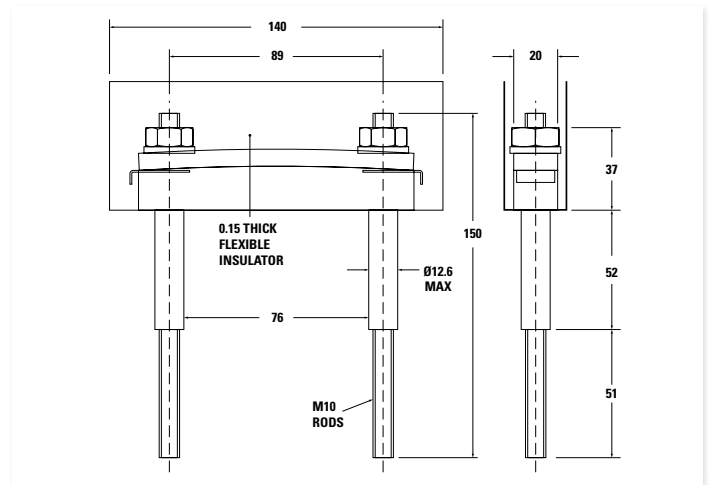


WC17 - XK1800SA076M

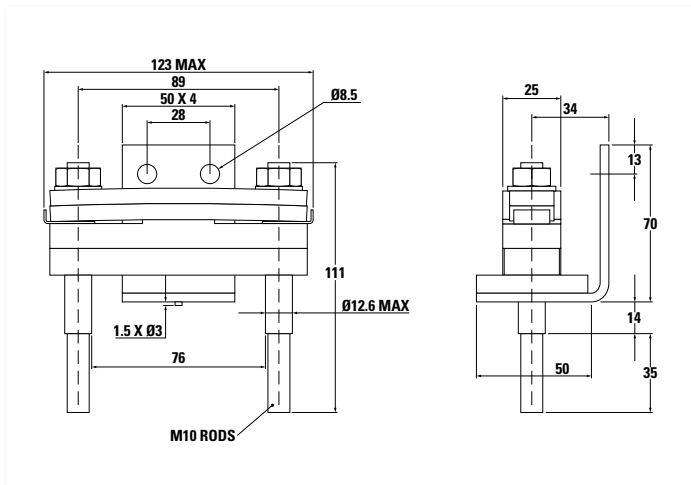


WC18 - XK1800DA076M

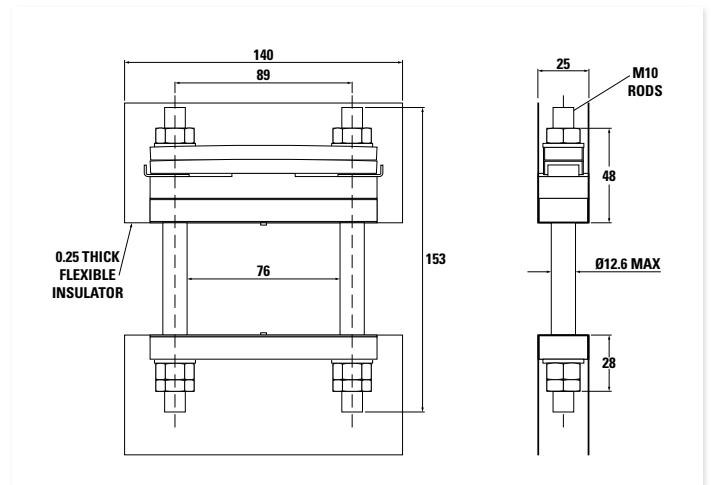


WC19 - XK1800DT076M

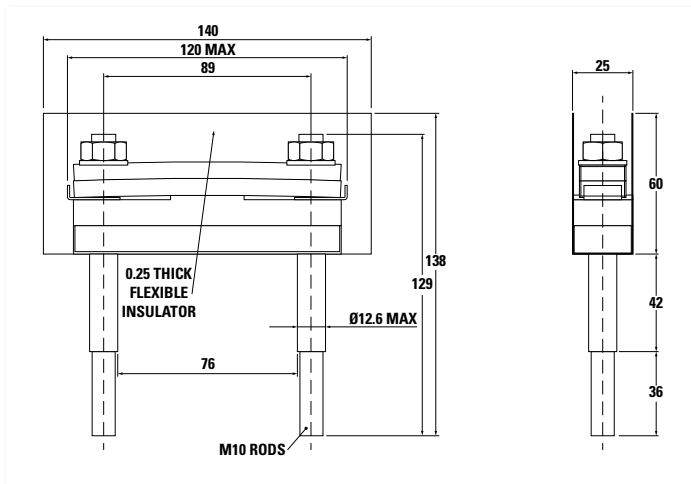


WC20 - XK2100SA076M/ML

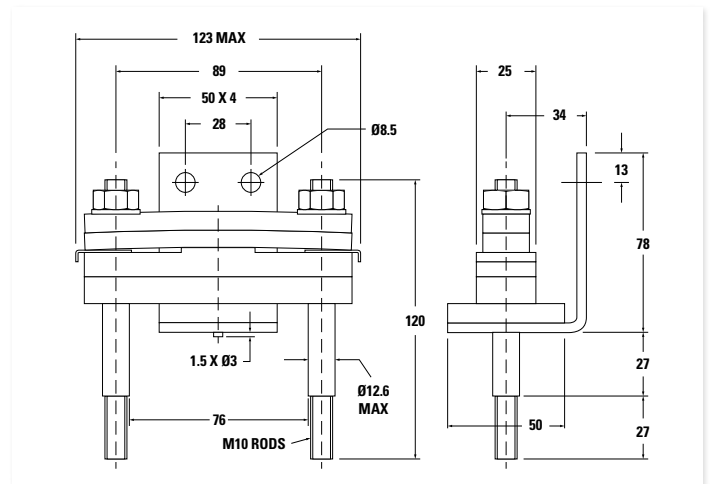


WC21 - XK2100DA076M/ML

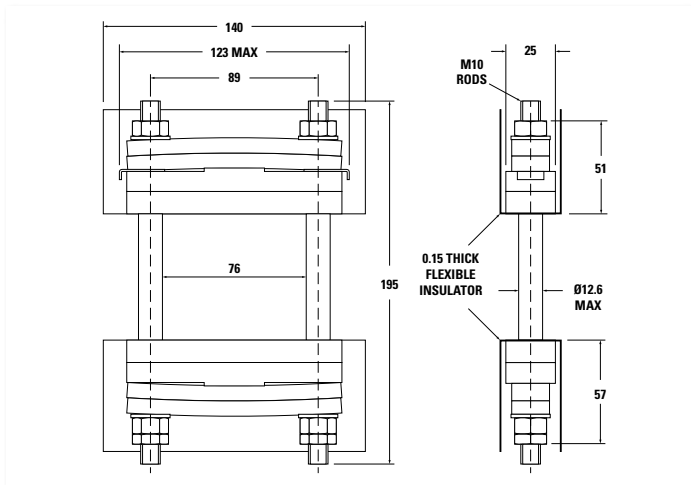


FPO WC22 - XK2140SA076M/ML

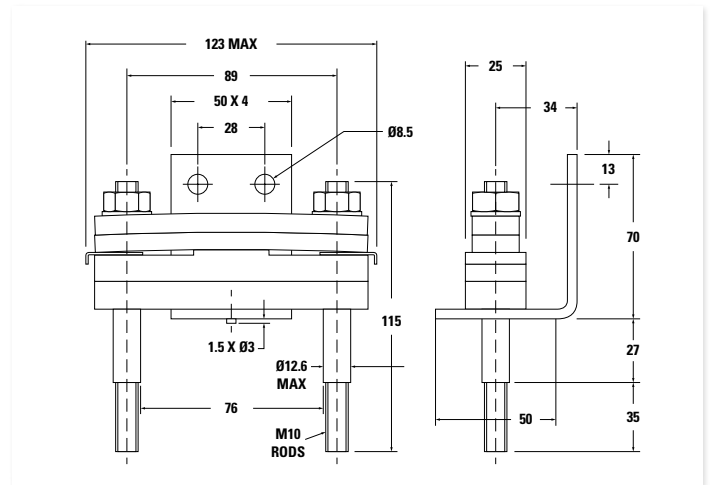


WC23 - XK2140DA076M/ML

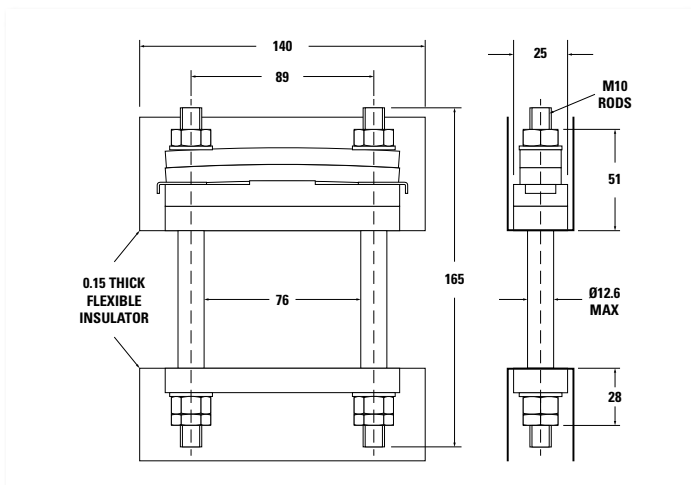


WC24 - XK2140DT076M/ML

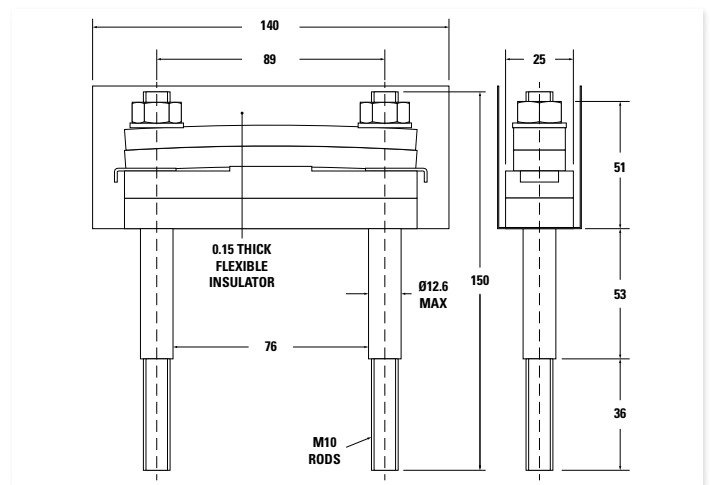

WC25 - XK2700SA076M

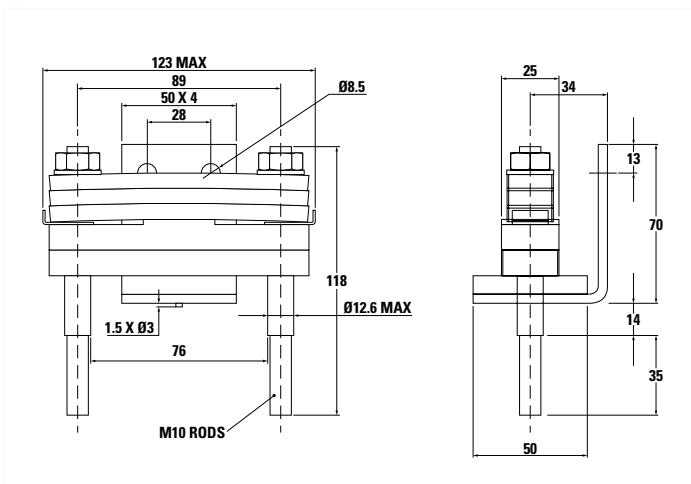


WC26 - XK2700DA076M

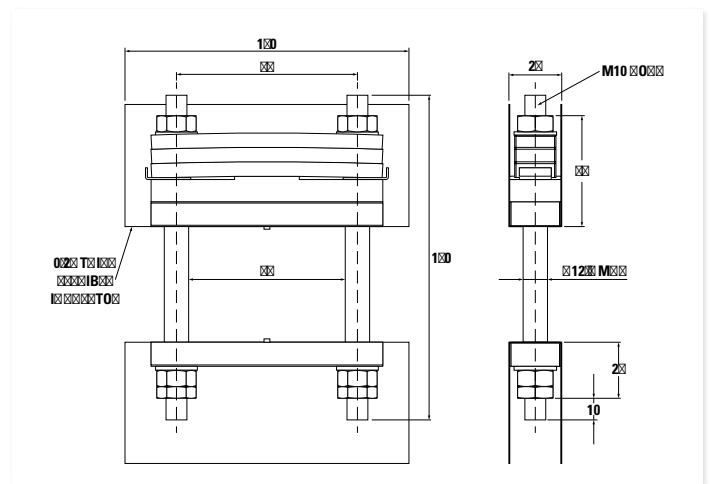


Outline in's


WC27 - XK2700DT076M

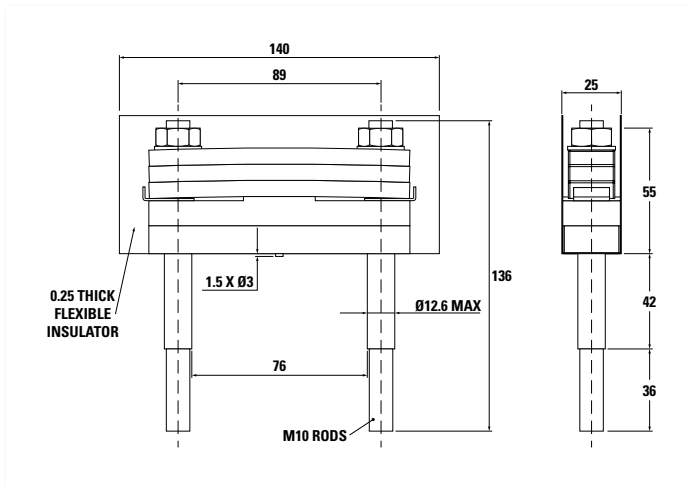


WC28 - XK2000SA114M

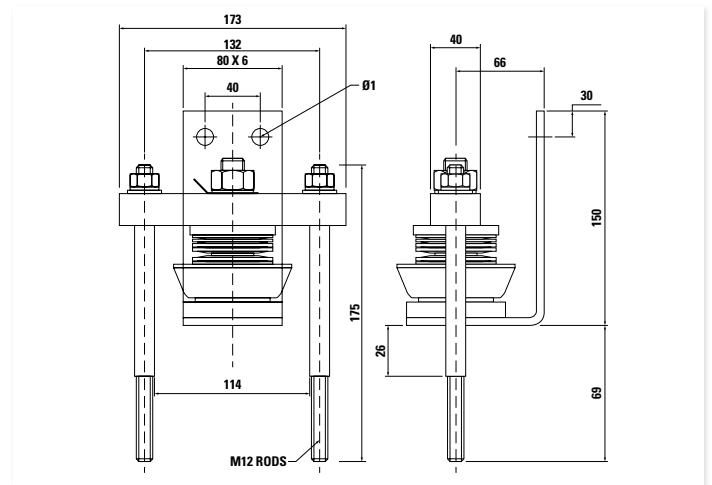


WC29 - XK2000DA114M

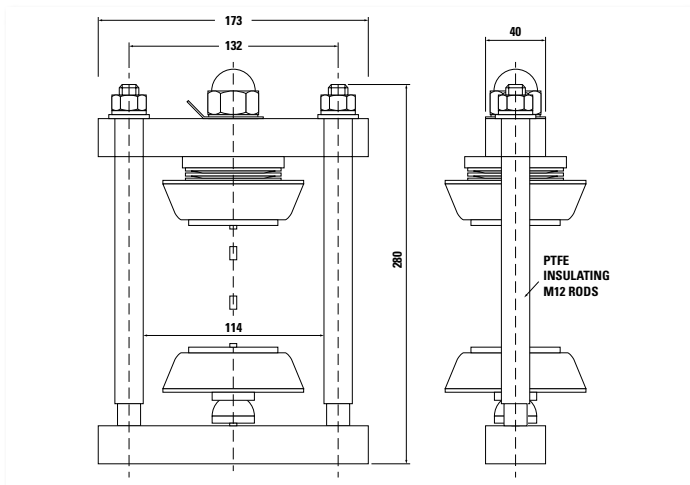


WC30 - XK2500SA114M

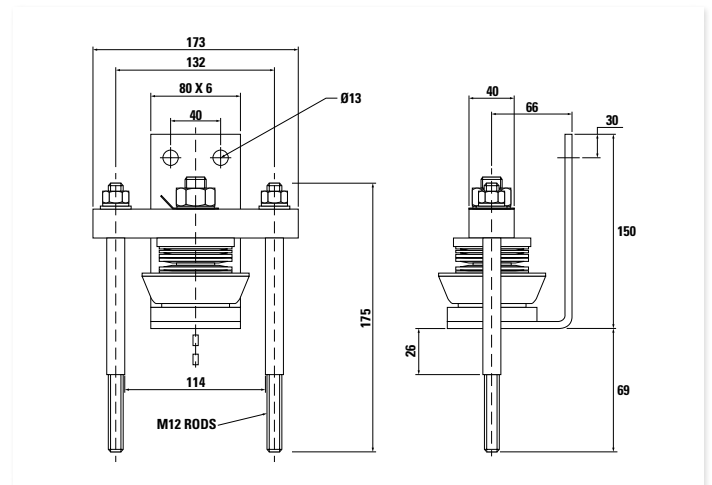


WC31 - XK2500DA114M

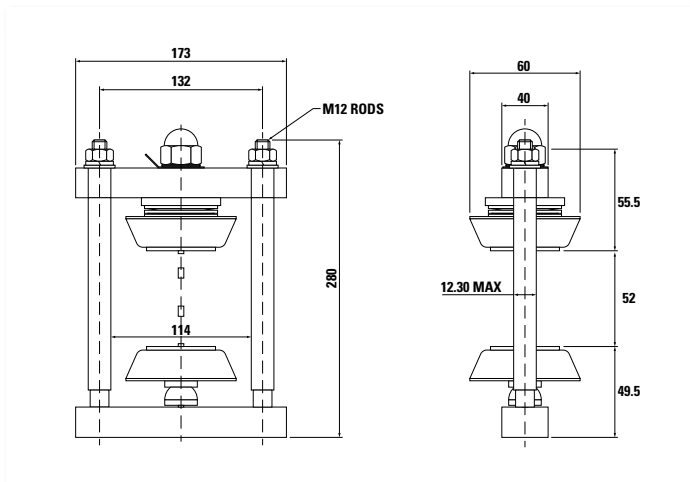


WC32 - XK2500SA116M/ML

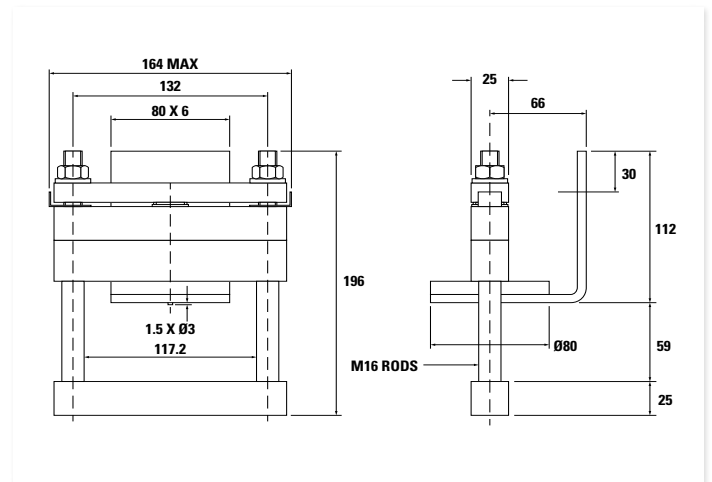


WC33 - XK2500DA116M/ML

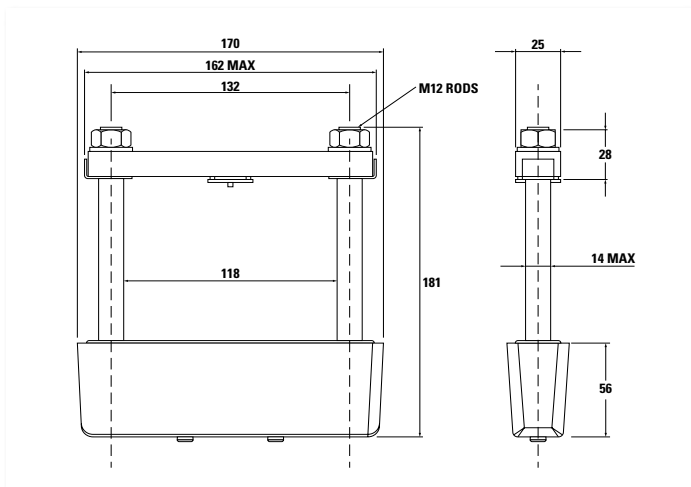


WC34 - XK3000SA116M/ML

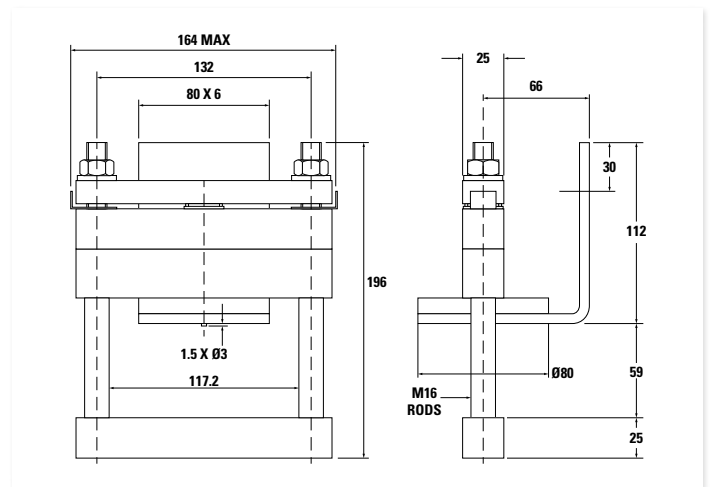


WC35 - XK3000DA116M/Mx

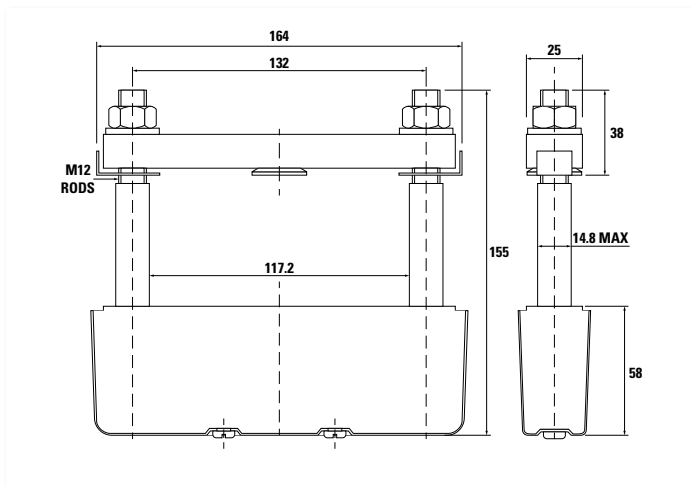


WC36 - XK3500SA116M/ML

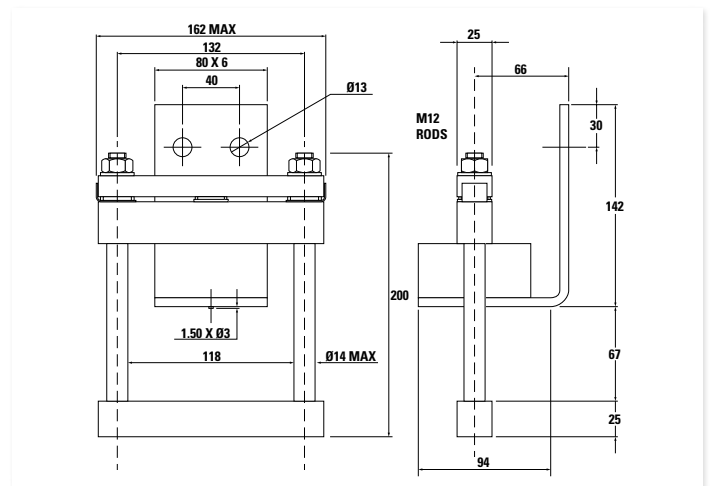

WC37 - XK3500DA116M/ML

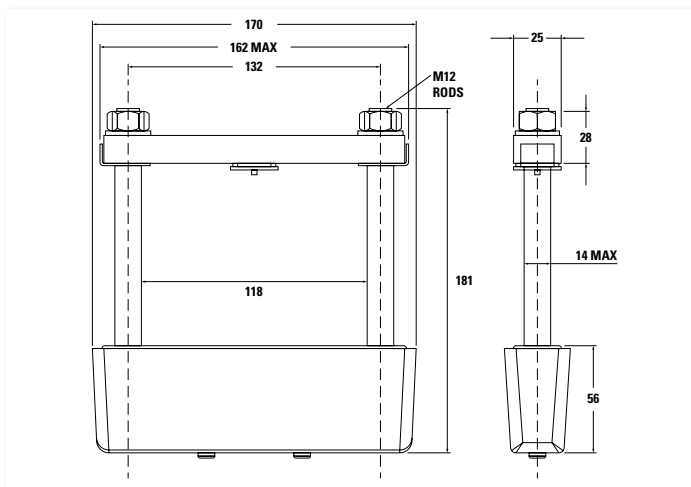


WC38 - XK4000SA116M/ML

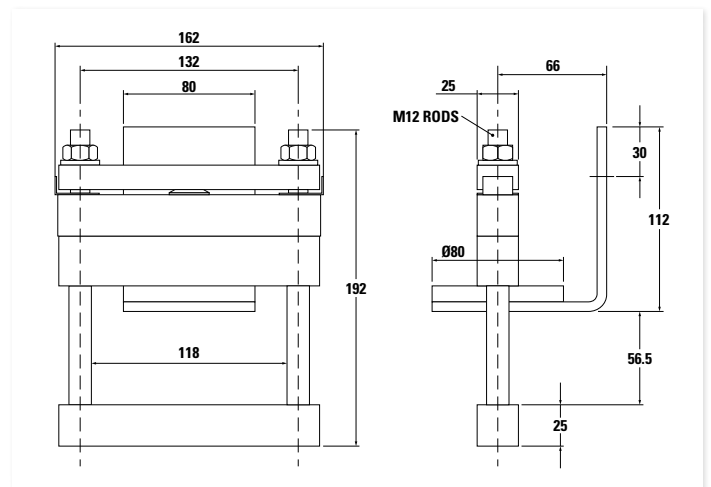


Outline in's


WC39 - XK4000DA116M/ML

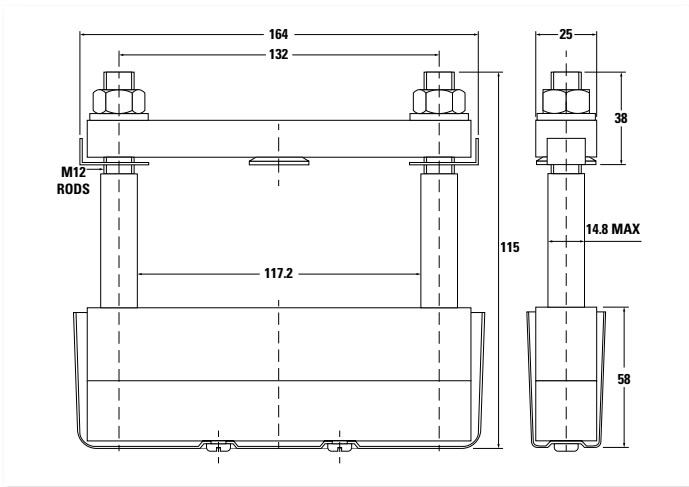


WC40 - XK5000DA128M/ML

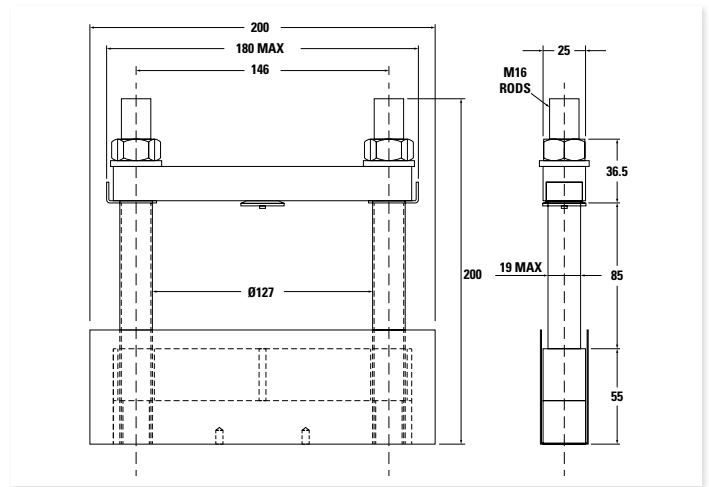


WC41 - XK7000DA128M/ML

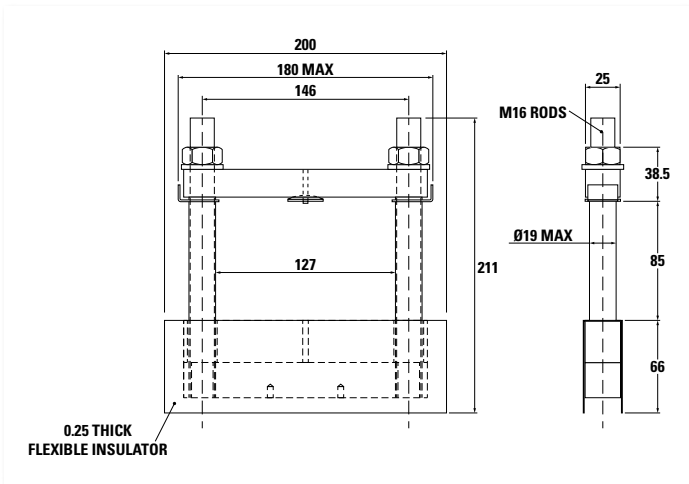


WC42 - XK3060SA140ML

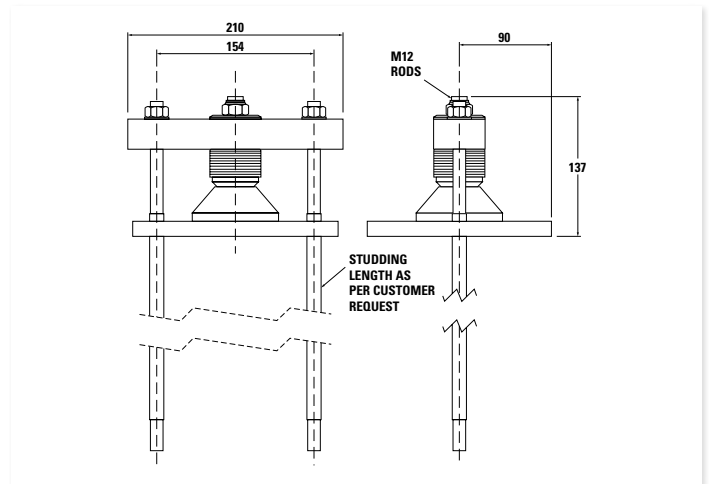


WC43 - XK3060DA140ML

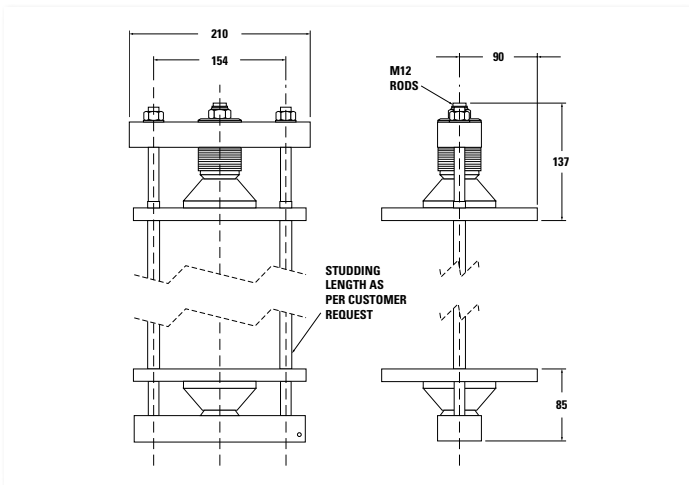


WC44 - XK9000SA160M/ML

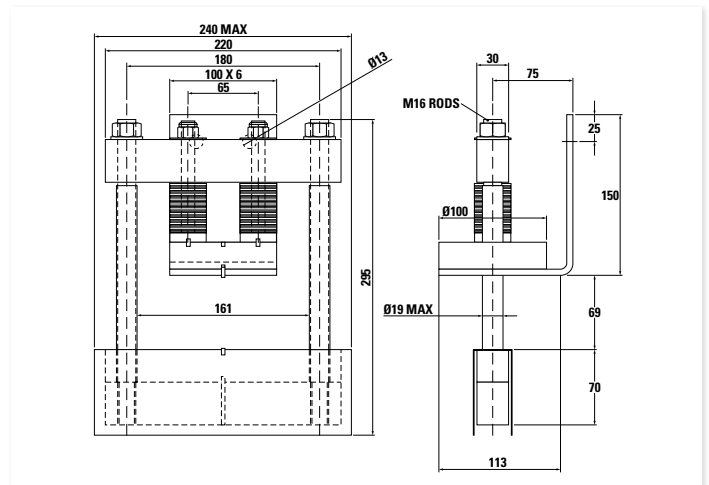


WC45 - XK9000DA160M/ML

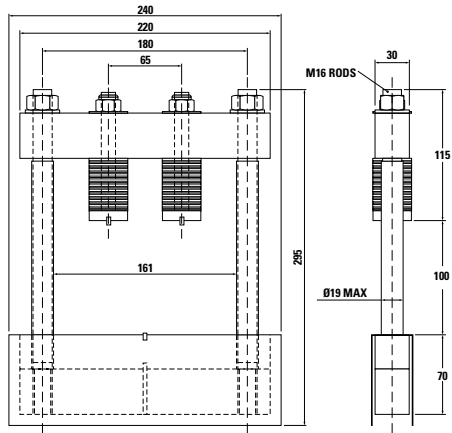


WC46 - XK6120DA180ML

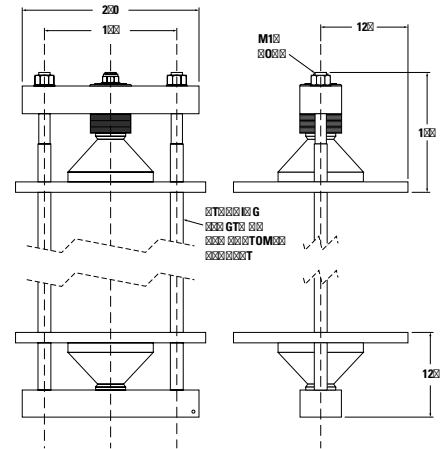


WC47 - XK6120SA180ML

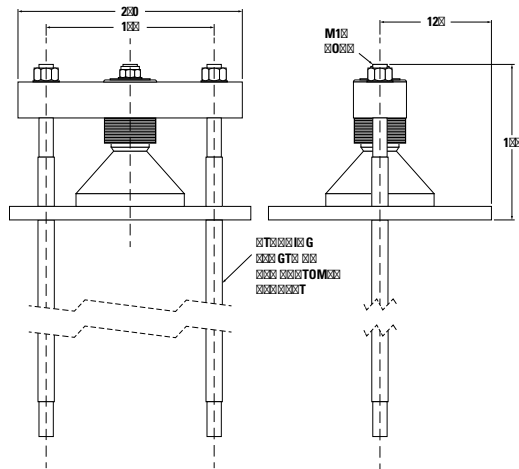


WC48 - XK0450xx019M

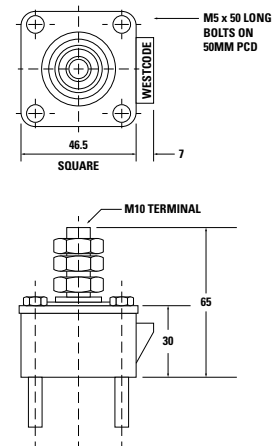

WC49 - XK####xx025M

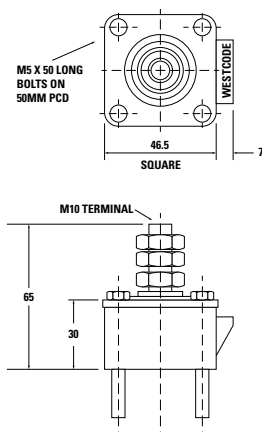


WC50 - XK1500BA034M

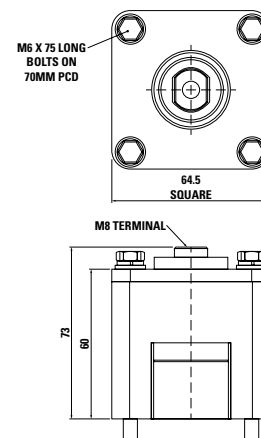


Outline in

WC51 - XSK1500DA076xxx

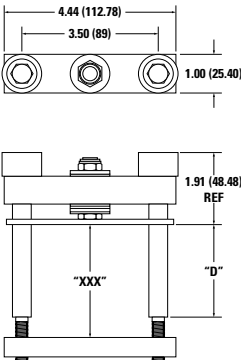


Notes:
1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.

WC52 - XSK2000DA076xxx

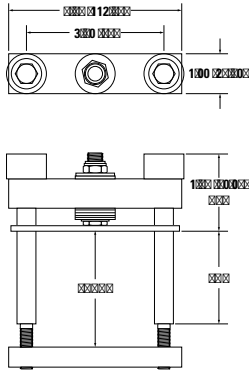


Notes:
1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.

WC53 - XSK3000DA076xxx

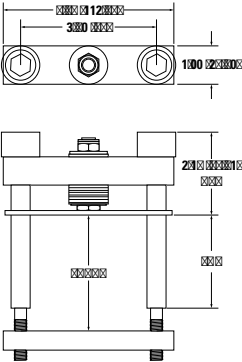


Notes:
1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.

WC54 - XSK3400DA076xxx

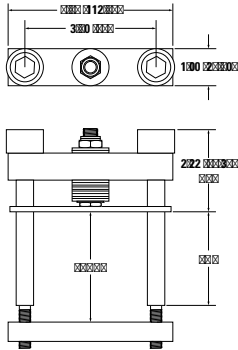


Notes:
1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.

WC55 - SK3800DA116Mxxx




Notes:
1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSIONS CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.

WC56 - XSK4400DA116Mxxx

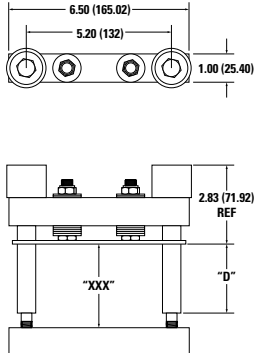

Notes:
1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC57 - XSK6000DA116Mxxx

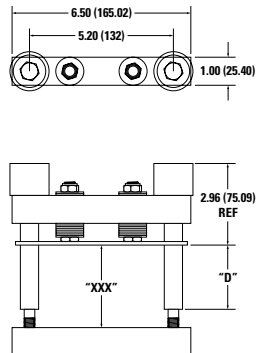


Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC58- DA

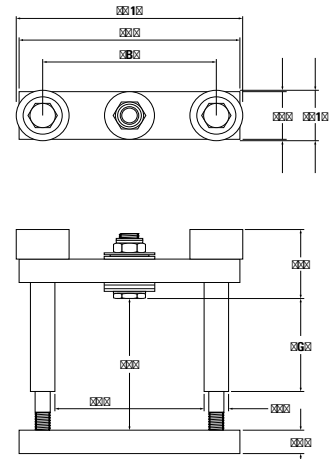


WC59 - DT

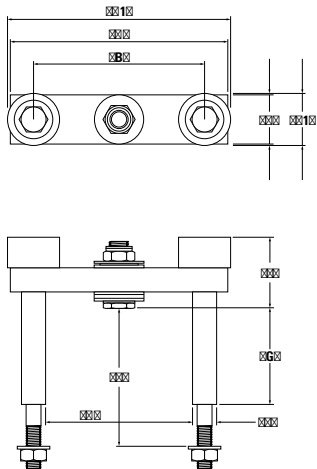


WC60 - DF

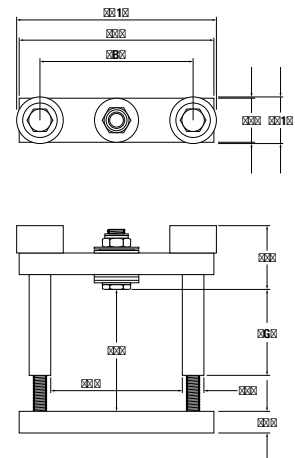

WC61 - DA

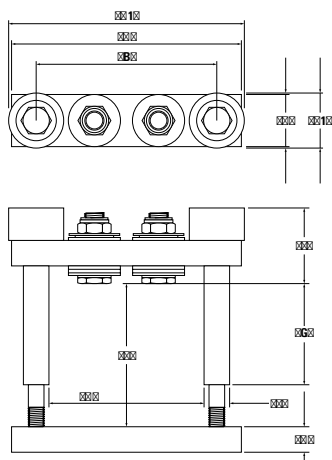


WC62 - DT

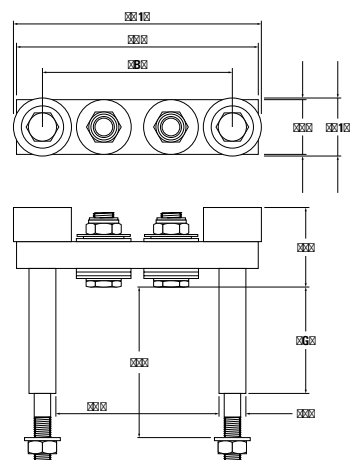


Outline in's


WC63 - DF

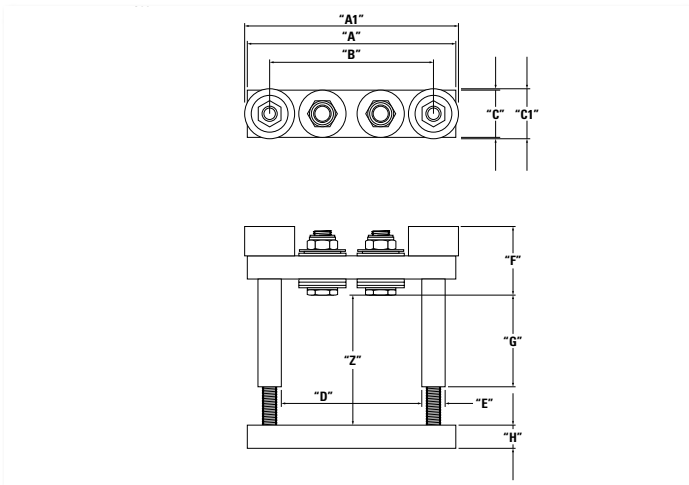


WC64 - XK1500CB034M

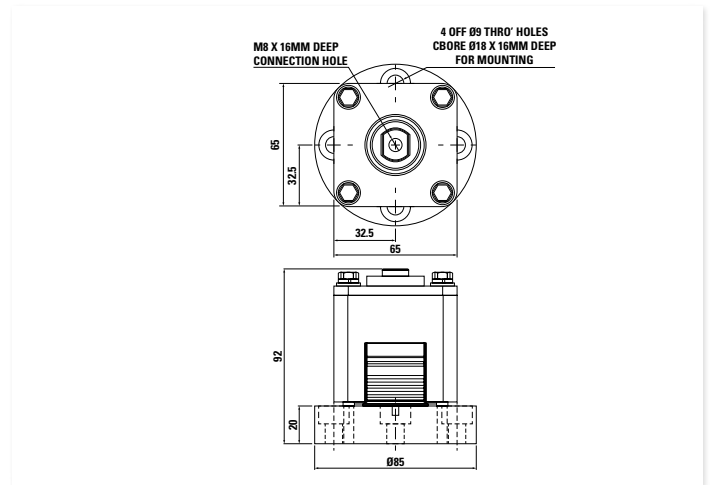


WC65 - XK1130SB076M

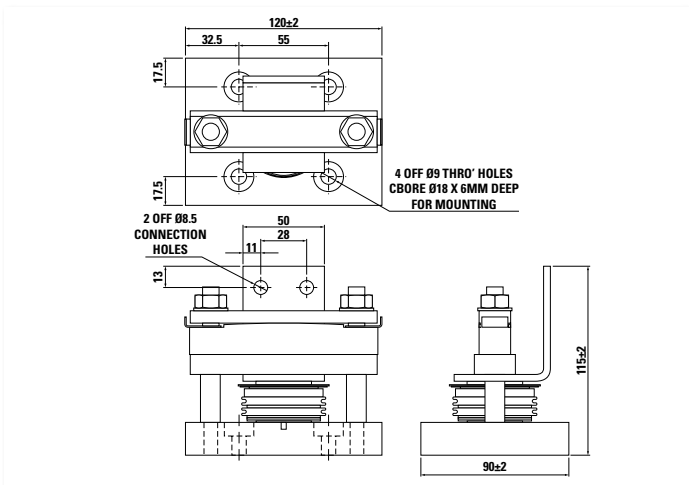


WC66 - XK2140SB076M

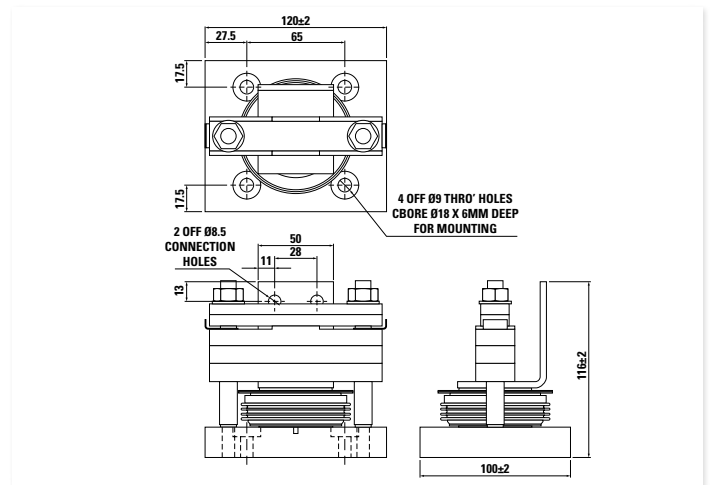

WC67 - XK8000DA180ML

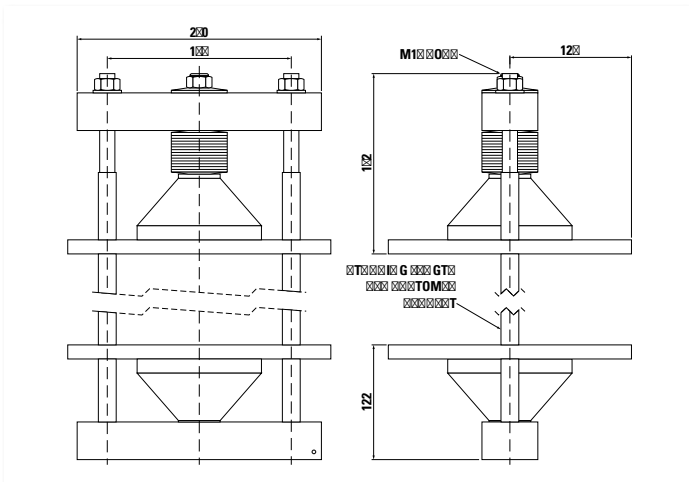

WC68 - XK8000SA180ML

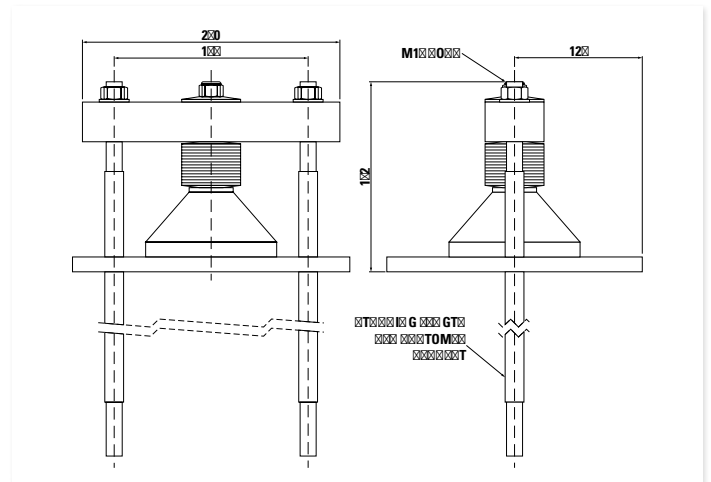

Technical drawing of a symmetrical mechanical part, likely a mold or a bracket, shown in a front view. The drawing is divided into two halves by a vertical dashed centerline. The part features a central rectangular cutout at the bottom, flanked by two large, symmetrical, trapezoidal sections. The top of the part has a complex profile with several horizontal and vertical lines. Dimensions are indicated by dimension lines and numerical values:

- Overall width: 100
- Overall height: 100
- Top horizontal segments: 20, 20, 20, 20
- Top vertical segments: 10, 10, 10, 10
- Central cutout width: 20
- Central cutout height: 10
- Bottom horizontal segments: 20, 20, 20, 20
- Bottom vertical segments: 10, 10, 10, 10


Technical drawing of a symmetrical mechanical part. The drawing shows a top-down view with a central vertical dashed line indicating symmetry. The overall width is dimensioned as 100. The overall height is dimensioned as 120. A horizontal dimension of 102 is shown at the top, indicating the width of the upper section. The part features a series of vertical slots or fins on both sides, and a central rectangular feature at the bottom.

Technical drawing of a stylized 'X' logo. The drawing includes the following dimensions:


- Overall width: 178
- Overall height: 79
- Top horizontal bar width: 84
- Bottom horizontal bar width: 142
- Central vertical bar width: 27
- Left and right side bar width: 10

Outline in s


WH4 - T FIN

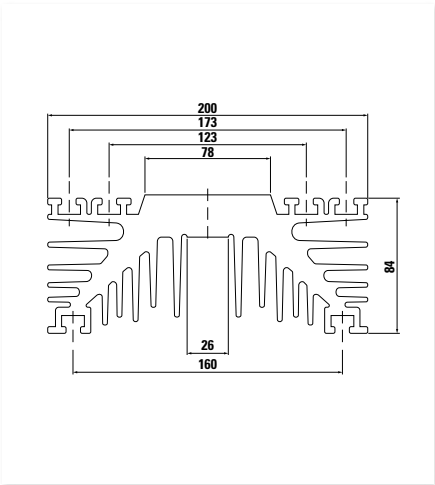


WH5 - TB FIN

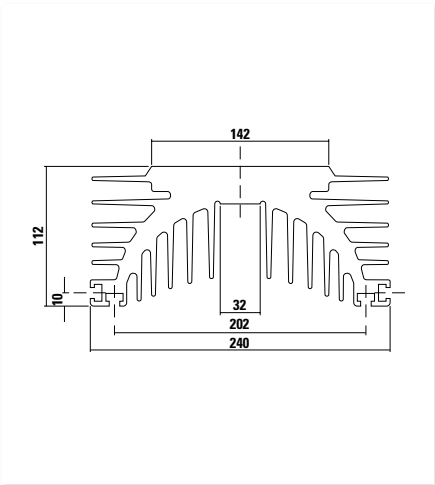


WH6 - TC FIN

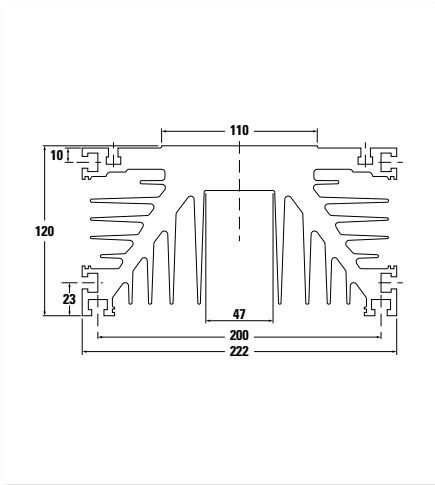


WH7 - LP100

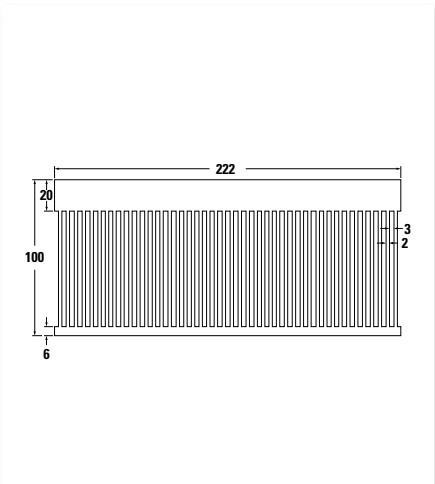

WH8 - WS46

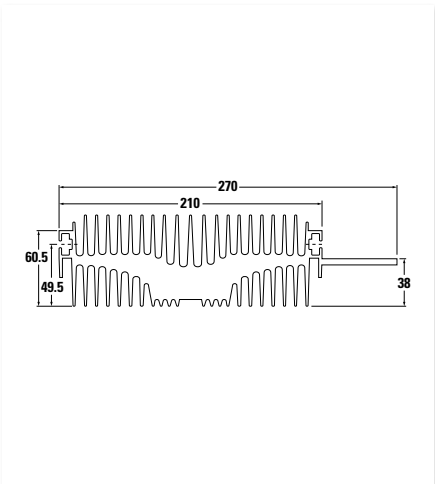


WH9 - WS30 - COPPER

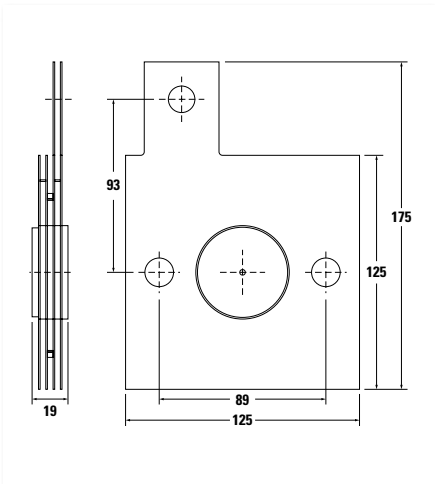


NOZZLES SUITABLE FOR 10MM HOSE

15 55.5 25 6 130.2 60.2 30.1

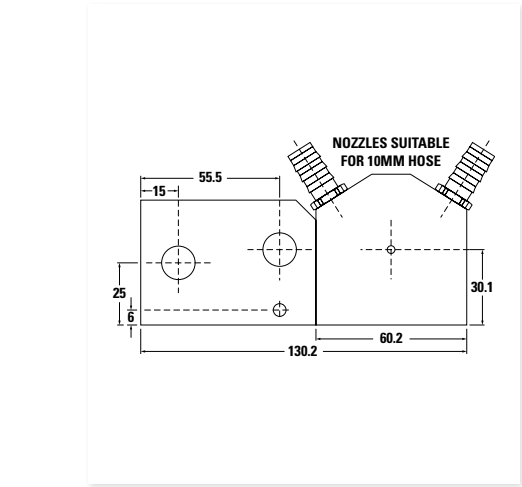


Technical drawing of a square fire nozzle. The main body is a square with a width of 60.2 and a height of 30.1. A central circular hole is marked with a crosshair. Two angled nozzle attachments are shown on the top corners, labeled "NOZZELS SUITABLE FOR 10MM HOSE".

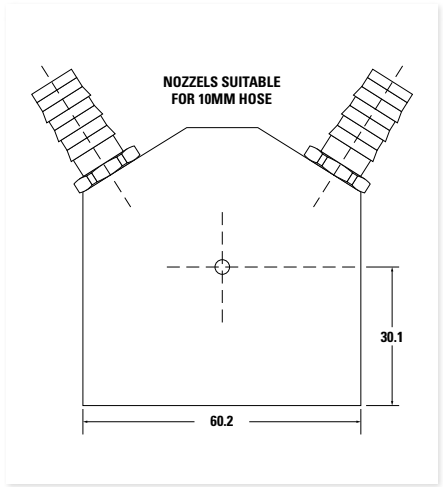

Technical drawing of the spray gun body (Fig. 10.10). The drawing shows the front and side views with the following dimensions:



- Overall length: 175
- Overall width: 60
- Distance from front face to first nozzle: 26
- Distance between nozzles: 64
- Distance from front face to second nozzle: 40
- Distance from front face to third nozzle: 20
- Distance from front face to fourth nozzle: 10
- Distance from front face to nozzle holder: 90
- Distance from nozzle holder to rear face: 40

NOZZELS SUITABLE FOR 12MM HOSE

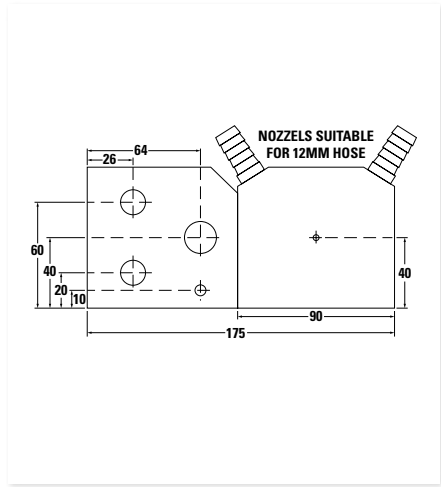

Technical drawing of a mechanical part. The part is a rectangular plate with a central hole. The dimensions and tolerances are as follows:




- Overall width: 120 ± 0.1 mm
- Overall height: 80 ± 0.1 mm
- Central hole diameter: $\varnothing 10 \pm 0.05$ mm
- Top corners: Two chamfers, each with a width of 10 ± 0.1 mm and a height of 10 ± 0.1 mm.

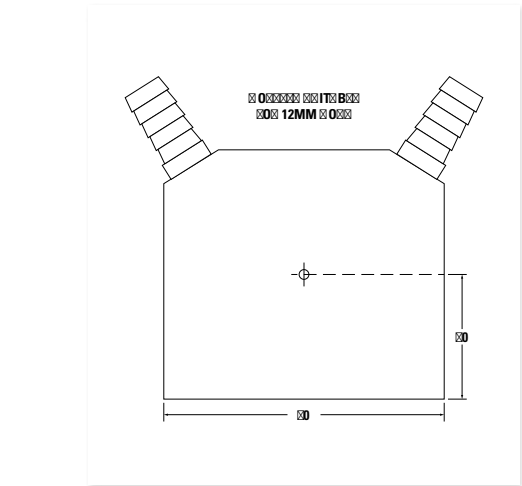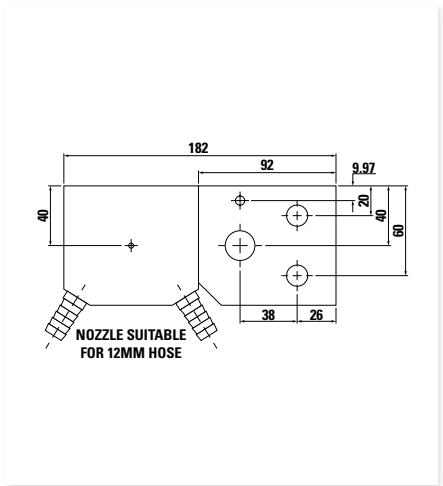[illegible]

127

63.5

NOZZLES SUITABLE
FOR 12MM HOSE

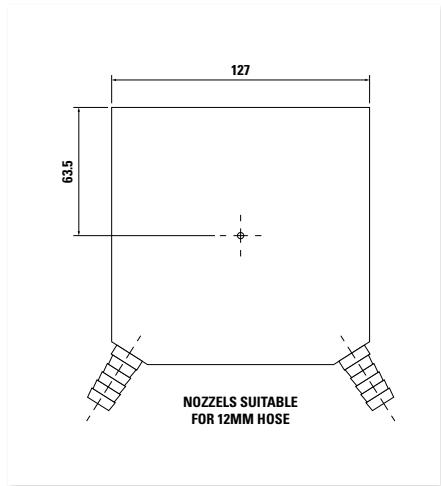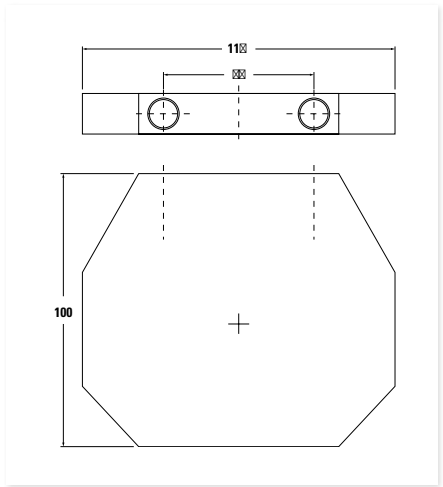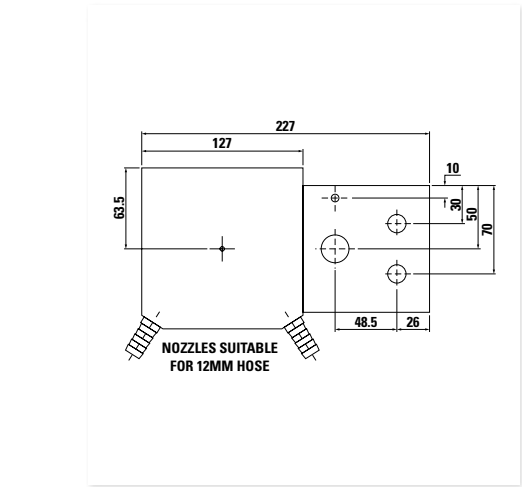[illegible]


Technical drawing of a rectangular unit, likely a control panel or terminal block, showing dimensions and port specifications.

Dimensions:

- Overall width: 270
- Overall height: 190
- Top flange height: 20
- Right side flange height: 30
- Bottom flange height: 20
- Internal vertical spacing: 112
- Internal horizontal spacing: 48 TYP
- Port offset from left edge: 70
- Port offset from bottom edge: 12.5
- Port offset from right edge: 30
- Port offset from bottom edge: 50
- Port offset from right edge: 60
- Port offset from bottom edge: 20
- Port offset from right edge: 20
- Port offset from bottom edge: 20
- Port offset from right edge: 20


Ports and Features:

- 4 HOLES M3 X 6 DEEP (CONTACT WESTCODE FOR SUITABLE THERMOSTATS)** (Top right)
- 12 HOLES M6 X 12 DEEP** (Right side)
- 4 HOLES Ø7 THROUGH** (Right side)
- 3/8 BSPP INLET** (Right side)
- 3/8 BSPP OUTLET** (Bottom left)
- 48 TYP** (Internal horizontal spacing)
- 32 TYP** (Internal horizontal spacing)

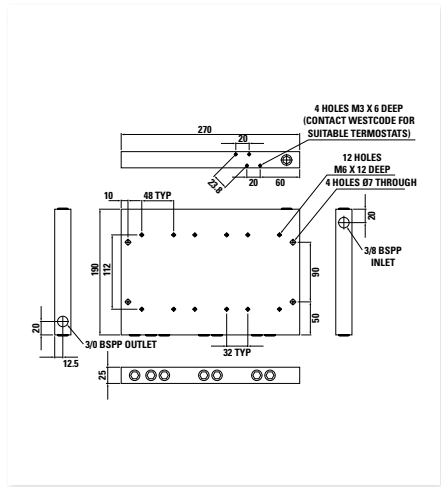


Outline in@s


WCL10 - WS69 COOLER

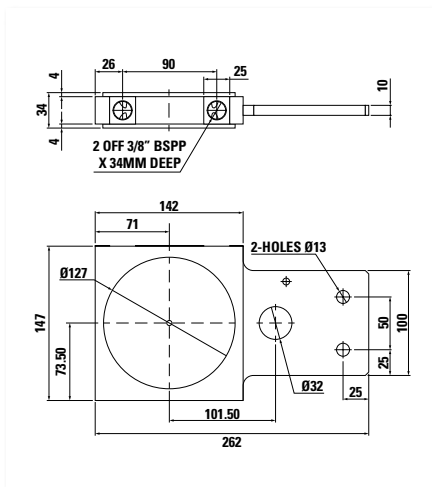


WCL11 - WS70 COOLER

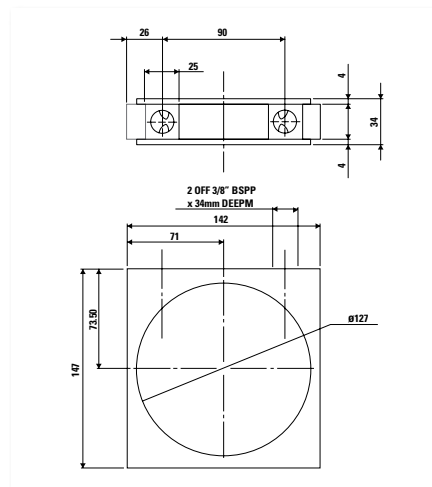


WCL12 - WS71-1 COOLER

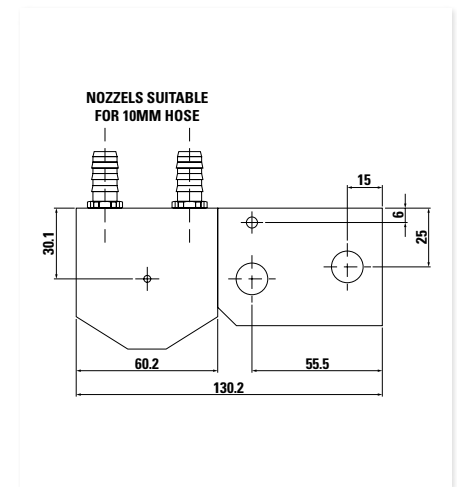


WCL13 - WS71-2 COOLER

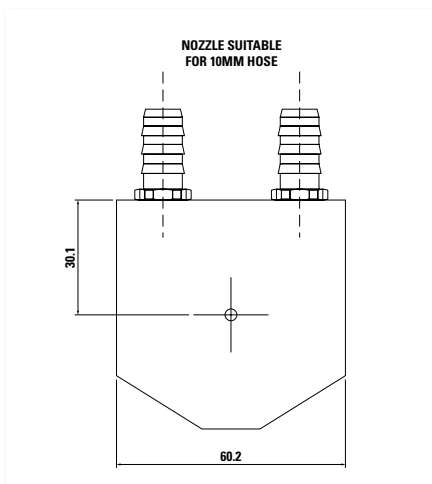


WCL14 - WS72-1 COOLER

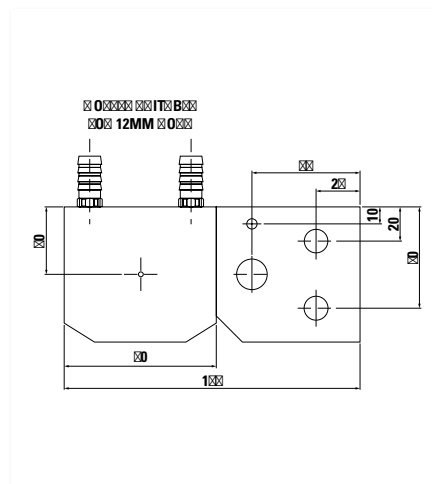


WCL15 - WS72-2 COOLER

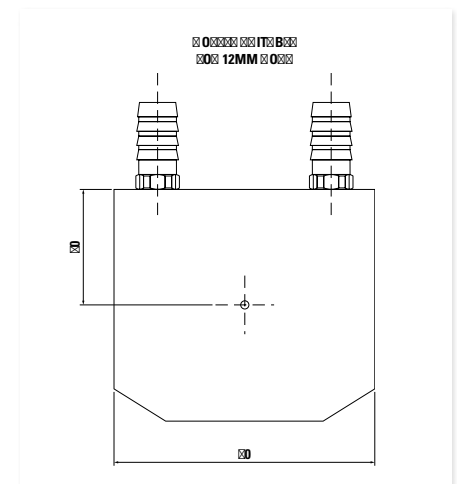


WCL16 - XW127ExxxA

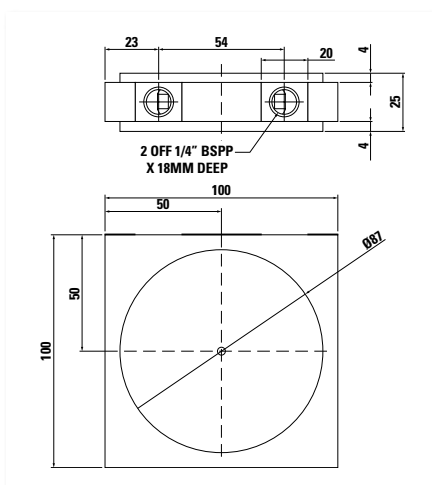


WCL17 - XW127ExxxB

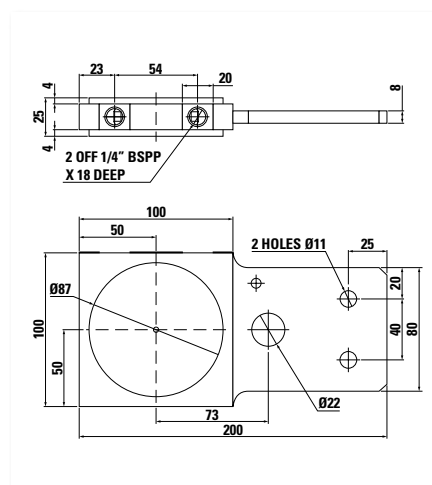


WCL18 - XW180GN25A

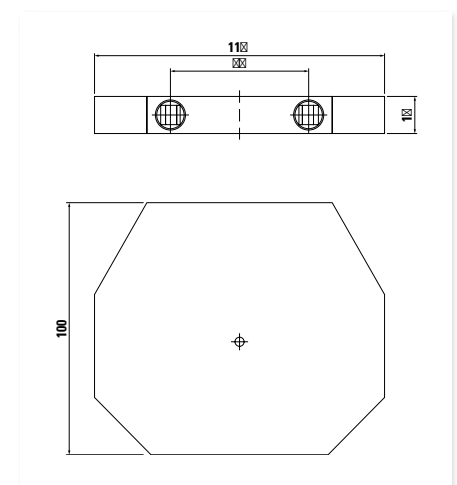


WCL19 - XW180BxxxE

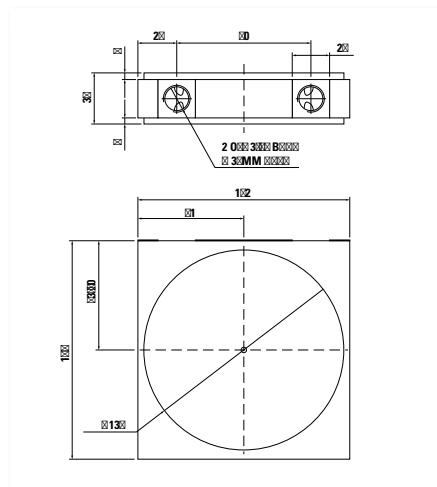


WCL20 - XW180BxxxF

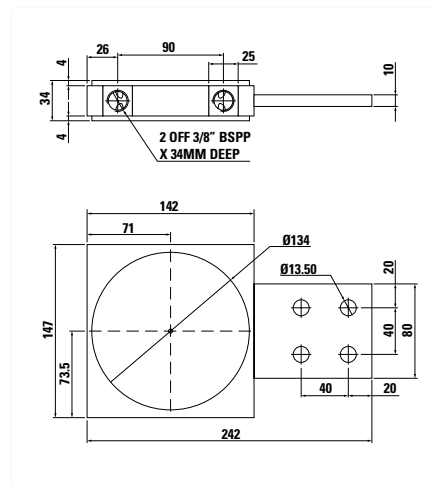


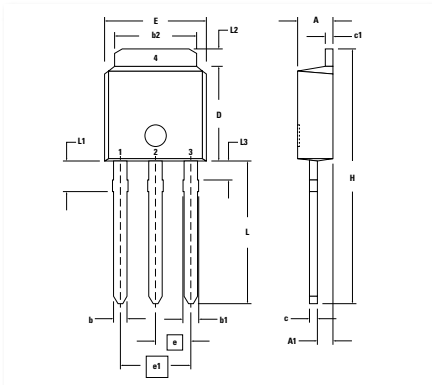Outline in **X003 TO-251 AA**
Weight = 0.4 g


Dim	Millimeters		Inches	
	min	max	min	max
A	2.19	2.38	0.086	0.094
A1	0.89	1.14	0.035	0.045
b	0.64	0.89	0.025	0.035
b1	0.76	1.14	0.030	0.045
b2	5.21	5.46	0.205	0.215
c	0.46	0.58	0.018	0.023
c1	0.46	0.58	0.018	0.023
D	5.97	6.22	0.235	0.245
E	6.35	6.73	0.250	0.265
e	2.28 BSC		0.090 BSC	
e1	4.57 BSC		0.180 BSC	
H	17.02	17.78	0.670	0.700
L	8.95	9.65	0.350	0.380
L1	1.91	2.28	0.075	0.090
L2	0.89	1.27	0.035	0.050
L3	1.15	1.52	0.045	0.060

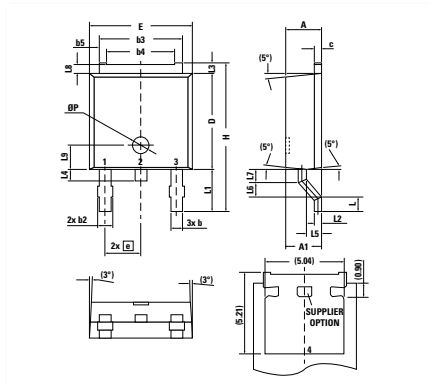X004 TO-252 AA (D PAK)
Weight = 0.3 g


Dim	Millimeters		Inches	
	min	max	min	max
A	2.20	2.40	0.087	0.094
A1	2.10	2.50	0.083	0.098
b	0.66	0.86	0.026	0.034
b2	—	0.96	—	0.038
b3	5.04	5.64	0.198	0.222
b4	4.34 BSC		0.171 BSC	
b5	0.50 BSC		0.020 BSC	
c	0.40	0.60	0.016	0.024
D	5.90	6.30	0.232	0.248
E	6.40	6.80	0.252	0.268
e	2.10	2.50	0.083	0.098
H	9.20	9.80	0.362	0.386
L	0.55	1.02	0.022	0.040
L1	2.50	2.90	0.098	0.114
L2	0.40	0.60	0.016	0.024
L3	0.50	0.90	0.020	0.035
L4	0.60	1.00	0.024	0.039
L5	0.82	1.22	0.032	0.048
L6	0.79	0.99	0.031	0.039
L7	0.81	1.01	0.032	0.040
L8	0.40	0.80	0.016	0.031
L9	1.50 BSC		0.059 BSC	
Ø P	1.00 BSC		0.039 BSC	

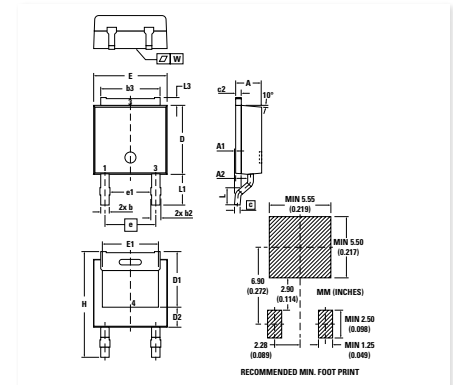X004a TO-252 AA (D PAK HV)
Weight = 0.3 g


Dim	Millimeters		Inches	
	min	max	min	max
A	2.18	2.39	0.086	0.094
A1	0.00	0.13	0.000	0.005
A2	0.97	1.17	0.038	0.046
b	0.64	0.89	0.025	0.035
b2	0.76	1.14	0.030	0.045
b3	5.08	5.59	0.200	0.220
c	0.46	0.61	0.018	0.024
c2	0.46	0.58	0.018	0.023
D	5.97	6.22	0.235	0.245
D1	4.57	5.21	0.180	0.205
D2	2.03		0.080	
E	6.35	6.73	0.250	0.265
E1	4.32	5.21	0.170	0.205
e	4.57		0.180	
e1	3.62		0.143	
H	9.15	10.34	0.360	0.407
L	1.40	1.78	0.055	0.070
L1	2.54	2.92	0.100	0.115
L3	0.64	1.02	0.025	0.040
W	typ. 0.02	0.040	typ. 0.0008	0.000

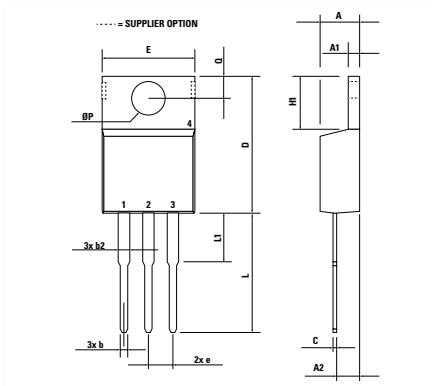X005a TO-220 AB
Weight = 2 g

Dim	Millimeters		Inches	
	min	max	min	max
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	2.54 BSC		0.100 BSC	
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
Ø P	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125

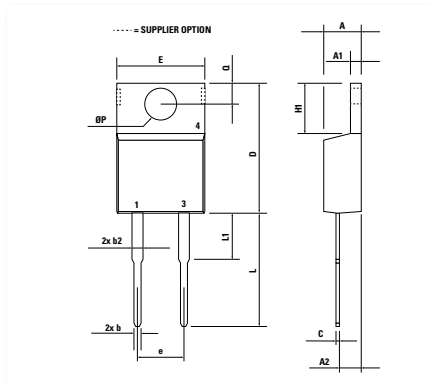
X005b TO-220 AC
Weight = 2 g

Dim	Millimeters		Inches	
	min	max	min	max
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	5.08 BSC		0.200 BSC	
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
Ø P	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125

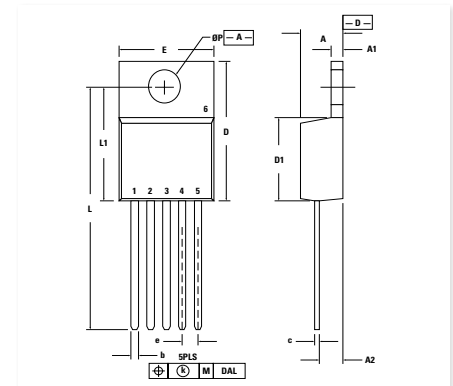X006 TO-220 (5)
Weight = 2 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
c	0.38	0.64	0.015	0.025
D	14.73	15.75	0.580	0.620
D1	8.64	9.40	0.340	0.370
E	9.91	10.54	0.390	0.415
e	1.70 BSC		0.067 BSC	
k	0.00	0.36	0.000	0.014
L	25.27	26.54	0.995	1.045
L1	11.94	12.95	0.470	0.510
Ø P	3.53	3.96	0.139	0.156

X007a TO-220 ABFP
Weight = 2 g

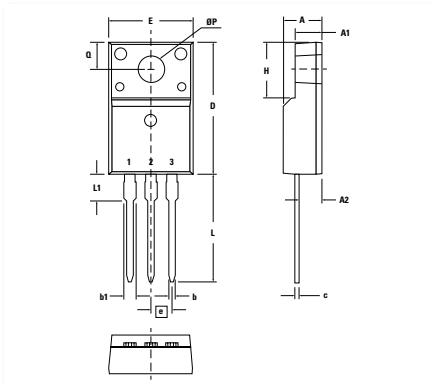


Dim	Millimeters		Inches	
	min	max	min	max
A	4.50	4.90	0.177	0.193
A1	2.34	2.74	0.092	0.108
A2	2.56	2.96	0.101	0.117
b	0.70	0.90	0.028	0.035
b1	1.27	1.47	0.050	0.058
c	0.45	0.60	0.018	0.024
D	15.67	16.07	0.617	0.633
E	9.96	10.36	0.392	0.408
e	2.54 BSC		0.100 BSC	
H	6.48	6.88	0.255	0.271
L	12.68	13.28	0.499	0.523
L1	3.03	3.43	0.119	0.135
Ø P	3.08	3.28	0.121	0.129
Q	3.20	3.40	0.126	0.134

X007b TO-220 ACFP
Weight = 2 g

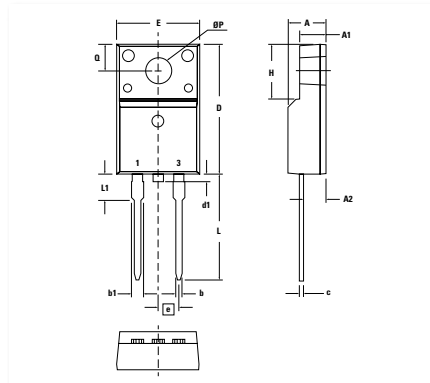


Dim	Millimeters		Inches	
	min	max	min	max
A	4.50	4.90	0.177	0.193
A1	2.34	2.74	0.092	0.108
A2	2.56	2.96	0.101	0.117
b	0.70	0.90	0.028	0.035
b1	1.27	1.47	0.050	0.058
c	0.45	0.60	0.018	0.024
D	15.67	16.07	0.617	0.633
d1	0.00	1.10	0.000	0.043
E	9.96	10.36	0.392	0.408
e	2.54 BSC		0.100 BSC	
H	6.48	6.88	0.255	0.271
L	12.68	13.28	0.499	0.523
L1	3.03	3.43	0.119	0.135
Ø P	3.08	3.28	0.121	0.129
Q	3.20	3.40	0.126	0.134

X008a TO-262 I2PAK
Weight = 1.5 g

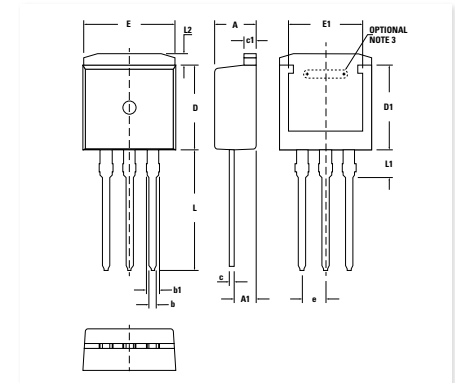


Dim	Millimeters		Inches	
	min	max	min	max
A1	2.20	2.60	0.087	0.102
b	0.70	0.90	0.028	0.035
b1	1.37	1.57	0.054	0.062
c	0.45	0.60	0.018	0.024
c1	1.25	1.40	0.049	0.055
D	9.00	9.40	0.355	0.370
D1	7.20		0.284	
E	9.70	9.90	0.382	0.390
E1	7.00		0.276	
e	2.54 BSC		0.100 BSC	
L	12.88	13.28	0.507	0.523
L1	3.00	—	0.118	—
L2	1.00	1.40	0.039	0.055

X008b TO-262 I2PAK
Weight = 1.5 g

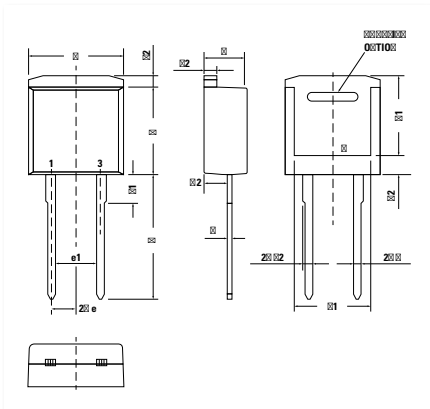


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.28		0.169	
L	13.00	13.60	0.512	0.535
L1	2.90	3.10	0.114	0.122
L2	1.02	1.68	0.040	0.066

X009a PLUS220™
Weight = 2.5 g b) middle leg cut

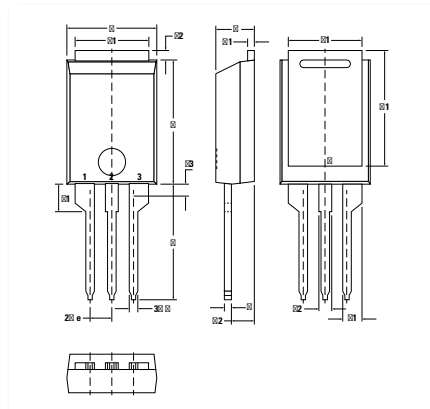

Dim	Millimeters		Inches	
	min	max	min	max
A	4.30	4.70	0.169	0.185
A1	0.70	0.90	0.028	0.035
A2	2.50	3.00	0.098	0.118
b	0.90	1.20	0.035	0.047
b1	2.03	2.41	0.080	0.095
b2	1.37	1.63	0.054	0.064
c	0.70	0.90	0.028	0.035
D	14.00	15.00	0.551	0.591
D1	13.00	13.70	0.512	0.539
E	10.00	11.00	0.394	0.433
E1	8.40	8.80	0.331	0.346
e	2.54 BSC		0.100 BSC	
L	13.00	14.00	0.512	0.551
L1	3.00	3.50	0.118	0.138
L2	0.90	1.30	0.035	0.051
L3	1.20	1.50	0.047	0.059


X010a ISOPLUS220™ AB
Weight = 2.5 g

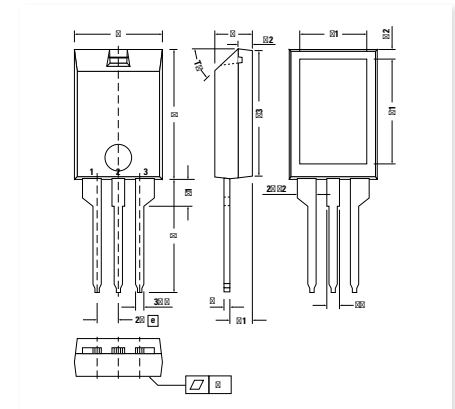

Dim	Millimeters		Inches	
	min	max	min	max
A	4.00	5.00	0.157	0.197
A1	2.50	3.00	0.098	0.118
A2	1.60	1.80	0.063	0.071
b	0.90	1.30	0.035	0.051
b2	2.35	2.55	0.093	0.100
b4	1.25	1.65	0.049	0.065
c	0.70	1.00	0.028	0.039
D	15.00	16.00	0.591	0.630
D1	12.00	13.00	0.472	0.512
D2	1.10	1.50	0.043	0.059
D3	14.90	15.50	0.587	0.610
E	10.00	11.00	0.394	0.433
E1	7.50	8.50	0.295	0.335
e	2.54 BSC		0.100 BSC	
L	13.00	14.50	0.512	0.571
L1	3.00	3.50	0.118	0.138
T°	42.5	47.5	—	—
W	—	0.10	—	0.004


Outline in

X010b ISOPLUS220™ AC
Weight = 2.5 g

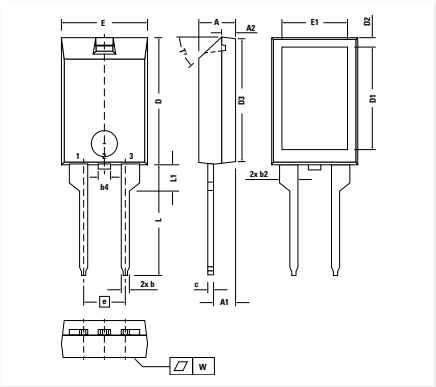


Dim	Millimeters		Inches	
	min	max	min	max
A	4.00	5.00	0.157	0.197
A1	2.50	3.00	0.098	0.118
A2	1.60	1.80	0.063	0.071
b	0.90	1.30	0.035	0.051
b2	1.25	1.65	0.049	0.065
b4	2.35	2.55	0.093	0.100
c	0.70	1.00	0.028	0.039
D	15.00	16.00	0.591	0.630
D1	12.00	13.00	0.472	0.512
D2	1.10	1.50	0.043	0.059
D3	14.90	15.50	0.587	0.610
E	10.00	11.00	0.394	0.433
E1	7.50	8.50	0.295	0.335
e	5.08 BSC		0.200 BSC	
L	13.00	14.50	0.512	0.571
L1	3.00	3.50	0.118	0.138
T°	42.5	47.5	—	—
W	—	0.10	—	0.004

X011a TO-263 AA (D2PAK)
Weight = 1.5 g

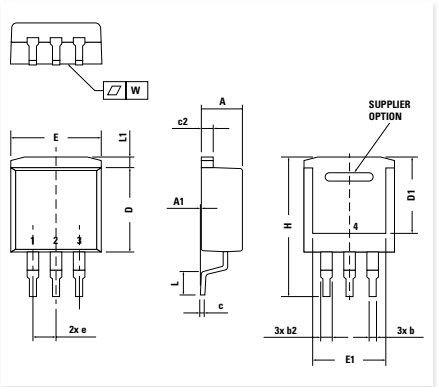


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
E	9.65	10.41	0.380	0.410
E1	6.22	8.13	0.245	0.320
e	2.54 BSC		0.100 BSC	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

X011b TO-263 AB (D2PAK)
Weight = 1.5 g

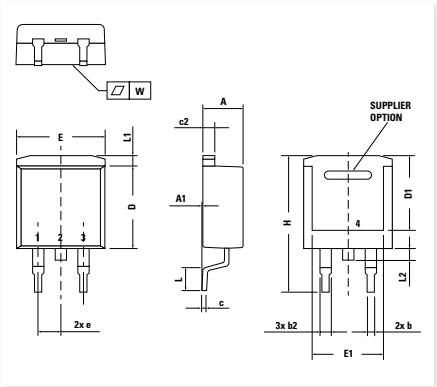


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
E	9.65	10.41	0.380	0.410
E1	6.22	8.13	0.245	0.320
e	2.54 BSC		0.100 BSC	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

X011c TO-263 AB (D2PAK HV)
Weight = 1.5 g

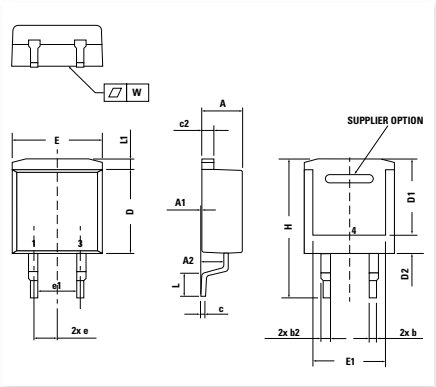


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ 0.10		typ 0.004	
A2	2.410		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.280		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L2	1.02	1.68	0.040	0.066
W	typ 0.02	0.040	typ 0.0008	0.002

X012a TO-263 (5)
Weight = 1.5 g

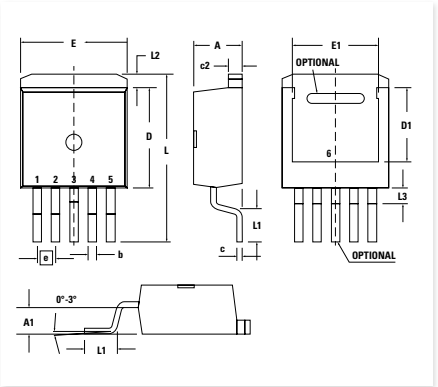


Dim	Millimeters		Inches	
	min	max	min	max
A	4.20	4.80	0.160	0.190
A1	2.10	2.70	0.083	0.106
b	0.60	0.99	0.024	0.039
c	0.40	0.70	0.016	0.028
c2	1.20	1.40	0.047	0.055
D	8.80	9.50	0.346	0.374
D1	6.60	7.20	0.260	0.283
E	9.65	10.30	0.380	0.406
E1	7.50	8.20	0.295	0.323
e	1.70 BSC		0.067 BSC	
L	14.80	15.80	0.583	0.622
L1	2.24	2.84	0.088	0.112
L2	1.00	1.40	0.039	0.067
L3	1.20	1.70	0.047	0.067

X012b TO-263 (7)
Weight = 2.5 g c) middle leg cut

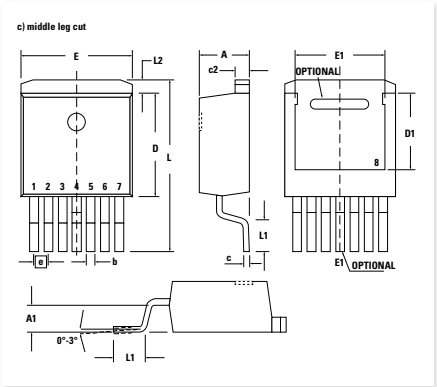


Dim	Millimeters		Inches	
	min	max	min	max
A	4.20	4.60	0.165	0.181
A1	2.45	2.75	0.096	0.108
b	0.65	0.90	0.026	0.035
c	0.40	0.60	0.016	0.024
c2	1.14	1.40	0.045	0.055
D	8.38	8.64	0.330	0.340
D1	6.10	6.35	0.240	0.250
E	10.00	10.30	0.394	0.406
E1	7.34	8.00	0.290	0.315
e	1.27 BSC		0.050 BSC	
L	14.73	15.75	0.580	0.620
L1	2.24	2.84	0.088	0.112
L2	1.35	1.55	0.053	0.061

X013 PLUS220™ (SMD)
Weight = 2 g

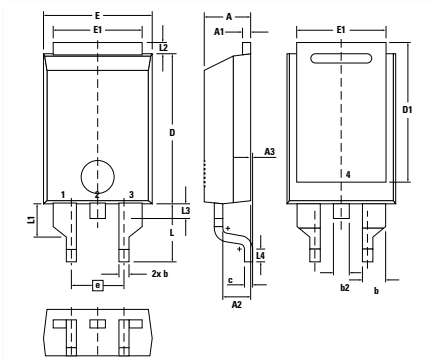


Dim	Millimeters		Inches	
	min	max	min	max
A	4.30	4.70	0.169	0.185
A1	0.70	0.90	0.028	0.035
A2	2.50	3.00	0.098	0.118
A3	0.00	0.25	0.000	0.010
b	0.90	1.20	0.035	0.047
b1	2.03	2.41	0.080	0.095
b2	1.37	1.63	0.054	0.064
c	0.70	0.90	0.028	0.035
D	14.00	15.00	0.551	0.591
D1	13.00	13.70	0.512	0.539
E	10.00	11.00	0.394	0.433
E1	8.40	8.80	0.331	0.346
e	5.08 BSC		0.200 BSC	
L	5.30	5.80	0.209	0.228
L1	3.00	3.50	0.118	0.138
L2	0.90	1.30	0.035	0.051
L3	1.20	1.50	0.047	0.059
L4	1.00	1.50	0.039	0.059

X014a TO-247 AD
Weight = 6 g

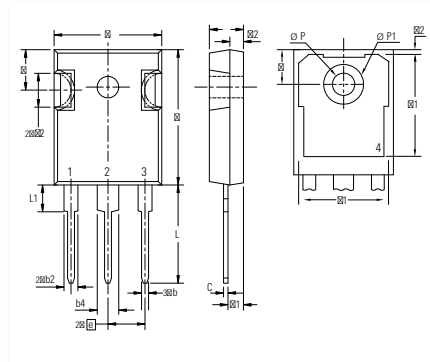


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.530	—
E2	4.31	5.48	0.170	0.216
e	5.45 BSC		0.215 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

X014b TO-247 AD
Weight = 6 g

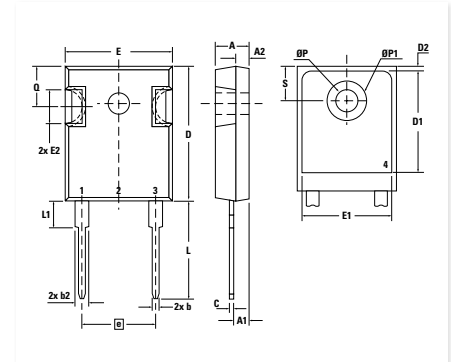


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.530	—
E2	4.31	5.48	0.170	0.216
e	10.90 BSC		0.430 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

X014c TO-247 AD
Weight = 6 g

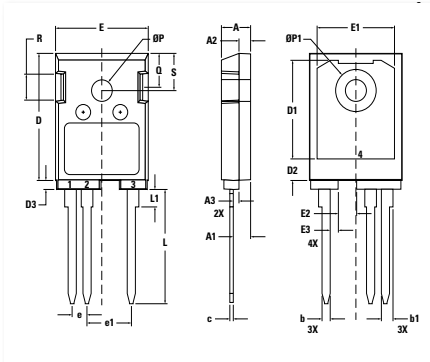


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.90	3.10	0.114	0.122
A2	1.90	2.10	0.075	0.083
A3	0.90	1.10	0.035	0.043
b	1.35	1.50	0.053	0.059
b1	1.90	2.10	0.075	0.083
c	0.55	0.75	0.022	0.030
D	20.80	21.40	0.819	0.843
D1	16.20	16.40	0.638	0.646
D2	3.40	3.70	0.134	0.146
D3	1.40	1.60	0.055	0.063
E	15.80	16.20	0.622	0.638
E1	13.20	13.40	0.520	0.528
E2	3.00	3.20	0.118	0.126
E3	1.30	1.50	0.051	0.059
e	2.54 BSC		0.100 BSC	
e1	7.62 BSC		0.300 BSC	
L	18.60	19.00	0.732	0.748
L1	2.70	3.00	0.106	0.118
Ø P	3.50	3.60	0.138	0.142
Ø P1	6.90	7.10	0.272	0.280
Q	5.50	5.70	0.216	0.224
R	4.20	4.30	0.165	0.169
S	6.10	6.30	0.240	0.248

X015a PLUS247™
Weight = 7 g

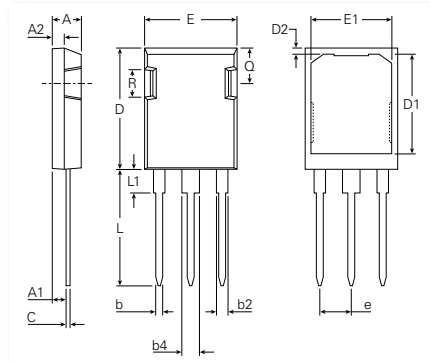


Dim	Millimeters		Inches	
	min	max	min	max
A	0.190	0.205	4.83	5.21
A1	0.090	0.100	2.29	2.54
A2	0.075	0.085	1.91	2.16
b	0.045	0.055	1.14	1.40
b2	0.075	0.087	1.91	2.20
b4	0.115	0.126	2.92	3.20
C	0.024	0.031	0.61	0.80
D	0.819	0.840	20.80	21.34
D1	0.650	0.690	16.51	17.53
D2	0.035	0.050	0.89	1.27
E	0.620	0.635	15.75	16.13
E1	0.520	0.560	13.08	14.22
e	0.215 BSC		5.45 BSC	
L	0.780	0.810	19.81	20.57
L1	0.150	0.170	3.81	4.32
Q	0.220	0.244	5.59	6.20
R	0.170	0.190	4.32	4.83


X015c PLUS247™
Weight = 7 g

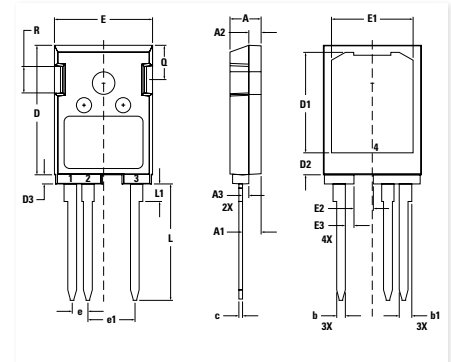


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.90	3.10	0.114	0.122
A2	1.90	2.10	0.075	0.083
A3	0.90	1.10	0.035	0.043
b	1.35	1.50	0.053	0.059
b1	1.90	2.10	0.075	0.083
c	0.55	0.75	0.022	0.030
D	20.80	21.40	0.819	0.843
D1	16.20	16.40	0.638	0.646
D2	3.40	3.70	0.134	0.146
D3	1.40	1.60	0.055	0.063
E	15.80	16.20	0.622	0.638
E1	13.20	13.40	0.520	0.528
E2	3.00	3.20	0.118	0.126
E3	1.30	1.50	0.051	0.059
e	2.54 BSC		0.100 BSC	
e1	7.62 BSC		0.300 BSC	
L	18.60	19.00	0.732	0.748
L1	2.70	3.00	0.106	0.118
Q	5.50	5.70	0.216	0.224
R	4.20	4.30	0.165	0.169

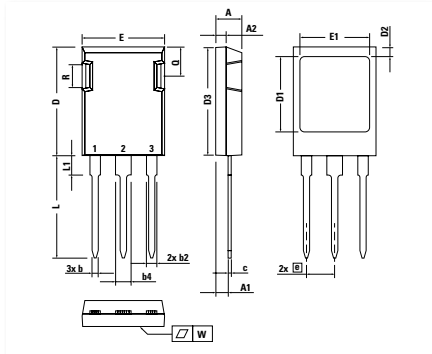Outline in **X016a ISOPLUS247™**
Weight = 4.5 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.29	2.54	0.090	0.100
A2	1.91	2.16	0.075	0.085
b	1.14	1.40	0.045	0.055
b2	1.91	2.20	0.075	0.087
b4	2.92	3.24	0.115	0.128
c	0.61	0.83	0.024	0.033
D	20.80	21.34	0.819	0.840
D1	15.75	16.26	0.620	0.640
D2	1.65	2.15	0.065	0.085
D3	20.30	20.70	0.799	0.815
E	15.75	16.13	0.620	0.635
E1	13.21	13.72	0.520	0.540
e	5.45 BSC		0.215 BSC	
L	19.81	20.60	0.780	0.811
L1	3.81	4.38	0.150	0.172
Q	5.59	6.20	0.220	0.244
R	4.25	5.50	0.167	0.217
W	—	0.10	—	0.004

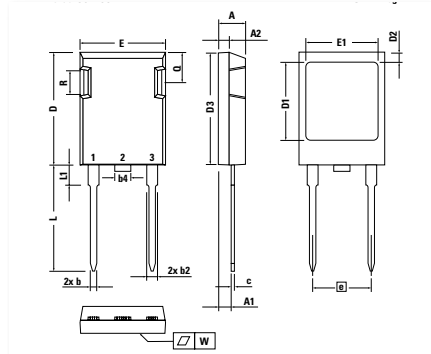X016b ISOPLUS247™
Weight = 4.5 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.29	2.54	0.090	0.100
A2	1.91	2.16	0.075	0.085
b	1.14	1.40	0.045	0.055
b2	1.91	2.20	0.075	0.087
b4	2.92	3.24	0.115	0.128
c	0.61	0.83	0.024	0.033
D	20.80	21.34	0.819	0.840
D1	15.75	16.26	0.620	0.640
D2	1.65	2.15	0.065	0.085
D3	20.30	20.70	0.799	0.815
E	15.75	16.13	0.620	0.635
E1	13.21	13.72	0.520	0.540
e	10.90 BSC		0.430 BSC	
L	19.81	20.60	0.780	0.811
L1	3.81	4.38	0.150	0.172
Q	5.59	6.20	0.220	0.244
R	4.25	5.50	0.167	0.217
W	—	0.10	—	0.004

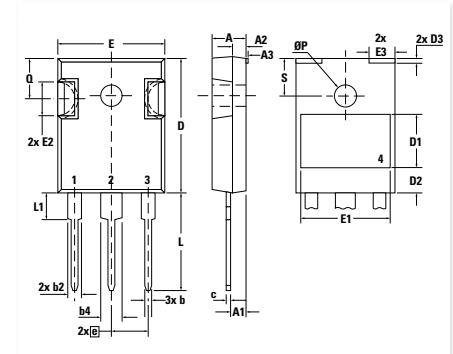X016c ISO247™
Weight = 4.5 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	0.05		0.002	
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
C	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.844
D1	8.90		0.350	
D2	2.90		0.114	
D3	1.00		0.039	
E	15.49	16.24	0.610	0.639
E1	typ.	13.45	typ.	0.530
E2	4.31	5.48	0.170	0.216
E3	4.00		0.157	
e	5.46	BSC	0.215	BSC
L	19.80	20.30	0.780	0.799
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

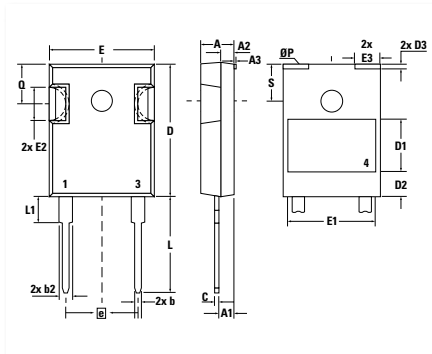X016d ISO247™
Weight = 4 g

Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	typ.	0.05	typ.	0.002
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
C	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.844
D1	typ.	8.90	typ.	0.350
D2	typ.	2.90	typ.	0.114
D3	typ.	1.00	typ.	0.039
E	15.49	16.24	0.610	0.639
E1	typ.	13.45	typ.	0.530
E2	4.31	5.48	0.170	0.216
E3	typ.	4.00	typ.	0.157
e	10.92	BSC	0.430	BSC
L	19.80	20.30	0.780	0.799
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Q	5.38	6.19	0.212	0.244
S	6.14	BSC	0.242	BSC

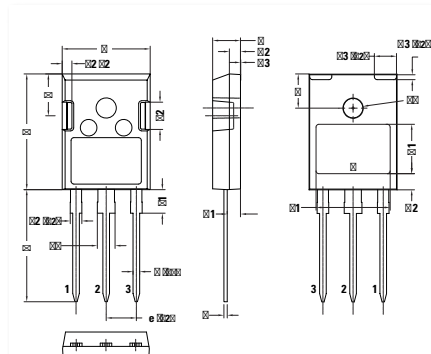
X016e ISO247™
Weight = # g

Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.21	0.185	0.205
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	0.05		0.002	
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.80	21.45	0.819	0.844
D1	9.15		0.360	
D2	2.80		0.110	
D3	1.00		0.039	
E	15.49	16.24	0.610	0.639
E1	13.40		0.528	
E2	4.32	5.48	0.170	0.216
E3	4.00		0.157	
e	5.46		0.215	
L	19.81	20.30	0.780	0.799
L1	—	4.49	—	0.177
Q	7.36	7.76	0.290	0.306
Ø P	3.56	3.65	0.140	0.144
S	0.242		0.100	
W	0.004		0.10	

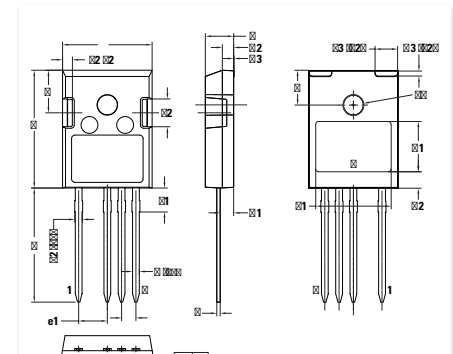X016f ISO247™
Weight = # g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.21	0.185	0.205
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	0.05		0.002	
b	0.99	1.40	0.039	0.055
b2	1.10	1.50	0.043	0.059
c	0.38	0.89	0.015	0.035
D	20.80	21.45	0.819	0.844
D1	9.15		0.360	
D2	2.80		0.110	
D3	1.00		0.039	
E	15.49	16.24	0.610	0.639
E1	13.40		0.528	
E2	4.32	5.48	0.170	0.216
E3	4.00		0.157	
e	2.54		0.100	
e1	5.08		0.200	
L	19.81	20.30	0.780	0.799
L1	—	4.49	—	0.177
Ø P	3.56	3.65	0.140	0.144
Q	7.36	7.76	0.290	0.306
S	6.15		0.242	
W	0.004		0.10	

X017a TO-3P
Weight = 5.5 g

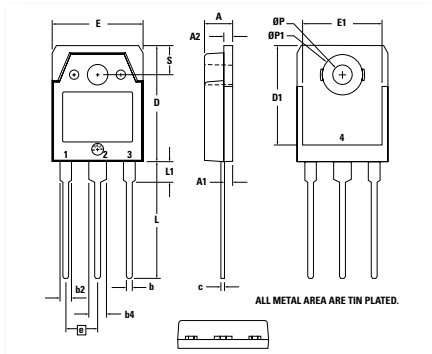


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	4.90	0.185	0.193
A1	1.30	1.50	0.051	0.059
A2	1.45	1.65	0.057	0.065
b	0.90	1.15	0.035	0.045
b2	1.90	2.20	0.075	0.087
b4	2.90	3.20	0.114	0.126
c	0.55	0.80	0.022	0.031
D	19.80	20.10	0.780	0.791
D1	16.90	17.20	0.665	0.677
E	15.50	15.80	0.610	0.622
E1	13.50	13.70	0.531	0.539
e	5.45 BSC		0.215 BSC	
L	19.80	20.20	0.780	0.795
L1	3.40	3.60	0.134	0.142
Ø P	3.20	3.40	0.126	0.134
Ø P1	6.90	7.10	0.272	0.280
S	4.90	5.10	0.193	0.201

X017b TO-3P
Weight = 5.5 g

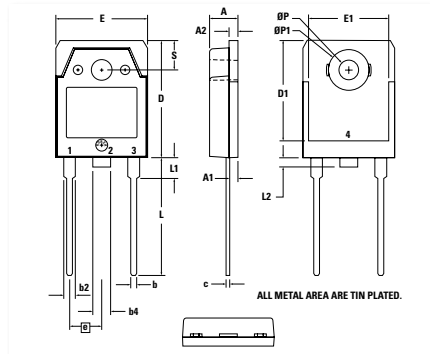


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	4.90	0.185	0.193
A1	1.30	1.50	0.051	0.059
A2	1.45	1.65	0.057	0.065
b	0.90	1.15	0.035	0.045
b2	1.90	2.20	0.075	0.087
b4	2.90	3.20	0.114	0.126
c	0.55	0.80	0.022	0.031
D	19.80	20.10	0.780	0.791
D1	16.90	17.20	0.665	0.677
E	15.50	15.80	0.610	0.622
E1	13.50	13.70	0.531	0.539
e	5.45 BSC		0.215 BSC	
L	19.80	20.20	0.780	0.795
L1	3.40	3.60	0.134	0.142
L2	0.00	1.40	0.000	0.055
Ø P	3.20	3.40	0.126	0.134
Ø P1	6.90	7.10	0.272	0.280
S	4.90	5.10	0.193	0.201

X017c TO-3PFP
Weight = 5.5 g

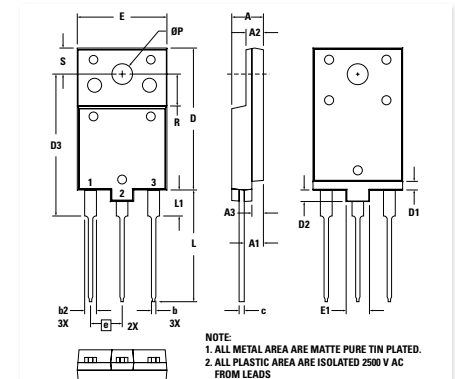


Dim	Millimeters		Inches	
	min	max	min	max
A	5.40	5.80	0.213	0.228
A1	3.10	3.50	0.122	0.138
A2	2.90	3.30	0.114	0.130
A3	1.90	2.30	0.075	0.091
b	0.65	0.95	0.026	0.037
b2	1.90	2.30	0.075	0.091
c	0.80	1.10	0.031	0.043
D	24.30	24.70	0.957	0.972
D1	1.30	1.70	0.051	0.067
D2	1.80	2.2	0.071	0.087
E	15.40	15.80	0.606	0.622
E1	3.90	4.30	0.154	0.169
e	5.45 BSC		0.215 BSC	
L	19.00	19.50	0.748	0.768
L1	4.30	4.70	0.169	0.185
Ø P	3.40	3.80	0.134	0.150
R	5.30	5.70	0.209	0.224
S	4.30	4.70	0.169	0.185

X017d TO-3PFP
Weight = 5.4 g

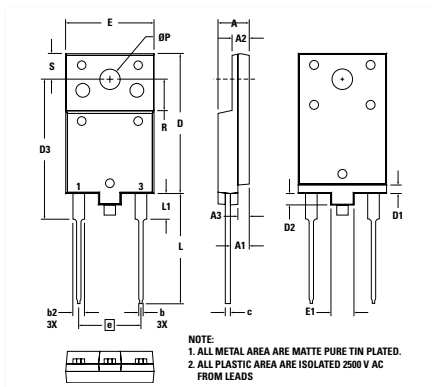


Dim	Millimeters		Inches	
	min	max	min	max
A	5.40	5.80	0.213	0.228
A1	3.10	3.50	0.122	0.138
A2	2.90	3.30	0.114	0.130
A3	1.90	2.30	0.075	0.091
b	0.65	0.95	0.026	0.037
b2	1.90	2.30	0.075	0.091
c	0.80	1.10	0.031	0.043
D	24.30	24.70	0.957	0.972
D1	1.30	1.70	0.051	0.067
D2	1.80	2.2	0.071	0.087
E	15.40	15.80	0.606	0.622
E1	3.90	4.30	0.154	0.169
e	5.45 BSC		0.215 BSC	
L	19.00	19.50	0.748	0.768
L1	4.30	4.70	0.169	0.185
Ø P	3.40	3.80	0.134	0.150
R	5.30	5.70	0.209	0.224
S	4.30	4.70	0.169	0.185

X018 TO-268 I3PAK
Weight = 4.5 g

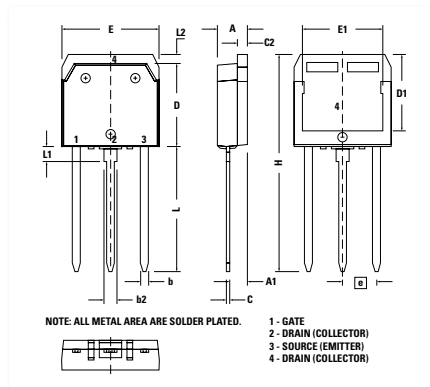


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
b	1.15	1.45	0.045	0.057
b2	1.90	2.10	0.075	0.083
C	0.40	0.65	0.016	0.026
C2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	12.40	12.70	0.488	0.500
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	34.67	35.43	1.365	1.395
L	19.81	20.32	0.780	0.800
L1	2.00	2.30	0.079	0.091
L2	1.00	1.15	0.039	0.045


X019 TO-268 AA (D3PAK)
Weight = 4 g

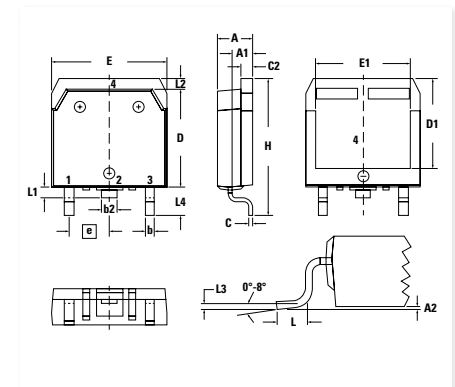


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
A2	0.02	0.25	0.001	0.100
b	1.15	1.45	0.045	0.057
b2	1.90	2.10	0.075	0.083
C	0.40	0.65	0.016	0.026
C2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	12.40	12.70	0.488	0.500
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	18.70	19.10	0.736	0.752
L	2.40	2.70	0.094	0.106
L1	1.20	1.40	0.047	0.055
L2	1.00	1.15	0.039	0.045
L3	2.54 BSC		0.100 BSC	
L4	3.80	4.10	0.150	0.161

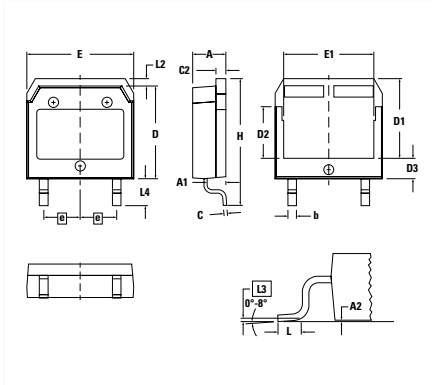Outline in **X019a TO-268 AA (D3PAK HV)**
Weight = 4 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
A2	0.02	0.25	0.001	0.100
b	1.15	1.45	0.045	0.057
C	0.40	0.65	0.016	0.026
C 2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	11.80	12.10	0.465	0.476
D2	7.50	7.80	0.295	0.307
D3	2.90	3.20	0.114	0.126
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	18.70	19.10	0.736	0.752
L	1.70	2.00	0.067	0.079
L2	1.00	1.15	0.039	0.045
L3	0.25 BSC		0.010 BSC	
L4	3.80	4.10	0.150	0.161

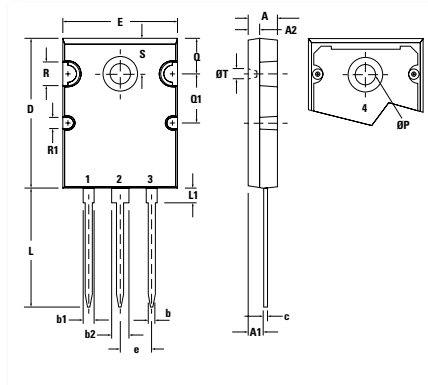X020a TO-264 AA
Weight = 10 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.82	5.13	0.190	0.202
A1	2.54	2.89	0.100	0.114
A2	2.00	2.10	0.079	0.083
b	1.12	1.42	0.044	0.056
b2	2.90	3.09	0.114	0.122
c	0.53	0.83	0.021	0.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	0.780	0.786
e	5.45 BSC		0.215 BSC	
J	0.00	0.25	0.000	0.010
K	0.00	0.25	0.000	0.010
L	20.32	20.83	0.800	0.820
L1	2.29	2.59	0.090	0.102
P	3.17	2.66	0.125	0.144
Q	6.07	6.27	0.239	0.247
Q1	8.38	8.69	0.330	0.342
R	3.81	4.32	0.150	0.170
R1	1.78	2.29	0.070	0.090
S	6.04	6.30	0.238	0.248
T	1.57	1.83	0.062	0.072

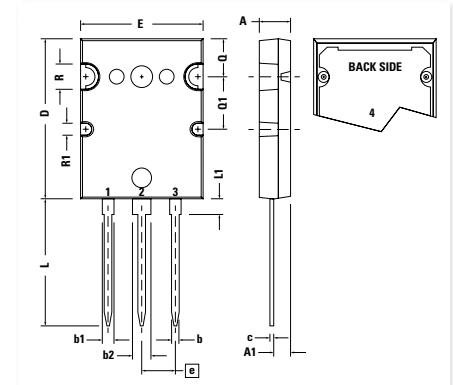X021a PLUS264™
Weight = 10 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.31	0.185	0.209
A1	2.59	3.00	0.102	0.118
b	0.94	1.40	0.037	0.055
b1	2.21	2.59	0.087	0.102
b2	2.79	3.20	0.110	0.126
c	0.43	0.74	0.017	0.029
D	25.58	26.59	1.007	1.047
E	19.30	20.29	0.760	0.799
e	5.45 BSC		0.215 BSC	
L	19.79	21.39	0.779	0.842
L1	2.21	2.59	0.087	0.102
Q	6.10	6.50	0.240	0.256
Q1	8.38	8.79	0.330	0.346
Ø R	3.94	4.75	0.155	0.187
Ø R1	2.16	2.36	0.085	0.093

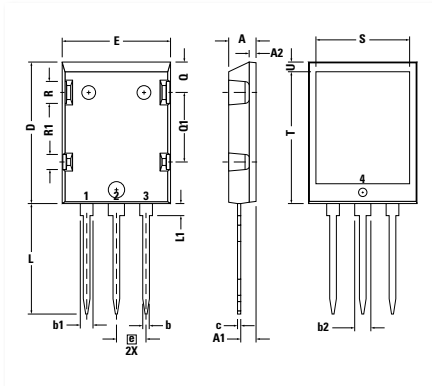X022a ISOPLUS264™
Weight = 7.5 g

Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	1.40	0.046	0.055
b	1.14	1.40	0.045	0.055
b1	1.60	1.83	0.063	0.072
b2	2.54	2.79	0.100	0.110
b3	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	25.91	26.42	1.020	1.040
E	19.56	20.29	0.770	0.799
e	3.81 BSC		0.150 BSC	
L	19.81	21.83	0.780	0.820
L1	2.03	2.59	0.080	0.102
Q	5.33	5.97	0.210	0.235
Q1	12.45	13.03	0.490	0.513
R	3.81	4.57	0.150	0.180
R1	2.54	3.30	0.100	0.130
S	16.97	17.53	0.668	0.690
T	20.34	20.85	0.801	0.821
U	1.65	2.03	0.065	0.080

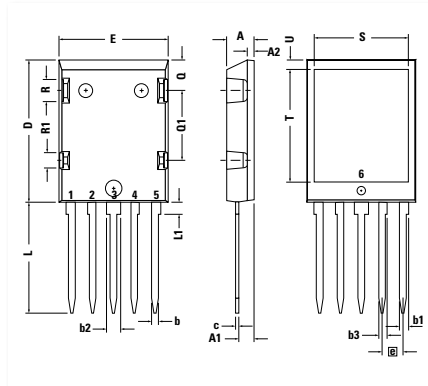
X022 ISOPLUS264™
Weight = 7.5 g

Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	1.40	0.046	0.055
b	1.14	1.40	0.045	0.055
b1	1.60	1.83	0.063	0.072
b2	2.54	2.79	0.100	0.110
b3	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	25.91	26.42	1.020	1.040
E	19.56	20.29	0.770	0.799
e	3.81 BSC		0.150 BSC	
L	19.81	21.83	0.780	0.820
L1	2.03	2.59	0.080	0.102
Q	5.33	5.97	0.210	0.235
Q1	12.45	13.03	0.490	0.513
R	3.81	4.57	0.150	0.180
R1	2.54	3.30	0.100	0.130
S	16.97	17.53	0.668	0.690
T	20.34	20.85	0.801	0.821
U	1.65	2.03	0.065	0.080

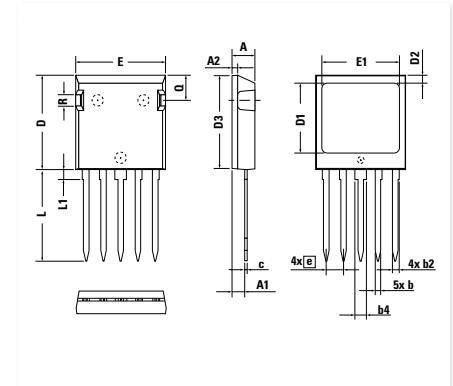X024a ISOPLUS i4-PAC™
Weight = 6 g


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81 BSC		0.150 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004

X024b ISOPLUS i4-PAC™
Weight = 5.5 g

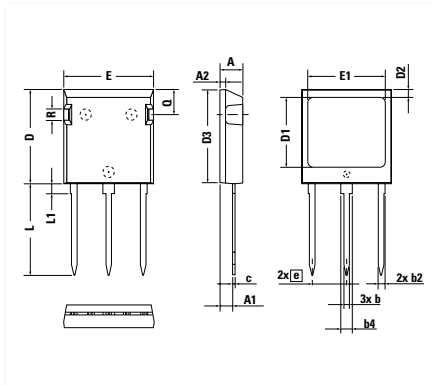


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	762 BSC		0.300 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004

X024c ISOPLUS i4-PAC™
Weight = 5.5 g

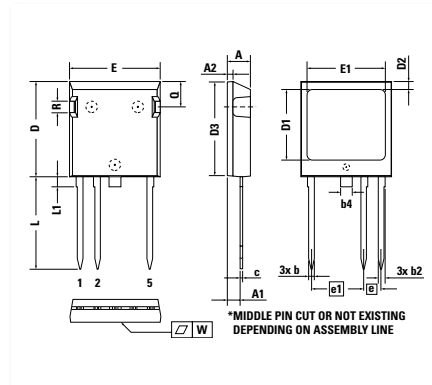


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81 BSC		0.150 BSC	
e1	11.43 BSC		0.450 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004

X024d ISOPLUS i4-PAC™
Weight = 6 g

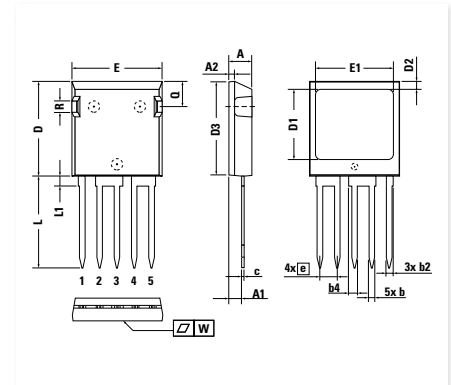


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81 BSC		0.150 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004

X024e ISOPLUS i4-PAC™
Weight = 6 g

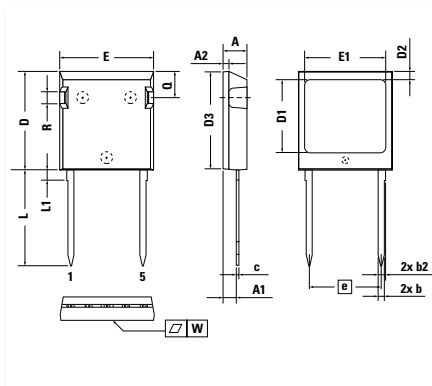

Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	15.24 BSC		0.600 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004


X025a GBFP
Weight = 7 g

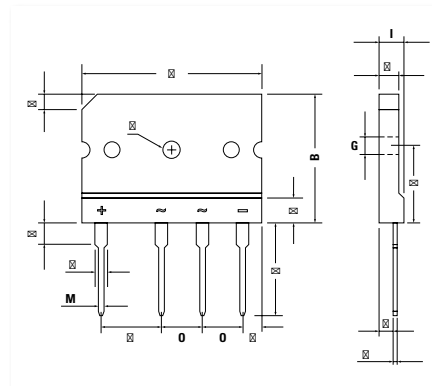

Dim	Millimeters		Inches	
	min	max	min	max
A	29.70	30.30	1.170	1.194
B	19.70	20.30	0.776	0.800
C	17.00	18.00	0.670	0.709
D	4.70	4.90	0.185	0.193
E	10.80	11.20	0.426	0.441
F	2.30	2.70	0.091	0.106
G	3.10	3.40	0.122	0.134
H	3.40	3.80	0.134	0.150
I	4.40	4.80	0.173	0.189
J	2.50	2.90	0.099	0.114
K	0.60	0.80	0.024	0.032
L	2.00	2.40	0.079	0.095
M	0.90	1.10	0.035	0.043
N	9.80	10.20	0.386	0.402
O	7.30	7.70	0.288	0.303
P	3.80	4.20	0.150	0.165
Q	(3.0) × 45°		(0.118) × 45°	
Ø R	3.1	3.4	0.122	0.134


Outline $\square\square\square$ in $\square$ s

X025b GUPF
Weight = 8.5 g

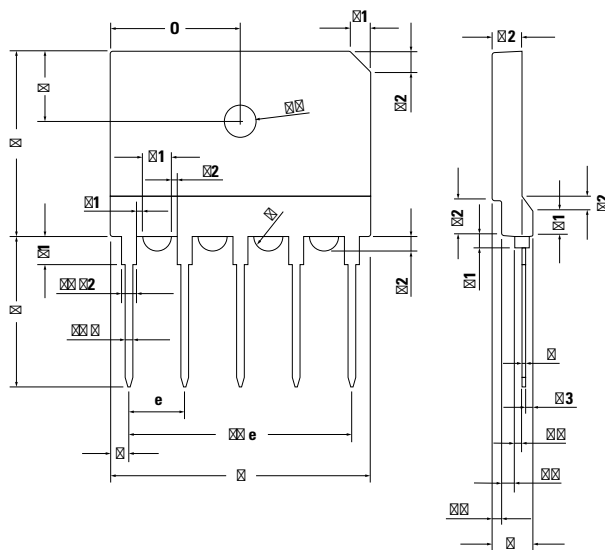


Dim	Millimeters			Inches		
	min	typ.	max	min	typ.	max
A	5.40	5.50	5.60	0.213	0.217	0.221
A2	3.90	4.00	4.10	0.154	0.158	0.162
A3	0.95	1.00	1.10	0.037	0.039	0.043
A4	0.95	1.00	1.05	0.037	0.039	0.041
A5	1.60	1.70	1.80	0.063	0.067	0.071
A6	1.25	1.30	1.35	0.049	0.051	0.053
b	0.95	1.00	1.05	0.037	0.039	0.041
b2	1.95	2.00	2.05	0.077	0.079	0.081
C	0.45	0.50	0.55	0.018	0.020	0.022
D	24.80	25.00	25.20	0.977	0.985	0.993
E	34.70	35.00	35.30	1.367	1.379	1.391
e	BSC	750	—	BSC	0.296	—
F	2.40	2.50	2.60	0.095	0.099	0.102
L	2.30	20.40	2.50	0.091	0.804	0.099
L1	3.70	3.75	3.80	0.146	0.148	0.150
O	17.40	17.50	17.60	0.686	0.690	0.693
Ø P	4.10	4.20	4.30	0.162	0.165	0.169
Q	9.20	9.30	9.40	0.362	0.366	0.370
Ø/2 R	—	1.77	—	—	0.070	—
s1	3.45	3.50	3.55	0.136	0.138	0.140
s2	1.45	1.50	1.55	0.057	0.059	0.061
t1	0.95	1.00	1.05	0.037	0.039	0.041
t2	0.95	1.00	1.05	0.037	0.039	0.041
x1	3.20	3.30	3.40	0.126	0.130	0.134
x2	1.90	2.00	2.10	0.075	0.079	0.083
y1	1.60	1.65	1.70	0.063	0.065	0.067
y2	4.65	4.70	4.75	0.183	0.185	0.187
z1	2.80	2.90	3.00	0.110	0.114	0.118


X026c ISOPLUS™-DIL (SMD)
Weight = 13 g

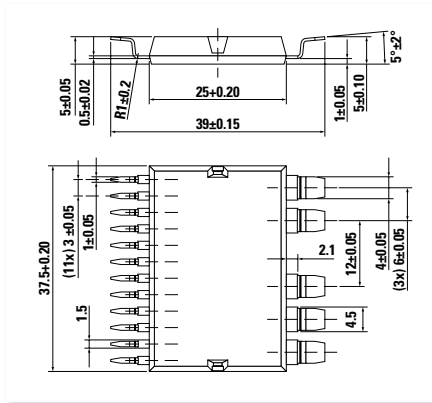

X026d ISOPLUS™-DIL (SMD)
Weight = 13 g

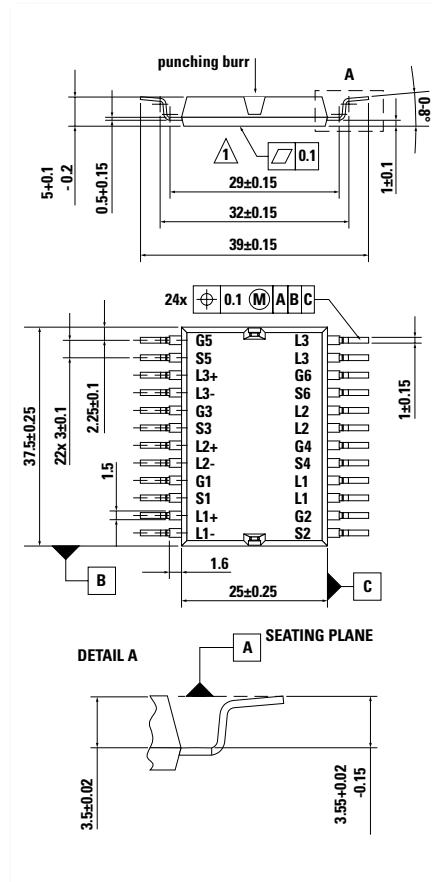


X027a SOT-227 B miniBLOC
Weight = 29 g

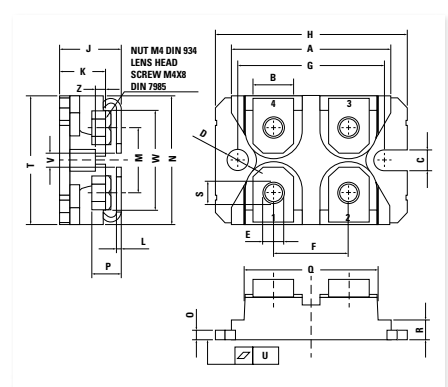


Dim	Millimeters		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

X028 ISOPLUS227™
Weight = 19 g

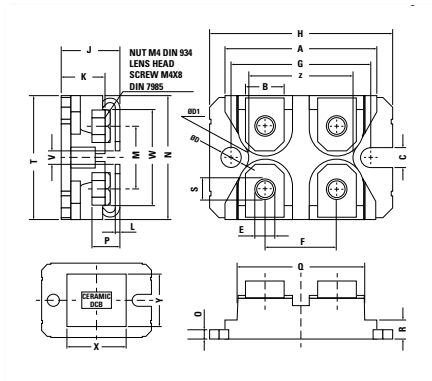

Dim	Millimeters		Inches	
	min	max	min	max
A	31.50	32.26	1.240	1.270
B	7.87	8.38	0.310	0.330
C	3.94	4.19	0.155	0.165
D	3.94	4.19	0.155	0.165
D1	3.81	3.98	0.150	0.157
E	4.06	4.27	0.160	0.168
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.489	1.505
J	11.81	12.22	0.465	0.481
K	9.40	9.65	0.370	0.380
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	2.54	2.64	0.100	0.105
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	4.06	4.32	0.160	0.170
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.03	0.05	-0.001	0.002
V	3.30	4.06	0.130	0.160
W	19.81	21.08	0.780	0.830
X	19.56	20.57	0.770	0.810
Y	17.27	18.29	0.680	0.720
Z	22.48	22.66	0.885	0.892


X030a SMPD-B
Weight = 8.5 g

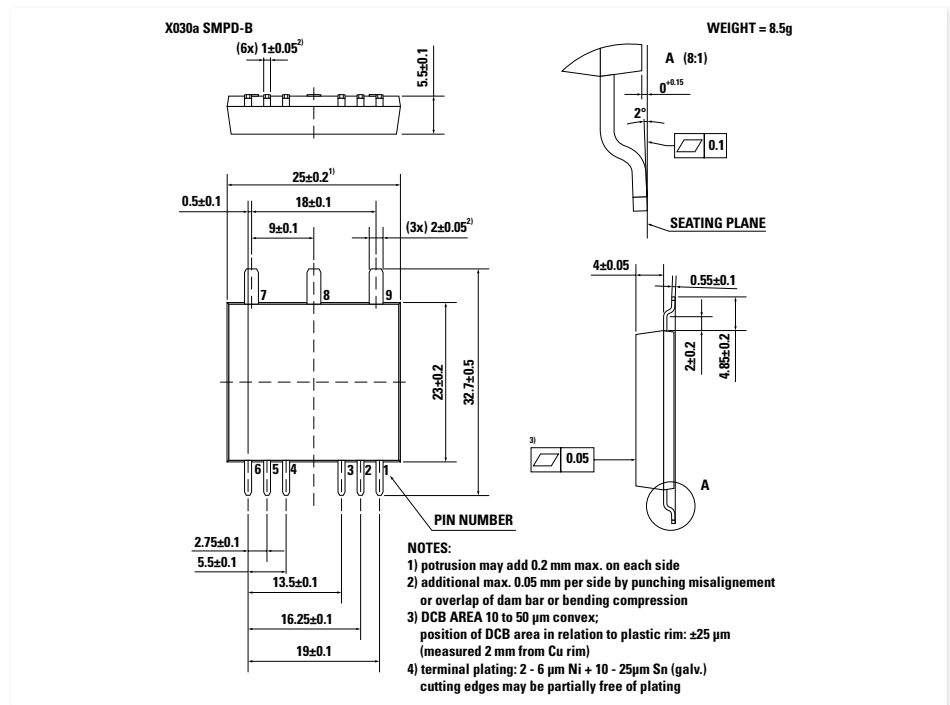

Outline Dimensions

X031...* SMPD- x
Weight = 8.5 g*


See data sheet for pin arrangement

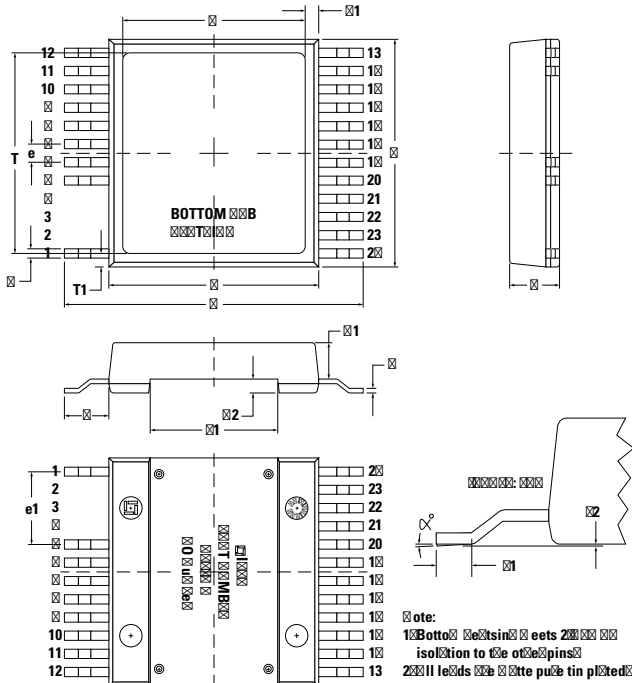

Dim	Millimeters		Inches	
	min	max	min	max
A	5.30	5.70	0.209	0.224
A1	3.90	4.10	0.154	0.161
A2	1.40	1.60	0.055	0.063
b	0.90	1.15	0.035	0.045
c	0.45	0.65	0.018	0.026
D	24.80	25.25	0.976	0.994
E	22.80	23.25	0.898	0.915
E1	13.80	14.20	0.543	0.559
e	2.00	BSC	0.079	BSC
e1	8.00	BSC	0.315	BSC
H	32.30	33.30	1.272	1.311
L	4.60	5.30	0.181	0.209
L1	1.30	1.70	0.051	0.067
L2	0.00	0.15	0.000	0.006
S	18.85	20.12	0.742	0.792
S1	1.45	2.08	0.057	0.082
T	20.90	22.17	0.823	0.873
T1	1.42	2.03	0.056	0.080
a	4°	—	4°	—

X032...* MiniSMPD- x

See data sheet for pin arrangement

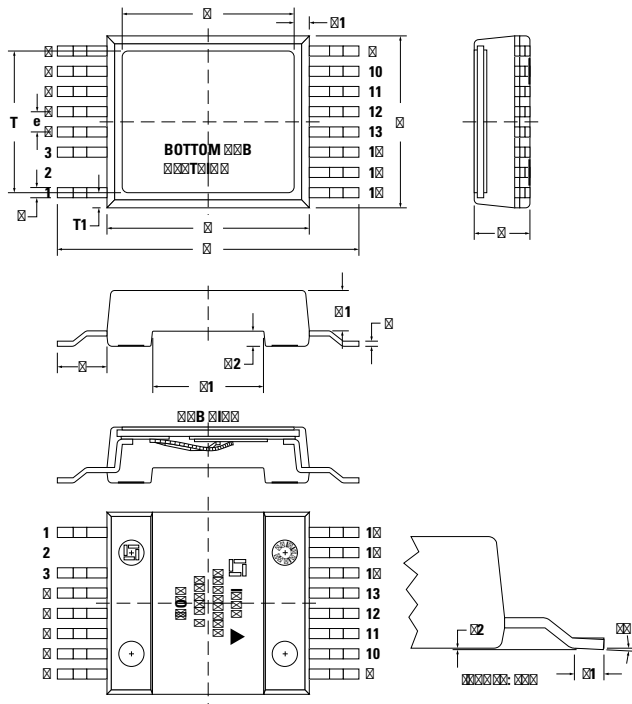


Dim	Millimeters		Inches	
	min	max	min	max
A	5.30	5.70	0.209	0.224
A1	3.90	4.10	0.154	0.161
A2	1.40	1.60	0.055	0.063
b	0.90	1.15	0.035	0.045
c	0.45	0.65	0.018	0.026
D	16.80	17.20	0.661	0.677
E	19.80	20.20	0.780	0.795
E1	10.80	11.20	0.425	0.441
e	2.00 BSC		0.079 BSC	
H	29.50	30.10	1.161	1.185
L	4.60	5.30	0.181	0.209
L1	1.30	1.70	0.051	0.067
L2	0.00	0.15	0.000	0.006
S	16.80	17.20	0.661	0.677
S1	1.30	1.70	0.051	0.067
T	13.80	14.20	0.543	0.559
T1	1.30	1.70	0.051	0.067

Note:
1) All leads are matte pure tin plated.
2) Cu surface of bottom of package is pre-plated unless otherwise.
3) Cu surface of bottom of package is electrically isolated from all other leads.
4) Unless otherwise specified, pin out are as follows:
Pin 1 - Gate
Pin 2 - Gate return or source
Pin 3 through 8 - Source (emitter)
Pin 9 through 16 - Drain (collector)


X101 ECO-PAC1 Weight = 19 g

See data sheet for pin arrangement

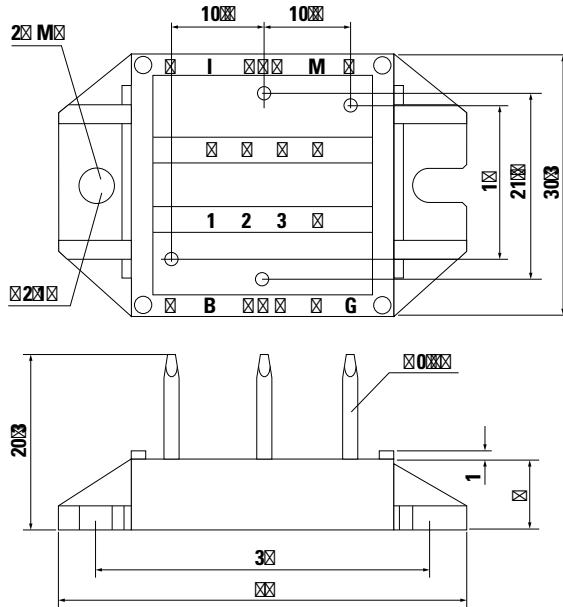


X102 ECO-PAC2 Weight = 23 g

See data sheet for pin arrangement

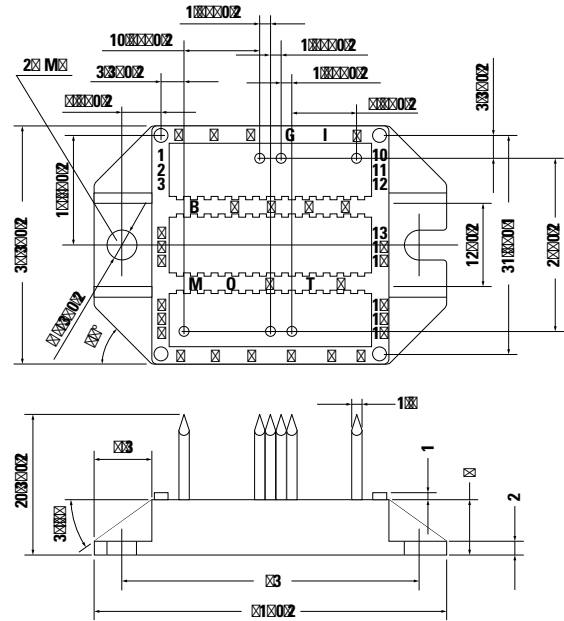


X103 V1-A-Pack Weight = 37 g

See data sheet for pin arrangement

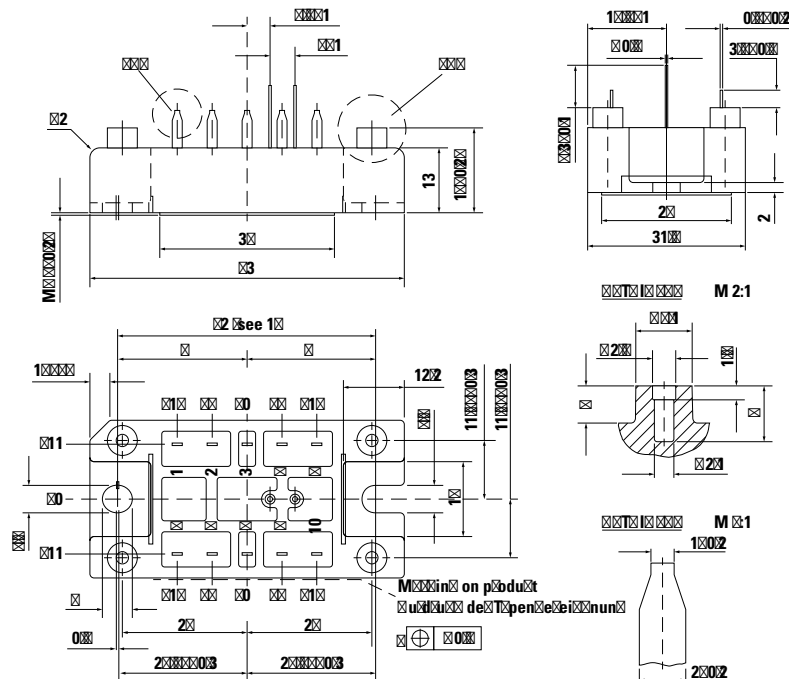


X112 E2-Pack Weight = 176 g


See data sheet for pin arrangement

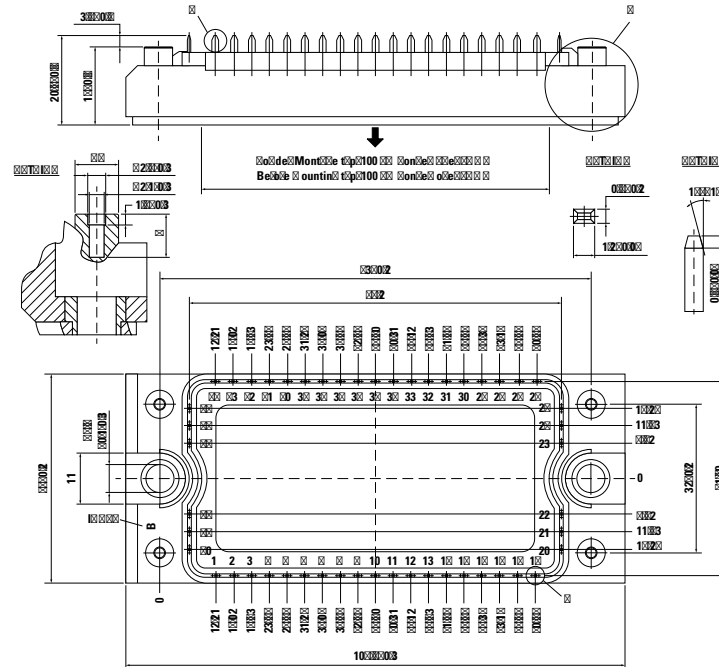


X112a E2-Pack PFP Weight = 176 g

See data sheet for pin arrangement

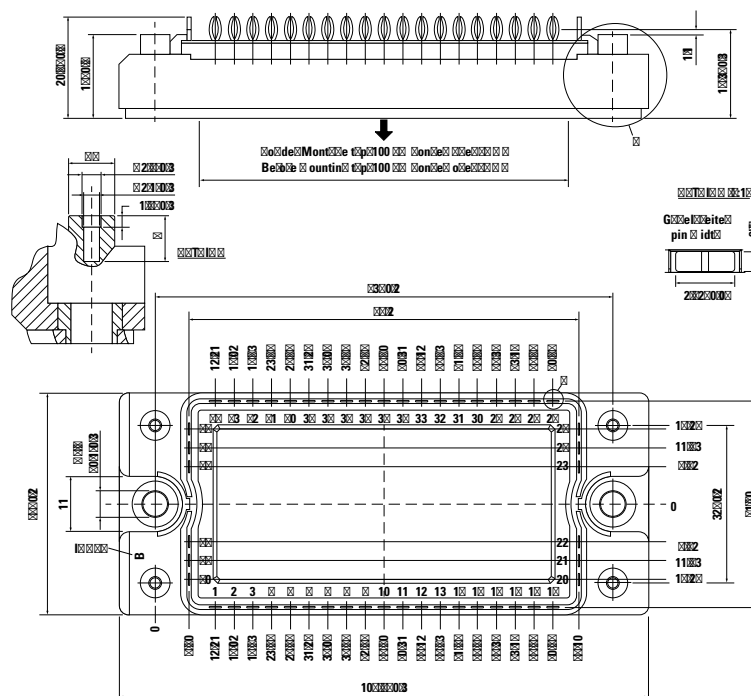

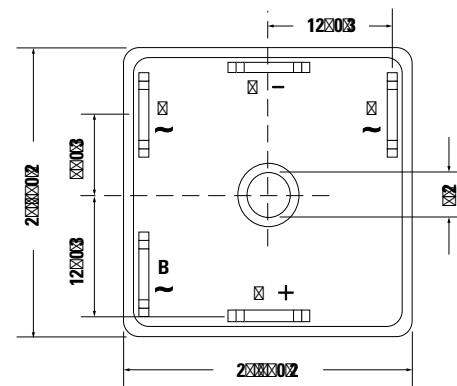

a: $\square\square\square$	$\square$ eight $\square$ 284 g
b: w/o terminal 4, 5 $\square$ 6 ($\square\square\square$)	$\square$ eight $\square$ 284 g
c: w/o terminal 1, 2, 3, 4, 5 $\square$ 6 ($\square\square\square$)	$\square$ eight $\square$ 284 g
d: w/o terminal $\square$, 3, 4, 5 $\square$ 6 ($\square\square\square$)	$\square$ eight $\square$ 273 g
e: w/o terminal $\square$, 1, 2, 3, 4, 5 $\square$ 6 ($\square\square\square$)	$\square$ eight $\square$ 273 g

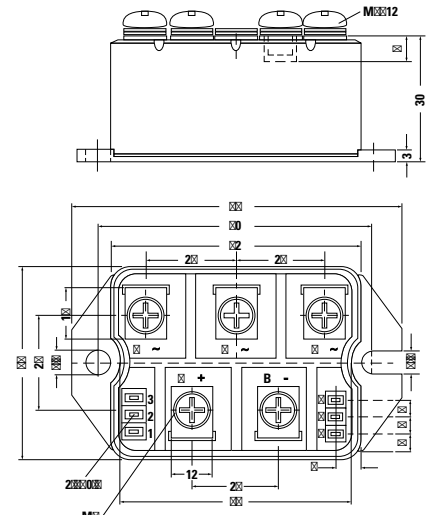

Outline Dimensions

X123 PWS-E Flat

w/o terminal 1, 2, 3, 4, 5 & 6 (MCC)


eight 8159 g

a, y: elvin contact (MCC)
b, y: elvin contact, w/o pin 6 & 7 (MCC)
c: w/o elvin contact 4 & 7 (MCC)


eight 81 g
eight 81 g
eight 81 g

d: w/o elvin contact 4, 7 & pin 6 (MCC)
e: w/o terminal 1, 2, 3, 4, 5 & 6 (MCC)
y: w/o metal inserts

eight 81 g
eight 81 g

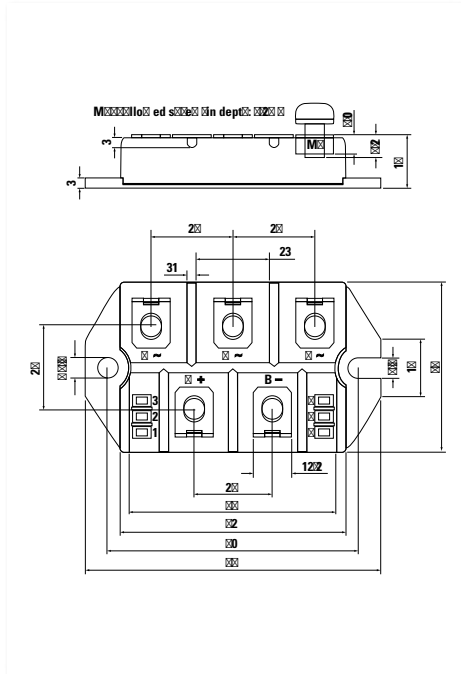

X125 TO-240AA

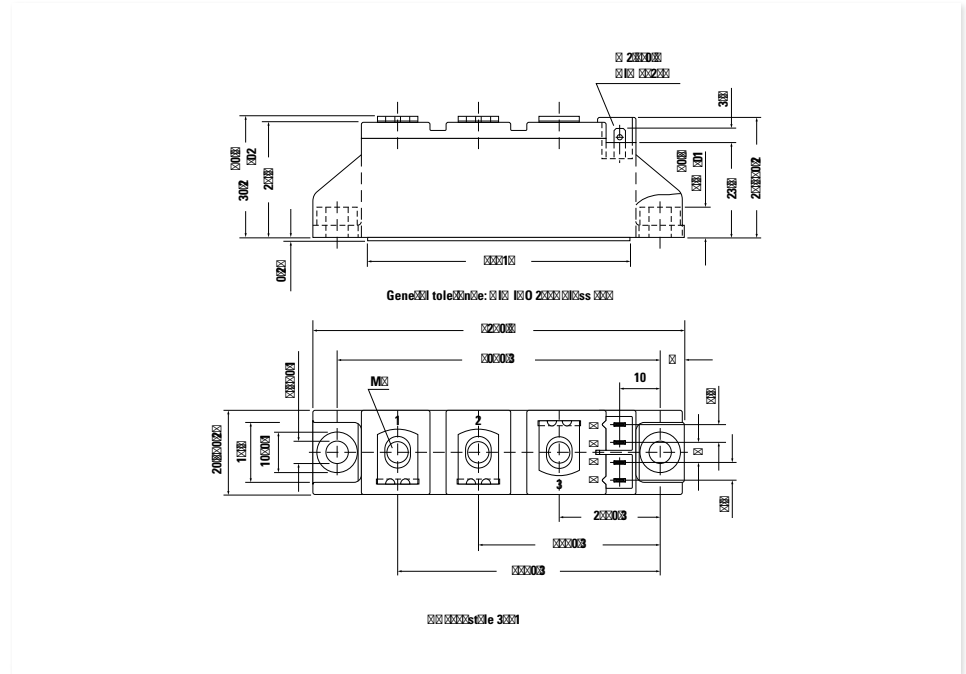

X126 Y4-M6




a, y: elvin cont., w/o pin 8 up to 11 (MCC) eight 131 g
b, y: elvin cont., w/o pin 6 up to 11 (MCC) eight 131 g
c: w/o pin 4 up to 11 (MCC) eight 126 g
d: w/o terminal 2 & pin 4 up to 11 (MCC) eight 108 g
y: with metal inserts

a: w/o pin 8 up to 11 (MII) eight 110 g
b: w/o pin 6 up to 11 (MII) eight 108 g
c: w/o pin 4, 5 & 8 up to 11 (MII) eight 108 g

eight 110 g
eight 108 g
eight 108 g

d: w/o pin 8 up to 11 (..PF.)
e: w/o pin 6 up to 11 (..PF.)
f: w/o pin 4, 5 & 8 up to 11 (..PF.)


eight 170 g
eight 168 g
eight 166 g

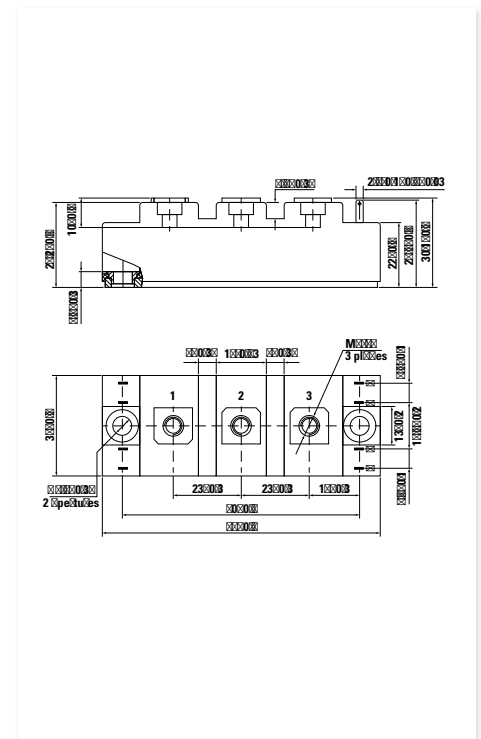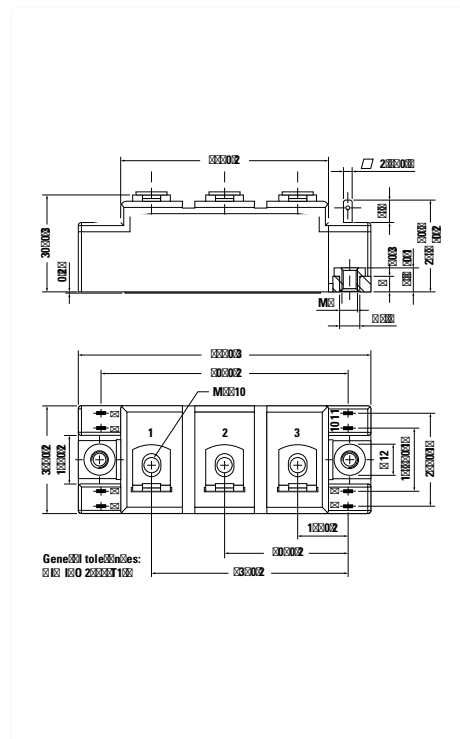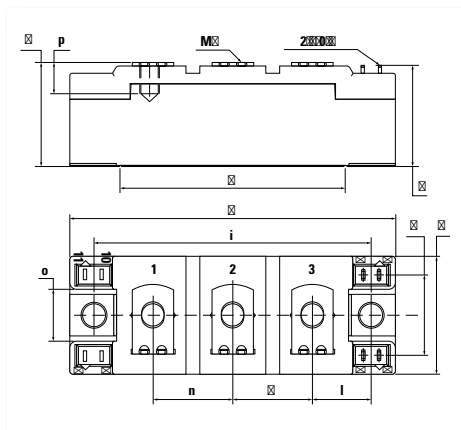

Dim	Millimeters		Inches	
	min	max	min	max
a	30.0	30.6	1.181	1.205
c	64.0	65.0	2.520	2.559
f	28.6	29.2	1.126	1.150
h	93.5	94.5	3.681	3.720
i	79.5	80.5	3.130	3.169
j	4.8	5.2	0.189	0.205
k	33.4	34.0	1.315	1.339
l	16.7	17.3	0.657	0.681
m	22.7	23.3	0.894	0.917
n	22.7	23.3	0.894	0.917
o	14.0	15.0	0.551	0.591
p	typ. 10.5		typ. 0.413	
q	22.8	23.3	0.898	0.917


X129 Y2-DCB

- a: $\varnothing$ elvin contact (MCC) $\varnothing$ eight $\varnothing$ 245 g
 b: $\varnothing$ elvin contact, w/o pin 6 $\varnothing$ 7 (MCC) $\varnothing$ eight $\varnothing$ 245 g
 c: w/o pin 4, 5, 6 $\varnothing$ 7 (MCC) $\varnothing$ eight $\varnothing$ 244 g

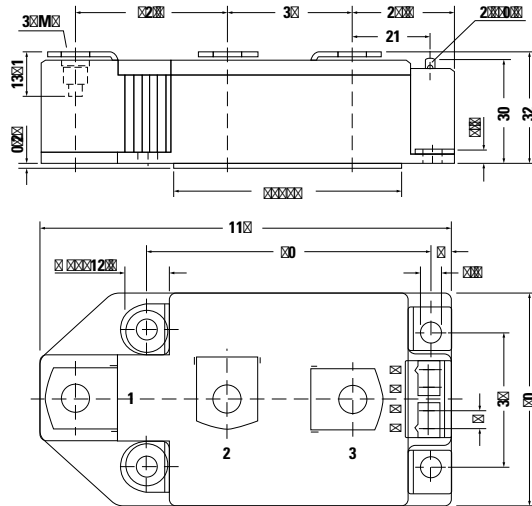


X131 Y1-CU

- a: $\varnothing$ elvin contact (MCC) $\varnothing$ eight $\varnothing$ 680 g
 b: $\varnothing$ elvin contact, w/o pin 6 $\varnothing$ 7 (MCC) $\varnothing$ eight $\varnothing$ 680 g
 c: w/o pin 4, 5, 6 $\varnothing$ 7 (MCC) $\varnothing$ eight $\varnothing$ 680 g

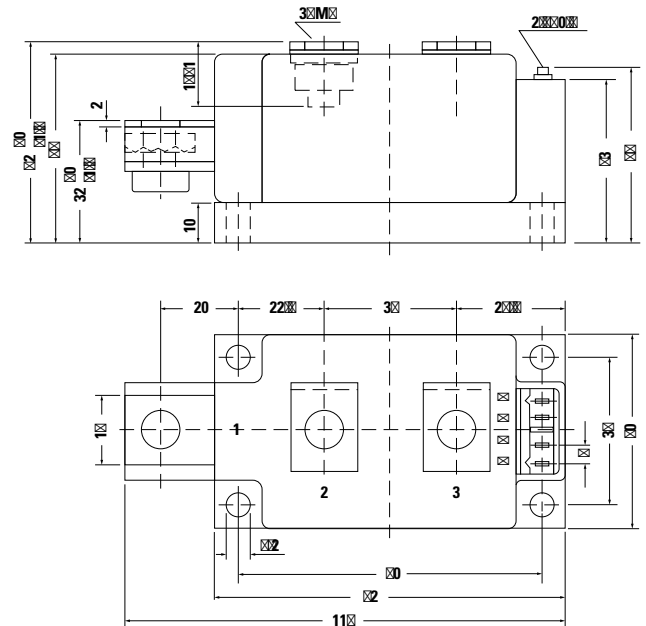

X132 Y1-2-CU


- a: $\varnothing$ elvin contact w/o pin 6 $\varnothing$ 7 (MCC) $\varnothing$ eight $\varnothing$ 650 g
 b: w/o pin 4, 5, 6 $\varnothing$ 7 (MCC) $\varnothing$ eight $\varnothing$ 650 g

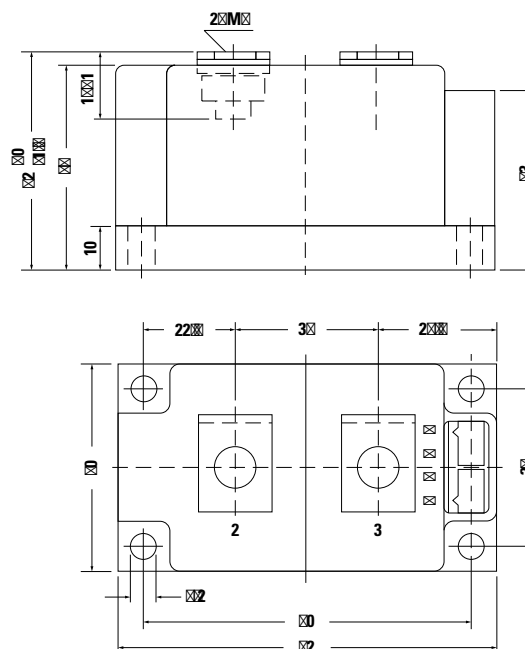

Outline in@s


X141 SimBus A

- a: $\times \times$ elvin contact (MCC) $\times$ eight $\times$ 152 g
b: $\times \times$ elvin contact, w/o pin 7 $\times$ 8 (MC $\times$)
c: w/o pin 5, 6, 7 $\times$ 8 (M $\times \times$)

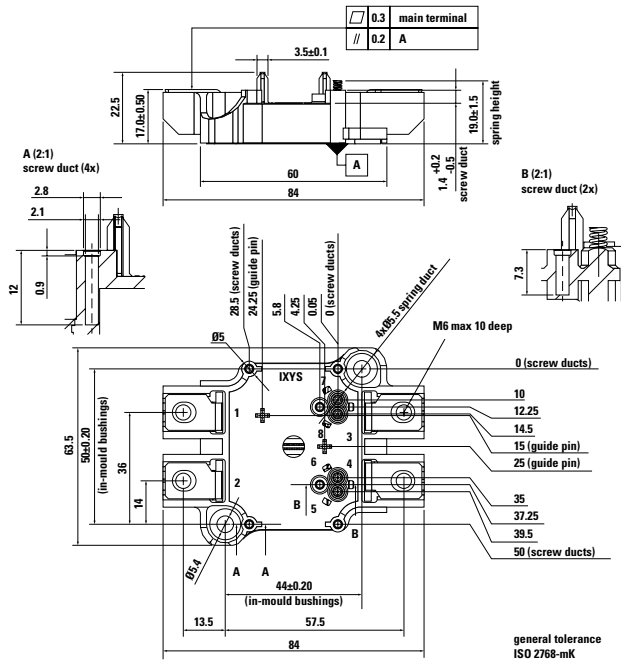


X142 ComPack

- a: $\times$ $\times$ elvin contact (MCC) $\times$ eight $\times$ 500 g
 b: $\times$ $\times$ elvin contact, w/o pin 6 $\times$ 7 (MC $\times$)
 c: w/o pin 4, 5, 6 $\times$ 7 (M $\times$ $\times$)

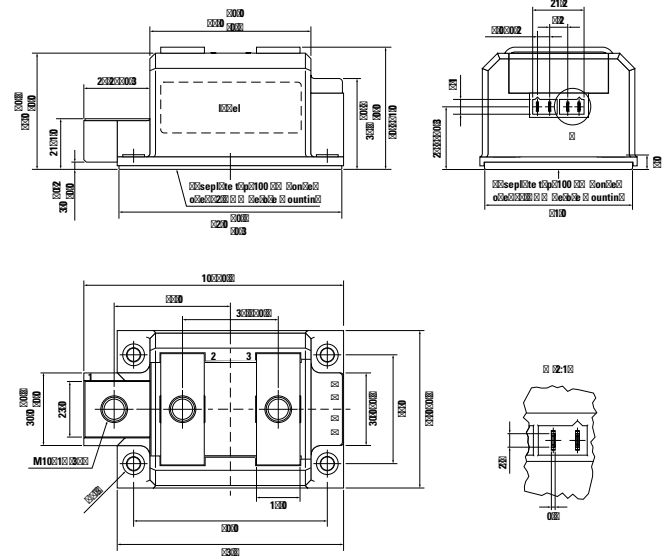


X143 SimBus F
Weight = 150 g

See data sheet for pin arrangement

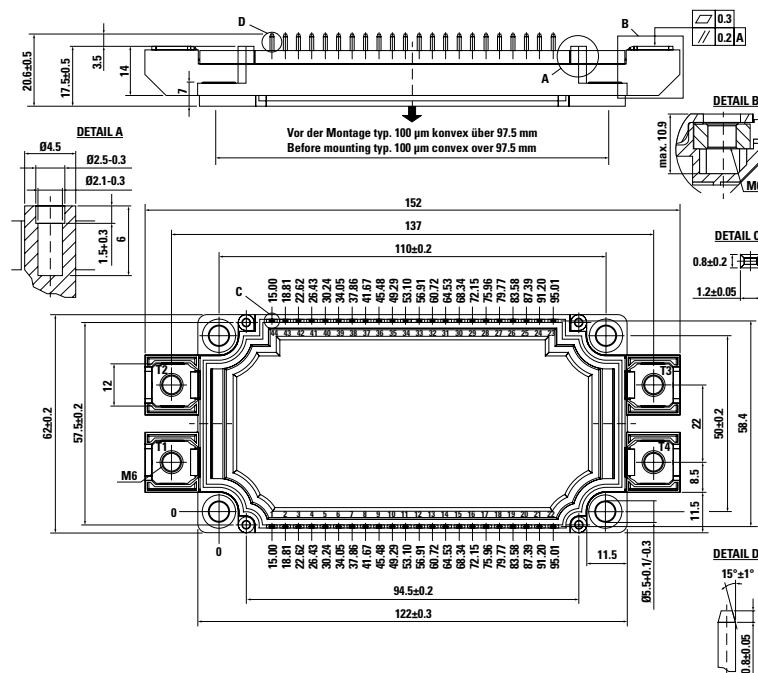


☒☒ See data sheet for pin arrangement


☒☒ See data sheet for pin arrangement

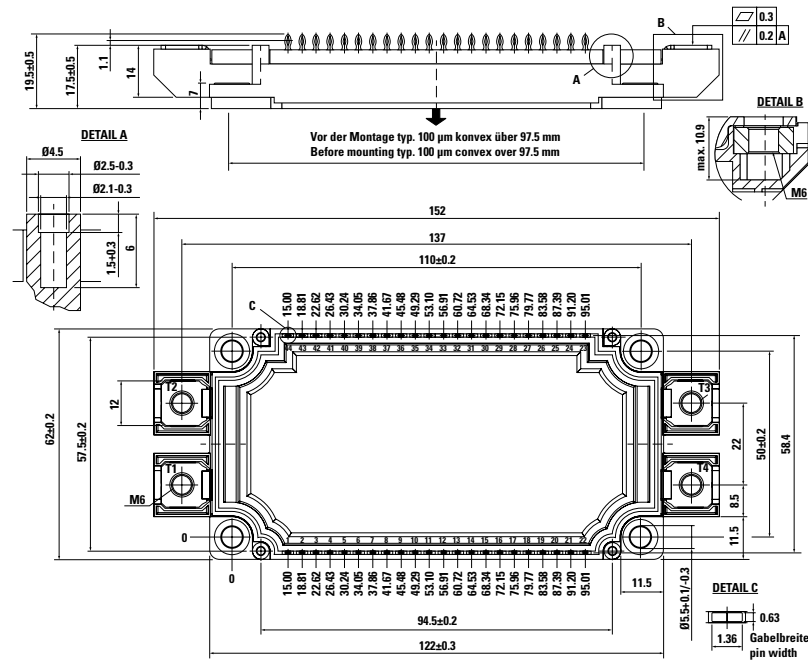

Modul-34mm
Weight = 160 g

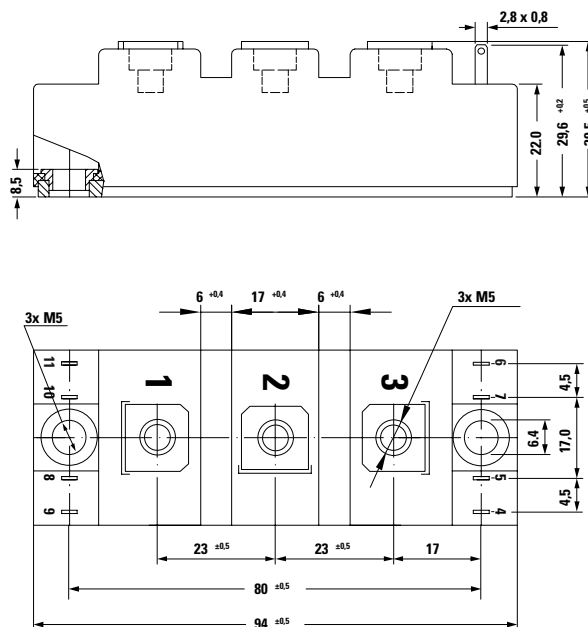


X200 Metal-can
Weight = 2.5 g

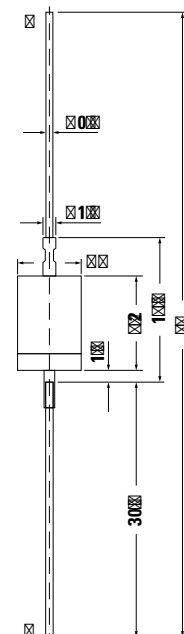


Outline in


X201 FP-Case (oilproof)
Weight = 0.9 g

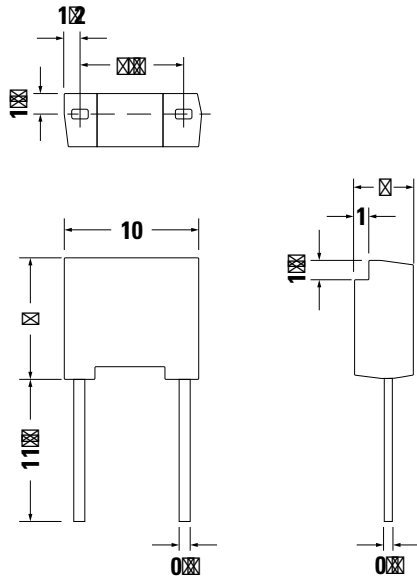


X202 BOD-Package
Weight = 9.5 g

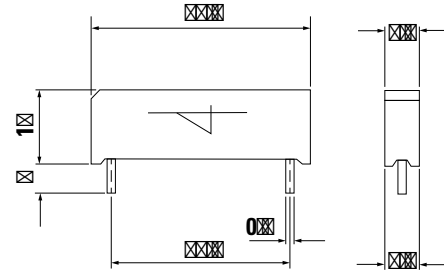


X204 DO-203 AA [M] (DO-4)
Weight = 6 g

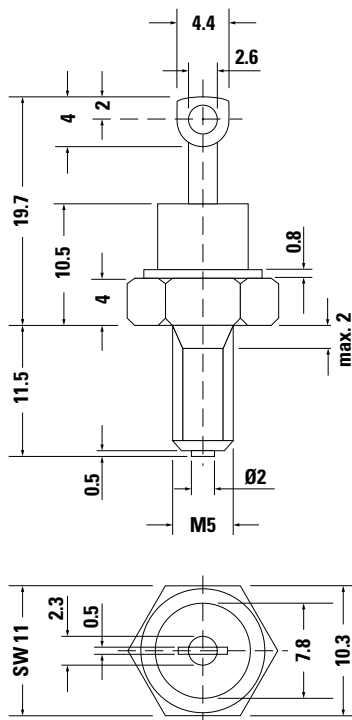


X205 DO-203 AA [UNF] (DO-4)
Weight = 5.5 g

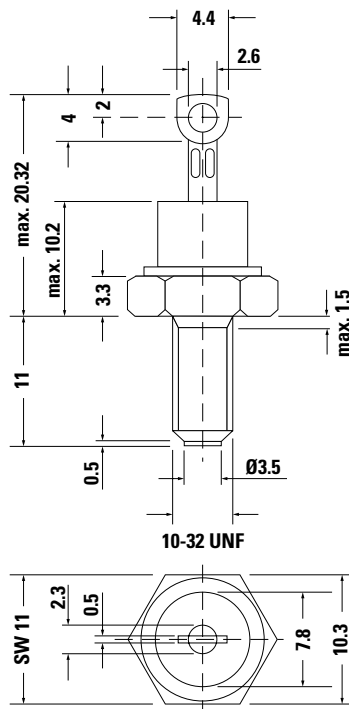


X206a DO-203 AB [UNF] (DO-5)
X206b DO-203 AB [M] (DO-5)
Weight = 14 g

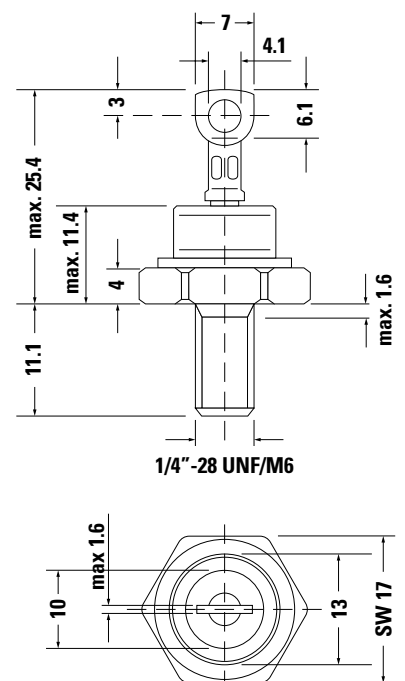

X207 DO-203 AB (DO-5)
Weight = 20 g

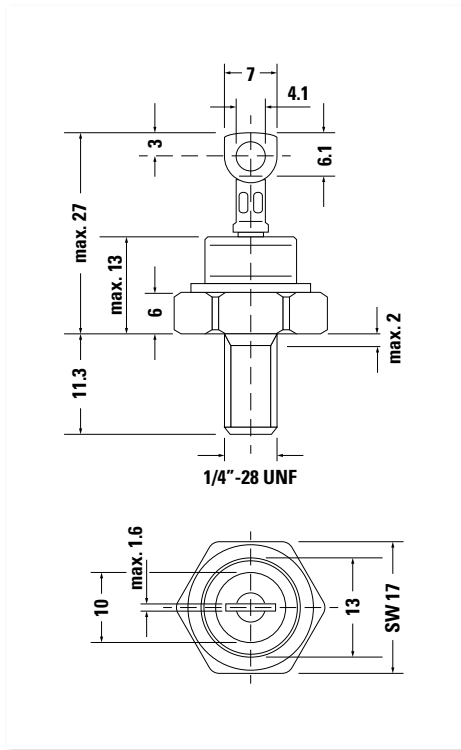


X209 TO-208 AA (TO-48)
Weight = 11.6 g

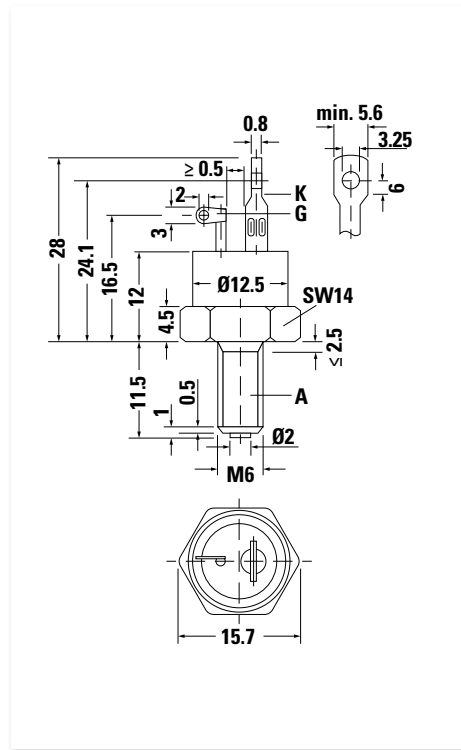


X210 TO-208 AC (TO-65)
Weight = 21.7 g

☒☒☒ See data sheet for pin arrangement

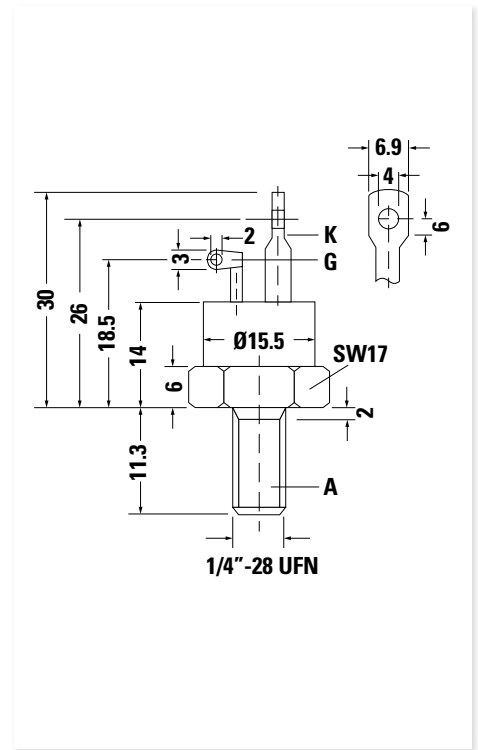


X207 DO-203 AB (DO-5)
Weight = 20 g

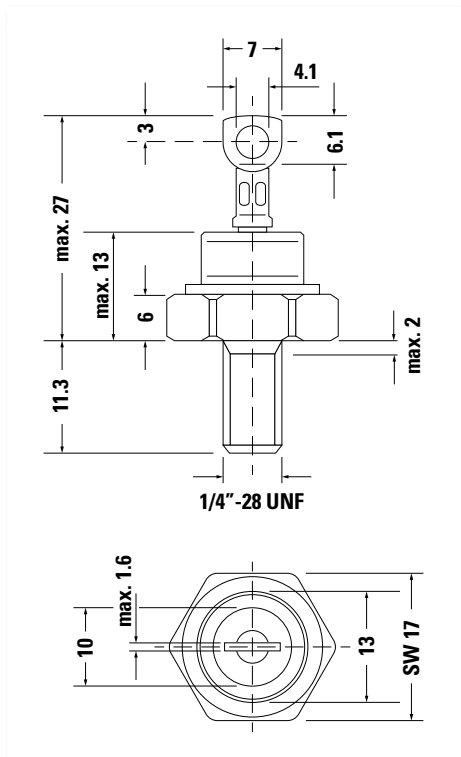


X252 UG
Weight = 155 g

☒☒☒ See data sheet for pin arrangement

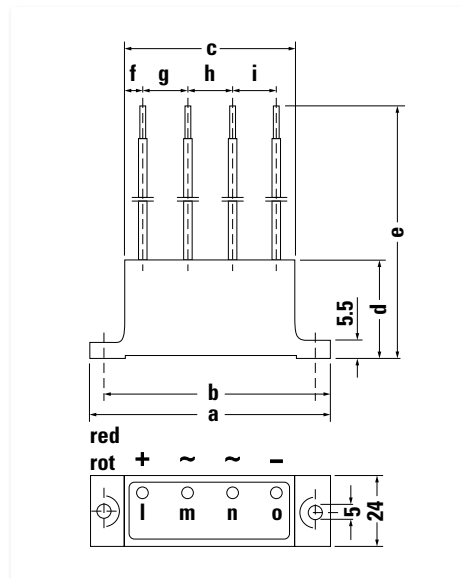

X253a UG
Weight = 310 g

b: w/o middle terminal

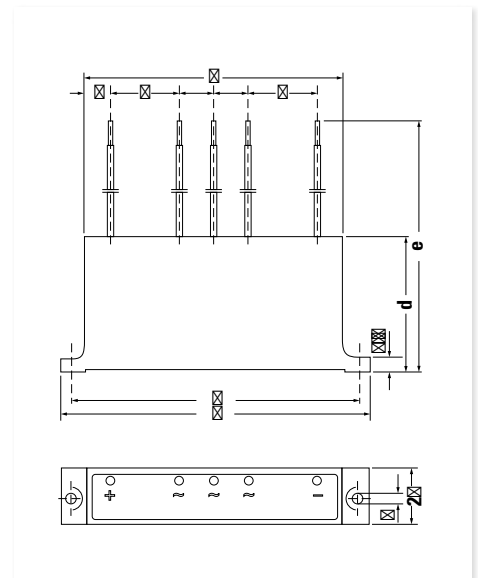


Type	a	b	c	d	e	f	g	h	i	k
UGB 3132 AD	80	70	57	58.5	260	6	15	15	15	—
UGB 6124 AG	135	125	112	58.5	260	11	32.5	25	32.5	—
UGD 6123 AG	135	125	112	58.5	260	8	30	18	18	30
UGD 8124 AG	135	125	112	58.5	260	8	30	18	18	30


Dimensions in mm

Outline Dimensions


X254 VG-A
Weight = 61 g

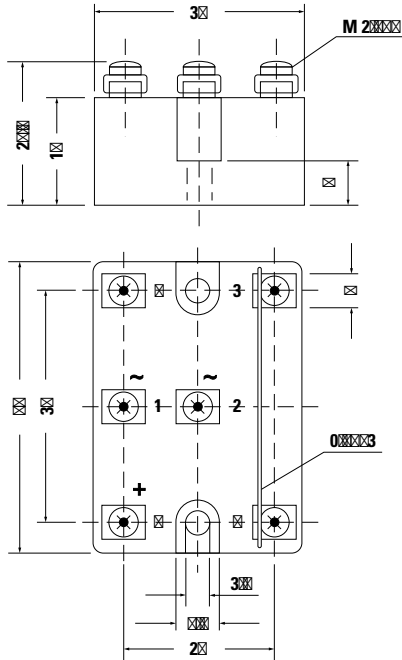


X255 VG-B
Weight = 87 g

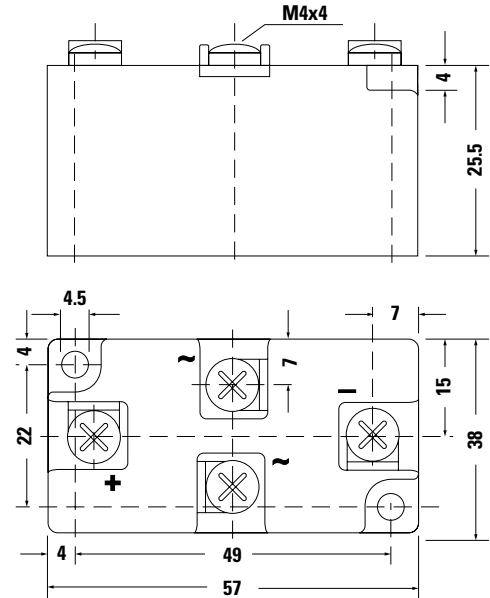

D5 DE475

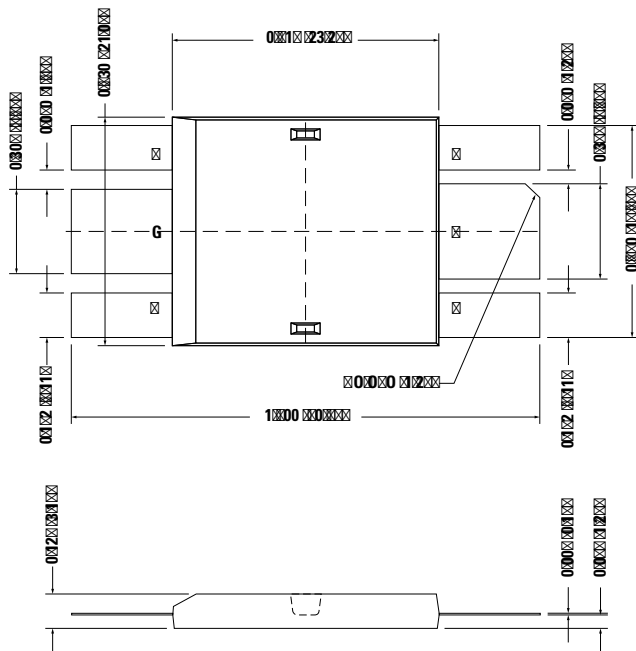


L001 SOT-223
Weight = 0.11 g




Dim	Millimeters			Inches		
	min	typ	max	min	typ	max
A	6.30	6.50	6.70	0.248	0.256	0.264
B	3.30	3.50	3.70	0.130	0.138	0.146
C	—	—	1.80	—	—	0.071
D	0.02	—	0.10	0.001	—	0.004
E	2.90	3.00	3.15	0.114	0.118	0.124
F	0.60	0.70	0.85	0.024	0.027	0.034
G	—	2.30	—	—	0.090	—
H	—	4.60	—	—	0.181	—
I	6.70	7.00	7.30	0.264	0.276	0.287
J	0.24	0.26	0.35	0.009	0.010	0.014
K	10° max					

L002 TO-218AC
Weight = 5 g




Dim	Millimeters		Inches	
	min	max	min	max
A	20.57	21.21	0.810	0.835
B	15.49	16.00	0.610	0.630
C	4.52	4.78	0.178	0.188
D	1.40	1.78	0.055	0.070
E	12.37	12.62	0.487	0.497
F	16.13	16.64	0.635	0.655
G	0.56	0.74	0.022	0.029
H	1.91	2.41	0.075	0.095
J	14.61	15.88	0.575	0.625
K	5.36	5.56	0.211	0.219
L	10.72	11.10	0.422	0.437
M	1.47	1.73	0.058	0.068
N	1.14	1.40	0.045	0.055
P	2.41	2.92	0.095	0.115
Q	0.20	0.41	0.008	0.016
R	0.20	0.41	0.008	0.016
U	4.10	4.20	0.164	0.165
W	2.17	2.42	0.085	0.095

L002a TO-218 x
Weight = 5.2 g




Dim	Millimeters		Inches	
	min	max	min	max
A	20.57	21.21	0.810	21.210
B	15.49	16.00	0.610	16.000
C	4.52	4.78	0.178	4.780
D	1.40	1.78	0.055	1.780
E	12.37	12.62	0.487	12.620
F	16.13	16.64	0.635	16.640
G	0.56	0.74	0.022	0.740
H	1.91	2.41	0.075	2.410
J	14.61	15.88	0.575	15.880
K	6.50	6.71	0.256	6.710
L	5.58	5.79	0.220	5.790
M	2.03	2.24	0.080	2.240
N	4.29	4.49	0.169	4.490
P	0.86	1.07	0.034	1.070
R	2.87	3.07	0.113	3.070
S	2.18	2.44	0.086	2.440
T	3.96	4.22	0.156	4.220
U	0.41	0.42	0.164	0.420
V	15.31	15.70	0.603	15.700
W	0.00	0.13	0.000	0.130
X	0.07	0.30	0.003	0.300
Y	0.71	0.81	0.028	0.810
Z	2.17	2.42	0.085	2.420

L003a DO-214AA
Weight = 0.1 g




Dim	Millimeters		Inches	
	min	max	min	max
A	1.950	2.200	0.077	0.086
B	4.060	4.570	0.160	0.180
C	3.300	3.940	0.130	0.155
D	2.130	2.440	0.084	0.096
E	0.760	1.520	0.030	0.060
F	—	0.203	—	0.008
G	5.210	5.590	0.205	0.220
H	0.152	0.305	0.006	0.012

L003b DO-214AB
Weight = 0.2 g



Dim	Millimeters		Inches	
	min	max	min	max
A	2.900	3.200	0.114	0.126
B	6.600	7.110	0.260	0.280
C	5.590	6.220	0.220	0.245
D	2.060	2.620	0.079	0.103
E	0.760	1.520	0.030	0.060
F	—	0.203	—	0.008
G	7.750	8.130	0.305	0.320
H	0.152	0.305	0.006	0.012


L004 TO-252AA
Weight = 0.3 g

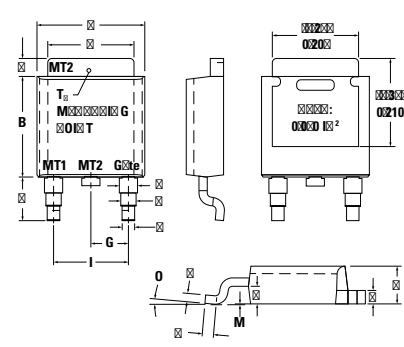

Dim	Millimeters			Inches		
	min	nom	max	min	nom	max
A	0.94	1.01	1.09	0.037	0.040	0.043
B	5.97	6.16	6.22	0.235	0.243	0.245
C	2.69	2.74	2.87	0.106	0.108	0.113
D	5.21	5.29	5.41	0.205	0.208	0.213
E	6.48	6.65	6.73	0.255	0.262	0.265
F	0.69	0.80	0.84	0.027	0.031	0.033
G	2.21	2.28	2.36	0.087	0.090	0.093
H	2.16	2.33	2.41	0.085	0.092	0.095
I	4.47	4.55	4.67	0.176	0.179	0.184
J	0.46	0.51	0.58	0.018	0.020	0.023
K	0.90	0.95	1.00	0.04	0.04	0.04
L	0.46	0.51	0.58	0.018	0.020	0.023
M	0.00	0.00	0.10	0.000	0.000	0.004
N	0.53	0.67	0.69	0.02	0.03	0.03
O	0°	0°	5°	0°	0°	5°
P	1.06	1.20	1.32	0.042	0.047	0.052
Q	0.86	1.00	1.11	0.034	0.039	0.044


Outline Dimensions

L005a TO-220AB (NON-ISO)
Weight = 2 g

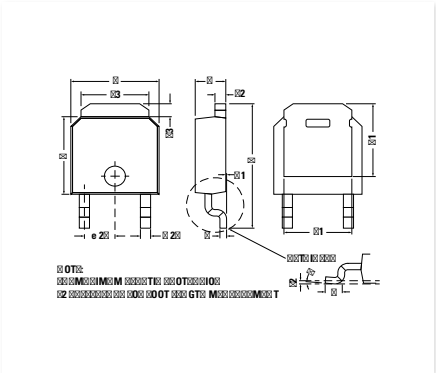


Dim	Millimeters			Inches		
	min	nom	max	min	nom	max
A	2.16	2.29	2.41	0.085	0.090	0.095
A1	0	0.08	0.13	0	0.003	0.005
b	0.64	0.76	0.89	0.025	0.030	0.035
b3	4.95	5.08	5.46	0.195	0.200	0.215
c	0.46	0.51	0.61	0.018	0.020	0.024
C2	0.46	0.81	0.89	0.018	0.032	0.035
D	5.97	6.10	6.22	0.235	0.240	0.245
D1	5.21	—	0.205	—	—	—
E	6.35	6.60	6.73	0.250	0.260	0.265
E1	4.32	—	0.170	—	—	—
e	2.29 BSC			0.090 BSC		
H	9.40	9.83	10.41	0.370	0.387	0.410
L	1.02	1.14	1.27	0.040	0.045	0.050
L2	0.25 BSC			0.010 BSC		
L3	0.89	—	1.27	0.035	—	0.050
P	0°	—	8°	0°	—	8°

L005a TO-220AB (NON-ISO)
Weight = 2 g

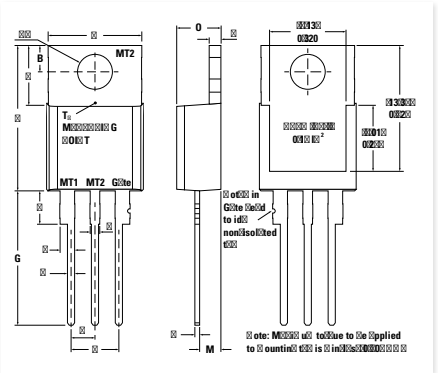


Dim	Millimeters		Inches	
	min	max	min	max
A	9.65	10.67	0.380	0.420
B	2.67	2.92	0.105	0.115
C	5.84	6.35	0.230	0.250
D	14.99	15.75	0.590	0.620
E	3.61	3.73	0.142	0.147
F	2.79	3.30	0.110	0.130
G	13.72	14.61	0.540	0.575
H	0.64	0.89	0.025	0.035
J	4.95	5.21	0.195	0.205
K	2.41	2.67	0.095	0.105
L	1.52	1.91	0.060	0.075
M	2.16	2.41	0.085	0.095
N	0.46	0.61	0.018	0.024
O	4.52	4.78	0.178	0.188
P	1.14	1.52	0.045	0.060
R	0.97	1.22	0.038	0.048

L005b TO-220AC
Weight = 2 g

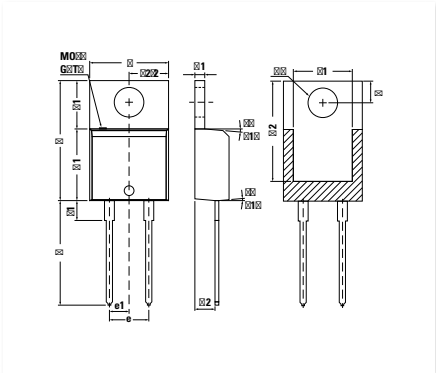


Dim	Millimeters		
	min	nominal	max
A	4.320	4.450	4.570
A1	1.140	1.270	1.400
A2	2.500	—	2.740
b	0.690	—	0.880
b1	0.680	—	0.870
b2	1.230	—	1.390
b3	1.220	1.270	1.380
c	0.360	—	0.503
c1	0.630	—	0.527
D	14.900	—	15.600
D1	8.615	—	9.017
D2	12.840	—	12.950
E	10.000	10.180	10.360
E1	7.570	7.610	7.680
e1	2.490	2.540	2.590
e	5.030	5.080	5.130
H1	6.295	6.545	6.795
L	13.000	13.500	14.000
L1	2.390	—	3.250
øP	3.710	3.840	3.960
Q	2.650	—	3.050
R	—	—	0.254

L005c TO-220AB (ISO)
Weight = 2 g

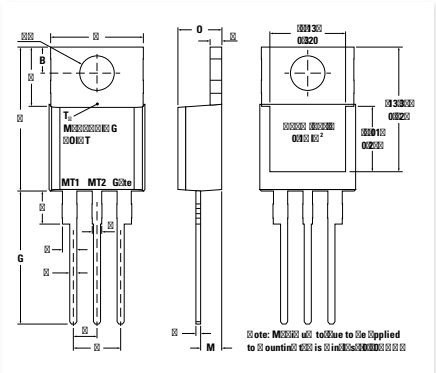


Dim	Millimeters		Inches	
	min	max	min	max
A	9.65	10.67	0.380	0.420
B	2.67	2.92	0.105	0.115
C	5.84	6.35	0.230	0.250
D	14.99	15.75	0.590	0.620
E	3.61	3.73	0.142	0.147
F	2.79	3.30	0.110	0.130
G	13.72	14.61	0.540	0.575
H	0.64	0.89	0.025	0.035
J	4.95	5.21	0.195	0.205
K	2.41	2.67	0.095	0.105
L	1.52	1.91	0.060	0.075
M	2.16	2.41	0.085	0.095
N	0.46	0.61	0.018	0.024
O	4.52	4.78	0.178	0.188
P	1.14	1.52	0.045	0.060
R	0.97	1.22	0.038	0.048

L006a TO-92
L006b TO-92 (GAK)
Weight = 0.2 g

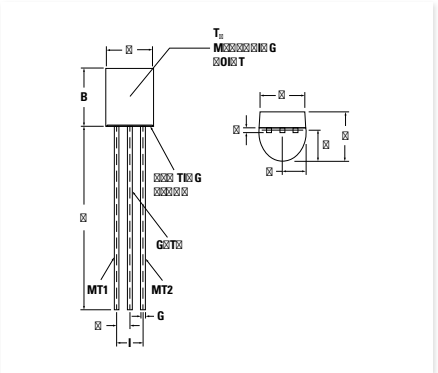


Dim	Millimeters		Inches	
	min	max	min	max
A	4.450	5.200	0.175	0.205
B	4.320	5.330	0.170	0.210
C	12.70	—	0.500	—
D	3.430	—	0.135	—
E	3.180	4.190	0.125	0.165
F	2.040	2.660	0.080	0.105
G	0.407	0.533	0.016	0.021
H	1.150	1.390	0.045	0.055
I	2.420	2.660	0.095	0.105
J	0.380	0.500	0.015	0.020

L007 SMT0-263
Weight = 2.6 g

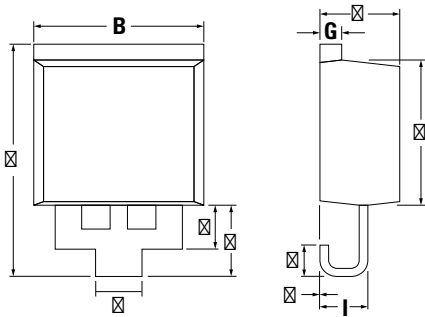


Dim	Millimeters		Inches	
	min	max	min	max
A	14.44	15.24	0.568	0.600
B	9.65	10.67	0.38	0.420
C	2.50	2.90	0.098	0.114
D	4.30	4.80	0.169	0.189
E	2.60	3.00	0.102	0.118
F	4.52	4.78	0.178	0.188
G	1.14	1.52	0.045	0.06
H	9.14	9.40	0.360	0.370
I	2.69	3.09	0.106	0.122
J	1.75	2.25	0.069	0.089
U	0	0.25	0	0.010

L008 1206 SMD
Weight = 0.008g




Dim	Millimeters		Inches	
	min	max	min	max
A	3.022	3.378	0.119	0.133
B	1.430	1.730	0.056	0.068
C	0.820	0.850	0.027	0.039
D	0.320	0.720	0.012	0.028

L011b TO-263AB
Weight = 1.5 g

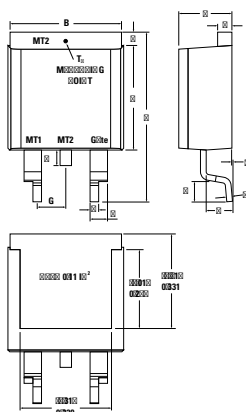

Dim	Millimeters		Inches	
	min	max	min	max
A	9.14	9.40	0.360	0.370
B	9.65	10.67	0.380	0.420
C	4.52	4.78	0.178	0.188
D	0.64	0.89	0.025	0.035
E	1.14	1.52	0.045	0.060
F	1.52	1.91	0.060	0.075
G	2.41	2.67	0.095	0.105
H	2.34	2.59	0.092	0.102
J	0.46	0.61	0.018	0.024
K	2.29	2.79	0.090	0.110
S	14.99	15.88	0.590	0.625
V	0.89	1.14	0.035	0.045
U	0.05	0.25	0.002	0.010
W	1.02	1.78	0.040	0.070


L008 1206 SMD
Weight = 0.008g



Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ 0.10		typ 0.004	
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.28		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L2	1.02	1.68	0.040	0.066
W	typ 0.02	0.040	typ 0.0008	0.002


Outline Dimensions

L012b TO-263 (7)
Weight = 2.5 g
C) middle leg cut

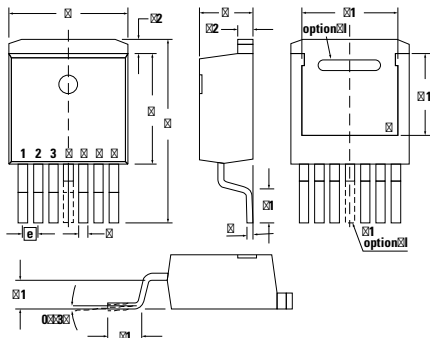


Dim	Millimeters		Inches	
	min	max	min	max
A	4.20	4.60	0.165	0.181
A1	2.45	2.75	0.096	0.108
b	0.65	0.90	0.026	0.035
c	0.40	0.60	0.016	0.024
c2	1.14	1.40	0.045	0.055
D	8.38	8.64	0.330	0.340
D1	6.10	6.35	0.240	0.250
E	10.00	10.30	0.394	0.406
E1	7.34	8.00	0.290	0.315
e	1.27 BSC		0.050 BSC	
L	14.73	15.75	0.580	0.620
L1	2.24	2.84	0.088	0.112
L2	1.35	1.55	0.053	0.061

L014a TO-247AD
Weight = 6 g

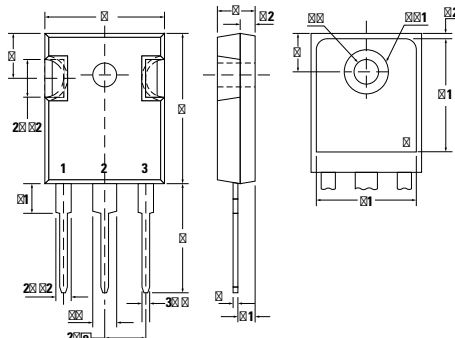


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.53	—
E2	4.31	5.48	0.170	0.216
e	5.45 BSC		0.215 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

L014b TO-247AD
Weight = 6 g

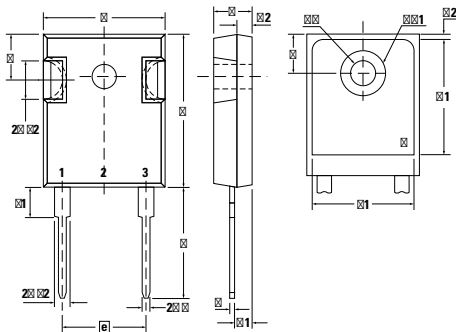


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.530	—
E2	4.31	5.48	0.170	0.216
e	10.90 BSC		0.430 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

L014d TO-247AD
Weight = 6 g

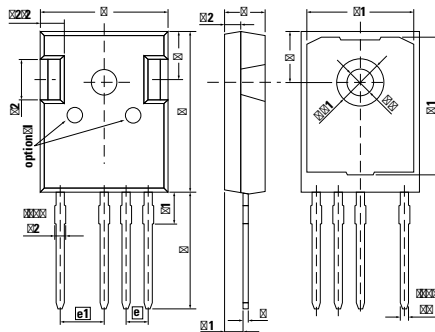


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.31	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.85	2.16	0.073	0.085
b	1.10	1.30	0.043	0.051
b2	1.30	1.50	0.051	0.059
c	0.50	0.89	0.020	0.035
D	20.80	21.46	0.819	0.845
D1	13.50	—	—	—
e	2.54 BSC		0.100 BSC	
e1	5.08 BSC		0.200 BSC	
E	15.49	16.26	0.610	0.640
E1	13.06	14.15	0.514	0.557
E2	4.32	4.83	0.170	0.190
L	19.81	20.57	0.780	0.810
L1	3.81	4.50	0.150	0.177
Ø P	3.55	3.70	0.140	0.146
Ø P1	7.00	7.40	0.276	0.291
Q	5.38	6.20	0.212	0.244
S	6.15 BSC		0.242 BSC	

L015 SOT-23
Weight = 0.008 g

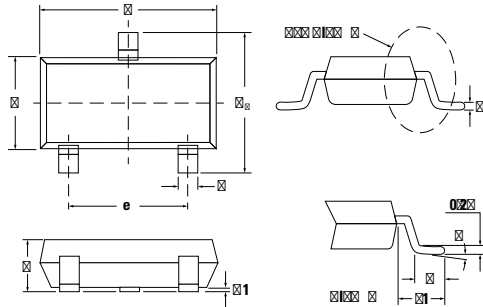

Dim	Millimeters		Inches	
	min	max	min	max
A	0.89	1.17	0.035	0.046
A1	0.05	0.15	0.001	0.006
b	0.30	0.50	0.012	0.020
c	0.08	0.20	0.003	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
e	1.90 BSC		0.075 BSC	
L	0.40	0.58	0.016	0.023
L1	0.46	0.64	0.018	0.025
HE	2.10	2.49	0.083	0.098
Ø	0°	10°	0°	10°


L016 SOT-89
Weight = 0.045 g

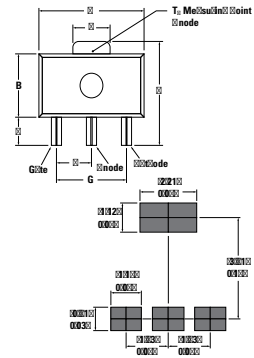

Dim	Millimeters		Inches	
	min	max	min	max
A	4.40	4.60	0.173	0.181
B	2.29	2.60	0.090	0.102
C	1.40	1.60	0.055	0.063
D	3.94	4.25	0.155	0.167
E	0.89	1.20	0.035	0.047
F	1.42	1.57	0.056	0.062
G	2.92	3.07	0.115	0.121
H	0.35	0.44	0.014	0.017
I	0.36	0.48	0.014	0.019
J	1.62	1.83	0.064	0.072


Outline in

L019a TO-268 AA (D3PAK HV)
Weight = 4 g

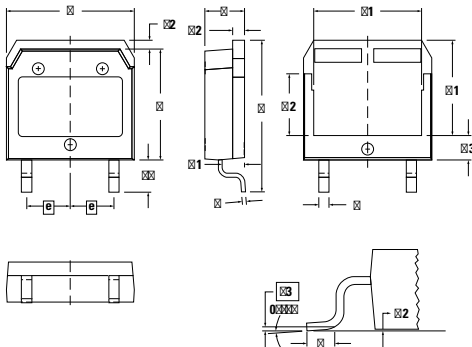


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
A2	0.02	0.25	0.001	0.100
b	1.15	1.45	0.045	0.057
C	0.40	0.65	0.016	0.026
C 2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	11.80	12.10	0.465	0.476
D2	7.50	7.80	0.295	0.307
D3	2.90	3.20	0.114	0.126
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	18.70	19.10	0.736	0.752
L	1.70	2.00	0.067	0.079
L2	1.00	1.15	0.039	0.045
L3	0.25 BSC		0.010 BSC	
L4	3.80	4.10	0.150	0.161

L016 SOT-89
Weight = 0.045 g



Dim	Millimeters		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

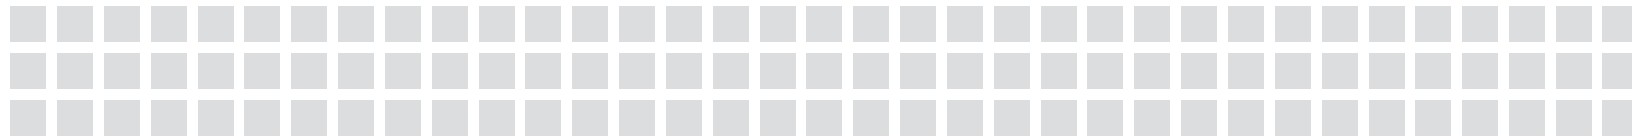

233 u e l p n u e Index

Symbols

2N607xA 97

B

B0470WC120 144

B0470WC160 144

B0713YC200 144

B0713YC220..... 144

B0713YC240..... 144

B0713YC250..... 144

B0800YC120 144

B0800YC140 144

B0800YC160 144

B0800YC180 144

B0870YC120..... 144

B0870YC140..... 144

B0870YC160..... 144

B1050LC180 144

B1050LC220 144

B1115LC160..... 144

B1115LC180..... 144

B1175JK200 144

B1175JK220 144

B1230LC120..... 144

B1230LC140..... 144

B1230LC160..... 144

B1265JK160..... 144

B1265JK180..... 144

B1370JK120..... 144

B1370JK140..... 144

B1370JK160..... 144

B1545NC160 144

B1545NC180 144

B1545NC200 144

B1725NC120 144

B1725NC140 144

B1725NC160 144

B1725NC180 144

B1815NC120 145

B1815NC140 145

B1815NC160 145

B2295VC180 145

B2295VC200 145

B2295VC220 145

B2295VF180..... 145

B2295VF200..... 145

B2295VF220..... 145

B2505VC140..... 145

B2505VC160 145

B2505VF140..... 145

B2505VF160..... 145

B3420ZC180..... 145

B3420ZC200 145

B3420ZC220..... 145

B3420ZD180 145

B3420ZD200 145

B3420ZD220 145

B3570HA160 145

B3570HA180 145

B3885ZC160..... 145

B3885ZC180..... 145

B3885ZD160 145

B3885ZD180 145

B3910HK180 145

B3910HK200 145

B3910HK220 145

B3935ZC120..... 145

B3935ZC140..... 145

B3935ZC160..... 145

B3935ZD120 145

B3935ZD140 145

B3935ZD160 145

B4475HK160 145

B4475HK180 145

B4945HK120 145

B4945HK140 145

B6975HK040 145

B6975HK060 145

C

C106x 94

CLA5E1200PZ..... 6, 92

CLA5E1200UC 92

CLA15E1200NPB..... 92

CLA15E1200NPZ 6, 92

CLA16E800PN 92

CLA16E1200PN 92

CLA30E1200HB 93

CLA30E1200NPZ..... 6, 92

CLA30E1200PB..... 92

CLA30E1200PC..... 92

CLA30MT1200NPB 96

CLA30MT1200NPZ..... 6, 96

CLA40E1200HR 8, 93

CLA40E1200NHB 93

CLA40E1200NPZ..... 6, 93

CLA40MT1200NHB 96

CLA40MT1200NPB 96

CLA40MT1200NPZ..... 6, 96

CLA40P1200FC..... 19, 93

CLA50E1200HB 93

CLA50E1200TC..... 93

CLA60MT1200NHB 96

CLA60MT1200NHR 8, 96

CLA60MT1200NTZ..... 8, 96

CLA60MU1200LB 15

CLA60PD1200NA 107

CLA80E1200HF..... 93

CLA80MT1200NHB 96

CLA80MT1200NHR 8, 96

CLA100E1200HB 93

CLA100E1200KB..... 93

CLA100E1200TZ 8

CLA100PD1200NA 108

CLA110MB1200NA..... 123

CLA120E1200HB 93

CLB30I1200HB..... 93

CLB30I1200PZ 6, 93

CLB40I1200PZ 6, 93

CLE20E1200PC 93

CLE30E1200PB 93

CLE90UH1200TLB..... 93, 122

CLF20E1200PB 93

CMA20E1600PB 92

CMA20E1600PZ 6, 92

CMA30E1600PB 93

CMA30E1600PN..... 93

CMA30E1600PZ 6, 93

CMA30P1600FC 19, 93

CMA40E1600HR..... 8, 93

CMA50E1600HB..... 93

CMA50E1600QB..... 93

CMA50E1600TZ 8, 93

CMA50P1600FC 19, 93

CMA50P1600LB 15

CMA60MT1600NHB..... 96

CMA60MT1600NHR..... 8, 96

CMA80E1600HB..... 93

CMA80MT1600NHB..... 96

CMA80MT1600NHR..... 8, 96

CMA80PD1600NA..... 107

CME30E1600PZ..... 6, 93

CNE60E2200TZ 8, 93

CPC3701..... 50

CPC3703..... 50

CPC3708..... 50

CPC3710..... 50

CPC3714..... 50

CPC3720..... 50

CPC3730..... 50

CPC3902..... 50

CPC3909..... 50

CPC3960..... 50

CPC3980..... 50

CPC3981.....	50	DCK20I1200PC	5	DHG100X650NA.....	81	DMA90U1800LB.....	15, 119
CPC3982.....	50	DCK30C1200HB.....	85	DHG100X1200NA.....	81	DMA120B800LB	15, 117
CS19	92	DCK30I1200HA.....	85	DHH55.....	19, 77, 81	DMA150E1600NA	88
CS20	92	DCK40C1200HB.....	85	DK015LTP	88	DMA150YA1600NA	120
CS20-22MOF1	19	DCK40I1200HA.....	85	DK020LTP	88	DMA150YC1600NA.....	120
CS20-25MO1F	19	DFE10I600PM	82	DK025LTP	88	DMA200X1600NA.....	88
CS22	92	DFE25I600HA	82	DLA5P800UC.....	86	DMA200XA1600NA	88
CS30	93	DFE240X600NA.....	83	DLA10IM800UC.....	86	DMA200YA1600NA.....	120
CS45	93	DFE250X600NA.....	83	DLA20IM800PC	86	DMA200YC1600NA.....	120
CS60	93	DH2X60	81	DLA40IM800PC	87	DMA240YA1600NA.....	120
D		DH2X61	81	DLA60I1200HA	88	DMA240YC1600NA.....	120
D60X7S4ARP.....	88	DH20	81	DLA100B800LB	15, 55, 117	DNA30E2200FE	19, 87
D4015LTP	88	DH40	81	DLA100B1200LB.....	15, 55, 117	DNA30E2200PA.....	87
D4020LTP	88	DH60	81	DLA100IM1200TZ.....	8	DNA30E2200PZ.....	5, 87
D4025LTP	88	DHG5I600PA	81	DMA10I1600PA.....	86	DNA30EM2200PZ	5, 87
D6001S4ARP	88	DHG5I600PM.....	81	DMA10IM1200UZ.....	5, 86	DNA30ER2200IY	87
D6002S4ARP	88	DHG10C600PB.....	81	DMA10IM1600PZ	5, 86	DNA40U2200GU	118
D6015LTP	88	DHG10I1200PA	81	DMA10IM1600UZ.....	5, 86	DNA90U2200LB	119
D6020LTP	88	DHG10I1200PM	81	DMA10P1200HR.....	8, 87	DNA90YA2200NA	120
D6025LTP	88	DHG10I1800PA	81	DMA10P1200UZ.....	5, 86	DNA90YC2200NA	120
D8015LTP	88	DHG10IM1800UZ	5, 81	DMA10P1600HR.....	8, 87	DNA120E2200KO	88
D8020LTP	88	DHG20C1200PB	81	DMA10P1600PZ	5, 86	DPF30I300PA	78
D8025LTP	88	DHG20I1200HA	81	DMA10P1600UZ.....	5, 86	DPF30P600HR	8, 77
DAA10EM1800PZ.....	5, 86	DHG20I1200PA.....	81	DMA10P1800PZ	5, 86	DPF60C200HB	78
DAA10P1800PZ	5, 86	DHG30I600HA	81	DMA30E1800HA	87	DPF60C200HJ.....	78
DAA200X1800NA.....	88	DHG30I600PA	81	DMA30IM1600PZ.....	5, 87	DPF60C300HB	78
DAA200XA1800NA	88	DHG30I1200HA	81	DMA30P1200HB.....	87	DPF60I200HA	78
DCG20B650LB	15, 115	DHG30IM600PC	81	DMA30P1600HB.....	87	DPF60IM400HB	79
DCG40X1200LB.....	15	DHG40B1200LB.....	15, 115	DMA30P1600HR.....	8, 87	DPF80C200HB	78
DCK10I650HA	85	DHG40C1200HB	81	DMA40U1800GU	118	DPF100C1200HB	78
DCK10I650PA.....	85	DHG40I4500KO	81	DMA50I800HA.....	88	DPF120C600HB	78
DCK10I1200HA	85	DHG50X650NA.....	81	DMA50I1200HA.....	88	DPF240X200NA.....	78
DCK10I1200PA.....	85	DHG50X1200NA	81	DMA50I1600HA.....	88	DPF240X400NA.....	79
DCK15I1200HA.....	85	DHG55I3300FE	81	DMA50P1200HB.....	88	DPG10I200PA.....	78
DCK20C650HB.....	85	DHG60C600HB.....	81	DMA50P1200HR.....	8, 88	DPG10I200PM	78
DCK20C1200HB.....	85	DHG60I600HA	81	DMA50P1600HB.....	88	DPG10I300PA.....	78
DCK20I650HA	85	DHG60I1200HA	81	DMA80I1600HA.....	88	DPG10I400PA.....	79
DCK20I1200HA.....	85	DHG60U1200LB	15, 115	DMA80IM1600HB	88	DPG10I400PM	79

Product Index

DPG10IM300UC 78	DPG60I400HA..... 79	DSA30C200PC..... 72	DSDI60..... 84
DPG10P400PJ..... 77, 79	DPG60IM300PC..... 79	DSA30I100PA..... 71	DSDI60-14A 84
DPG15I200PA 78	DPG60IM400QB 79	DSA30I150PA..... 72	DSEC16..... 80
DPG15I300PA 78	DPG80C300HB 78	DSA50C100HB..... 71	DSEC29..... 80
DPG15I400PM 79	DPG80C400HB 79	DSA50C100QB 71	DSEC30..... 80
DPG20C200PB..... 78	DPG120C300QB 79	DSA50C150HB..... 72	DSEC59..... 80
DPG20C200PN 78	DPH30IS600HI 77, 79	DSA60C45HB..... 71	DSEC60..... 80
DPG20C300PB..... 78	DPJ50XS1800NA 77	DSA60C45PB 71	DSEC120..... 80
DPG20C300PN 78	DSA1 86	DSA60C60HB..... 71	DSEE15 77
DPG20C400PB..... 79	DSA1-12D 86	DSA60C60PB 71	DSEE29 77
DPG20C400PC..... 79	DSA10C150PB 72	DSA60C100PB 71	DSEE30..... 77
DPG20C400PN 79	DSA10C150UC..... 72	DSA60C150PB 72	DSEE55 19, 77
DPG30C200HB 78	DSA10I100PM..... 71	DSA70C100HB..... 71	DSEI2x30 83
DPG30C200PB..... 78	DSA10IM100UC..... 71	DSA70C150HB..... 72	DSEI2x31 83
DPG30C200PC..... 78	DSA15I45PA..... 71	DSA70C200HB 72	DSEI2x60 83
DPG30C300HB 78	DSA15IM45IB 71	DSA80C45HB..... 71	DSEI2x61 83
DPG30C300PB..... 78	DSA15IM45UC 71	DSA80C100PB 71	DSEI2x101..... 83
DPG30C300PC..... 78	DSA15IM150UC..... 72	DSA90C200HB 72	DSEI2x121 83
DPG30C400HB 79	DSA15IM200UC 72	DSA90C200HR 8, 72	DSEI2x161 83
DPG30C400PB..... 79	DSA20C45PB 71	DSA120C150QB..... 72	DSEI8 82
DPG30I300HA..... 78	DSA20C60PB 71	DSA120X150LB 15, 72	DSEI12 82
DPG30I300PA 78	DSA20C60PN..... 71	DSA120X200LB 15, 72	DSEI12-12AZ 5
DPG30I400HA..... 79	DSA20C100PB 71	DSA240X150NA 72	DSEI19..... 82
DPG30I600PM 80	DSA20C100PN..... 71	DSA240X200LB 15, 72	DSEI20 82
DPG30IM300PC..... 78	DSA20C150PB 72	DSA240X200NA 72	DSEI25 82
DPG30IM400PC..... 79	DSA20C150PN..... 72	DSB10I45PM..... 71	DSEI30 82
DPG30P300PJ 77, 78	DSA20C200PB..... 72	DSB15IM30UC..... 71	DSEI36 82
DPG30P400PJ 77, 79	DSA30C45PB 71	DSB15IM45IB 71	DSEI60 82
DPG60B600LB 15, 115	DSA30C45PC 71	DSB20C60PN..... 71	DSEI60-12A..... 83
DPG60C200HB 78	DSA30C60PB 71	DSB20I15PA..... 71	DSEI120 83
DPG60C200QB 78	DSA30C100HB..... 71	DSB30C30PB 71	DSEI120-12AZ 8
DPG60C300HB 78	DSA30C100PB 71	DSB30C45PB 71	DSEK60 82
DPG60C300HJ..... 78	DSA30C100PN..... 71	DSB30C60PB 71	DSEP2x25 77
DPG60C300PC..... 78	DSA30C100QB 71	DSB40C15PB 71	DSEP2X31..... 80
DPG60C300QB 78	DSA30C150PB 72	DSB60C30PB 71	DSEP2X60..... 80
DPG60C400HB 79	DSA30C150PC 72	DSB60C45HB..... 71	DSEP2X61..... 80
DPG60C400QB 79	DSA30C200IB 72	DSB60C45PB 71	DSEP2X91..... 80
DPG60I300HA..... 78	DSA30C200PB..... 72	DSB60C60PB 71	DSEP2X101 80

DSEP6	80	DSSK10	74	DST20150C	75	DUR30120	76
DSEP8	80	DSSK16	73	DST30100C	75	DUR60120W	76
DSEP12	80	DSSK18	73	DST40100C	75	DUR75120W	76
DSEP12-12AZ	5	DSSK20	73, 74	DSTB2045C	75	DURB1640CT	76
DSEP12-12BZ	5	DSSK28	73	DSTB30200C	75	DURB2020CT	76
DSEP15	77, 80	DSSK30	74	DSTB60100C	75	DURD560A	76
DSEP29	80	DSSK38	73	DSTD5200	75	DURF840	76
DSEP30	77, 80	DSSK40	73	DSTF2045C	75	DURF1030CT	76
DSEP40-03AS	80	DSSK48	73	DSTF2050C	75	DURF1030CTR	76
DSEP60	80	DSSK50	73, 74	DSTF2060C	75	DURF1040CT	76
DSEP60-12AZ	8	DSSK60	73, 74	DSTF2080C	75	DURF1040CTR	76
DSEP75	80	DSSK70	73	DSTF3045C	75	DURF1060	76
DSEP90	80	DSSK80	73	DSTF3060C	75	DURF1060CT	76
DSEP90-12AZ	8	DST560S	76	DSTF3060CR	75	DURF2040CT	76
DSI2x55	88	DST580S	76	DSTF3080C	75	DURF3060CT	76
DSI30	87	DST860S	76	DSTF4045C	75	E	
DSI45	87	DST1040S	76	DSTF4050C	75	E0460QC45E	137
DSIK45	87	DST1040S-A	76	DSTF4060C	75	E0660NC45E	137
DSP8	86	DST1045S	76	DSTF10200C	75	E0660NH45E	137
DSP25	87	DST1050S	76	DSTF20100C	75	E1250HC45E	137
DSP45	87	DST1545S	76	DSTF20120C	75	E1500NC42P	137
DSP45-12AZ	8	DST1550S	76	DSTF20120CR	75	E1500NC48P	137
DSP45-16AZ	8	DST2045AX	75	DSTF20150CR	75	E1500NH42P	137
DSS2x41	73	DST2045C	75	DSTF30100C	75	E1500NH48P	137
DSS2x61	73	DST2050S	76	DSTF30100S	75	E1780TG65E	137
DSS2x81	73	DST2060C	75	DSTF30120C	75	E1800TC45E	137
DSS2X101	74	DST2060DJF	75	DSTF30120CR	75	E2400EC45E	137
DSS2x111	73	DST2080C	75	DSTF30150C	75	E3000EC45E	137
DSS2x121	73	DST2080S	76	DSTF40100C	75	E4000FD45E	137
DSS6	73	DST3060DJF	75	DSTF40120C	75	EC103x	94
DSS6-015AS	74	DST3060LC	75	DSTF40150C	75	F	
DSS10	73	DST3080C	75	DSTF60100C	75	F0240YC250	136
DSS16	73	DST5100S	76	DUR1040CT	76	F0240YC300	136
DSS17	77	DST5200	75	DUR2030CT	76	F0240YH250	136
DSS20	73	DST8100S	76	DUR3060CT	76	F0240YH300	136
DSS25	73	DST10100S	76	DUR6030WT	76	F0300WC140	136
DSS40-0008D	73	DST12100S	76	DUR6040WT	76	F0300WC180	136
DSS60	73	DST20100C	75	DUR6060W	76	F0800LC140	136

233 u e Ip nu e Inde

F0800LC180.....	136	ITF48IF1200HR.....	10, 66	IXBH32N300.....	69	IXCP10M45S.....	50
F0900VC450.....	136	IXA4IF1200TC.....	66	IXBH32N300HV.....	9, 69	IXCP10M90S.....	50
F0900VC520.....	136	IXA4IF1200UC.....	6, 66	IXBH42N170.....	69	IXCY10M45S.....	50
F0900VF450.....	136	IXA12IF1200HB.....	66	IXBH42N170A.....	69	IXCY10M90S.....	50
F0900VF520.....	136	IXA12IF1200PB.....	66	IXBH42N300HV.....	9, 69	IXEL40N400.....	68
F1000LC080.....	136	IXA12IF1200TC.....	66	IXBK55N300.....	69	IXFA4N85X.....	43
F1000LC120.....	136	IXA17IF1200HJ.....	66	IXBK64N250.....	69	IXFA4N100P.....	35
F1300NC45P.....	136	IXA20I1200PB.....	66	IXBK75N170.....	69	IXFA5N100P.....	35
F1300NC50P.....	136	IXA20I1200PZ.....	66	IXBL64N250.....	69	IXFA6N120P.....	35
F1300NC55P.....	136	IXA20IF1200HB.....	66	IXBN42N170A.....	69	IXFA7N80P.....	34
F1400NC140.....	136	IXA20IF1200HR.....	10	IXBN75N170.....	69	IXFA7N100P.....	35
F1400NC180.....	136	IXA27IF1200HJ.....	66	IXBOD.....	89, 90	IXFA8N65X2.....	41
F1500NC200.....	136	IXA30IF1200HR.....	10	IXBOD 1-06.....	89	IXFA8N85XHV.....	6, 43
F1500NC250.....	136	IXA33IF1200HB.....	66	IXBOD2.....	91	IXFA10N60P.....	33
F1600NC080.....	136	IXA37IF1200HJ.....	66	IXBOD 2-01.....	90	IXFA10N80P.....	34
F1600NC120.....	136	IXA40IF1200HR.....	10	IXBOD2-29R.....	91	IXFA12N50P.....	33
FBE22.....	19, 115	IXA45IF1200HB.....	66	IXBOD2-48R.....	91	IXFA12N65X2.....	41
FBO16.....	19, 55	IXA55I1200HJ.....	66	IXBR42N170.....	69	IXFA14N60P.....	33
FBO16-12N.....	116	IXA60IF1200NA.....	66	IXBT6N170.....	69	IXFA14N60P3.....	37
FBO40.....	19, 55, 116	IXA70I1200NA.....	66	IXBT10N170.....	69	IXFA14N85XHV.....	6, 43
FMM50.....	18	IXBA10N300HV.....	6, 69	IXBT16N170A.....	69	IXFA16N50P.....	33
FMM60.....	18	IXBA14N300HV.....	6, 69	IXBT16N170AHV.....	7, 69	IXFA16N50P3.....	36
FMM75.....	18	IXBA16N170AHV.....	6, 69	IXBT16N360HV.....	7	IXFA16N60P3.....	37
FUE30.....	19, 115	IXBF22N300.....	18, 69	IXBT20N360HV.....	7	IXFA18N65X2.....	41
FUO22.....	19, 118	IXBF32N300.....	18, 69	IXBT22N300HV.....	7, 69	IXFA20N50P3.....	36
FUO22-12N.....	118	IXBF42N300.....	18, 69	IXBT24N170.....	69	IXFA20N85XHV.....	6, 43
FUO50.....	19, 118	IXBF55N300.....	18, 69	IXBT32N300HV.....	7, 69	IXFA22N60P3.....	37
G		IXBH6N170.....	69	IXBT42N170.....	69	IXFA22N65X2.....	41
GBO25.....	116	IXBH10N170.....	69	IXBT42N170A.....	69	IXFA26N30X3.....	40
GMM3x60-015X2.....	16	IXBH10N300.....	69	IXBT42N300HV.....	7, 69	IXFA26N50P3.....	36
GUO40.....	118	IXBH10N300HV.....	9, 69	IXBX28N300HV.....	9, 69	IXFA30N25X3.....	39
H		IXBH14N300HV.....	9, 69	IXBX50N360HV.....	9	IXFA34N65X2.....	42
HQ6025xH5.....	98	IXBH16N170.....	69	IXBX55N300.....	69	IXFA36N20X3.....	38
HS4040xAQx.....	95	IXBH16N170A.....	69	IXBX64N250.....	69	IXFA36N30P3.....	36
I		IXBH16N360HV.....	9	IXBX75N170.....	69	IXFA38N30X3.....	40
ITF40PF1200DHGTLB.....	14	IXBH20N360HV.....	9	IXBX75N170A.....	69	IXFA44N25X3.....	39
ITF40PG1200DHGLB.....	14	IXBH22N300HV.....	9, 69	IXCH36N250.....	69	IXFA50N20X3.....	38
		IXBH24N170.....	69	IXCK36N250.....	69	IXFA56N30X3.....	40

IXFA60N25X3	39	IXFH12N65X2	41	IXFH30N85X	43	IXFH110N25T	26
IXFA72N20X3	38	IXFH12N80P	34	IXFH32N100X	43	IXFH120N15P	32
IXFA72N30X3	40	IXFH12N90P	34	IXFH34N50P3	36	IXFH120N20P	32
IXFA76N15T2	29	IXFH12N100P	35	IXFH34N65X2	42	IXFH120N25T	26
IXFA80N25X3	39	IXFH12N120P	35	IXFH36N50P	33	IXFH120N25X3	39
IXFA90N20X3	38	IXFH14N60P	33	IXFH36N60P	33	IXFH120N30X3	40
IXFA102N15T	26	IXFH14N60P3	37	IXFH40N85X	43	IXFH140N10P	32
IXFA110N15T2	29	IXFH14N80P	34	IXFH42N60P3	37	IXFH140N20X3	39
IXFA130N10T	26	IXFH14N85X	43	IXFH44N50P	33	IXFH150N15P	32
IXFA130N10T2	28	IXFH15N100P	35	IXFH44N50Q3	44	IXFH150N17T2	29
IXFA180N10T2	28	IXFH15N100Q3	44	IXFH46N30T	26	IXFH150N20T	26
IXFA230N075T2	28	IXFH16N50P	33	IXFH46N65X2	42	IXFH150N25X3	39
IXFB30N120P	35	IXFH16N50P3	36	IXFH50N30Q3	44	IXFH150N30X3	40
IXFB40N110P	35	IXFH16N60P3	37	IXFH50N60P3	37	IXFH160N15T	26
IXFB40N110Q3	44	IXFH16N80P	34	IXFH50N85X	43	IXFH160N15T2	29
IXFB44N100P	35	IXFH16N120P	35	IXFH52N30P	32	IXFH170N10P	32
IXFB44N100Q3	44	IXFH18N60P	33	IXFH56N30X3	40	IXFH170N25X3	39
IXFB52N90P	34	IXFH18N65X2	41	IXFH60N50P3	36	IXFH180N20X3	39
IXFB60N80P	34	IXFH18N90P	34	IXFH60N65X2	42	IXFH220N20X3	39
IXFB62N80Q3	44	IXFH18N100Q3	44	IXFH69N30P	32	IXFH230N10T	26
IXFB70N100X	43	IXFH20N50P3	36	IXFH70N20Q3	44	IXFH230N075T2	28
IXFB82N60P	33	IXFH20N80P	34	IXFH70N30Q3	44	IXFH320N10T2	28
IXFB82N60Q3	44	IXFH20N85X	43	IXFH72N30X3	40	IXFH340N075T2	28
IXFB90N85X	43	IXFH20N100P	35	IXFH74N20P	32	IXFH400N075T2	28
IXFB100N50P	33	IXFH22N50P	33	IXFH80N25X3	39	IXFJ20N85X	10, 43
IXFB100N50Q3	44	IXFH22N60P	33	IXFH80N65X2	42	IXFJ26N50P3	10, 36
IXFB110N60P3	37	IXFH22N60P3	37	IXFH86N30T	26	IXFJ80N25X3	10, 39
IXFB132N50P3	36	IXFH22N65X2	41	IXFH88N30P	33	IXFK20N120P	35
IXFB150N65X2	42	IXFH24N80P	34	IXFH90N20X3	38	IXFK24N80P	34
IXFB170N30P	33	IXFH24N90P	34	IXFH94N30P3	36	IXFK24N100Q3	44
IXFB210N20P	32	IXFH26N50P	33	IXFH94N30T	26	IXFK26N100P	35
IXFB210N30P3	36	IXFH26N50P3	36	IXFH96N15P	32	IXFK26N120P	35
IXFB300N10P	32	IXFH26N60P	33	IXFH96N20P	32	IXFK32N80P	34
IXFH5N100P	35	IXFH26N100X	43	IXFH100N25P	32	IXFK32N80Q3	44
IXFH6N120P	35	IXFH28N60P3	37	IXFH100N30X3	40	IXFK32N90P	34
IXFH7N100P	35	IXFH30N50P	33	IXFH102N15T	26	IXFK32N100P	35
IXFH10N80P	34	IXFH30N50Q3	44	IXFH110N10P	32	IXFK32N100Q3	44
IXFH10N100P	35	IXFH30N60P	33	IXFH110N15T2	29	IXFK32N100X	43

IXFK IXFN IXP Index

IXFK36N60P..... 33	IXFK170N25X3 39	IXFN40N110Q3 44	IXFN170N30P 33
IXFK40N90P..... 34	IXFK180N15P..... 32	IXFN44N80P 34	IXFN170N65X2..... 42
IXFK44N50P..... 33	IXFK180N25T..... 26	IXFN44N80Q3..... 44	IXFN180N15P 32
IXFK44N80P..... 34	IXFK200N10P..... 32	IXFN44N100P 35	IXFN180N25T 26
IXFK44N80Q3..... 44	IXFK210N30X3 40	IXFN44N100Q3..... 44	IXFN200N10P 32
IXFK48N60P..... 33	IXFK220N15P..... 32	IXFN48N60P 33	IXFN210N20P 32
IXFK48N60Q3 44	IXFK220N17T2..... 29	IXFN52N90P 34	IXFN210N30P3 36
IXFK50N85X 43	IXFK220N20X3 39	IXFN52N100X 43	IXFN210N30X3..... 40
IXFK52N100X 43	IXFK230N20T..... 26	IXFN56N90P 34	IXFN220N20X3..... 39
IXFK64N50P..... 33	IXFK240N15T2..... 29	IXFN60N80P 34	IXFN230N20T 26
IXFK64N50Q3 44	IXFK240N25X3 39	IXFN62N80Q3..... 44	IXFN240N15T2 29
IXFK64N60P..... 33	IXFK250N10P..... 32	IXFN64N50P 33	IXFN240N25X3..... 39
IXFK64N60P3..... 37	IXFK300N20X3 39	IXFN64N60P 33	IXFN300N10P 32
IXFK64N60Q3 44	IXFK320N17T2..... 29	IXFN66N85X..... 43	IXFN300N20X3..... 39
IXFK66N85X 43	IXFK360N10T..... 26	IXFN70N100X 43	IXFN320N17T2 29
IXFK78N50P3..... 36	IXFK360N15T2..... 29	IXFN74N100X 43	IXFN360N10T 26
IXFK80N50P..... 33	IXFK420N10T..... 26	IXFN75N120SK..... 55	IXFN360N15T2 29
IXFK80N50Q3 44	IXFK520N075T2..... 28	IXFN80N50P 33	IXFN420N10T 26
IXFK80N60P3..... 37	IXFL32N120P 35	IXFN80N50Q3..... 44	IXFN520N075T2 28
IXFK80N65X2 42	IXFL38N100P 35	IXFN80N60P3 37	IXFP4N85X 43
IXFK88N30P..... 33	IXFL44N100P 35	IXFN82N60P 33	IXFP4N85XM 43
IXFK98N50P3..... 36	IXFL60N80P 34	IXFN82N60Q3..... 44	IXFP4N100P..... 35
IXFK100N65X2 42	IXFL82N60P 33	IXFN90N85X..... 43	IXFP5N100P..... 35
IXFK102N30P..... 33	IXFL100N50P 33	IXFN100N50P 33	IXFP6N120P..... 35
IXFK120N20P..... 32	IXFL132N50P3 36	IXFN100N50Q3..... 44	IXFP7N80P 34
IXFK120N25P..... 32	IXFL210N30P3 36	IXFN100N65X2..... 42	IXFP7N100P..... 35
IXFK120N30P3..... 36	IXFN20N120P 35	IXFN102N30P 33	IXFP8N65X2 41
IXFK120N30T..... 26	IXFN26N100P 35	IXFN110N60P3..... 37	IXFP8N85X 43
IXFK120N65X2 42	IXFN26N120P 35	IXFN110N85X 43	IXFP8N85XM 43
IXFK140N20P..... 32	IXFN30N120P 35	IXFN120N65X2..... 42	IXFP10N60P..... 33
IXFK140N25T..... 26	IXFN30N120SK..... 55	IXFN130N90SK..... 55	IXFP10N80P..... 34
IXFK140N30P..... 33	IXFN32N80P 34	IXFN132N50P3 36	IXFP12N50P..... 33
IXFK150N30P3..... 36	IXFN32N100P 35	IXFN140N20P 32	IXFP12N65X2 41
IXFK150N30X3 40	IXFN32N100Q3..... 44	IXFN140N25T 26	IXFP12N65X2M 41
IXFK160N30T..... 26	IXFN32N120P 35	IXFN140N30P 33	IXFP14N60P3..... 37
IXFK170N10P..... 32	IXFN38N100P 35	IXFN150N65X2..... 42	IXFP14N85X 43
IXFK170N20P..... 32	IXFN40N90P 34	IXFN160N30T 26	IXFP14N85XM 43
IXFK170N20T..... 26	IXFN40N110P..... 35	IXFN170N25X3..... 39	IXFP16N50P..... 33

IXFP16N50P3.....	36	IXFP130N10T.....	26	IXFR44N50P.....	33	IXFT50N60P3.....	37
IXFP16N60P3.....	37	IXFP130N10T2.....	28	IXFR44N50Q3.....	44	IXFT50N85XHV.....	7, 43
IXFP18N65X2.....	41	IXFP180N10T2.....	28	IXFR44N80P.....	34	IXFT60N50P3.....	36
IXFP18N65X2M.....	41	IXFP230N075T2.....	28	IXFR48N60P.....	33	IXFT60N65X2HV.....	7, 42
IXFP20N50P3.....	36	IXFQ8N85X.....	43	IXFR48N60Q3.....	44	IXFT69N30P.....	32
IXFP20N85X.....	43	IXFQ20N50P3.....	36	IXFR64N50P.....	33	IXFT70N20Q3.....	44
IXFP22N60P3.....	37	IXFQ22N60P3.....	37	IXFR64N50Q3.....	44	IXFT70N30Q3.....	44
IXFP22N65X2.....	41	IXFQ26N50P3.....	36	IXFR64N60P.....	33	IXFT80N65X2HV.....	7, 42
IXFP22N65X2M.....	41	IXFQ28N60P3.....	37	IXFR64N60Q3.....	44	IXFT86N30T.....	26
IXFP26N30X3.....	40	IXFQ34N50P3.....	36	IXFR80N50P.....	33	IXFT88N30P.....	33
IXFP26N50P3.....	36	IXFQ50N60P3.....	37	IXFR80N50Q3.....	44	IXFT94N30P3.....	36
IXFP30N25X3.....	39	IXFQ60N25X3.....	39	IXFR80N60P3.....	37	IXFT94N30T.....	26
IXFP30N25X3M.....	39	IXFQ60N50P3.....	36	IXFR102N30P.....	32	IXFT96N20P.....	32
IXFP34N65X2.....	42	IXFQ72N20X3.....	38	IXFR140N20P.....	32	IXFT100N30X3HV.....	7, 40
IXFP34N65X2M.....	42	IXFQ72N30X3.....	40	IXFR140N30P.....	32	IXFT120N15P.....	32
IXFP36N20X3.....	38	IXFQ80N25X3.....	39	IXFR180N15P.....	32	IXFT120N25T.....	26
IXFP36N20X3M.....	38	IXFQ90N20X3.....	38	IXFR200N10P.....	32	IXFT120N25X3HV.....	7, 39
IXFP36N30P3.....	36	IXFQ94N30P3.....	36	IXFR230N20T.....	26	IXFT120N30X3HV.....	7, 40
IXFP38N30X3.....	40	IXFQ120N25X3.....	39	IXFT14N80P.....	34	IXFT140N10P.....	32
IXFP38N30X3M.....	40	IXFQ140N20X3.....	39	IXFT15N100Q3.....	44	IXFT140N20X3HV.....	7, 39
IXFP44N25X3.....	39	IXFR15N100Q3.....	44	IXFT16N80P.....	34	IXFT150N17T2.....	29
IXFP44N25X3M.....	39	IXFR16N120P.....	35	IXFT16N120P.....	35	IXFT150N20T.....	26
IXFP50N20X3.....	38	IXFR18N90P.....	34	IXFT18N100Q3.....	44	IXFT150N25X3HV.....	7, 39
IXFP50N20X3M.....	38	IXFR20N80P.....	34	IXFT20N100P.....	35	IXFT150N30X3HV.....	7, 40
IXFP56N30X3.....	40	IXFR20N120P.....	35	IXFT24N80P.....	34	IXFT170N25X3HV.....	7, 39
IXFP56N30X3M.....	40	IXFR24N80P.....	34	IXFT24N90P.....	34	IXFT180N20X3HV.....	7, 39
IXFP60N25X3.....	39	IXFR24N90P.....	34	IXFT26N60P.....	33	IXFT220N20X3HV.....	7, 39
IXFP60N25X3M.....	39	IXFR24N100Q3.....	44	IXFT26N100XHV.....	7, 43	IXFT320N10T2.....	28
IXFP72N20X3.....	38	IXFR26N100P.....	35	IXFT30N50Q3.....	44	IXFT340N075T2.....	28
IXFP72N20X3M.....	38	IXFR26N120P.....	35	IXFT30N85XHV.....	7, 43	IXFT400N075T2.....	28
IXFP72N30X3.....	40	IXFR30N60P.....	33	IXFT32N100XHV.....	7, 43	IXFX20N120P.....	35
IXFP72N30X3M.....	40	IXFR32N80P.....	34	IXFT36N50P.....	33	IXFX24N100Q3.....	44
IXFP76N15T2.....	29	IXFR32N80Q3.....	44	IXFT36N60P.....	33	IXFX26N100P.....	35
IXFP80N25X3.....	39	IXFR32N100P.....	35	IXFT40N85XHV.....	7, 43	IXFX26N120P.....	35
IXFP90N20X3.....	38	IXFR32N100Q3.....	44	IXFT44N50P.....	33	IXFX32N80P.....	34
IXFP90N20X3M.....	38	IXFR36N50P.....	33	IXFT44N50Q3.....	44	IXFX32N80Q3.....	44
IXFP102N15T.....	26	IXFR36N60P.....	33	IXFT46N30T.....	26	IXFX32N90P.....	34
IXFP110N15T2.....	29	IXFR40N90P.....	34	IXFT50N30Q3.....	44	IXFX32N100P.....	35

202

IXTA15P15T	52	IXTA94N20X4	39	IXTH02N250	45	IXTH32P20T	52
IXTA16N50P	31	IXTA96P085T	52	IXTH2N300P3HV	9, 45	IXTH34N65X2	41
IXTA18P10T	52	IXTA100N04T2	27	IXTH02N450HV	9, 45	IXTH36N50P	31
IXTA20N65X2	41	IXTA100N15X4	38	IXTH2R4N120P	31	IXTH36P15P	51
IXTA24N65X2	41	IXTA110N055T2	27	IXTH3N100P	31	IXTH38N30L2	48
IXTA24P085T	52	IXTA120N04T2	27	IXTH3N120	46	IXTH40N50L2	48
IXTA26P10T	52	IXTA120N075T2	27	IXTH3N150	46	IXTH44N25L2	48
IXTA26P20P	51	IXTA120P065T	52	IXTH3N200P3HV	9, 45	IXTH44P15T	52
IXTA28P065T	52	IXTA130N10T	25	IXTH4N100L	47	IXTH48N65X2	41
IXTA30N25L2	48	IXTA130N15X4	38	IXTH4N150	46	IXTH48P20P	51
IXTA30N65X2	41	IXTA140N055T2	27	IXTH04N300P3HV	9, 45	IXTH50N30L2	48
IXTA32P05T	52	IXTA140P05T	52	IXTH05N250P3HV	9, 45	IXTH52P10P	51
IXTA32P20T	52	IXTA150N15X4	38	IXTH6N50D2	49	IXTH58N25L2	48
IXTA34N65X2	41	IXTA160N04T2	27	IXTH6N100D2	49	IXTH60N20L2	48
IXTA36N30P	30	IXTA170N075T2	27	IXTH6N120	46	IXTH60N20X4	39
IXTA36P15P	51	IXTA180N10T	25	IXTH6N150	46	IXTH62N65X2	41
IXTA42N25P	30	IXTA200N055T2	27	IXTH10N100D2	49	IXTH64N10L2	48
IXTA44P15T	52	IXTA220N04T2	27	IXTH10P50P	51	IXTH68P20T	52
IXTA48N20T	25	IXTA230N075T2	27	IXTH12N65X2	41	IXTH75N10L2	48
IXTA48P05T	52	IXTA260N055T2	27	IXTH12N70X2	43	IXTH76N25T	25
IXTA50N20P	30	IXTA300N04T2	27	IXTH12N100L	47	IXTH76P10T	52
IXTA50N25T	25	IXTB30N100L	47	IXTH15N50L2	48	IXTH80N20L	47
IXTA52P10P	51	IXTF1N250	45	IXTH16N20D2	49	IXTH80N65X2	41
IXTA60N10T	25	IXTF1N450	18, 45	IXTH16N50D2	49	IXTH80N075L2	48
IXTA60N20T	25	IXTF1R4N450	18, 45	IXTH16P60P	51	IXTH86N25T	25
IXTA60N20X4	39	IXTF2N300P3	18, 45	IXTH20N65X2	41	IXTH88N30P	31
IXTA62N15P	30	IXTF02N450	18, 45	IXTH20P50P	51	IXTH90P10P	51
IXTA64N10L2	48	IXTF6N200P3	18, 45	IXTH22N50P	31	IXTH94N20X4	39
IXTA70N075T2	27	IXTF200N10T	18, 25	IXTH24N50L	47	IXTH96N20P	30
IXTA75N10P	30	IXTH1N170DHV	49	IXTH24N65X2	41	IXTH96N25T	25
IXTA76N25T	25	IXTH1N200P3	45	IXTH26N60P	31	IXTH96P085T	52
IXTA76P10T	52	IXTH1N200P3HV	9, 45	IXTH26P20P	51	IXTH110N10L2	48
IXTA80N12T2	27	IXTH1N250	45	IXTH30N25L2	48	IXTH110N25T	25
IXTA80N075L2	48	IXTH1N300P3HV	9, 45	IXTH30N50L2	48	IXTH120N20X4	39
IXTA86N20T	25	IXTH1N450HV	9, 45	IXTH30N50P	31	IXTH120P065T	52
IXTA86N20X4	39	IXTH1R4N250P3	45	IXTH30N60L2	48	IXTH130N10T	25
IXTA90N055T2	27	IXTH2N150L	47	IXTH30N60P	31	IXTH130N15X4	38
IXTA90N075T2	27	IXTH2N170D2	49	IXTH30N65X2	41	IXTH130N20T	25

2000

IXTP86N20T.....	25	IXTQ30N60P	31	IXTQ150N15P	30	IXTT30N60L2.....	48
IXTP86N20X4	39	IXTQ32P20T.....	52	IXTQ170N10P	30	IXTT34N65X2HV	7, 41
IXTP90N055T2.....	27	IXTQ34N65X2M	41	IXTQ180N10T	25	IXTT36N50P.....	31
IXTP90N075T2.....	27	IXTQ36N30P	30	IXTQ200N10T	25	IXTT38N30L2.....	48
IXTP94N20X4	39	IXTQ36N50P	31	IXTR16P60P.....	51	IXTT40N50L2.....	48
IXTP96P085T	52	IXTQ36P15P.....	51	IXTR20P50P.....	51	IXTT44N25L2HV	7, 48
IXTP100N04T2.....	27	IXTQ40N50L2	48	IXTR32P60P.....	51	IXTT48P20P	51
IXTP100N15X4	38	IXTQ42N25P	30	IXTR36P15P.....	51	IXTT52N30P.....	30
IXTP110N055T2	27	IXTQ44N50P	31	IXTR40P50P.....	51	IXTT60N20L2.....	48
IXTP120N04T2.....	27	IXTQ44P15T.....	52	IXTR48P20P.....	51	IXTT64N25P.....	30
IXTP120N20X4	39	IXTQ48N20T	25	IXTR68P20T.....	52	IXTT68P20T	52
IXTP120N075T2.....	27	IXTQ48N65X2M	41	IXTR90P20P.....	51	IXTT69N30P.....	31
IXTP120P065T	52	IXTQ50N20P	30	IXTR102N65X2	41	IXTT74N20P.....	30
IXTP130N10T.....	25	IXTQ50N25T	25	IXTR120P20T.....	52	IXTT75N10L2.....	48
IXTP130N15X4	38	IXTQ52N30P	30	IXTR140P10T	52	IXTT80N20L.....	47
IXTP140N055T2.....	27	IXTQ52P10P.....	51	IXTR170P10P	51	IXTT82N25P.....	30
IXTP140P05T	52	IXTQ60N10T	25	IXTR200N10P	30	IXTT88N30P.....	31
IXTP150N15X4	38	IXTQ60N20L2	48	IXTR210P10T	52	IXTT90P10P	51
IXTP160N04T2.....	27	IXTQ60N20T	25	IXTT1N250HV	7, 45	IXTT96N15P.....	30
IXTP170N13X4	38	IXTQ62N15P	30	IXTT1N300P3HV	7, 45	IXTT96N20P.....	30
IXTP170N075T2.....	27	IXTQ64N25P	30	IXTT1N450HV.....	7, 45	IXTT100N25P.....	30
IXTP180N10T.....	25	IXTQ69N30P	31	IXTT2N170D2	49	IXTT110N10L2.....	48
IXTP200N055T2	27	IXTQ74N20P	30	IXTT2N300P3HV	7, 45	IXTT110N10P	30
IXTP220N04T2.....	27	IXTQ75N10P	30	IXTT02N450HV.....	7, 45	IXTT120N15P.....	30
IXTP230N075T2.....	27	IXTQ76N25T	25	IXTT3N200P3HV	7, 45	IXTT140N10P.....	30
IXTP260N055T2.....	27	IXTQ82N25P	30	IXTT4N150HV.....	7, 46	IXTT140N075L2HV	7, 48
IXTP300N04T2	27	IXTQ86N20T	25	IXTT6N120.....	46	IXTT140P10T	52
IXTQ10P50P.....	51	IXTQ86N25T	25	IXTT6N150.....	46	IXTT170N10P.....	30
IXTQ14N60P	31	IXTQ88N30P	31	IXTT10N100D2	49	IXTT220N20X4HV	39
IXTQ16N50P	31	IXTQ96N15P	30	IXTT12N150HV.....	7, 46	IXTT240N15X4HV	7, 38
IXTQ18N60P	31	IXTQ96N20P	30	IXTT16N20D2	49	IXTT360N055T2.....	27
IXTQ22N50P	31	IXTQ96N25T	25	IXTT16N50D2	49	IXTT440N055T2.....	27
IXTQ22N60P	31	IXTQ100N25P	30	IXTT16P60P.....	51	IXTT500N04T2	27
IXTQ26N50P	31	IXTQ110N10P.....	30	IXTT20P50P.....	51	IXTU4N70X2.....	43
IXTQ26P20P.....	51	IXTQ120N15P	30	IXTT26N50P.....	31	IXTU8N70X2.....	43
IXTQ30N50L2	48	IXTQ120N20P	30	IXTT26N60P.....	31	IXTX1R4N450HV	9, 45
IXTQ30N50P	31	IXTQ130N10T	25	IXTT30N50L2.....	48	IXTX3N250L	47
IXTQ30N60L2	48	IXTQ140N10P	30	IXTT30N50P.....	31	IXTX4N300P3HV	9, 45

IXTX IXTY IXXK IXXN IXXQ IXXR IXXX IXYA IXYH

IXTX5N250 45	IXTY10P15T 52	IXXK110N65B4H1 62	IXYA20N65C3 61
IXTX6N200P3HV 9, 45	IXTY15P15T 52	IXXK160N65B4 62	IXYA20N65C3D1 61
IXTX8N150L 47	IXTY18P10T 52	IXXK160N65C4 62	IXYA20N120A4HV 6, 63
IXTX17N120L 47	IXTY26P10T 52	IXXK200N60B3 60	IXYA20N120B4HV 6, 63
IXTX22N100L 47	IXTY32P05T 52	IXXK200N60C3 60	IXYA20N120C3HV 6, 65
IXTX32P60P 51	IXTY44N10T 25	IXXK200N65B4 62	IXYA20N120C4HV 6, 63
IXTX40P50P 51	IXTY48P05T 52	IXXK300N60B3 60	IXYA30N120A4HV 6, 63
IXTX46N50L 47	IXTY90N055T2 27	IXXK300N60C3 60	IXYA50N65C3 61
IXTX60N50L2 48	IXTZ550N055T2 27	IXXN100N60B3H1 60	IXYB82N120C3H1 65
IXTX80N30L2 48	IXXA50N60B3 60	IXXN110N65B4H1 62	IXYF16N250CV1 18, 64
IXTX90N25L2 48	IXXH30N60B3 60	IXXN110N65C4H1 62	IXYF20N400C 68
IXTX90P20P 51	IXXH30N60B3D1 60	IXXN200N60B3 60	IXYF30N170CV1 18, 64
IXTX102N65X2 41	IXXH30N60C3 60	IXXN200N60B3H1 60	IXYF30N400 68
IXTX110N20L2 48	IXXH30N60C3D1 60	IXXN200N60C3H1 60	IXYF30N400V1 68
IXTX120P20T 52	IXXH30N65B4 62	IXXN200N65A4 62	IXYF30N450 18, 68
IXTX170P10P 51	IXXH40N65B4 62	IXXN340N65B4 62	IXYF40N450 18, 68
IXTX200N10L2 48	IXXH40N65B4H1 62	IXXP12N65B4 62	IXYH8N250CHV 9, 64
IXTX210P10T 52	IXXH50N60B3 60	IXXP12N65B4D1 62	IXYH8N250CV1HV 9, 64
IXTX240N075L2 48	IXXH50N60B3D1 60	IXXP50N60B3 60	IXYH10N170C 64
IXTX400N15X4 38	IXXH50N60C3 60	IXXQ30N60B3M 60	IXYH10N170CV1 64
IXTX550N055T2 27	IXXH50N60C3D1 60	IXXR100N60B3H1 60	IXYH12N250CHV 9, 64
IXTX600N04T2 27	IXXH60N65B4 62	IXXR110N65B4H1 62	IXYH12N250CV1HV 9, 64
IXTY1N100P 31	IXXH60N65B4H1 62	IXXX100N60B3H1 60	IXYH16N170C 64
IXTY1R4N100P 31	IXXH60N65C4 62	IXXX100N60C3H1 60	IXYH16N170CV1 64
IXTY1R4N120P 31	IXXH75N60B3 60	IXXX110N65B4H1 62	IXYH16N250CV1HV 9, 64
IXTY1R4N120PHV 5, 31	IXXH75N60B3D1 60	IXXX140N65B4H1 62	IXYH20N65B3 61
IXTY1R6N50D2 49	IXXH75N60C3 60	IXXX160N65B4 62	IXYH20N65C3 61
IXTY1R6N100D2 49	IXXH75N60C3D1 60	IXXX160N65C4 62	IXYH20N120C3 65
IXTY2N65X2 41	IXXH80N65B4 62	IXXX200N60B3 60	IXYH20N120C3D1 65
IXTY2N100P 31	IXXH80N65B4H1 62	IXXX200N60C3 60	IXYH24N90C3 65
IXTY02N120P 31	IXXH100N60B3 60	IXXX200N65B4 62	IXYH24N90C3D1 65
IXTY4N65X2 41	IXXH100N60C3 60	IXXX300N60B3 60	IXYH24N170C 64
IXTY4N70X2 43	IXXH110N65B4 62	IXXX300N60C3 60	IXYH24N170CV1 64
IXTY08N50D2 49	IXXH110N65C4 62	IXYA8N90C3D1 65	IXYH25N250CHV 9, 64
IXTY8N65X2 41	IXXH140N65B4 62	IXYA8N250CHV 6, 64	IXYH30N65C3 61
IXTY8N70X2 43	IXXH140N65C4 62	IXYA12N250CHV 6, 64	IXYH30N65C3H1 61
IXTY08N100D2 49	IXXK100N60B3H1 60	IXYA15N65C3D1 61	IXYH30N120A4 63
IXTY08N100P 31	IXXK100N60C3H1 60	IXYA20N65B3 61	IXYH30N120B4 63

IXYH30N120C3..... 65	IXYH100N65C3..... 61	IXYN300N65A3 61	IXYX110N120A4 63
IXYH30N120C3D1 65	IXYH120N65A5..... 62	IXYP8N90C3 65	IXYX110N120B4 63
IXYH30N120C4..... 63	IXYH120N65B3..... 61	IXYP8N90C3D1..... 65	IXYX110N120C4 63
IXYH30N170C..... 64	IXYH120N65C3..... 61	IXYP10N65C3 61	IXYX120N120B3..... 65
IXYH30N450HV 9, 68	IXYK30N170CV1..... 64	IXYP15N65C3 61	IXYX120N120C3..... 65
IXYH40N65B3..... 61	IXYK85N120C4H1 63	IXYP15N65C3D1..... 61	IXYX140N90C3..... 65
IXYH40N65B3D1 61	IXYK100N65C3D1 61	IXYP20N65B3 61	IXYX140N120A4..... 63
IXYH40N65C3..... 61	IXYK100N120B3 65	IXYP20N65C3D1..... 61	IXYX200N65B3..... 61
IXYH40N65C3H1 61	IXYK100N120C3 65	IXYP20N120A4..... 63	IXYX300N65A3 61
IXYH40N90C3..... 65	IXYK110N120A4 63	IXYP20N120B4 63	IXYY8N90C3 65
IXYH40N90C3D1 65	IXYK110N120B4 63	IXYP20N120C3 65	K
IXYH40N120A4..... 63	IXYK110N120C4..... 63	IXYP20N120C4 63	K2xx0yHU..... 98
IXYH40N120B3..... 65	IXYK120N120B3 65	IXYP30N65C3 61	K0443LC600..... 146
IXYH40N120B3D1 65	IXYK120N120C3 65	IXYP30N120A4..... 63	K0443LC650..... 146
IXYH40N120B4..... 63	IXYK140N90C3..... 65	IXYP30N120C3 65	K0769NC600 146
IXYH40N120B4H1 63	IXYK140N120A4..... 63	IXYP50N65C3 61	K0769NC650 146
IXYH40N120C3..... 65	IXYK200N65B3..... 61	IXYP60N65A5..... 62	K0890NC360 146
IXYH40N120C3D1 65	IXYK300N65A3..... 61	IXYQ40N65C3D1..... 61	K0890NC420 146
IXYH40N120C4..... 63	IXYL40N250CV1 64	IXYR50N120C3D1 65	K1121NC320 146
IXYH40N120C4H1 63	IXYL50N170CV1 64	IXYR100N120C3 65	K1121NC360 146
IXYH50N65C3..... 61	IXYL60N450..... 68	IXYT12N250CV1HV 7, 64	K1197NC280..... 146
IXYH50N65C3H1 61	IXYN30N170CV1 64	IXYT20N120C3D1HV..... 7, 65	K1197NC320..... 146
IXYH50N120C3..... 65	IXYN50N170CV1 64	IXYT25N250CHV 7, 64	K1351VF600..... 146
IXYH50N120C3D1 65	IXYN80N90C3H1 65	IXYT30N65C3H1HV..... 7, 61	K1351VF620..... 146
IXYH55N120A4..... 63	IXYN82N120C3..... 65	IXYT30N450HV..... 7, 68	K1351VF640..... 146
IXYH55N120B4H1 63	IXYN82N120C3H1 65	IXYT40N120A4HV 7, 63	K1351VF650..... 146
IXYH55N120C4..... 63	IXYN85N120C4H1 63	IXYT55N120A4HV 7, 63	K1947ZC400..... 146
IXYH55N120C4H1 63	IXYN100N65A3 61	IXYT80N90C3 65	K1947ZC450..... 147
IXYH60N90C3..... 65	IXYN100N65C3H1 61	IXYT85N120A4HV 7, 63	K1947ZD400 147
IXYH75N65C3..... 61	IXYN100N120B3H1 65	IXYX25N250CV1 64	K1947ZD450..... 147
IXYH75N65C3H1 61	IXYN100N120C3..... 65	IXYX25N250CV1HV 9, 64	K2095ZC360..... 147
IXYH80N90C3..... 65	IXYN100N120C3H1 65	IXYX30N170CV1 64	K2095ZC420..... 147
IXYH82N120C3..... 65	IXYN110N120A4 63	IXYX40N250CHV..... 9, 64	K2095ZD360 147
IXYH85N120A4..... 63	IXYN110N120B4H1..... 63	IXYX40N450HV 9, 68	K2095ZD420 147
IXYH85N120C4..... 63	IXYN110N120C4 63	IXYX50N170C..... 64	Kxxx0yH..... 98
IXYH90N65A5..... 62	IXYN110N120C4H1..... 63	IXYX100N65C3D1 61	Kxxx0yU 98
IXYH100N65A3..... 61	IXYN120N120C3..... 65	IXYX100N120B3..... 65	Kxxx1G 98
IXYH100N65B3..... 61	IXYN140N120A4..... 63	IXYX100N120C3..... 65	Kxxx1GL 98

2025 uS eSIP nu e Inde

Kxxxxzy.....	98	M0130RL250.....	133	M0334RJ120.....	133	M0759YH120.....	134
L		M0130RM200.....	133	M0334RJ200.....	133	M0759YH160.....	134
L01.....	97	M0130RM250.....	133	M0334SC120.....	133	M0790YC200.....	131
L0001HC600XXX.....	163	M0130SL200.....	133	M0334SC200.....	133	M0790YC250.....	131
L0001NC600XXX.....	163	M0130SL250.....	133	M0334SJ120.....	133	M0790YH200.....	131
L0001QC600XXX.....	163	M0130SM200.....	133	M0334SJ200.....	133	M0790YH250.....	131
L0001TC600XXX.....	163	M0130SM250.....	133	M0336RA120.....	133	M0859LC140.....	134
L0001YC600XXX.....	163	M0139RL120.....	133	M0336RA140.....	133	M0859LC180.....	134
L0001ZF600XXX.....	163	M0139RL180.....	133	M0336SA120.....	133	M0863LC260.....	135
LJxx04xx.....	98	M0139RM120.....	133	M0336SA140.....	133	M0863LC300.....	135
LJxx06xx.....	98	M0139RM180.....	133	M0347WC160.....	134	M0863LC360.....	135
LJxx08xx.....	98	M0139SL120.....	133	M0347WC200.....	134	M0872LC140.....	135
LKK47.....	53	M0139SL180.....	133	M0347WC250.....	134	M0872LC180.....	135
LSIC1MO170E0750.....	54	M0139SM120.....	133	M0358WC120.....	134	M0872LC210.....	135
LSIC1MO170H0750.....	54	M0139SM180.....	133	M0358WC180.....	134	M0914LC200.....	131
LSIC1MO170T0750.....	54	M0225YH300.....	134	M0367WC140.....	134	M0914LC250.....	131
LSIC2SB170B10A.....	85	M0225YH360.....	134	M0367WC220.....	134	M0955LC200.....	135
LSIC2SB170B25A.....	85	M0225YH450.....	134	M0367WC280.....	134	M0955LC250.....	135
LSIC2SD065D10A.....	5, 85	M0268RC200.....	133	M0371YH350.....	134	M1010NC400.....	131
LSIC2SD065D20A.....	5	M0268RC250.....	133	M0371YH450.....	134	M1010NC450.....	131
LSIC2SD065D40CC.....	85	M0268RJ200.....	133	M0433WC120.....	134	M1010ND400.....	131
LSIC2SD065E40CCA.....	85	M0268RJ250.....	133	M0433WC160.....	134	M1010ND450.....	131
LSIC2SD120D10A.....	5, 85	M0268SC200.....	133	M0433WC200.....	134	M1022LC120.....	135
LSIC2SD120D20A.....	85	M0268SC250.....	133	M0437WC080.....	134	M1022LC160.....	135
LSIC2SD120N40PA.....	85	M0268SJ200.....	133	M0437WC140.....	134	M1022LC200.....	135
LSIC2SD120N80PA.....	85	M0268SJ250.....	133	M0451YC120.....	134	M1080LC100.....	135
LSIC2SD120N120PA.....	85	M0280RC200.....	133	M0451YC160.....	134	M1080LC120.....	135
Lx01Ex.....	97	M0280RC250.....	133	M0451YC200.....	134	M1102NC500.....	135
LX8.....	97	M0280RJ200.....	133	M0588LC400.....	131	M1102NC600.....	135
LX507MBB.....	97	M0280RJ250.....	133	M0588LC450.....	131	M1102ND500.....	135
LxNx.....	97	M0280SC200.....	133	M0659LC400.....	134	M1102ND600.....	135
Lxx04xx.....	97	M0280SC250.....	133	M0659LC450.....	134	M1104NC400.....	135
Lxx06xx.....	97	M0280SJ200.....	133	M0710LC560.....	134	M1104NC450.....	135
LxX8Ex.....	97	M0280SJ250.....	133	M0710LC600.....	134	M1104ND400.....	135
Lxx08xx.....	97	M0310YH300.....	134	M0736LC400.....	134	M1104ND450.....	135
LxXx.....	97	M0310YH350.....	134	M0736LC450.....	134	M1163NC400.....	131
M		M0334RC120.....	133	M0759YC120.....	134	M1163NC450.....	131
M0130RL200.....	133	M0334RC200.....	133	M0759YC160.....	134	M1163ND400.....	131

M1163ND450	131	M2322ZD400	135	MBR1060CTL	74	MCC72	111
M1242NC260	135	M2325HA400	131	MBR2060CT	74	MCC94	111
M1242NC360	135	M2325HA450	131	MBR6045WT	74	MCC95	111
M1242ND260	135	M2408NC020	131	MBR10100CT	74	MCC132	111
M1242ND360	135	M2408NC060	131	MBR10150CT	75	MCC161	111
M1494NC160	135	M2408ND020	131	MBR10200CT	75	MCC162	111
M1494NC250	135	M2408ND060	131	MBR20100CTP	74	MCC200	112
M1494ND160	135	M2413VC200	135	MBR20150CT	75	MCC224	112
M1494ND250	135	M2413VC250	135	MBR40100WT	74	MCC225	112
M1494NK160	135	M2413VF200	135	MBRB1060CT	74	MCC255	112
M1494NK250	135	M2413VF250	135	MBRB2060CT	74	MCC310	112
M1502NC200	131	M2505MC220	135	MBRB10100CT	74	MCC312	112
M1502NC250	131	M2505MC250	135	MBRB20100CT	74	MCD26	107
M1502ND200	131	M2639ZC360	131	MBRD10100CT	74	MCD40	107
M1502ND250	131	M2639ZC420	131	MBRD10150CT	75	MCD44	107
M1565VC400	135	M2639ZD360	131	MBRD10200CT	75	MCD56	107
M1565VC450	135	M2639ZD420	131	MBRF1060CTL	74	MCD72	107
M1565VF400	135	M2698ZC250	131	MBRF2045CT	74	MCD94	108
M1565VF450	135	M2698ZC280	132	MBRF2060CT	74	MCD95	108
M1583VC400	131	M2698ZC350	132	MBRF3060CT	74	MCD132	108
M1583VC450	131	M2698ZD250	132	MBRF10100CTL	74	MCK200	112
M1583VF400	131	M2698ZD280	132	MBRF10100CTR	74	MCL10P1200LB	55
M1583VF450	131	M2698ZD350	132	MBRF10150CTL	75	MCMA25P1200TA	110
M1609NC200	131	M2837VC180	132	MBRF10200CT	75	MCMA25P1600TA	110
M1609NC260	131	M2837VC250	132	MBRF20100CTP	74	MCMA25PD1200TB	107
M1609ND200	131	M2837VF180	132	MBRF20150CT	75	MCMA25PD1600TB	107
M1609ND260	131	M2837VF250	132	MBRF20200CT	75	MCMA35P1200TA	110
M1858NC100	135	M3560TJ420	135	MBRF20200CTR	75	MCMA35P1600TA	110
M1858NC120	135	M3560TJ450	135	MBRF30100CTP	74	MCMA35PD1200TB	107
M1858ND100	135	M3770ZC200	132	MBRF30150CT	75	MCMA35PD1600TB	107
M1858ND120	135	M3770ZC240	132	MBRF30200CT	75	MCMA50P1200TA	110
M2273VC300	131	M3770ZC300	132	MCC19	110	MCMA50P1600TA	110
M2273VC360	131	M3770ZD200	132	MCC19-08io1B	110	MCMA50PD1200TB	107
M2273VF300	131	M3770ZD240	132	MCC21	110	MCMA50PD1600TB	107
M2273VF360	131	M3770ZD300	132	MCC26	110	MCMA65P1200TA	111
M2322ZC300	135	M4305TJ240	135	MCC44	110	MCMA65P1600TA	111
M2322ZC400	135	M4305TJ280	135	MCC56	110, 111	MCMA65P1800TA	111
M2322ZD300	135	MBR1045	74	MCC56-08io8B	111	MCMA65PD1200TB	107

MCMA MCMA IP Index

MCMA65PD1600TB 107	MCMA650MT1400NKD 96	MDD56..... 104	MDMA210P1600YD 105
MCMA65PD1800TB 107	MCMA650MT1800NKD 96	MDD72..... 105	MDMA210UB1600PTED 121
MCMA85P1200TA..... 111	MCMA700P1600CA 112	MDD72-08N1B..... 105	MDMA240UB1600ED 121
MCMA85P1600TA..... 111	MCMA700P1600NCA..... 112	MDD95..... 105	MDMA280P1600YD 105
MCMA85P1800TA..... 111	MCMA700P1800CA 112	MDD142 105	MDMA280UB1600PTED 121
MCMA85PD1200TB 108	MCMA700P1800NCA..... 112	MDD172..... 105	MDMA300P1600PTSF 105
MCMA85PD1600TB 108	MCNA40P2200TA 110	MDD175..... 105	MDMA360UB1600PTED 121
MCMA85PD1800TB 108	MCNA40PD2200TB..... 107	MDD200..... 105	MDMA360UC1600TED 122
MCMA110P1200TA..... 111	MCNA55P2200TA 110	MDD255..... 105	MDMA380P1600KC 106
MCMA110P1600TA..... 111	MCNA55PD2200TB..... 107	MDD310 106	MDMA380P1800KC 106
MCMA110P1600VA 111	MCNA75P2200TA 111	MDD310-12N1 106	MDMA425P1600PTSF 106
MCMA110P1800TA..... 111	MCNA75PD2200TB..... 108	MDD312..... 106	MDMA450U1600PTEH 120
MCMA110PD1200TB 108	MCNA95P2200TA 111	MDMA25P1200TG 104	MDMA450UB1600PTED 121
MCMA110PD1600TB 108	MCNA95PD2200TB..... 108	MDMA25P1600TG 104	MDMA450UB1600PTEH 121
MCMA110PD1800TB 108	MCNA120P2200TA..... 111	MDMA25P1800TG 104	MDMA600P1600PTSF 106
MCMA140P1200TA 111	MCNA120PD2200TB..... 108	MDMA35P1200TG 104	MDMA660U1600PTEH 120
MCMA140P1400TA 111	MCNA120UI2200PED 121	MDMA35P1600TG 104	MDMA700P1600CC 106
MCMA140P1600TA 111	MCNA120UI2200TED 121	MDMA35P1800TG 104	MDMA700P1800CC 106
MCMA140P1800TA..... 111	MCNA150P2200YA 111	MDMA50P1200TG 104	MDMA900U1600PTEH 120
MCMA140PD1200TB 108	MCNA180P2200YA 112	MDMA50P1600TG 104	MDNA25P2200TG..... 104
MCMA140PD1600TB 108	MCNA220P2200YA 112	MDMA50P1800TG 104	MDNA35P2200TG..... 104
MCMA140PD1800TB 108	MCNA250P2200PTSF..... 112	MDMA60UC1600VC..... 122	MDNA50P2200TG..... 104
MCMA160P1600YA..... 111	MCNA360P2200PTSF..... 112	MDMA65P1200TG 104	MDNA65P2200TG..... 104
MCMA160P1800YA..... 111	MCNA500P2200PTSF..... 112	MDMA65P1600TG 104	MDNA85P2200TG..... 104
MCMA200P1600SA 112	MCNA650P2200CA 112	MDMA65P1800TG 104	MDNA110P2200TG..... 105
MCMA200P1600YA..... 112	MCO25..... 113	MDMA85P1200TG 104	MDNA140P2200TG 105
MCMA200P1800YA..... 112	MCO25-12io1..... 113	MDMA85P1600TG 104	MDNA180P2200YD..... 105
MCMA240UI1600ED 121	MCO50..... 113	MDMA85P1800TG 104	MDNA210P2200YD 105
MCMA240UI1600PED..... 121	MCO75..... 113	MDMA110P1200TG 105	MDNA210UB2200PTED..... 121
MCMA245UI1600ED 121	MCO100..... 113	MDMA110P1600TG 105	MDNA210UB2200TED 121
MCMA260P1600YA..... 112	MCO150..... 113	MDMA110P1800TG 105	MDNA240U2200ED 120
MCMA260P1800YA..... 112	MCO450..... 113	MDMA120U1600VA..... 119	MDNA280P2200YD..... 105
MCMA265P1600KA 112	MCO500..... 113	MDMA140P1200TG 105	MDNA280UB2200PTED..... 121
MCMA265P1800KA 112	MCO600..... 113	MDMA140P1600TG 105	MDNA300P2200PTSF..... 105
MCMA280P1600PTSF..... 112	MCR12DSx 94	MDMA140P1800TG 105	MDNA360UB2200PTED..... 121
MCMA400P1600PTSF..... 112	MDA95..... 105	MDMA150U1600VA..... 119	MDNA380P2200KC 106
MCMA450UH1600TEH 122	MDD26..... 104	MDMA180P1600YD 105	MDNA425P2200PTSF..... 106
MCMA550P1600PTSF..... 112	MDD44 104	MDMA200P1600SA 105	MDNA600P2200PTSF..... 106

MDNA660U2200PTEH 120	MIXA80W1200TEH1 99	MMIX1Y82N120C3H1 14	N0646LC300 138
MDNA700P2200CC 106	MIXA80WB1200TEH 100	MMIX1Y100N120C3H1 14	N0646LC360 138
MDO500 106	MIXA81WB1200TEH 100	MMIX2F60N50P3 13	N0676YC120 139
MDO600 106	MIXA100W1200TEH1 99	MMIX2F150N20T 13	N0676YC180 139
MEA75 84	MIXA150Q1200VA 101, 102	MMIX4B22N300 14	N0734YC120 139
MEA95 84	MIXA150R1200VA 101, 102	MMO62 123	N0734YC160 139
MEA250 84	MIXA150W1200TEH1 99	MMO62-12io6 123	N0882NC400 139
MEA300 84	MIXA225PF1200TSF 101, 102	MMO74 123	N0882NC450 139
MEE75 84	MIXA300PF1200TSF 101, 102	MMO90 123	N0910LC200 139
MEE95 84	MIXA450PF1200TSF 101, 102	MMO110 123	N0910LC260 139
MEE250 84	MIXG120W1200TEH1 99	MMO140 123	N0910LC280 139
MEE300 84	MIXG180W1200PTEH2 99	MMO175 123	N1010NC300 139
MEK75 84	MIXG180W1200TEH1 99	MMO230 123	N1010NC380 139
MEK95 84	MIXG240RF1200PTED 101, 102	MPK95 84	N1052LC200 139
MEK150-04DA 84	MIXG240RF1200TED 101, 102	MS0690J-D1TE 97	N1052LC220 139
MEK250 84	MIXG240W1200PZTEH 99	MTC120WX75GD 16	N1114LC120 139
MEK300 84	MIXG240W1200PZTEH2 99	MTI85W100GC 16	N1114LC180 139
MEK350 84	MIXG240W1200TEH1 99	MTI85WX100GD 16	N1132NC300 139
MEK600 84	MIXG360RF1200PTED 101, 102	MTI145WX100GD 16	N1132NC340 139
MEO450 84	MIXG360RF1200TED 101, 102	MUBW50 100	N1132NC360 139
MEO500 84	MKE38RK600DFELB 53, 55	MUBW50-17T8 100	N1159NC380 139
MEO550-02DA 84	MMIX1F44N100Q3 13	MUBW75 100	N1159NC420 139
MITA300RF1700PTED 101, 102	MMIX1F132N50P3 13	MXB12R600DPHFC 18, 53, 55	N1174JK200 139
MIXA10WB1200TED 100	MMIX1F160N30T 13	N	N1174JK220 139
MIXA20WB1200TED 100	MMIX1F180N25T 13	N0180SH120 138	N1263JK160 139
MIXA30W1200TED 99	MMIX1F210N30P3 13	N0180SH160 138	N1263JK180 139
MIXA30W1200TED1 99	MMIX1F230N20T 13	N0335SC120 138	N1351VC400 139
MIXA30WB1200TED 100	MMIX1F360N15T2 13	N0335SC160 138	N1351VC450 139
MIXA40W1200TED1 99	MMIX1F420N10T 13	N0392WC120 138	N1351VF400 139
MIXA40WB1200TED 100	MMIX1F520N075T2 13, 28	N0392WC160 138	N1351VF450 139
MIXA41W1200ED1 99	MMIX1H60N150V1 15	N0416SC040 138	N1366JK080 139
MIXA60HU1200VA 101, 102	MMIX1T500N20X4 13	N0416SC080 138	N1366JK120 139
MIXA60W1200TED1 99	MMIX1T550N055T2 13, 28	N0606YC200 138	N1366JK140 139
MIXA60WB1200TEH 100	MMIX1T600N04T2 13, 28	N0606YC250 138	N1449QL200 139
MIXA60WH1200TEH1 100	MMIX1X100N60B3H1 14	N0616LC400 138	N1467NC200 139
MIXA80R1200VA 101, 102	MMIX1X200N60B3 14	N0616LC450 138	N1467NC260 139
MIXA80W1200PTED1 99	MMIX1X200N60B3H1 14	N0634LC380 138	N1547NC160 139
MIXA80W1200TED1 99	MMIX1X340N65B4 14	N0634LC420 138	N1547NC200 139

2025 Littelfuse Product Index

N1581QL160.....	139	N2191ML180.....	140	N3012ZD260.....	141	N3930ZC120.....	142
N1581QL180.....	139	N2293VC180.....	140	N3022MK080.....	141	N3930ZC160.....	142
N1651QK200.....	139	N2293VC220.....	140	N3022MK120.....	141	N3930ZD120.....	142
N1651QK220.....	139	N2293VF180.....	140	N3022MK140.....	141	N3930ZD160.....	142
N1661VC300.....	139	N2293VF220.....	140	N3029ZC240.....	141	N4085ZC080.....	142
N1661VC360.....	139	N2367MK200.....	140	N3029ZC280.....	141	N4085ZC120.....	142
N1661VF300.....	139	N2367MK220.....	140	N3029ZD240.....	141	N4085ZD080.....	142
N1661VF360.....	139	N2418ZC300.....	140	N3029ZD280.....	141	N4085ZD120.....	142
N1718NC120.....	139	N2418ZC360.....	140	N3165HA260.....	141	N4165EE420.....	142
N1718NC180.....	139	N2418ZD300.....	140	N3165HA280.....	141	N4165EE450.....	142
N1718NC200.....	139	N2418ZD360.....	140	N3175HE160.....	141	N4316MK020.....	142
N1725MC360.....	140	N2500VC120.....	141	N3175HE180.....	141	N4316MK040.....	142
N1802NC120.....	140	N2500VC160.....	141	N3229QK020.....	141	N4316MK060.....	142
N1802NC160.....	140	N2500VF120.....	141	N3229QK040.....	141	N4340TE180.....	142
N1806QK160.....	140	N2500VF160.....	141	N3229QK060.....	141	N4340TE220.....	142
N1806QK180.....	140	N2520ML080.....	141	N3533ZC140.....	141	N4340TJ180.....	142
N1817QL080.....	140	N2520ML120.....	141	N3533ZC180.....	141	N4340TJ180MBR.....	156
N1817QL120.....	140	N2520ML140.....	141	N3533ZC220.....	141	N4340TJ220.....	142
N1817QL140.....	140	N2543ZC240.....	141	N3533ZD140.....	141	N4340TJ220MBR.....	156
N2015ML200.....	140	N2543ZC300.....	141	N3533ZD180.....	141	N4472HK160.....	142
N2015ML220.....	140	N2543ZD240.....	141	N3533ZD220.....	141	N4472HK180.....	142
N2055HE420.....	140	N2543ZD300.....	141	N3565HA160.....	141	N4650EA420.....	142
N2055HE450.....	140	N2593MK160.....	141	N3565HA180.....	141	N4650EA450.....	142
N2055MC260.....	140	N2593MK180.....	141	N3597ML020.....	141	N4845EE320.....	142
N2055MC280.....	140	N2600MC160.....	141	N3597ML040.....	141	N4845EE360.....	142
N2083QK080.....	140	N2600MC180.....	141	N3597ML060.....	141	N4940HK120.....	142
N2083QK120.....	140	N2825TE420.....	141	N3620TE320.....	141	N4940HK140.....	142
N2083QK140.....	140	N2825TE450.....	141	N3620TE360.....	141	N5320FE420.....	142
N2086NC060.....	140	N2825TJ420.....	141	N3620TJ320.....	141	N5320FE450.....	142
N2086NC100.....	140	N2825TJ450.....	141	N3620TJ360.....	141	N5715EE240.....	143
N2154JK020.....	140	N2830HE260.....	141	N3790TE240.....	141	N5715EE280.....	143
N2154JK040.....	140	N2830HE280.....	141	N3790TE280.....	141	N5910FA420.....	143
N2154JK060.....	140	N2900QL020.....	141	N3790TJ240.....	142	N5910FA450.....	143
N2172ZC420.....	140	N2900QL040.....	141	N3790TJ280.....	142	N6012ZD020.....	143
N2172ZC450.....	140	N2900QL060.....	141	N3880ZD160.....	142	N6012ZD040.....	143
N2172ZD420.....	140	N3012ZC200.....	141	N3880ZD180.....	142	N6012ZD060.....	143
N2172ZD450.....	140	N3012ZC260.....	141	N3904HK200.....	142	N6405EA240.....	143
N2191ML160.....	140	N3012ZD200.....	141	N3904HK220.....	142	N6405EA280.....	143

N6974HK020	143	Qxx06LT	98	R0633YC12F.....	148	R0964LC12C	149
N6974HK040	143	Qxx06LTH	98	R0717LC14G	148	R0964LC12D	149
N6974HK060	143	Qxx06xHx	97	R0717LC14H	148	R0964LC12E.....	149
N7585FE240.....	143	Qxx06xx.....	97	R0717LC16G	148	R0990LC08A	149
N7585FE280.....	143	QxX8Ex	97	R0717LC16H	148	R0990LC08B	149
N7905FE180.....	143	Qxx08LT	98	R0736LC20J.....	148	R0990LC08C	149
N7905FE220.....	143	Qxx08LTH	98	R0736LC20K	148	R1045NC28L	149
N8440FA240	143	Qxx08xHx	97	R0736LC22J.....	148	R1045NC28M.....	149
N8440FA280	143	Qxx08xx.....	97	R0736LC22K	148	R1045NC32L	149
N8800FA180	143	Qxx10LT	98	R0736LC25J.....	148	R1045NC32M.....	149
N8800FA220	143	Qxx10LTH	98	R0736LC25K	148	R1124NC18J.....	149
NYC0102B (200V)	94	Qxx10xHx	97	R0736LC25L.....	148	R1124NC18K	149
Q		Qxx10xx	97	R0736LC25M	148	R1124NC18L.....	149
Q6008LTH1LED	98	Qxx12xHx	97	R0809LC10A	148	R1124NC18M	149
Q6008xH1LED	97	Qxx15LT	98	R0809LC10B.....	148	R1124NC20J	149
Q6012LTH1LED.....	98	Qxx15LTH	98	R0830LC12C	148	R1124NC20K	149
Q6012xH1LED.....	97	Qxx15xx.....	97	R0830LC12D	148	R1124NC20L	149
Q6016LH1LED.....	97	Qxx16xHx	97	R0830LC12E.....	148	R1124NC20M	149
Q6035NAH5.....	97	Qxx25xHx	97	R0830LC12F.....	148	R1124NC21J	149
QJxx04xx.....	98	Qxx25xx.....	97	R0830LC14C	148	R1124NC21K	149
QJxx06xHx	98	Qxx30xHx	97	R0830LC14D	148	R1124NC21L	149
QJxx06xx.....	98	Qxx35xHx	97	R0830LC14E.....	148	R1124NC21M	149
QJxx08xHx	98	Qxx40xx.....	97	R0830LC14F.....	148	R1127NC32P	149
QJxx08xx.....	98	QxXx	97	R0878LC18K	148	R1127NC32R	149
QJxx10xHx	98	R		R0878LC18L.....	148	R1127NC32S	149
QJxx10xx.....	98	R0472YC12E	148	R0878LC18M	148	R1127NC32T	149
QJxx12xHx	98	R0472YC12F.....	148	R0878LC20K	148	R1127NC34R	149
QJxx16xHx	98	R0472YC16E	148	R0878LC20L.....	148	R1127NC34S	149
QJxx25xHx	98	R0472YC16F.....	148	R0878LC20M	148	R1127NC34T	149
QJxx30LH4	98	R0487YC12D	148	R0878LC21K	148	R1127NC36R	149
QJxx40xx.....	98	R0487YC12E	148	R0878LC21L.....	148	R1127NC36S	149
QSxx04xHx.....	97	R0487YC14D	148	R0878LC21M	148	R1127NC36T	149
QVxx12xHx.....	98	R0487YC14E	148	R0929LC12A	148	R1158NC26N.....	149
QVxx16xHx.....	98	R0577YC12C	148	R0929LC12B	148	R1158NC26P	149
Qx01Ex.....	97	R0577YC12D	148	R0929LC12C	148	R1158NC26T	149
QxNx.....	97	R0577YC12E	148	R0964LC10C.....	149	R1178NC14E	149
Qxx04LT	98	R0633YC12D	148	R0964LC10D	149	R1178NC14F.....	149
Qxx04xx.....	97	R0633YC12E	148	R0964LC10E.....	149	R1178NC14G	149

2025 Product Line Index

R1211NC12C.....	149	R1331NC12D.....	150	R1955MC16E.....	151	R2620ZC22L.....	151
R1211NC12D.....	149	R1446NC12C.....	150	R1955MC16F.....	151	R2620ZC25J.....	151
R1211NC12E.....	149	R1446NC12D.....	150	R2075MC12A.....	151	R2620ZC25K.....	151
R1271NC12B.....	149	R1446NC12E.....	150	R2075MC12B.....	151	R2620ZC25L.....	151
R1271NC12C.....	149	R1446NC12F.....	150	R2075MC12C.....	151	R2620ZD22J.....	151
R1271NC12D.....	149	R1448NC14H.....	150	R2295HA22F.....	151	R2620ZD22K.....	151
R1271NC12E.....	149	R1448NC14J.....	150	R2295HA22H.....	151	R2620ZD22L.....	151
R1275NC18L.....	149	R1448NC18H.....	150	R2475ZC28M.....	151	R2620ZD25J.....	151
R1275NC18M.....	149	R1448NC18J.....	150	R2475ZC28N.....	151	R2620ZD25K.....	151
R1275NC20L.....	149	R1448NC20H.....	150	R2475ZC28R.....	151	R2620ZD25L.....	151
R1275NC20M.....	149	R1448NC20J.....	150	R2475ZD28M.....	151	R2714ZC14H.....	151
R1275NC21L.....	149	R1448NC20K.....	150	R2475ZD28N.....	151	R2714ZC14J.....	151
R1275NC21M.....	149	R1448NC20L.....	150	R2475ZD28R.....	151	R2714ZC18H.....	151
R1279NC22J.....	149	R1448NC20M.....	150	R2619ZC18J.....	151	R2714ZC18J.....	151
R1279NC22K.....	149	R1605MC20E.....	150	R2619ZC18K.....	151	R2714ZC18K.....	151
R1279NC22L.....	149	R1605MC20F.....	150	R2619ZC18L.....	151	R2714ZD14H.....	151
R1279NC22M.....	149	R1605MC20G.....	150	R2619ZC20J.....	151	R2714ZD14J.....	151
R1279NC25J.....	149	R1605MC20H.....	150	R2619ZC20K.....	151	R2714ZD14K.....	151
R1279NC25K.....	149	R1605MC20J.....	150	R2619ZC20L.....	151	R2714ZD18H.....	152
R1279NC25L.....	149	R1605MC22E.....	150	R2619ZC21J.....	151	R2714ZD18J.....	152
R1279NC25M.....	149	R1605MC22F.....	150	R2619ZC21K.....	151	R2714ZD18K.....	152
R1280NC21J.....	149	R1605MC22G.....	150	R2619ZC21L.....	151	R3115TJ24J.....	152
R1280NC21K.....	149	R1605MC22H.....	150	R2619ZC25J.....	151	R3115TJ24K.....	152
R1280NC21L.....	150	R1605MC22J.....	150	R2619ZC25K.....	151	R3115TJ28J.....	152
R1280NC21M.....	150	R1700MC18E.....	150	R2619ZC25L.....	151	R3115TJ28K.....	152
R1280NC22J.....	150	R1700MC18F.....	150	R2619ZD18J.....	151	R3370ZC12C.....	152
R1280NC22K.....	150	R1700MC18G.....	150	R2619ZD18K.....	151	R3370ZC12D.....	152
R1280NC22L.....	150	R1700MC18H.....	150	R2619ZD18L.....	151	R3370ZC12E.....	152
R1280NC22M.....	150	R1700MC18J.....	150	R2619ZD20J.....	151	R3370ZD12C.....	152
R1280NC25J.....	150	R1700MC21E.....	150	R2619ZD20K.....	151	R3370ZD12D.....	152
R1280NC25K.....	150	R1700MC21F.....	150	R2619ZD20L.....	151	R3370ZD12E.....	152
R1280NC25L.....	150	R1700MC21G.....	150	R2619ZD21J.....	151	R4680EA24K.....	152
R1280NC25M.....	150	R1700MC21H.....	151	R2619ZD21K.....	151	R4680EA24L.....	152
R1331NC10B.....	150	R1700MC21J.....	151	R2619ZD21L.....	151	R4680EA24M.....	152
R1331NC10C.....	150	R1955MC14D.....	151	R2619ZD25J.....	151	R4680EA28K.....	152
R1331NC10D.....	150	R1955MC14E.....	151	R2619ZD25K.....	151	R4680EA28L.....	152
R1331NC12B.....	150	R1955MC14F.....	151	R2620ZC22J.....	151	R4680EA28M.....	152
R1331NC12C.....	150	R1955MC16D.....	151	R2620ZC22K.....	151	R5145FA42V.....	152

R5145FA42W	152	SVxx20xxQ	95	SxX8xSx	94	UGB6124AG	123
R5145FA45V	152	SVxx25xx	95	Sxx08xxx	94	UGD6123AG	123
R5145FA45W	152	SVxx25xxQ	95	Sxx10xxx	94	UGD8124AG	123
R5370EA18J	152	Sx01E	94	Sxx12xx	94	UGE0221AY4	123
R5370EA18K	152	Sx02xSx	94	Sxx16xx	94	UGE0421AY4	123
R5370EA22J	152	SXB1265FB	160	Sxx20xx	94	UGE1112AY4	123
R5370EA22K	152	SXB1375B	160	Sxx25xx	94	UGE3126AY4	123
S		SXB1645FB	160	Sxx35x	95	V	
S8X5ECSx	94	SXB1764FG	160	Sxx40x	95	VBE17	115
S802CSx	94	SXB1920G	160	Sxx55x	95	VBE17-06NO7	115
S802xSx	94	SXB2096B	160	Sxx65x	95	VBE26	115
S4040xQx	95	SXB2167FB	160	Sxx70x	95	VBE55	115
S6002xS	94	SXB2324FG	160	T		VBE60	115
S8016xAx	95	SXB2939G	160	T0115QB45G	154	VBE100	115
SJxx04xSx	95	SXB3120FG	160	T0240NB45E	154	VBO21	116
SJxx06xxx	95	SXB3442B	160	T0258HF65G	154	VBO22	116
SJxx08xxx	95	SXB3529HEXT	160	T0340VB45G	154	VBO36	116
SJxx10xxx	95	SXB3840HEX	160	T0385HF65E	154	VBO40	116
SJxx12xx	95	SXB4264B	160	T0510VB45E	154	VBO52	116
SJxx16xx	95	SXB4649HEXT	160	T0600TB45A	154	VBO54	116
SJxx20xx	95	SXB4869G	160	T0800EB45G	154	VBO68	116
SJxx20xxA	95	SXB5877HEX	160	T0800TB45E	154	VBO72	116
SJxx25xx	95	SXB5993G	160	T0900AF65E	154	VBO78	117
SJxx25xxA	95	SXB6240HEXT	160	T0900DF65A	154	VBO78-08NO7	117
SJxx32xx	95	SXB9737HEX	160	T0900EB45A	154	VBO88	117
SJxx32xxA	95	SXB11987HEX	160	T1200EB45E	154	VBO130	117
SJxx40xx	95	SXC1076FB	162	T1290BF65A	154	VBO160	117
SJxx40xxA	95	SXC1195FR	162	T1375DF65E	154	VCO132	113
SK230	94	SXC1318FB	162	T1600GB45G	154	VCO180	113
SRUK208x (1200V)	94	SXC1464FR	162	T1800GB45A	154	VGO36	117
STx802U2Sx	94	SXC1517FG	162	T1890BF65E	154	VHF25	117
SV6050xAx	95	SXC1609FB	162	T2000BB45G	154	VHF25-08io7	117
SV6050xx	95	SXC1788FR	162	T2322B	97	VHFD37	117
SVxx12xx	95	SXC1871FG	162	T2400GB45E	154	VTO39	122
SVxx12xxQ	95	SXC2319FG	162	T2960BB45E	154	VTO39-08ho7	122
SVxx16xx	95	Sxx04xSx	94	TCR22	94	VUB72	121
SVxx16xxQ	95	Sxx06xxx	94	U		VUB72-12NOXT	121
SVxx20xx	95	SxX8BBSx	94	UGB3132AD	123	VUB116	121

2024 uae IPnu e Index

VUB120	121	VVZ175.....	122	W1185LC420	126	W2830HE560	127
VUB135	121	VVZB120-16ioX	121	W1185LC450	126	W2830HE600	127
VUB145	121	VVZB135	121	W1260LG320	126	W2865HA620.....	127
VUB160	121	VVZB170	121	W1260LG360	126	W2865HA650.....	127
VUC36	122	VW2x60.....	123	W1263YC160	126	W2865HA680.....	127
VUC36-12go2	122	VWO35.....	123	W1263YC220	126	W2899MC460	127
VUE22	115	W		W1263YC250	126	W2899MC480	127
VUE35	115	W106CEC240	130	W1263YH160	126	W3082MC420	127
VUE50	115	W106CEC280	130	W1263YH200.....	126	W3082MC450	127
VUE75	115	W108CED180.....	130	W1263YH250	127	W3090HA520.....	127
VUE130	115	W108CED220.....	130	W1360LG240	127	W3090HA560.....	127
VUI72	121	W121CEC180	130	W1360LG300	127	W3090HA600.....	127
VUO25.....	118	W121CEC220	130	W1748LC180	127	W3128VC360	127
VUO28.....	118	W0507YH420.....	126	W1748LC250.....	127	W3128VC400	127
VUO34.....	118	W0507YH450	126	W1856NC400.....	127	W3128VF360.....	127
VUO36.....	118	W0642WC160	126	W1856NC500.....	127	W3128VF400	127
VUO52.....	118	W0642WC200	126	W1975MC620	127	W3270NC22A	127
VUO62.....	118, 119	W0642WC240	126	W1975MC650	127	W3270NC200.....	127
VUO62-08NO7	118	W0790LG650	126	W1975MC680	127	W3270NC220.....	127
VUO64.....	119	W0880LC620.....	126	W2054NC420.....	127	W3455QK200.....	127
VUO68.....	119	W0880LC650.....	126	W2054NC450.....	127	W3455QK220.....	127
VUO80.....	119	W0880LC680.....	126	W2058LC100.....	127	W3477MC360	127
VUO82.....	119	W0925LG500	126	W2058LC120.....	127	W3477MC400	127
VUO84.....	119	W0925LG560	126	W2058LC140.....	127	W3630TE650.....	127
VUO86.....	119	W0925LG600	126	W2115MC520.....	127	W3630TJ650	127
VUO98.....	119	W0944WC120	126	W2115MC560.....	127	W3697VC220	127
VUO105.....	119	W0944WC150	126	W2115MC600.....	127	W3697VC280	127
VUO110	119	W1032LC500.....	126	W2134NC360.....	127	W3697VF220.....	127
VUO121.....	119	W1032LC560.....	126	W2134NC400.....	127	W3697VF280.....	127
VUO122.....	119	W1032LC600.....	126	W2624NC240.....	127	W3708MC320	127
VUO160.....	120	W1060LG420	126	W2624NC280.....	127	W3708MC350	128
VUO162.....	120	W1060LG450	126	W2624ND240.....	127	W3743ZC400	128
VUO190	120	W1074YC200.....	126	W2624ND280.....	127	W3743ZC450.....	128
VUO192.....	120	W1074YC260	126	W2820VC420	127	W3743ZC500	128
VVZ39.....	122	W1074YC320.....	126	W2820VC450	127	W3743ZD400	128
VVZ39-08ho7	122	W1074YH200	126	W2820VF420.....	127	W3743ZD450	128
VVZ40.....	122	W1074YH260	126	W2820VF450.....	127	W3743ZD500	128
VVZ110	122	W1074YH320	126	W2830HE520	127	W3841VC300	128


W3841VC340	128	W5130MK280	129	W6672TJ350	129	XK1130SA076M	164
W3841VF300	128	W5139TE450	129	W7045MC030	129	XK1130SB076M	165
W3841VF340	128	W5139TE480	129	W7045MC060	129	XK1500BA034M	168
W3842MC28A	128	W5139TJ450	129	W8405ZC100	129	XK1500CB034M	165
W3842MC240	128	W5139TJ480	129	W8405ZC140	129	XK1800DA076M	164
W3842MC280	128	W5282ZC240	129	W8405ZD100	129	XK1800DT076M	164
W3864QK120	128	W5282ZC300	129	W8405ZD140	129	XK1800SA076M	164
W3864QK150	128	W5282ZD240	129	W8570TE180	130	XK2000DA114M	165
W3864QK180	128	W5282ZD300	129	W8570TE220	130	XK2000SA114M	165
W4096ZC420	128	W5334MK200	129	W8570TJ180	129	XK2100DA076M	164
W4096ZC450	128	W5334MK220	129	W8570TJ180MBR	156	XK2100DA076ML	164
W4096ZD420	128	W5636MC120	129	W8570TJ220	129	XK2100SA076M	164
W4096ZD450	128	W5636MC150	129	W8570TJ220MBR	156	XK2100SA076ML	164
W4205TE520	128	W5696VC100	129	W9830TE120	130	XK2140DA076M	164
W4205TE560	128	W5696VC140	129	W9830TE150	130	XK2140DA076ML	164
W4205TE600	128	W5696VF100	129	W9830TJ120	130	XK2140DT076M	164
W4205TJ520	128	W5696VF140	129	W9830TJ120MBR	156	XK2140DT076ML	164
W4205TJ560	128	W5715ED520	129	W9830TJ150	130	XK2140SA076M	164
W4205TJ600	128	W5715ED560	129	W9830TJ150MBR	156	XK2140SA076ML	164
W4534NC030	128	W5715ED600	129	X		XK2140SB076M	165
W4534NC060	128	W5838ZC180	129	XK0450BA019M	168	XK2500DA114M	165
W4534ND030	128	W5838ZC220	129	XK0450BA025M	168	XK2500DA116M	165
W4534ND060	128	W5838ZD180	129	XK0450DA056M	164	XK2500DA116ML	165
W4693QK050	128	W5838ZD220	129	XK0450DT056M	164	XK2500SA114M	165
W4693QK080	128	W5984TE360	129	XK0450SA056M	164	XK2500SA116M	165
W4693QR050	128	W5984TE400	129	XK0550DA056M	164	XK2500SA116ML	165
W4693QR080	128	W5984TJ360	129	XK0550SA056M	164	XK2700DA076M	164
W4713HL300	129	W5984TJ400	129	XK0600DA074M	164	XK2700DT076M	164
W4713HL350	129	W6262ZC200	129	XK0600SA074M	164	XK2700SA076M	164
W4713HM300	129	W6262ZC240	129	XK0900DA056M	164	XK3000DA116M	165
W4713HM350	129	W6262ZD200	129	XK0900DT056M	164	XK3000DA116ML	165
W4767MC180	129	W6262ZD240	129	XK0900SA056M	164	XK3000SA116M	165
W4767MC220	129	W6360EC520	129	XK1000BA025M	168	XK3000SA116ML	165
W5092ZC320	129	W6360EC560	129	XK1000DA074M	164	XK3060DA140ML	165
W5092ZC350	129	W6360EC600	129	XK1000SA074M	164	XK3060SA140ML	165
W5092ZD320	129	W6672TE320	129	XK1100DA076M	164	XK3500DA116M	165
W5092ZD350	129	W6672TE350	129	XK1130DA076M	164	XK3500DA116ML	165
W5130MK240	129	W6672TJ320	129	XK1130DT076M	164	XK3500SA116M	165

2025 u.s. e.s. l.p. nu. e.s. Index

XK3500SA116ML.....	165	XSK3800DA116M076	168	XW127EA25B	169
XK4000DA116M	165	XSK3800DA116M101	168	XW127EC25A	169
XK4000DA116ML	165	XSK4400DA116M076	168	XW127EC25B	169
XK4000SA116M	165	XSK4400DA116M101	168	XW160FC25A	169
XK4000SA116ML	165	XSK6000DA116M076	168	XW160FC25B.....	169
XK5000DA128M.....	165	XSK6000DA116M101	168	XW180BA34E	169
XK5000DA128ML.....	165	XSL200D8WRC	163	XW180BA34F	169
XK6120DA180ML	165	XSL200D8WRCP	163	XW180GA34A	169
XK6120SA180ML	165	XSL220C2WRT	163	XW180GA34B.....	169
XK7000DA128M.....	165	XSL300C2WRP.....	163	XW180GC34A.....	169
XK7000DA128ML.....	165	XSL300C2WS	163	XW180GC34B	169
XK8000DA180ML.....	165	XSL350C2WRP.....	163	XW270QA25A	169
XK8000SA180ML.....	165	XSL400C2WRP.....	163		
XK9000DA160M.....	165	XSL500C2WRP.....	163		
XK9000DA160ML.....	165	XSL600C2WRP.....	163		
XK9000SA160M	165	XSL1000C2WRP	163		
XK9000SA160ML.....	165	XSL1000C2WRT	163		
XS F30xxxxAN	168	XSL1100C2WRT.....	163		
XS F46xxxxAN	168	XSNM12H10S.....	169		
XSFGAxxxxAN.....	168	XSNM12H12S	169		
XSFGxxxxAN	168	XST1000M08P.....	163		
XS FHxxxxAN.....	168	XST1000M10P	163		
XSFLPxxxxAN	168	XST1000M12P	163		
XSFTBxxxxAN.....	168	XST1000M16P.....	163		
XSFTCxxxxAN.....	168	XW076NC16A.....	169		
XSFTxxxxAN	168	XW076NC16B	169		
XSK1500DA076038	168	XW076NC16BS.....	169		
XSK1500DA076076	168	XW076NC16BT	169		
XSK1500DA076101	168	XW076NC16C	169		
XSK2000DA076038.....	168	XW076NC16CT.....	169		
XSK2000DA076076	168	XW076NC16R	169		
XSK2000DA076101	168	XW076NC16W.....	169		
XSK3000DA076038.....	168	XW116ZC20A.....	169		
XSK3000DA076076	168	XW116ZC20B	169		
XSK3000DA076101	168	XW116ZC20C.....	169		
XSK3400DA076038	168	XW116ZC20R.....	169		
XSK3400DA076076	168	XW116ZC20W.....	169		
XSK3400DA076101	168	XW127EA25A	169		




GLOBAL RESOURCES FOR A GLOBAL MARKET

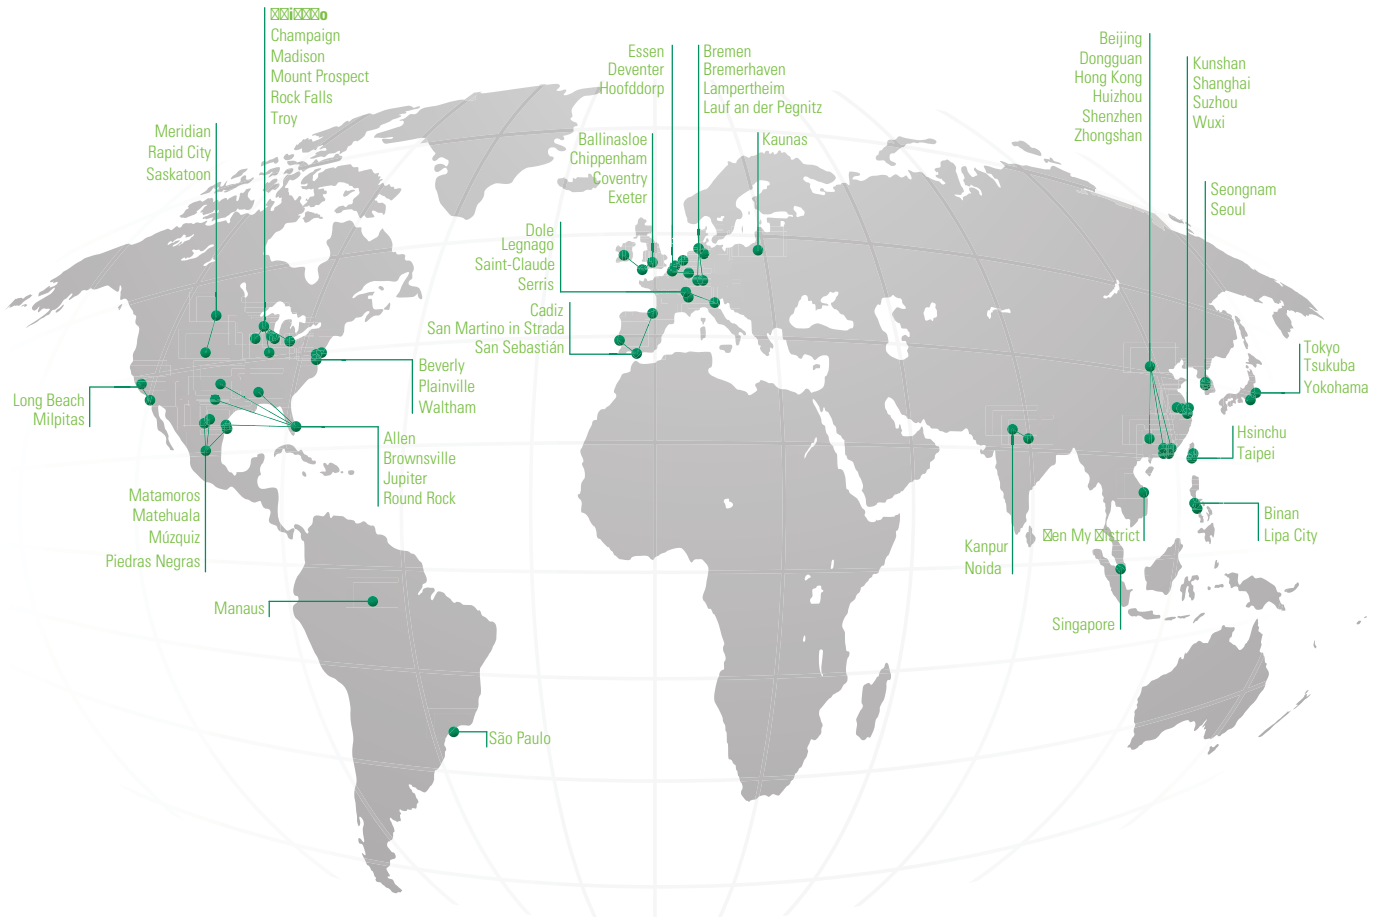

Disclaimer Notice: Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of each product selected and test them for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.

Read the complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.

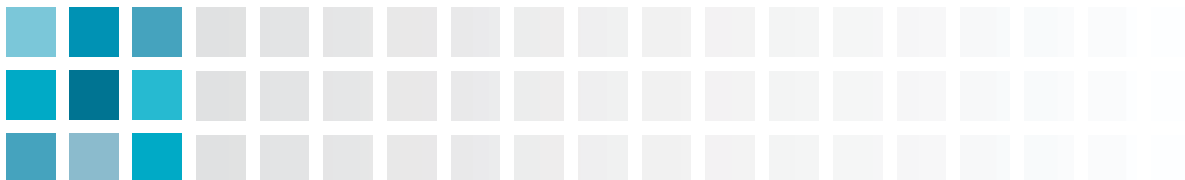

Expertise Applied | Answers Delivered