LOAD HANDLING DEVICES - USA

LHD Group
main products

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

2025-PR-01

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

ARES 65 W150

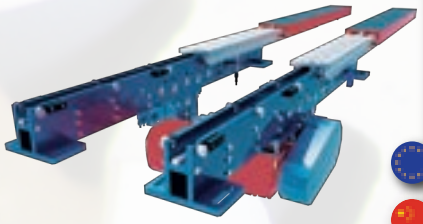

Technical details

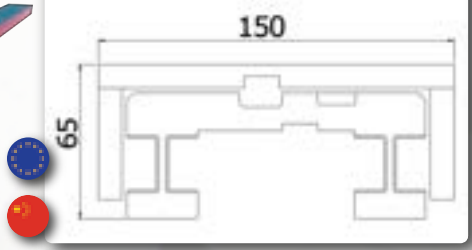

Description

The strength of the ARES 65 W150 is its load capacity of 300 kg on each fork, with only 150 mm width of the upper slide. The standard version has a transmission system with racks and pinions. Just like every LHD telescopic fork, the ARES 65 W150 can be supplied in the monofork, pair or battery arrangement.

min. length	700 mm	max. payload	600 kg
max. length	2000 mm	max. acceleration	1 m/s²
min. stroke	800 mm	max. speed	45 m/min
max. stroke	2100 mm		

ARES 65

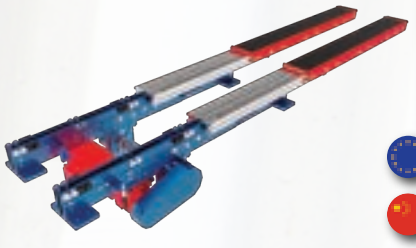

Technical details

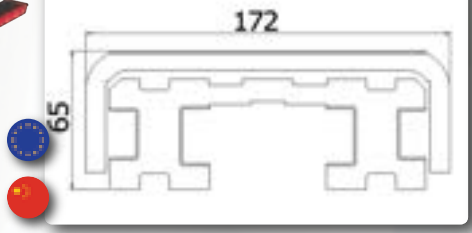

Description

Typical telescopic fork for automated warehouses, designed to move 800x1200 europallets. The upper slides are made of a single bent piece to increase the rigidity, and the ends are arrow-shaped to fit more easily under the pallet. As for the transmission, both chains and racks-and-pinions systems are available.

min. length	400 mm	max. payload	1200 kg
max. length	2000 mm	max. acceleration	1 m/s²
min. stroke	445 mm	max. speed	45 m/min
max. stroke	2100 mm		

ARES 65 K



Technical details

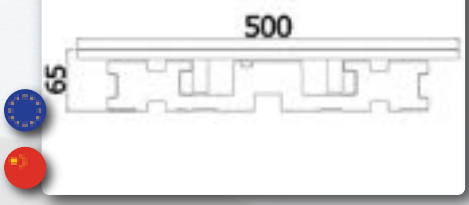

Description

The ARES 65 K is a particular wide-body telescopic monofork, which finds application where the load unit to move is else than a normal pallet (heavy boxes or closed pallets); in this case the load unit must be placed on special stands or L-profile to allow the fork to entry.

min. length	1200 mm	max. payload	1000 kg
max. length	2000 mm	max. acceleration	1 m/s²
min. stroke	1300 mm	max. speed	45 m/min
max. stroke	2100 mm		

ARES 85 K

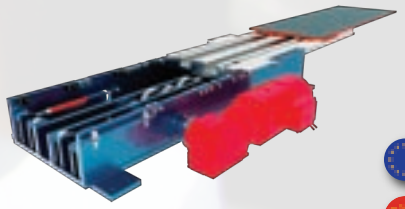

Technical details

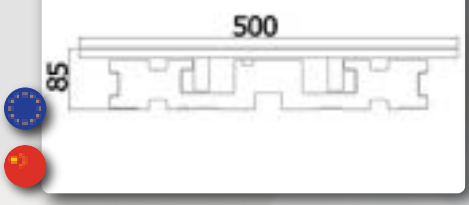

Description

The ARES 85 K relies upon the same design as the 65 K, but with a middle slide thickness increased by 20 mm, which allows the handling of heavier loads (up to 1.750 kg).

min. length	1200 mm	max. payload	1750 kg
max. length	2000 mm	max. acceleration	1 m/s²
min. stroke	1300 mm	max. speed	45 m/min
max. stroke	2100 mm		

ZEUS 165

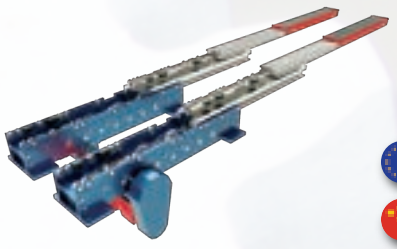

Technical details

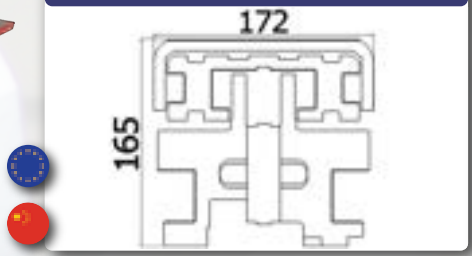

Description

Typical double-depth telescopic fork for europallets. It's a single-engined fork, so the required space when operating is constant.
The upper slides are made of a single bent piece to increase the rigidity, and the ends are arrow-shaped to fit more easily under the pallet.

min. length	1000 mm	max. payload	1200 kg
max. length	1500 mm	max. acceleration	1 m/s²
min. stroke	1900 mm	max. speed	45 m/min
max. stroke	3000 mm		

ZEUS 65-140

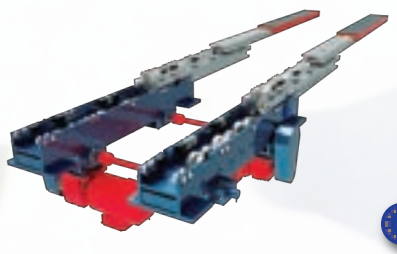

Technical details

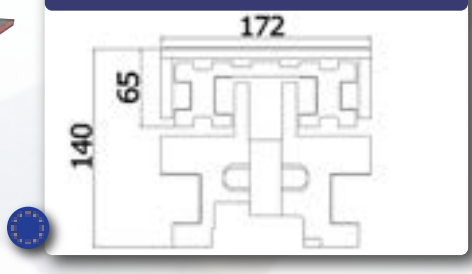

Description

This is a double-engined, double-depth telescopic fork; in this model, each stroke is operated independently by an engine. Despite its small size, this fork can rely upon a remarkable strength and an outstanding size/ thoughness ratio. It offers excellent performances in the work cycles, making the depth shift quicker.

min. length	1100 mm	max. payload	500 kg
max. length	1500 mm	max. acceleration	1 m/s²
min. stroke	2000 mm	max. speed	45 m/min
max. stroke	3000 mm		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

ZEUS 65-165

Technical details



Description

The ZEUS 65-165 has small size, high operating speed and small bending when picking up/laying down loads, with independently-operated engines. The upper slides are made of a single bent piece to increase the rigidity, and the ends are arrow-shaped to fit more easily under the pallet.

min. length	1100 mm	max. payload	1200 kg
max. length	1500 mm	max. acceleration	1 m/s²
min. stroke	2000 mm	max. speed	45 m/min
max. stroke	3000 mm		

ZEUS 70-172

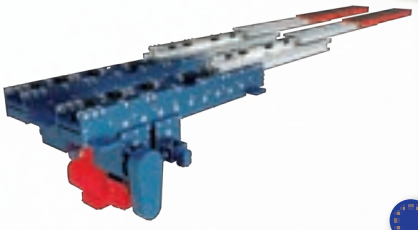

Technical details



Description

It's an enhanced version of the ZEUS 65-165. The 70-172 keeps all the peculiar features of the smaller sister, but with a higher load capacity. It's particularly fit for storage plants within bigger production facilities. Its shape allows attaining the highest moment of inertia of all telescopic forks currently on the market.

min. length	1100 mm	max. payload	1300 kg
max. length	1800 mm	max. acceleration	1 m/s²
min. stroke	2400 mm	max. speed	45 m/min
max. stroke	3300 mm		

ZEUS 80-182

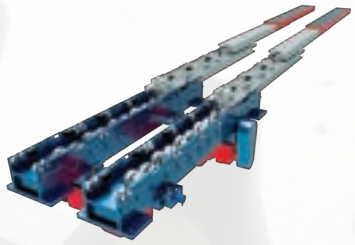

Technical details



Description

This is an even stronger version of the ZEUS 70-172. It keeps all the peculiar features of the twin-engined ZEUS series, but with an even higher carrying capacity (up to 1.600 kg).

min. length	1100 mm	max. payload	1600 kg
max. length	1800 mm	max. acceleration	1 m/s²
min. stroke	2400 mm	max. speed	45 m/min
max. stroke	3300 mm		

CRONOS 185

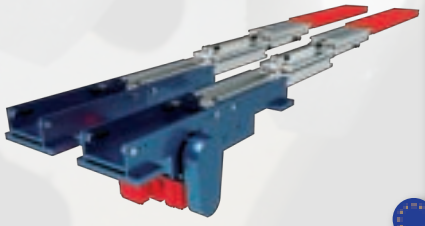

Technical details



Description

Little sister of the more powerful CRONOS 248, the CRONOS 185 finds its application in the handling of pallets in triple depth. Simpler and easier than the 248, it perfectly fulfills the needs of those customer who need to move medium loads with long strokes for picking and laying.

min. length	1300 mm	max. payload	1000 kg
max. length	1600 mm	max. acceleration	1 m/s²
min. stroke	3000 mm	max. speed	45 m/min
max. stroke	3700 mm		

CRONOS 248

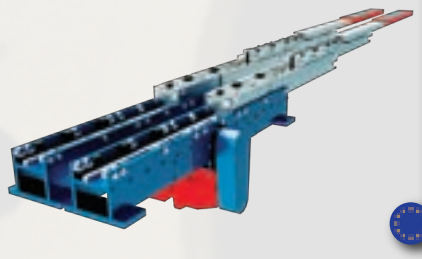

Technical details



Description

With its overall thickness of 248 mm, this equipment represents the solution to borderline cases in the sector of the linear handling. It finds application where a normal double-depth telescopic fork would be beyond the stroke limit, or where an even smaller bending, all other parameters being equal, is needed.

min. length	1300 mm	max. payload	1200 kg
max. length	1600 mm	max. acceleration	1 m/s²
min. stroke	3000 mm	max. speed	45 m/min
max. stroke	3700 mm		

CRONOS 165-248

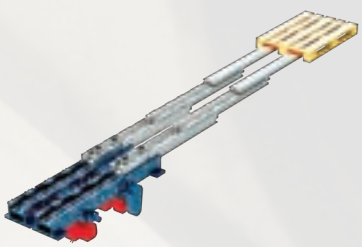

Technical details



Description

Same as a normal CRONOS 248, but with a twin drive (2 motors and 2 independent gear trains) allowing to operate the double and the triple depth separately, carrying out a double-depth stroke with only 165 mm thickness of ht moving elements.

min. length	1300 mm	max. payload	1200 kg
max. length	1600 mm	max. acceleration	1 m/s²
min. stroke	3000 mm	max. speed	45 m/min
max. stroke	3700 mm		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

HEPHAESTUS

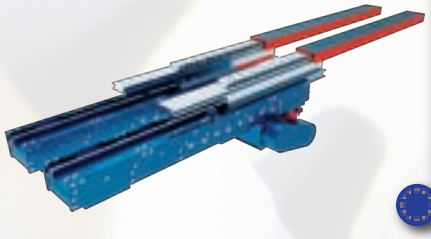

Technical details



Description

This machine can handle loads up to 800 kg with a low deflection, despite its thickness of just 55 mm. The peculiar arrangement of its gear train allows to cover the middle slide completely, making the HEPHAESTUS particularly recommended for "dirty" working environments (e.g. sand molded casting).

min. length	1000 mm	max. payload	800 kg
max. length	1500 mm	max. acceleration	1 m/s²
min. stroke	1100 mm	max. speed	45 m/min
max. stroke	1600 mm		

CERBERUS X1



Technical details

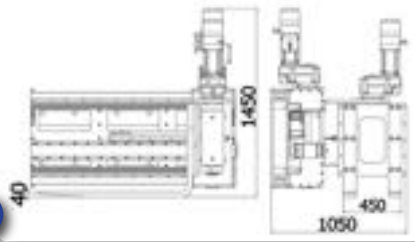

Description

The CERBERUS X1 allows handling pallets with a load capacity up to 1.500 kg. The rotation and translation speed is as fast as 30m/min. Thanks to this system, the pallets can be set down and picked up even rotated by 90° compared to the standard position on shelves. Both movements can be carried out simultaneously.

min. length	1700 mm	max. payload	1500 kg
max. length	2000 mm	max. acceleration	1 m/s²
min. stroke	1350 mm	max. speed	25 m/min
max. stroke	1650 mm		

SPHINX



Technical details



Description

The SPHINX is a moving carriage, designed to be installed on the vertical mast of forklift trucks, allowing them to act as a stacker crane on wheels; this way, a forklift can pick up and lay down pallets laterally in a warehouse, making it possible to operate in narrower aisles.

min. length	1000 mm	max. payload	1500 kg
max. length	1500 mm		

VARIAXIS

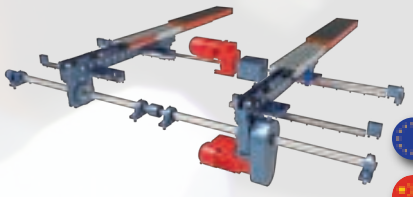

Technical details

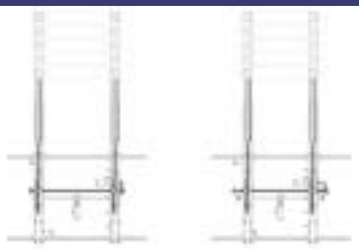

Description

It's possible to handle different kinds of load units by installing the fork set on a VARIAXIS. It's a relatively simple system that makes the stocking operation more flexible. A motor operates a system of screws with recirculating balls and prismatic rails; it's possible to shift only one fork, or both of them symmetrically.

max. adjustment range	2000 mm	max. payload	2000 kg
mobile forks	1 or 2	max. adjustment speed	10 m/min

ARES 140 SLV



Technical details



Description

Smaller sister of the ATHENA 220 SLV, in this type of telescopic fork the high moment of inertia totally lies in its arm thickness rather than in its width. It's designed to pass through particularly narrow openings, although it can handle notably heavy loads, such as big metal or paper coils, with low bending and long life cycle.

min. length	1000 mm	max. payload	1600 kg
max. length	1900 mm	max. acceleration	1 m/s²
min. stroke	1100 mm	max. speed	45 m/min
max. stroke	12000 mm		

ATHENA 183

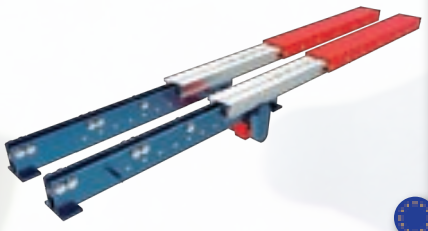

Technical details

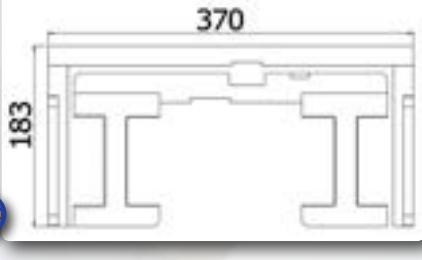

Description

This model of the heavy-duty ATHENA series is particularly suitable for handling heavy loads with long strokes and low bending. In its version with inclined slides is expressly designed to handle big size coils.

min. length	1500 mm	max. payload	5000 kg
max. length	3000 mm	max. acceler.	0,5 m/s²
min. stroke	1600 mm	max. speed	30 m/min
max. stroke	3200 mm		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

ATHENA 220 SLV

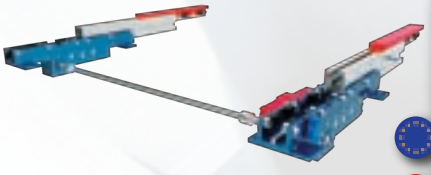

Technical details



Description

Bigger sister of the ARES 140 SLV, in this type of telescopic fork the high moment of inertia totally lies in its arm thickness rather than in its width. It's designed to pass through particularly narrow openings, although it can handle notably heavy loads, such as big metal or paper coils, with low bending and long life cycle.

min. length	**1300 mm**	**max. payload**	**4000 kg**
max. length	**2900 mm**	**max. acceler.**	**0,5 m/s²**
min. stroke	**1400 mm**	**max. speed**	**30 m/min**
max. stroke	**3000 mm**		

CERBERUS X2



Technical details

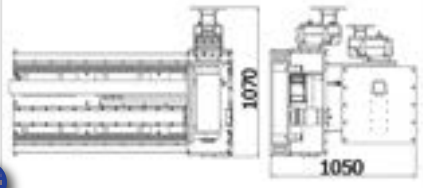

Description

The CERBERUS X2 is designed to handle coils, up to 1.500 kg heavy. The rotation and translation speed is as fast as 30m/min. Both movements can be carried out simultaneously.

min. length	**1700 mm**	**max. payload**	**1500 kg**
max. length	**2000 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**1350 mm**	**max. speed**	**25 m/min**
max. stroke	**1650 mm**		

CERBERUS X3

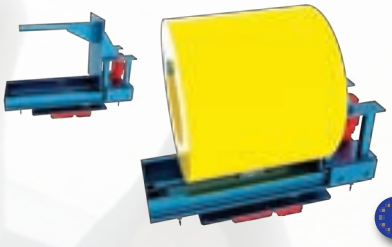

Technical details

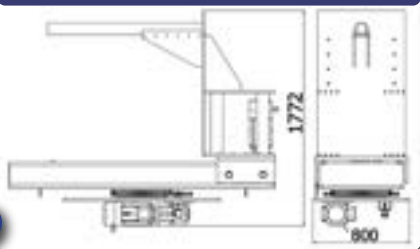

Description

The CERBERUS X3 is a single-sided sideshift suitable for picking up pallets or coils on all sides. It is equipped with a rotary table for a 360° storage. Its carrying capacity is as high as 2.500 kg.

min. length	**1600 mm**	**max. payload**	**2500 kg**
max. length	**2300 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**1100 mm**	**max. speed**	**25 m/min**
max. stroke	**1800 mm**		

ARES 100

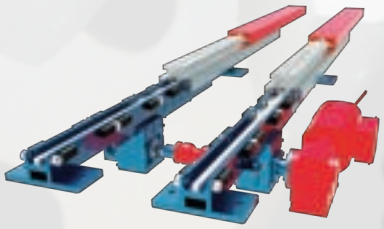

Technical details



Description

It's a very versatile and useful telescopic fork, entirely operated by racks and pinions, to pass through narrower openings other forks don't fit in. Although its limited thickness, the ARES 100 benefits from an outstanding carrying capacity resulting in a high moment of inertia, a small bending and a high speed.

min. length	**1000 mm**	**max. payload**	**800 kg**
max. length	**2000 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**1100 mm**	**max. speed**	**45 m/min**
max. stroke	**2100 mm**		

ATHENA 100

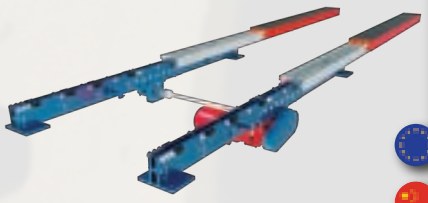

Technical details

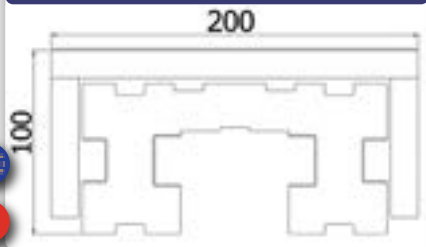

Description

This is the smaller product of the ATHENA heavy series. Its strong structure allows remarkable lengths and strokes. Its ultimate application field is the automotive industry; it's also suitable for the sectors of wood (panels), paper (rolls) and steel (coils). It's available both with racks-and-pinions and with chain transmission.

min. length	**900 mm**	**max. payload**	**2000 kg**
max. length	**2200 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**950 mm**	**max. speed**	**45 m/min**
max. stroke	**2300 mm**		

ATHENA 130

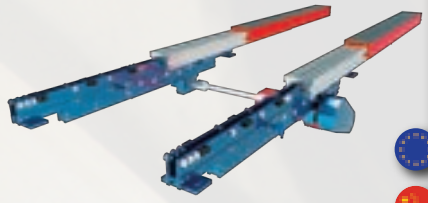

Technical details

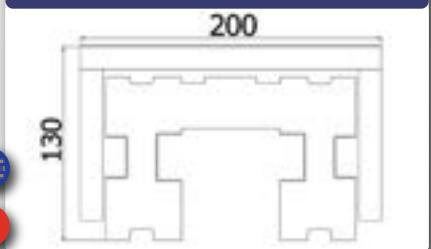

Description

Intermediate fork of the ATHENA series, it's a versatile and safe device equipment, with a remarkably small bending. It's the most used fork of this series, because despite its thoughness it preserves good operating speed and working paces. It's available both with racks and pinions and with chains.

min. length	**1500 mm**	**max. payload**	**2500 kg**
max. length	**2200 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**1600 mm**	**max. speed**	**45 m/min**
max. stroke	**2300 mm**		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

ATHENA 130 W250

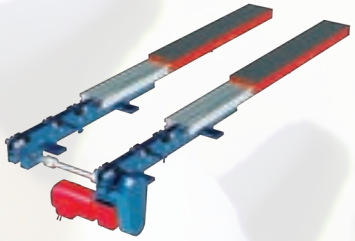

Technical details

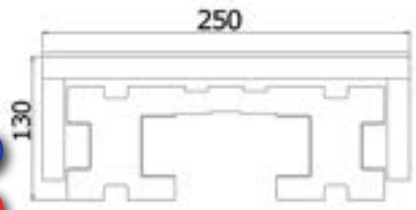

Description

This ATHENA for special applications allows handling heavy loads with long strokes and small bending. Not suitable for high speeds and accelerations, it works at its best where thoughness, repeatability and fatigue stress are required. As for the transmission, it's available both with racks and pinions and with chains.

min. length	1100 mm	max. payload	4000 kg
max. length	2500 mm	max. acceleration	1 m/s²
min. stroke	1200 mm	max. speed	45 m/min
max. stroke	2600 mm		

ATHENA 270

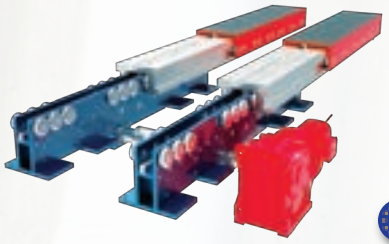

Technical details

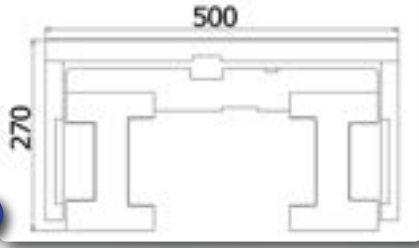

Description

It's a very strong, though and performing telescopic fork. Thanks to its though structure, the ATHENA 270 has a very small bending, even when carrying heavy loads. It's particularly suitable for the handling of car bodies and chassis within the automotive sector.

min. length	1300 mm	max. payload	20000 kg
max. length	2900 mm	max. acceler.	0,5 m/s²
min. stroke	1400 mm	max. speed	20 m/min
max. stroke	3000 mm		

GOLIATH



Technical details

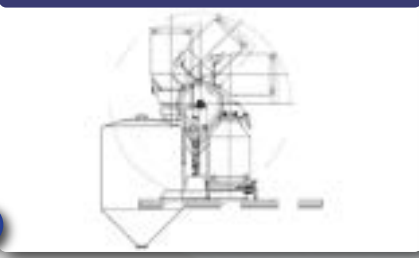

Description

Our GOLIATH, also known by its nickname Tipper, is indeed designed to tip over, by means of its pivoting framework, big hoppers in plants for chemical or food industry, to pour the contents into chemical reactors, autoclaves and such appliances.

minimum hopper height above ground	1000 mm	tipping angle	180°
		max. payload	1600 kg
maximum hopper height above ground	1700 mm		

HERMES

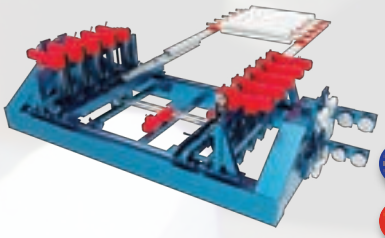

Technical details

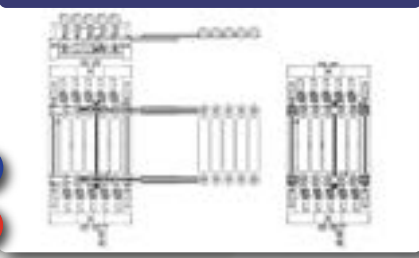

Description

The HERMES, operating jointly with telescopic forks for special loads, allows the operator to cherry-pick the desired items from a multiple storage, with an on-board selection system that lifts the items to keep while the telescopic forks put back down the remaining units. Also available for miniload boxes.

load units q.ty	up to 5	max. u. payload	300 kg
max. vertical stroke	450 mm	max. acceleration	0,5 m/s²
		max. speed	10 m/min

CYCLOPS

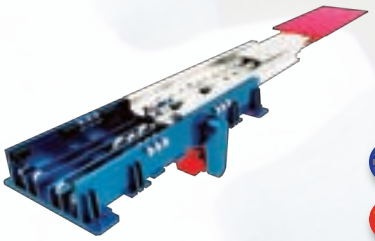

Technical details

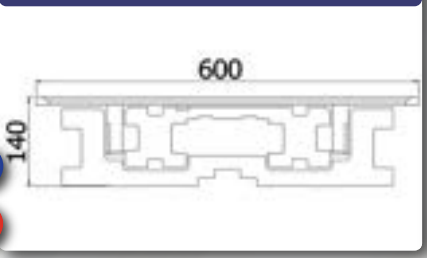

Description

The strong points of this monofork are its high moment of inertia and its relatively small size. With only 140 mm thickness, it can pick up a 2000 kg load in double depth alone, despite the small bending and the high work pace it can reach. It's very useful for all those tasks where there's no room for a typical pair of forks.

min. length	1300 mm	max. payload	2000 kg
max. length	2000 mm	max. acceler.	0,5 m/s²
min. stroke	2650 mm	max. speed	30 m/min
max. stroke	3900 mm		

ARES 30

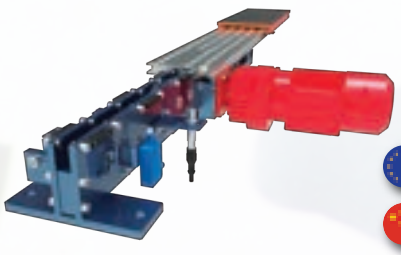

Technical details

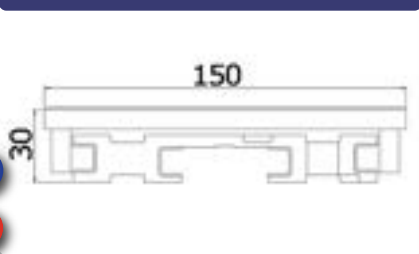

Description

The ARES 30 fork is designed to handle loads with limited weight, especially where a good size/load ratio is required. Chains and pulleys provide the movement of the top element. This light series of telescopic fork achieves remarkable performances as for top speed and acceleration.

min. length	600 mm	max. payload	15 kg
max. length	900 mm	max. acceleration	1 m/s²
min. stroke	700 mm	max. speed	45 m/min
max. stroke	1000 mm		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

ARES 40 W120

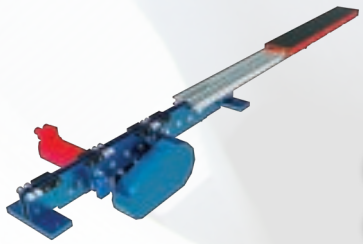

Technical details

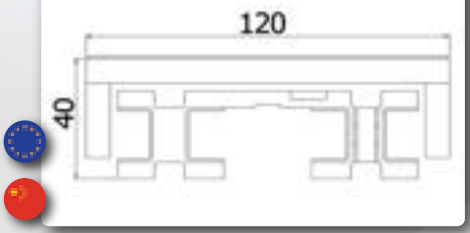

Description

The ARES 40 W120 fork is designed to handle loads with limited weight, especially where a good size/ load ratio is required. Chains and pulleys provide the movement of the top element. This light series of telescopic fork achieves remarkable performances as for top speed and acceleration.

min. length	**650 mm**	**max. payload**	**80 kg**
max. length	**1250 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**750 mm**	**max. speed**	**45 m/min**
max. stroke	**1350 mm**		

ARES 40 W150

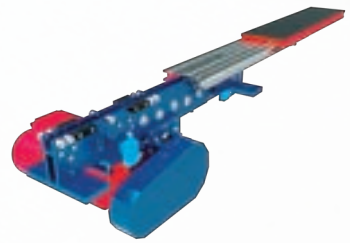

Technical details

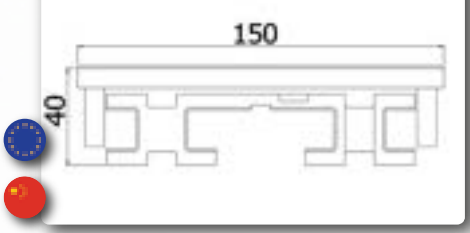

Description

The ARES 40 W150 fork is designed to handle loads with limited weight, especially where a good size/ load ratio is required. Chains and pulleys provide the movement of the top element. This light series of telescopic fork achieves remarkable performances as for top speed and acceleration.

min. length	**650 mm**	**max. payload**	**100 kg**
max. length	**1350 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**750 mm**	**max. speed**	**45 m/min**
max. stroke	**1450 mm**		

ARES 40 W220

Technical details

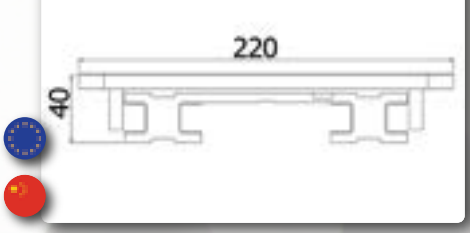

Description

It's the most important fork within the ARES miniload series, meant for unusual, bulky and heavy loads. It's driven through a chains/gears compound, to reach remarkable top speeds and accelerations. The wider top plate (with grip pad) allows carrying the load safely and firmly, in high-performaces mini-load plants.

min. length	**650 mm**	**max. payload**	**120 kg**
max. length	**1450 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**750 mm**	**max. speed**	**45 m/min**
max. stroke	**1550 mm**		

ZEUS 75

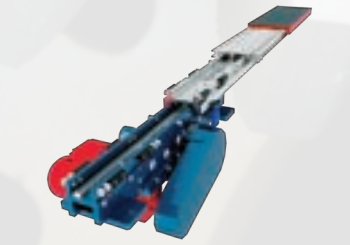

Technical details

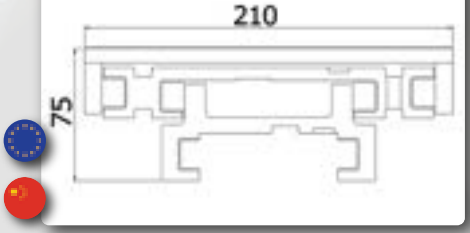

Description

Being the double-depth version of the ARES 40, the ZEUS 75 is fit for those applications where a small space of the slides is required. The steel/aluminium fixed body reduces the overall weight. The ZEUS 75 is recommended as single fork with a larger plate on top, to handle small carton or plastic boxes.

min. length	**700 mm**	**max. payload**	**100 kg**
max. length	**1200 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**1300 mm**	**max. speed**	**45 m/min**
max. stroke	**2400 mm**		

ZEUS 85

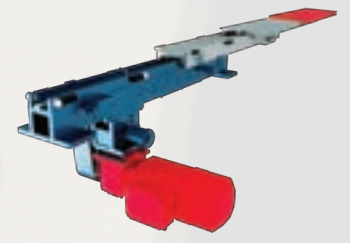

Technical details

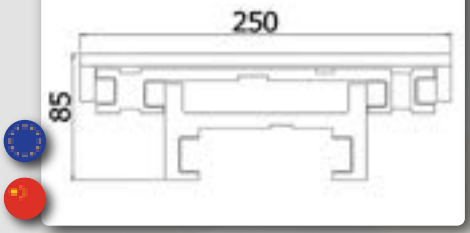

Description

Being the thicker version of the ZEUS 75, the ZEUS 85 is fit for those applications where a small space of the slides is required. The steel/aluminium fixed body reduces the overall weight. The ZEUS 85 is recommended as single fork with a larger plate on top, to handle small carton or plastic boxes.

min. length	**700 mm**	**max. payload**	**120 kg**
max. length	**1200 mm**	**max. acceleration**	**1 m/s²**
min. stroke	**1300 mm**	**max. speed**	**45 m/min**
max. stroke	**2400 mm**		

PHOEBUS X1

Technical details

Description

Designed for backing up the telescopic forks, the side belt conveyor allows moving the loads onboard simultaneously. The fork set can pick up the load from the shelf, and then the PHOEBUS can lay it down in the unloading bay with no need of telescopic stroke. The X1 version has 1 pair of side belts (for single depth).

min. length	**420 mm**	**max. payload**	**50 kg**
max. length	**1250 mm**	**max. acceleration**	**1 m/s²**
		max. speed	**45 m/min**

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

PHOEBUS X2



Technical details

Description

Designed for backing up the telescopic forks, the side belt conveyor allows moving the loads onboard simultaneously. The fork set can pick up the load from the shelf, and then the PHOEBUS can lay it down in the unloading bay with no need of telescopic stroke. The X2 version has 2 pairs of side belts (for double depth).

min. length	420 mm	max. payload	2x50 kg
max. length	1250 mm	max. acceleration	1 m/s²
		max. speed	45 m/min

MEDUSA

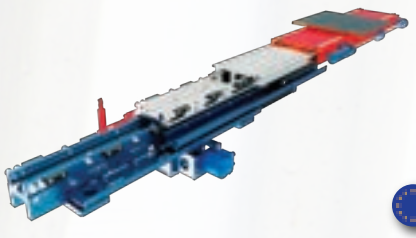

Technical details



Description

The MEDUSA is essentially a double-depth telescopic fork (usually in a monofork arrangement) equipped with a further moving plate that can shift along the top slide, regardless the position of the fork, allowing to change the position of a load unit that sits on the upper slide according to customer needs, with no need of side belts.

min. length	650 mm	max. payload	100 kg
max. length	1200 mm	max. acceleration	1 m/s²
min. stroke	1300 mm	max. speed	45 m/min
max. stroke	2400 mm		

ARACHNE X4

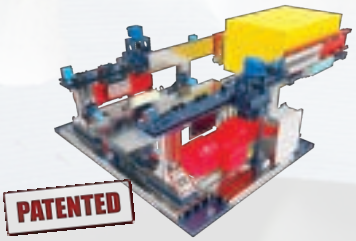

Technical details

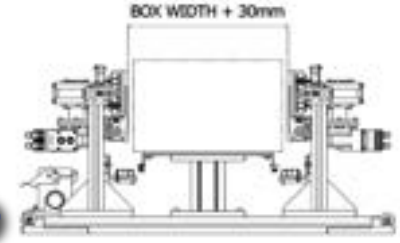

Description

The ARACHNE X4 can carry out the handling of 1 50 kg heavy plastic box (or carton) about as big as 600x400 mm in single depth; in the picking phase, two telescopic arms reach the load on the shelf and, by means of small pivoting fingers, drag it onboard the shuttle. Its light structure allows high work speeds.

min. length	700 mm	max. payload	50 kg
max. length	1200 mm	max. acceleration	1 m/s²
min. stroke	850 mm	max. speed	45 m/min
max. stroke	1300 mm		

ARACHNE X6

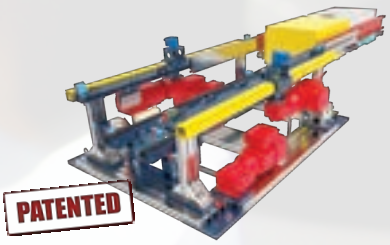

Technical details

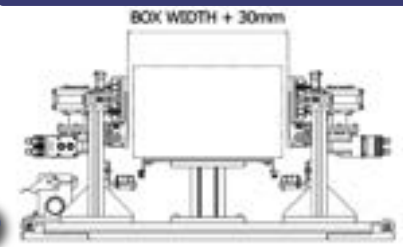

Description

The ARACHNE X6 can carry out the handling of 2 50 kg heavy plastic boxes (or cartons) about as big as 600x400 mm in single depth; in the picking phase, two telescopic arms reach the load on the shelf and, by means of small pivoting fingers, drag it onboard the shuttle. Its light structure allows high work speeds.

min. length	900 mm	max. payload	2x50 kg
max. length	1350 mm	max. acceleration	1 m/s²
min. stroke	1000 mm	max. speed	45 m/min
max. stroke	1450 mm		

ARACHNE X8

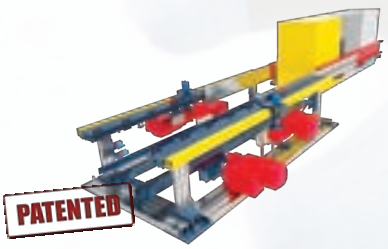

Technical details

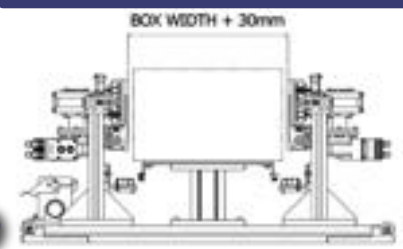

Description

The ARACHNE X8 can simultaneously handle 3 600x400 mm plastic or cardboard boxes, weighing up to 40 kg each in single depth; during the picking phase, two telescopic arms reach the load on the shelf and, by means of small mobile fingers, drag it onto the shuttle.

min. length	1300 mm	max. payload	3x40 kg
max. length	2015 mm	max. acceleration	1 m/s²
min. stroke	1375 mm	max. speed	45 m/min
max. stroke	2070 mm		

ARACHNE X10

Technical details

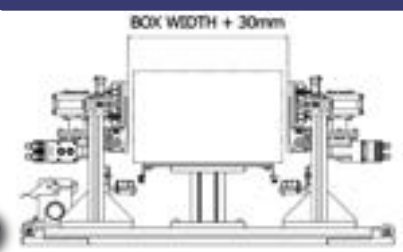

Description

The ARACHNE X10 can simultaneously handle 4 300x400-mm plastic or cardboard boxes, or 2 600x400-mm boxes, with an overall load of 100 kg; during the picking phase, two telescopic arms reach the load on the shelf and, by means of small mobile fingers, drag it onto the shuttle.

min. length	1550 mm	max. payload	4x25 kg
max. length	2015 mm	max. acceleration	1 m/s²
min. stroke	1605 mm	max. speed	45 m/min
max. stroke	2070 mm		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

ARACHNE XX4

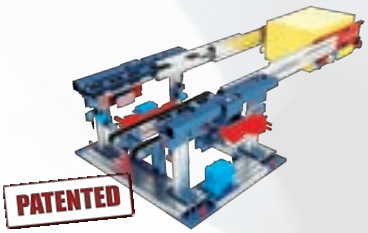

Technical details

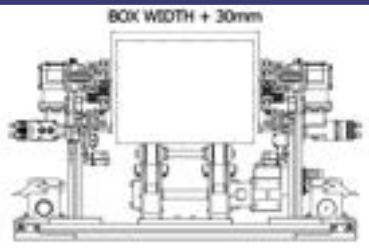

Description

The ARACHNE XX4 can carry out the handling of 1 50 kg heavy plastic box (or carton) about as big as 600x400 mm in double depth; in the picking phase, two telescopic arms reach the load on the shelf and, by means of small pivoting fingers, drag it onboard the shuttle. Its light structure allows high work speeds.

min. length	700 mm	max. payload	50 kg
max. length	1300 mm	max. acceleration	1 m/s²
min. stroke	1400 mm	max. speed	45 m/min
max. stroke	2400 mm		

ARACHNE XX6

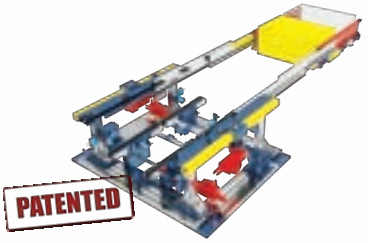

Technical details

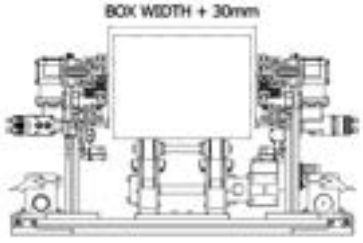

Description

The ARACHNE XX6 can carry out the handling of 2 30 kg heavy plastic boxes (or cartons) about as big as 600x400 mm in double depth; in the picking phase, two telescopic arms reach the load on the shelf and, by means of small pivoting fingers, drag it onboard the shuttle. Its light structure allows high work speeds.

min. length	800 mm	max. payload	2x30 kg
max. length	1350 mm	max. acceleration	1 m/s²
min. stroke	1400 mm	max. speed	45 m/min
max. stroke	2450 mm		

ARACHNE XXX6

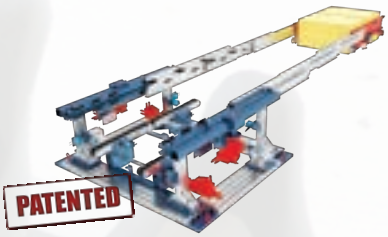

Technical details

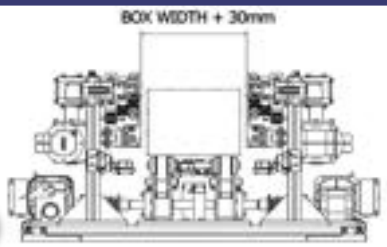

Description

The ARACHNE XXX6 can carry out the handling of 2 30 kg heavy plastic boxes (or cartons) about as big as 600x400 mm in triple depth; in the picking phase, two telescopic arms reach the load on the shelf and, by means of small pivoting fingers, drag it onboard the shuttle. Its light structure allows high work speeds.

min. length	800 mm	max. payload	2x30 kg
max. length	1350 mm	max. acceleration	1 m/s²
min. stroke	1700 mm	max. speed	45 m/min
max. stroke	2885 mm		

ARACHNE Z4

Technical details

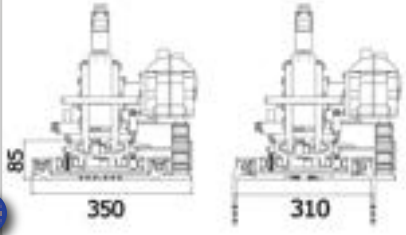

Description

The ARACHNE Z4 consists of a telescopic monofork operating upside down, whose last element includes small pivoting fingers, designed to drag light loads, such as carton or plastic boxes, on idle roller conveyors or similar surfaces, in a push/pull operation. With its light structure, it can attain remarkable work speeds.

min. length	850 mm	max. payload	50 kg
max. length	1000 mm	max. acceleration	1 m/s²
min. stroke	1450 mm	max. speed	45 m/min
max. stroke	2000 mm		

KARKINOS X

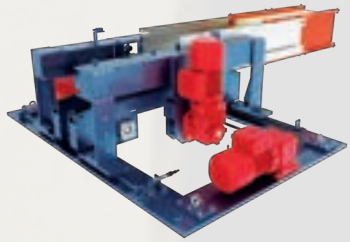

Technical details



Description

The KARKINOS is the best solution for handling plastic boxes or cartons in single depth, with high speed and reliability. It doesn't require much maintenance and it's easy to operate. With no mobile dragging "fingers", it can handle the load in a very simple way through a clamping movement.

min. length	600 mm	max. payload	100 kg
max. length	1200 mm	max. acceleration	1 m/s²
min. stroke	700 mm	max. speed	45 m/min
max. stroke	1300 mm		

KARKINOS XX



Technical details

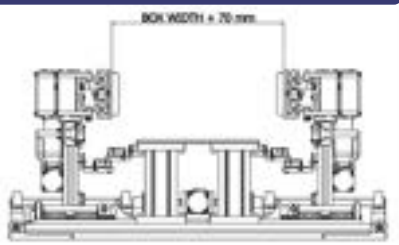

Description

The KARKINOS XX is the double-depth version of the KARKINOS X, to handle up to 4 plastic boxes or cartons per side (2 at once).

min. length	600 mm	max. payload	100 kg
max. length	1200 mm	max. acceleration	1 m/s²
min. stroke	1100 mm	max. speed	45 m/min
max. stroke	2200 mm		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

KARKINOS R

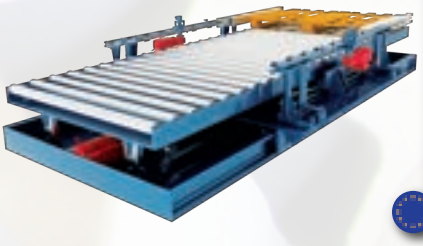

Technical details



Description

The KARKINOS R allows handling pallets or trays in single depth along an idle roller conveyor, with high speed and reliability. It's easy to operate and it doesn't require much maintenance. With no mobile dragging "fingers", it can handle the load in a very simple way.

max. length	2500 mm	max. payload in push/pull mode	1300 kg
max. stroke	1450 mm	max. acceleration	1 m/s²
		max. speed	45 m/min

KHARON

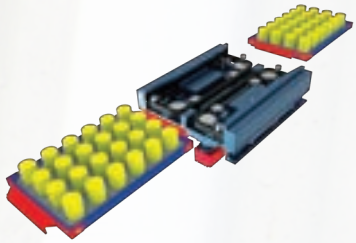

Technical details

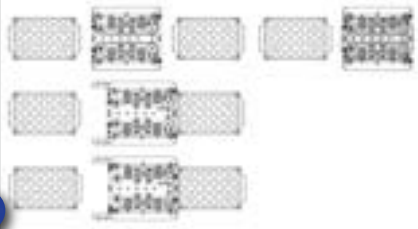

Description

This equipment carries out its operation by means of two cams ("fingers") moving along one or two chain loops that enable the picking. The KHARON allows picking up and laying down in automated warehouses so-called "trays", through appropriately shaped edges on both sides of these containers.

min. length	785 mm	max. payload	100 kg
max. length	1385 mm	max. acceleration	1 m/s²
min. stroke	865 mm	max. speed	45 m/min
max. stroke	1465 mm		

GRYPHON



Technical details



Description

Operating jointly with telescopic forks for miniload (usually monoforks), the GRYPHON can help to keep load units aligned and stable in the moving phases, especially in case of light but voluminous carton boxes, preventing misalignments on the shelves that could result in collisions.

max. length	1000 mm	max. speed	2 m/min

PEGASUS

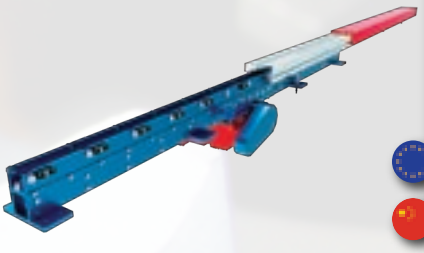

Technical details

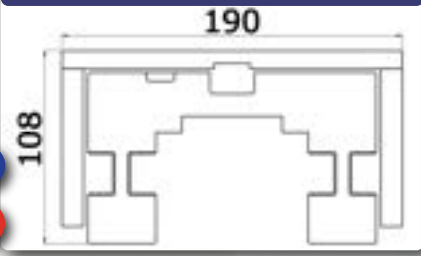

Description

When it comes to push/pull the load, PEGASUS is the right solution. It's a single-depth telescopic fork with internal double gear train transmission, to handle up to 4.000 kg in push/pull mode. Just like normal telescopic forks, it can also be used to lift the load, the capacity depending on the thickness.

min. length	1000 mm	max. payload in push/pull mode	4000 kg
max. length	2600 mm	max. acceleration	1 m/s²
min. stroke	1100 mm	max. speed	45 m/min
max. stroke	2700 mm		

TITAN

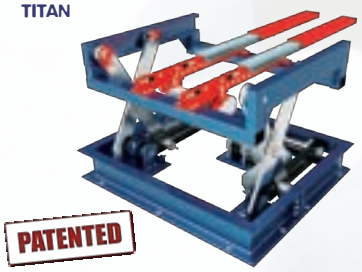

Technical details



Description

The TITAN is a new concept of electrically operated scissor lift: all of the now-existing machines of this kind need the center of gravity of the load to fall within their footprint. Conversely, this remarkably robust and sturdy equipment has been specifically designed to lift heavy loads in a cantilever mode.

maximum vertical stroke	1000 mm	max. payload	1800 kg
		lifting time	10 s

ATLAS X1



Technical details

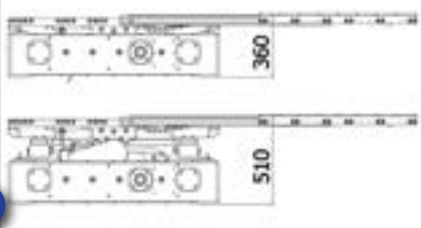

Description

To ensure efficiency, an accurate, reliable, maintenance-free and powerful system is needed. Hence, our ATLAS X1 is entirely gear-driven - unlike our competitors' ones, relying on chains - with a single-body chassis and a lifting movement carried out through eccentric cams.

minimum vertical stroke	60 mm	max. payload	2000 kg
		lifting time	5 s
maximum vertical stroke	120 mm		

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com

ATLAS X2

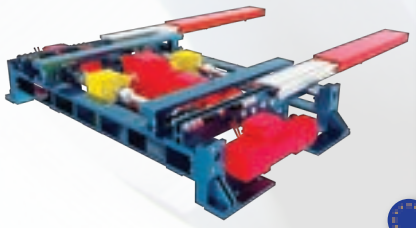

Technical details

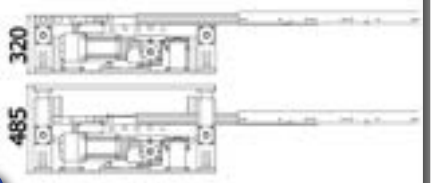

Description

To ensure efficiency, an accurate, reliable, maintenance-free and powerful system is needed. Hence, our ATLAS X2 is entirely gear-driven - unlike our competitors' ones, relying on chains - with a single-body chassis and a lifting movement carried out through gears and racks.

minimum vertical stroke	**60 mm**	**max. payload**	**2000 kg**
		lifting time	**8 s**
maximum vertical stroke	**180 mm**		

ATLAS X3

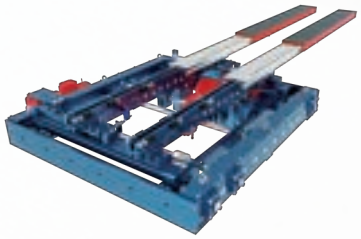

Technical details

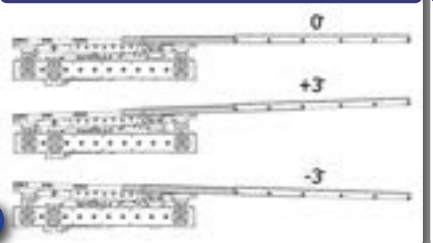

Description

This specific version of the ATLAS Lift allows adding a tilting movement by -3° or +3°, useful in some applications with gravity ramps, such as gravity flow racking.

maximum tilting angle	**+/- 3°**	**max. payload**	**1200 kg**
		tilting time	**6 s**

GEMINI X1



Technical details

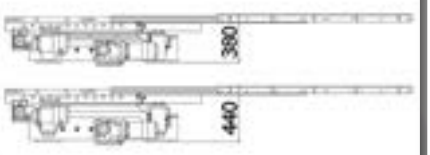

Description

It's a narrow-body version of our ATLAS Lift, meant to operate with telescopic monoforks, and driven through eccentric cams.

minimum vertical stroke	**60 mm**	**max. payload**	**600 kg**
		lifting time	**5 s**
maximum vertical stroke	**120 mm**		

GEMINI X2

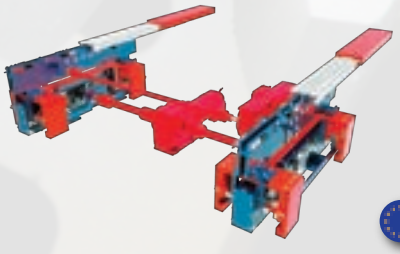

Technical details

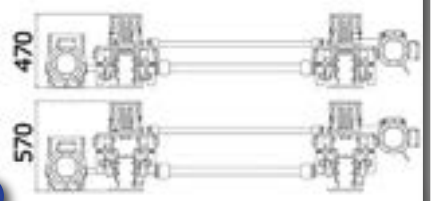

Description

It's simply the twin-body version of our GEMINI X1 Lift, meant to operate with couples of telescopic forks, and driven through eccentric cams, with a considerably lighter structure compared to the ATLAS series.

minimum vertical stroke	**60 mm**	**max. payload**	**1200 kg**
		lifting time	**5 s**
maximum vertical stroke	**120 mm**		

ARCHIMEDES X2

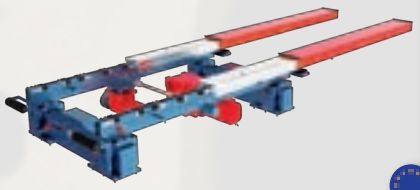

Technical details

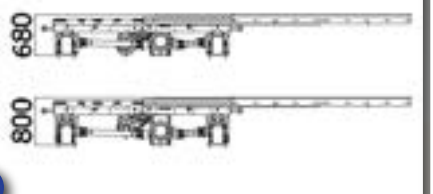

Description

ARCHIMEDES X1 and X2 are leverage lift systems which are able to lift significant loads with repeatability and accuracy. Not using chains nor gears for lifting, they are exceptional pieces of equipment as regards the close-to-zero maintenance needed and the very low operating noise level.

minimum vertical stroke	**60 mm**	**max. payload**	**5000 kg**
		lifting time	**10 s**
maximum vertical stroke	**150 mm**		

APOLLO



Technical details

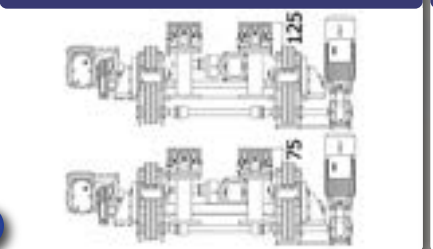

Description

The APOLLO is a compound system (telescopic forks + conveyor), meant to improve the functionality of the handling device. With closed forks, the conveyor lifts, handling the pallet separately. It allows to reduce the cycle times within the automated warehouses, and to improve the positioning of the load on the shelf.

min. length	**1000 mm**	**max. payload**	**1500 kg**
max. length	**1700 mm**	**max. speed**	**25 m/min**
maximum vertical stroke	**60 mm**		

www.lhdforks.com

follow us on

LHD
LOAD HANDLING DEVICES

HeadQuarter - LHD S.p.A.
Europe production site
CEO
Mr. Giuliano Rivoir
Via Piossasco-Rivalta 30-32,
10090 Bruino (TO), Italy
Mobile +39 345 187 9559
Phone/Fax +39 011 908 62 70
g.rivoir@lhdforks.com
info@lhdforks.com
Skype lhd.spa

LHD China/太仓艾拉德
Taicang LHD Co., Ltd.
China production site
Mr. James Li/李泽佺
Building 2, No.112 Dongting North
Road in High-Tech Area,
Taicang City, Jiangsu,
People's Republic of China
Mobile/手机 +86 138 1781 2271
Phone/座机 +86 512 5354 7892
james.li@lhdforks.com

LHD Managing Director
Mr. Daniele Ribetto
Mobile +39 346 727 46 78
d.ribetto@lhdforks.com

LHD India
Mr. Mahmood Haider
Noida, New Delhi, India
Mobile +91 98910 98818
m.haider@lhdforks.com

LHD Taiwan
Mr. Bogen Tong/唐嘉鴻
Knowledge&Technology
Trading Co., Ltd.
(81146) 1F., No.20, Jhongtai St.,
Nanzih District, Kaohsiung City 811,
Taiwan (R.O.C.)
Mobile: +886 921 250 790
Phone/Fax: +886 7 360 961(0)
bogen@germany-gear.tw

LHD Western Europe, Russia & CIS
Mr. Jacopo Trivero
Mobile +39 391 350 64 30
j.trivero@lhdforks.com

LHD Deutschland, Österreich & Schweiz
Mr. Jochen Gsell
Mobile +39 391 763 55 79
j.gsell@lhdforks.com

LHD BeNeLux
Mr. Jens Jacobs
Vansichen Linear Technology bvba
Hasselt, Belgium
Phone +32 11 37 79 63
jens@vansichen.be

LHD USA, Canada & Mexico
Mr. Kyle VanOphem
Carlson - Dimond & Wright, Inc.
25201 Terra Industrial Drive
(Suite B) Chesterfield,
Michigan, 48051 USA
Mobile +1 (586) 320 3087
k.vanophem@lhdforks.com

LHD LatAm
Mr. Diego Micol
Mobile +39 389 132 51 49
d.micol@lhdforks.com

LHD South-East Asia
Mr. Roger Chen/陈雁
Mobile/手机 +86 133 0622 8955
roger.chen@lhdforks.com

LHD Vietnam
Mr. Tao Van An
Au Viet System Co., Ltd.
Thu Duc, Ho Chi Minh, Viet Nam
Mobile + 84 989 514 905
an.taovan@avs-coltd.com

LHD France
Mr. Joaquim Da Costa
Alfatec France
Z.I. Des Plattes III, 20 Chemin Des
Ronzières, 69390 Vourles, France
Phone +33 4 72 67 01 77
info@alfatecfrance.fr

LHD South Korea
Mr. Eric Myung
Eurotech Corporation
#2403, Heungdeok U-Tower, 120
Heungdeokjoongang-ro, Giheung-gu,
Yongin-si, Gyeonggi-do, South Korea
Mobile +82 10 5663 9822
e.myung@lhdforks.com
eurotech@eurotech.co.kr

LHD Turkey
Mr. Çoruh Çubukçu
Tıkır Makina San. ve Tic. Ltd. ti.
Kestel OSB - Ahmetvefikpa a OSB
Mah. Karapınar Cad. No.5, 16450
Kestel, Bursa, Turkey
Mobile +90 533 511 90 90
satis@lhdturkiye.com

LHD Thailand
Mr. Teeradon Anumas
Master Automation Co., Ltd.
Phra Nakhon Si Ayutthaya, Thailand
Mobile +66 8 5516 2777
teeradon.anumas@ma-thailand.com

LHD South Africa
Mr. Asif Parvez
254 West Rd. South, Sandton 2196,
Johannesburg, South Africa
Mobile +27 72 792 8080
a.parvez@lhdforks.com

LHD After-Sales Service
Mr. Alessandro Faga
Mobile +39 351 505 49 04
service@lhdforks.com

Distributed by Gross Automation | +1 (262) 252-1600 | sales@grossautomation.com