


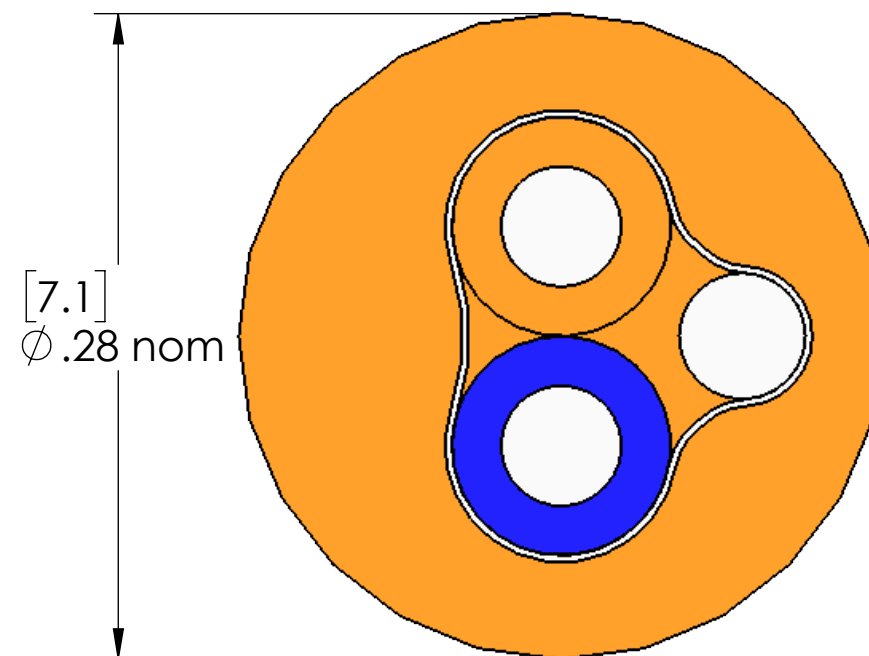

CABLE SUPPLIED ON A SINGLE SPOOL.
1 BREAK ALLOWED FOR LENGTHS
OF 1000' OR MORE WITH NO
PIECE BEING SHORTER THAN 250'

TABLE A		
PART NUMBER	LENGTH	TOL
30AX002-0250	250'	2'
30AX002-0500	500'	5'
30AX002-1000	1000'	5'
30AX002-1500	1500'	5'

SPECIFICATIONS:	
UL STYLE:	AWM 20201
CSA STYLE:	
NUMBER OF CONDUCTORS:	2
CABLE JACKET MATERIAL:	ORANGE PVC
COND. JACKET MATERIAL:	XLPE
COND. JACKET THICKNESS:	.023" MIN
COND. STRANDING:	18AWG
FILLER:	Poly
DRAIN WIRE:	22 AWG TC stranded
SEPARATOR:	Aluminum Foil-Polyester Tape
LAY:	2.25" nom.
ELECTRICAL REQUIREMENTS:	@ 31.25kHz
IMPEDANCE	100+/-10?
DWV	1.5kVAC
MECHANICAL REQUIREMENTS:	
EXTRUSION STYLE:	PRESSURE EXTRUSION
JACKET PRINTING:	INK PRINTING OF UL / CSA INFORMATION. NO COMPANY NAMES ALLOWED
CONVOLUTIONS:	NONE ALLOWED. LEVEL 2 SMOOTH

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	10/19/2016				TITLE: 18/2 Fieldbus cable		
		CHECKED BY							
		CHECK DATE							
		COMMENTS:		SIZE	DWG. NO.	REV			
MATERIAL				B	30AX002-ZZ	B			
FINISH				SCALE: 12:1	WEIGHT:	SHEET 1 OF 1			
DO NOT SCALE DRAWING									