



CA and MA CENTRAL LEVER

| inserts |                     | page:     |
|---------|---------------------|-----------|
| CDD     | 42 poles + ⊕        | 78        |
| CDS     | 18 poles + ⊕        | -         |
| CDSH    | 18 poles + ⊕        | 87        |
| CNE     | 10 poles + ⊕        | 111       |
| CSE     | 10 poles + ⊕        | -         |
| CSH     | 10 poles + ⊕        | 111       |
| CSH S   | 10 poles + ⊕        | 123       |
| CCE     | 10 poles + ⊕        | 131       |
| CMSH    | 3+2 (aux) poles + ⊕ | 136       |
| CMCE    | 3+2 (aux) poles + ⊕ | 137       |
| CSS     | 10 poles + ⊕        | 149       |
| CQE     | 18 poles + ⊕        | 169       |
| CX      | 8/24 poles + ⊕      | 194       |
| MIXO    | 3 modules           | 262 - 317 |

hoods with central lever



hoods with central lever




| description                   | part No.    | entry Pg | part No     | entry M | part No.    | entry Pg | part No.    | entry M |
|-------------------------------|-------------|----------|-------------|---------|-------------|----------|-------------|---------|
| side entry, high construction | CAO 10 YX21 | 21       | MAO 10 YX32 | 32      |             |          |             |         |
| side entry, high construction | CAO 10 YX29 | 29       | MAO 10 YX40 | 40      |             |          |             |         |
| top entry, high construction  |             |          |             |         | CAV 10 YX21 | 21       | MAV 10 YX32 | 32      |
| top entry, high construction  |             |          |             |         | CAV 10 YX29 | 29       | MAV 10 YX40 | 40      |


☑ Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

CAO..YX and MAO..YX

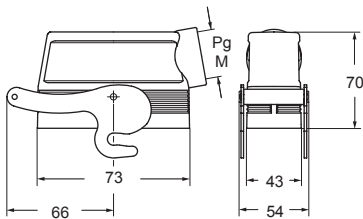

CAV..YX and MAV..YX

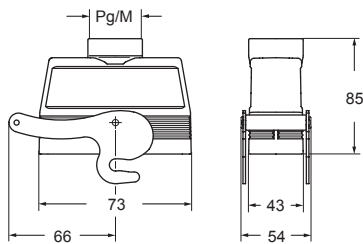

**CAUS**® Type 4/4X/12

