



CH - CA and MA CENTRAL LEVER

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CT, CTS (10A *)	40 poles + ⊕	156
CT, CTSE (16A *)	16 poles + ⊕	162
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

*) can be used only in bulkhead mounting housings

bulkhead mounting housings for central lever



surface mounting housings, with two entries for central lever




description	part No.	part No.	entry Pg	part No.	entry M
-------------	----------	----------	----------	----------	---------

bulkhead mounting with pegs **CHI 16 YC**

surface mounting, high construction, with pegs

CAP 16 YC229 29x2 **MAP 16 YC232** 32x2


panel cut-out for bulkhead mounting housings

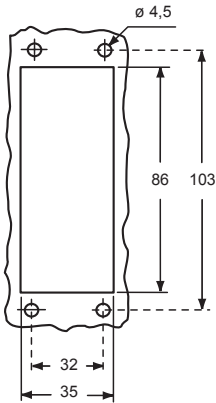


☑ Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

CHI YC



CAP YC and MAP YC

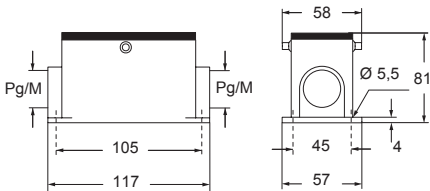

CAUS Type 4/4X/12

