

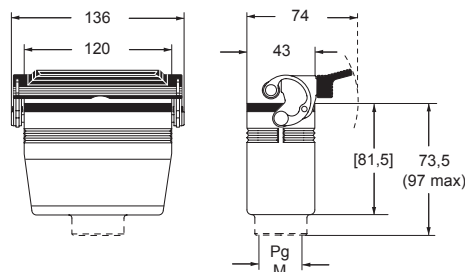
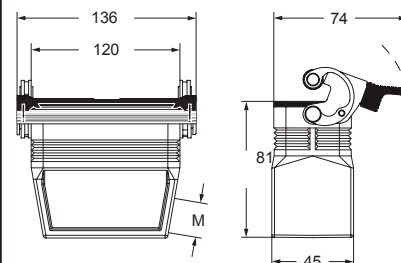
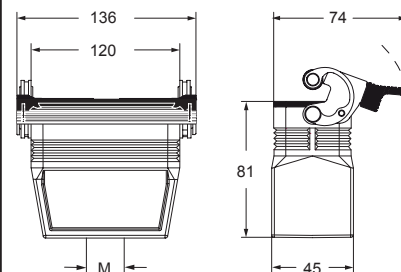
CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	64 poles + ⊕	72
CDD	108 poles + ⊕	81
CDS	42 poles + ⊕	-
CDSH	42 poles + ⊕	89
CNE	24 poles + ⊕	113
CSE	24 poles + ⊕	-
CSH	24 poles + ⊕	113
CSH S	24 poles + ⊕	125
CCE	24 poles + ⊕	133
CMSH	10+2 (aux) poles + ⊕	140
CMCE	10+2 (aux) poles + ⊕	141
CSS	24 poles + ⊕	151
CQE	46 poles + ⊕	171
CQEE	64 poles + ⊕	177
CX	4/8 and 6/6 poles + ⊕	204 and 206
MIXO	6 modules	262 - 317

hoods with 1 lever**hoods with 1 lever
M40 cable entry with 20 mm thread length**

description	part No.	entry Pg	part No.	entry M	part No.	entry M
with lever and gasket, side entry, high construction, without adapter 1)					MFO 24 LG40	40
with lever and gasket, top entry	CHV 24 LG	21	MHV 24 LG32	32		
with lever and gasket, top entry, high construction	CAV 24 LG21	21	MAV 24 LG25	25		
with lever and gasket, top entry, high construction	CAV 24 LG29	29	MAV 24 LG32	32		
with lever and gasket, top entry, high construction			MAV 24 LG40	40		
with lever and gasket, top entry, high construction, without adapter 1)	CFV 24 LG21	21	MFV 24 LG25	25		
with lever and gasket, top entry, high construction, without adapter 1)	CFV 24 LG29	29	MFV 24 LG32	32		
with lever and gasket, top entry, high construction, without adapter 1)					MFV 24 LG40	40

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

**CHV LG (CAV LG) and [CFV LG],
MHV LG (MAV LG) and [MFV LG]****MFO 24 LG40****MFV 24 LG40**

CAUS® Type
4/4X/12



insulating cable gland or fittings
without gasket



cable gland
with O-Ring gasket