

CH - CF and MH - MF C-TYPE standard version

inserts

		page:
CD	80 poles + ⊕	73
CDD	144 poles + ⊕	82
CDS	54 poles + ⊕	-
CDSH	54 poles + ⊕	90
CNE	32 poles + ⊕	114
CSE	32 poles + ⊕	-
CSH	32 poles + ⊕	114
CSH S	32 poles + ⊕	126
CCE	32 poles + ⊕	134
CSS	32 poles + ⊕	152
CQE	64 poles + ⊕	172
CME	12+4 (aux) poles + ⊕	142
CMSH	12+4 (aux) poles + ⊕	142
CMCE	12+4 (aux) poles + ⊕	143
CP	12 poles + ⊕	179
MIXO	4 + 4 modules	262 - 317

insert dimensions:
2 x (77,5 x 27) mm

hoods with 2 levers



covers




description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry ²⁾	CHO 32 X	36	MHO 32 X40	40		
with levers, side entry, without adaptor ^{1) 2)}	CFO 32 X	36	MFO 32 X40	40		
with levers, top entry ²⁾	CHV 32 X	36	MHV 32 X40	40		
with levers, top entry, without adaptor ^{1) 2)}	CFV 32 X	36	MFV 32 X40	40		
with 4 pegs (for enclosures with 2 levers with gasket)					CHC 32	CHC 32 S
with 4 pegs and gasket (for enclosures with 2 levers) ³⁾						CHC 32 C
with 2 pegs (for enclosures with 1 lever with gasket)					CHC 32 L	CHC 32 SL
with 2 levers (for hoods with 4 pegs)						CHC 32 G
with 1 lever (for hoods with 2 pegs)						CHC 32 LG

¹⁾ enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


²⁾ may be combined with CHI 32 CS enclosures

³⁾ may be combined with enclosures:
- CHO/CFO 32 X and CHV/CFV 32 X
- MHO/MFO 32 X and MHV/MFV 32 X

CHO/CFO X and MHO/MFO X

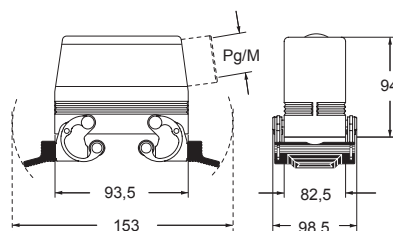


CHV/CFV X and MHV/MFV X

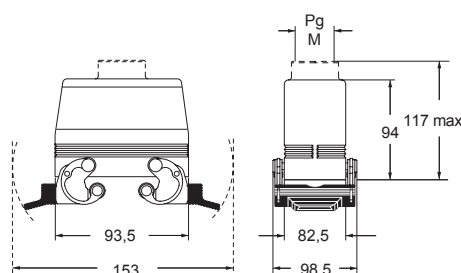


CHC (S)




CHC C




CHC L (SL)



CHC G

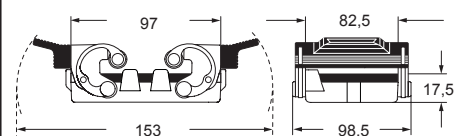

CHC LG

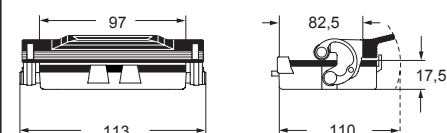


For fixing
on housings

eyelet



For fixing
on hoods

loop



CAUS Type
4/4X/12



insulating cable gland or fittings
without gasket



cable gland
with O-Ring gasket