

CX 01 T

enclosures: size "49.16"	page:
IL-BRID	374 - 377, 382
CZ7 IP67, single lever	384
W-TYPE for aggressive environments	519
E-Xtreme® corrosion proof	540
EMC	576
panel supports: COB + adaptor	page: 652 - 654


frames for modular units



description	part No.
-------------	----------

for CZ enclosures	CX 01 T
-------------------	---------

- die-cast zinc alloy frames
- protective earth (PE)
- polarisation on frames
- coding pins **CR..CX**

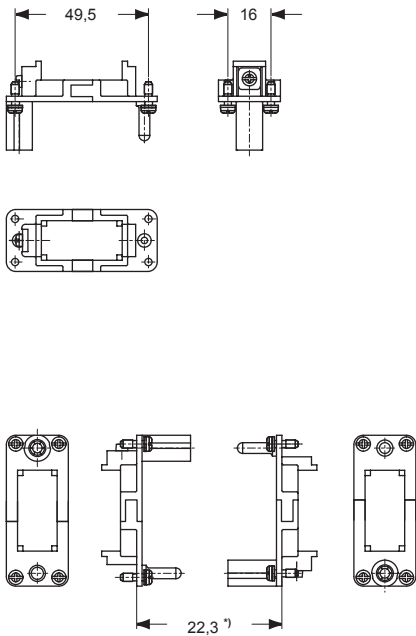

*) distance for electric contacts: max 24 mm
distance for pneumatic contacts: max 23,5 mm

- small earth terminal for cables from 1-2,5 mm², AWG 18-14