

CZ7 - MZ7 standard version RIGID LEVER

inserts

CD	15 poles + ⊕	68
CDA	10 poles + ⊕	98
CSAH	10 poles + ⊕	99
CDC	10 poles + ⊕	104
MIXO	1 module	264 - 316

page:

bulkhead mounting housings
with single lever



STAINLESS STEEL LEVER

surface mounting housings
with single lever

STAINLESS STEEL LEVER

description	part No.	part No.	entry M
with single lever	CZ7I 15 L		
with single lever and cover	CZ7I 15 LS		
with single lever		MZ7P 15 L25	25
with single lever		MZ7P 15 L225	25 x 2
with single lever and cover		MZ7P 15 LS25	25
with single lever and cover		MZ7P 15LS225	25 x 2

panel cut-out for bulkhead mounting housings

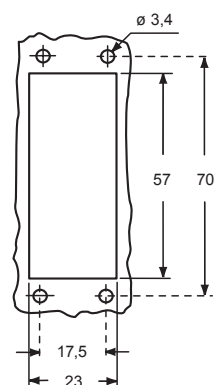Hoods
(page 376)

The rigid lever offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

CALUS Type
4/4X/12




insulating cable gland or fittings
without gasket




cable gland with O-Ring gasket
IP67 if coupled with IP67 hood or cover

CZ7I L

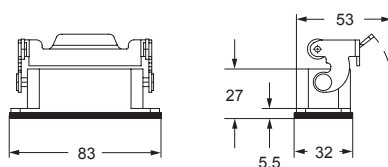


CZ7I LS

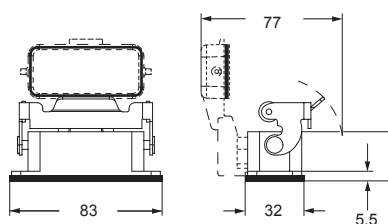

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use M3 screws of suitable length (negligible surface buckling when subjected to tightening torque on the fixing screws of 0,9 - 1 Nm or to deformation caused by the weight of the complete connector).

In addition, the panel surface in contact with the flange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

MZ7P L

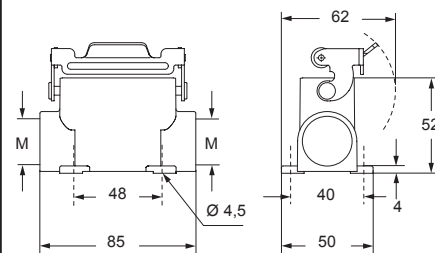

MZ7P LS

