


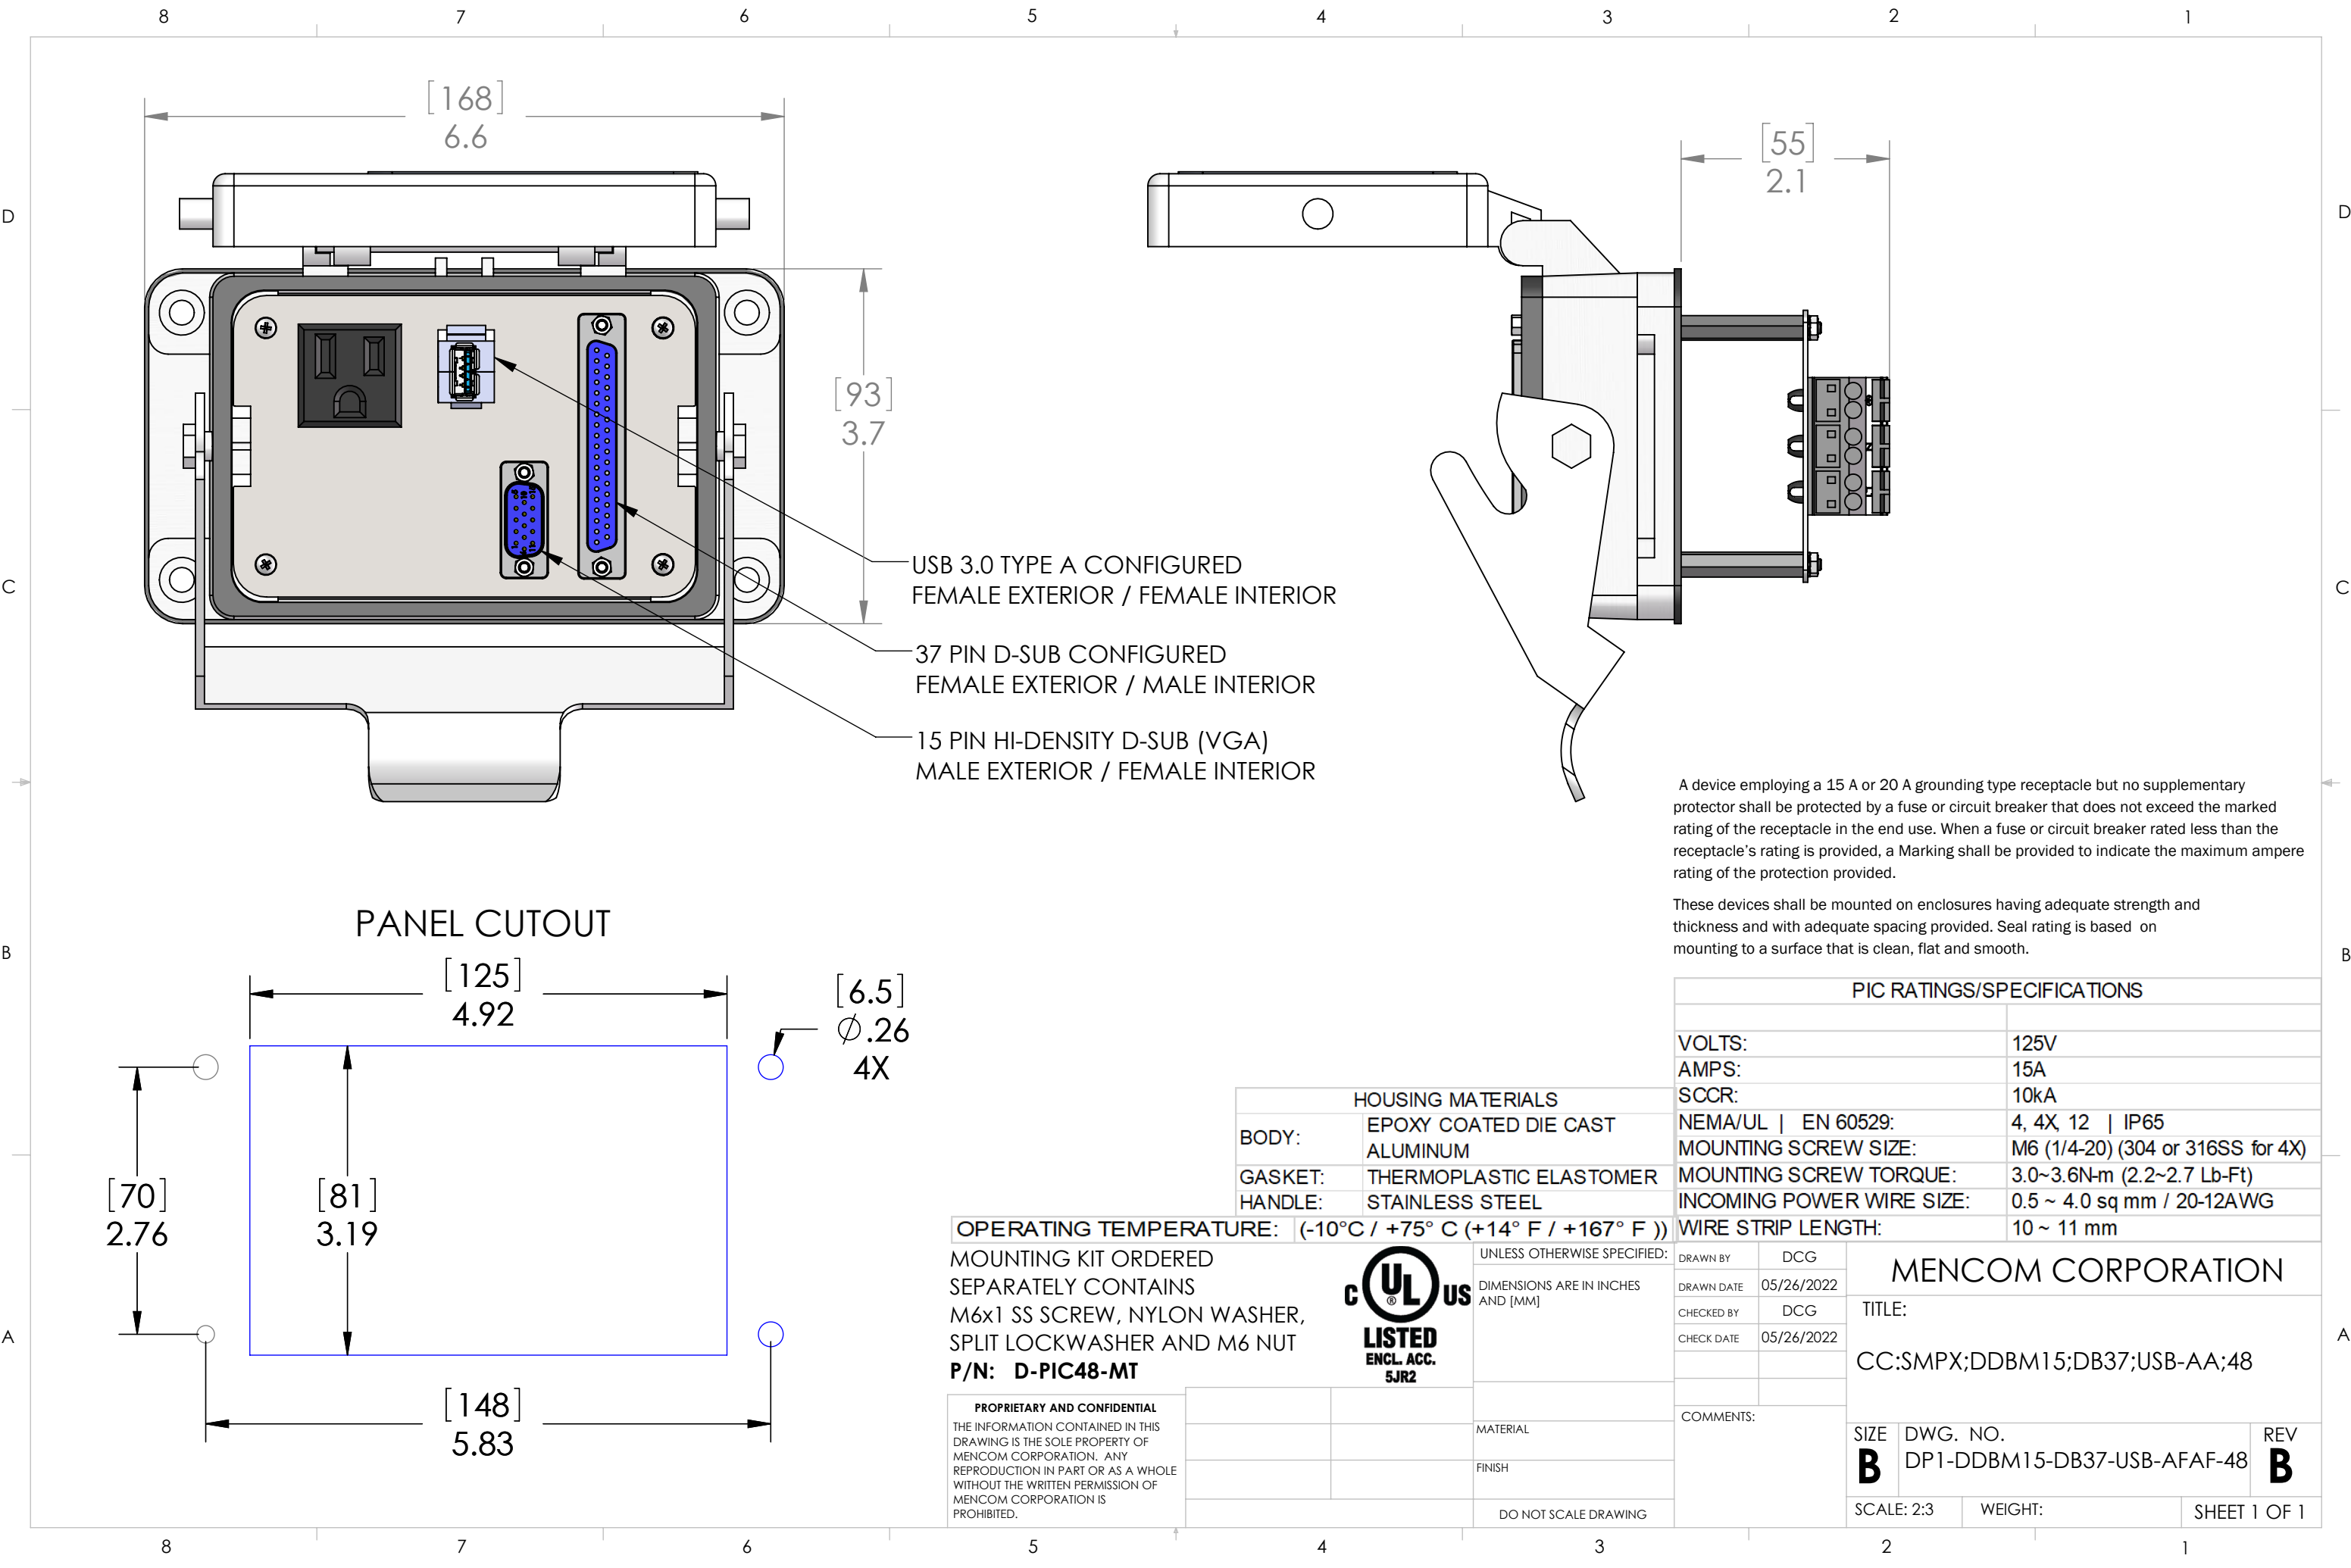

USB 3.0 TYPE A CONFIGURED
FEMALE EXTERIOR / FEMALE INTERIOR

37 PIN D-SUB CONFIGURED
FEMALE EXTERIOR / MALE INTERIOR

15 PIN HI-DENSITY D-SUB (VGA)
MALE EXTERIOR / FEMALE INTERIOR

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	15A
SCCR:	10kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M6 (1/4-20) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	3.0~3.6N·m (2.2~2.7 Lb·Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	STAINLESS STEEL

OPERATING TEMPERATURE: (-10°C / +75° C (+14° F / +167° F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M6x1 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M6 NUT
P/N: D-PIC48-MT



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

DRAWN BY	DCG
DRAWN DATE	05/26/2022
CHECKED BY	DCG
CHECK DATE	05/26/2022

COMMENTS:	

MENCOM CORPORATION			
TITLE:			
CC:SMPX;DDBM15;DB37;USB-AA;48			
SIZE	DWG. NO.	REV	
B	DP1-DDBM15-DB37-USB-AFAF-48	B	
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1	