



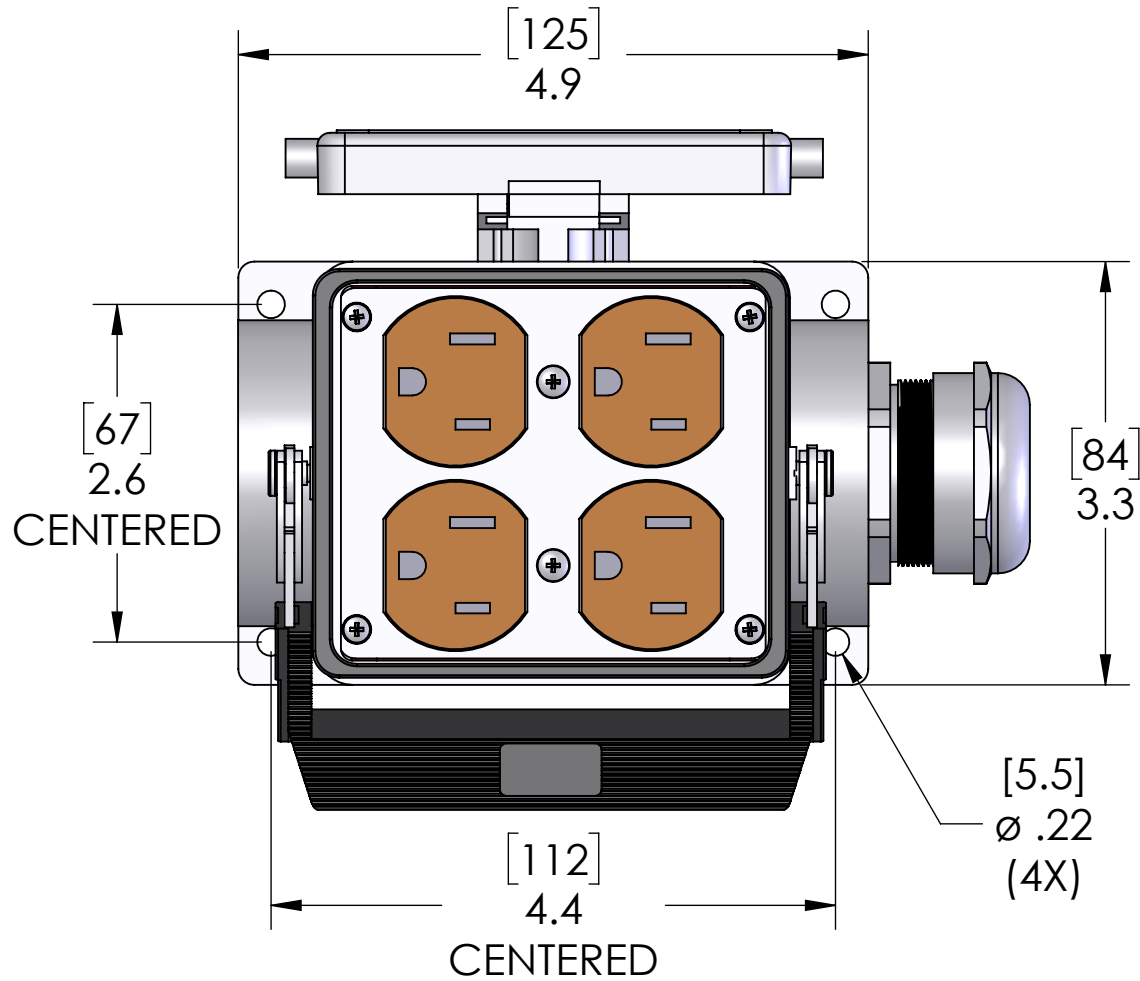

CABLE GLAND WILL SEAL ON CABLES OF DIAMETER .472\"-.787"

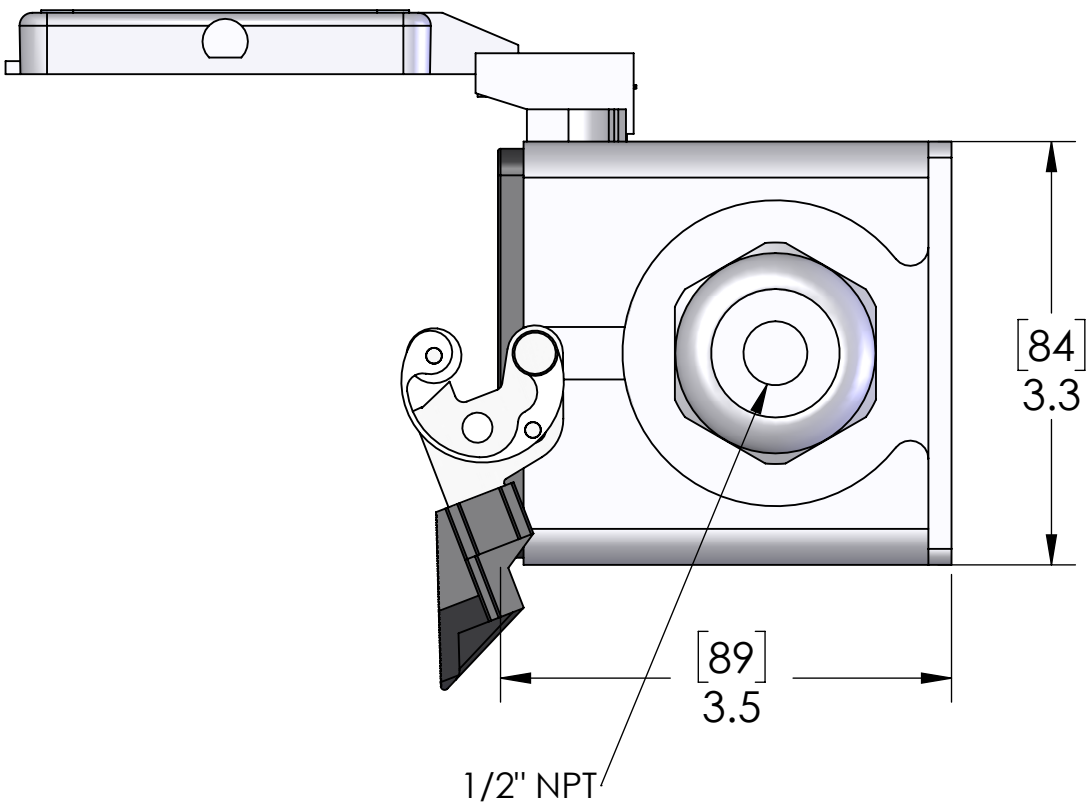

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS BODY: EPOXY COATED DIE CAST ALUMINUM GASKET: THERMOPLASTIC ELASTOMER HANDLE: POLYAMIDE LEVERS: STAINLESS STEEL			PIC RATINGS/SPECIFICATIONS					
			VOLTS:		125V			
			AMPS:		15A			
			SCCR:		10kA			
			NEMA/UL EN 60529:		4, 4X, 12 IP65			
			MOUNTING SCREW SIZE:		M5 (10-32) (304 or 316SS for 4X)			
OPERATING TEMPERATURE: (-40°C / +60° C (-40° F / +140° F))			MOUNTING SCREW TORQUE:		1.2~1.8N-m (0.9~1.3 Lb-Ft)			
MOUNTING KIT ORDERED SEPARATELY CONTAINS M5X0.8 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M5 NUT P/N: D-PIC-MT-M5 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED. UL LISTED ENCL. ACC. 5JR2 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM] MATERIAL FINISH DO NOT SCALE DRAWING			DRAWN BY		GO		MENCOM CORPORATION TITLE: DPLX X 2; 32 SRF MNT	
			DRAWN DATE		07/12/2021			
			CHECKED BY		DCG			
			CHECK DATE		07/14/2021			
			COMMENTS:					
					SIZE			
					DWG. NO.			
					REV			
					B			
					DP-2-P32			
					A			
					SCALE: 2:3			
					WEIGHT:			
					SHEET 1 OF 1			