



Foundation Fieldbus Series Receptacles


4 Conductor Foundation Fieldbus Receptacles, 18AWG




Front Mount Receptacles | 1/2"-14 NPT Threads | 300V, 10A | 300V, 4A | IP69/IP67 Rating



7/8" 16UN Receptacles						
# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Male Receptacles	Female Receptacles
4 IP67	 7/8"-16UN2	1. Blue(-) 2. Orange(+) 3. Shield 4. N/C	300V 10A	18 AWG	FFIN-4MR-**-SS	FFIN-4FR-**-SS

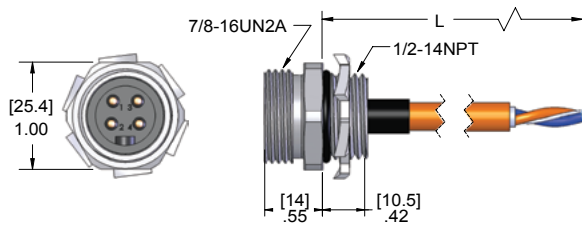

Male Receptacle

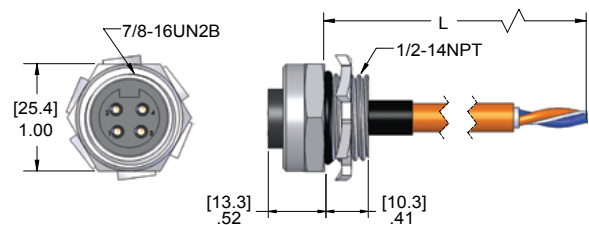

Female Receptacle


M12 Receptacles						
# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Male Receptacles	Female Receptacles
4 IP69	 M12 x 1	1. Blue(-) 2. Orange(+) 3. Shield 4. N/C	300V 4A	18 AWG	FFDC-4MR-2**-SS	FFDC-4FR-2**-SS

** Lengths in meters.


Lock Nut and O-Ring are included.

Specifications:

- Shell: Stainless Steel
- Insulator: FFIN: Oil Resistant Black PVC
FFDC: Polyamide
- Cable: Orange PVC, 2x18 AWG Cable with Foil Shield
- Contacts: Copper Alloy with Gold Plating
- O-Ring: NBR
- Lock Nut: Nickel Plated Brass
- Temperature: -40°C to 105°C (-40°F to +221°F)

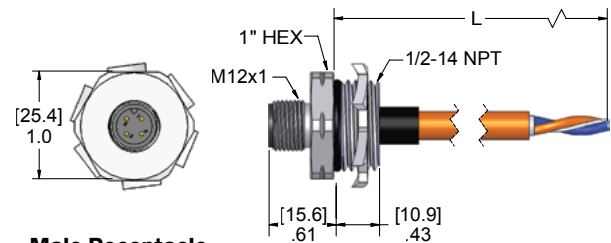

Male Receptacle

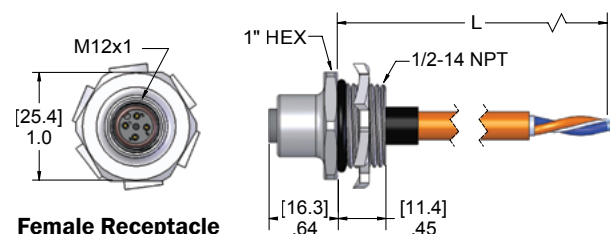

Female Receptacle

Foundation Fieldbus Series

M