

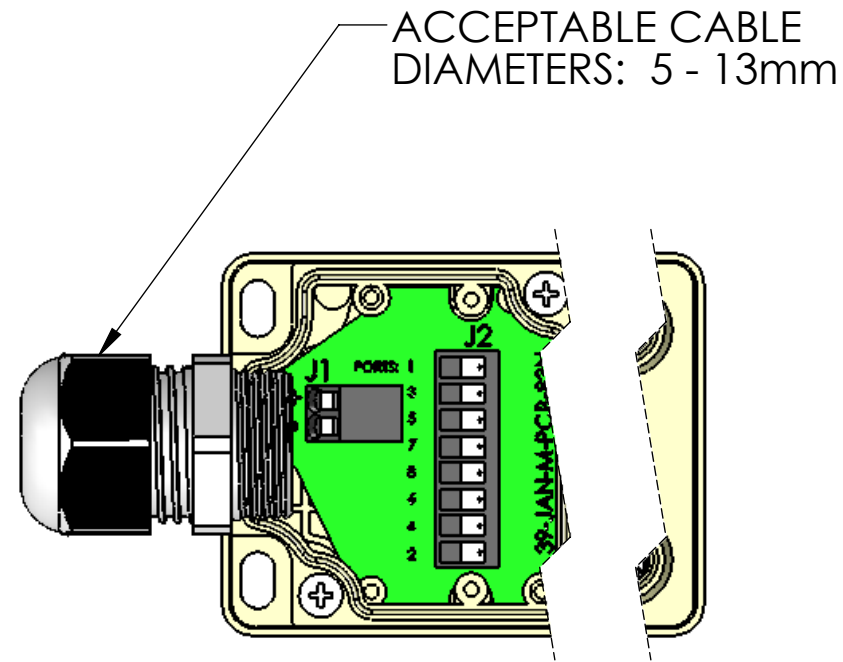
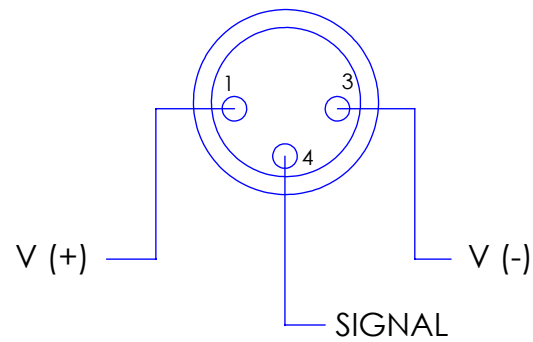


WIRING	
COLOR	FUNCTION
J1 - +	V+ (ALL PORTS PIN 1)
J1 - -	V- (ALL PORTS PIN 3)
J2 - 1	PORT 1 / PIN 4
J2 - 2	PORT 2 / PIN 4
J2 - 3	PORT 3 / PIN 4
J2 - 4	PORT 4 / PIN 4
J2 - 5	PORT 5 / PIN 4
J2 - 6	PORT 6 / PIN 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/20/2009	

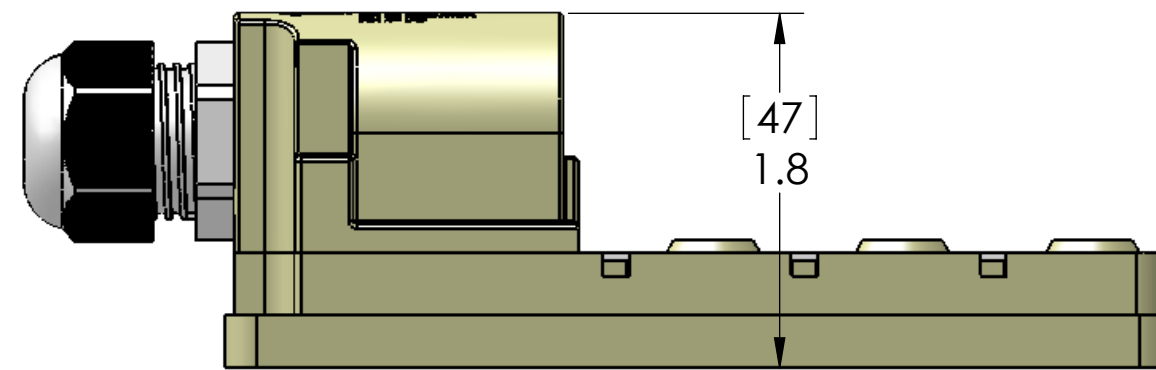

CONNECTIONS MADE VIA SPRING CLAMP TERMINAL BLOCKS

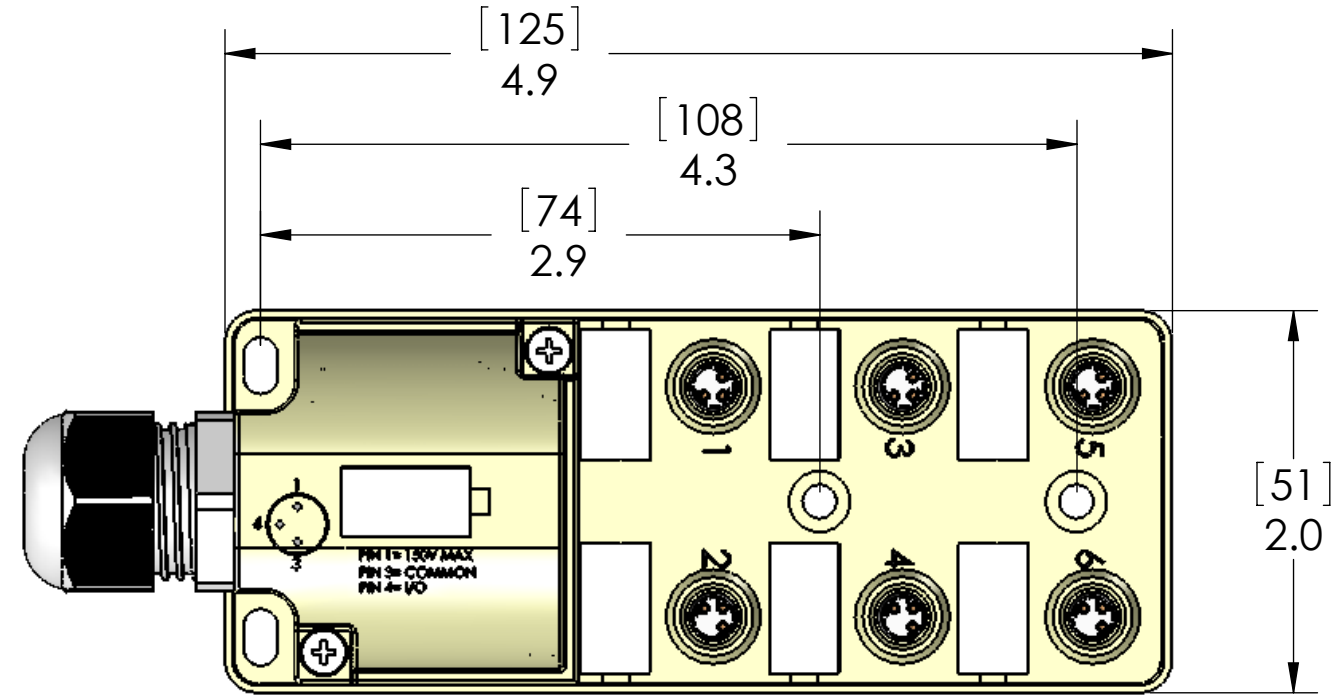

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	150V MAX
AMPS:	3A PER PORT, 8A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM	
	CHECKED		
	ENG APPR.		
	MFG APPR.		
	Q.A.		
MATERIAL		COMMENTS:	
FINISH			
DO NOT SCALE DRAWING			
MENCOM CORPORATION			
TITLE:			
SIZE	DWG. NO.	REV	
B	JAN-630-008-F000	A	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	