







JAN (M8) Junction Blocks

6 Port, 3 Pin JAN Junction blocks




Field Wireable | Cable | MIN Receptacle | MIN Receptacle | IP67 Rating



Trunk Style	Trunk Connection	Part Number		
		No LED	PNP	NPN
	Field Wireable 24 AWG - 16 AWG	JAN-630-008-F000	JAN-63P-208-F000	JAN-63N-208-F000
	Black PUR AWM 20233 With With Mylar Shield 24 AWG Drain Wire 3 x 18 AWG 6 x 22 AWG 7.9mm OD	JAN-630-008-C**	JAN-63P-208-C**	JAN-63N-208-C**
	MIN Size II 8 Pole Male Receptacles	JAN-630-008-M000	JAN-63P-208-M000	JAN-63N-208-M000
	M12 8 Pole Male Receptacles	JAN-630-008-E000	JAN-63P-208-E000	JAN-63N-208-E000

** Lengths in meters. Standard Cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

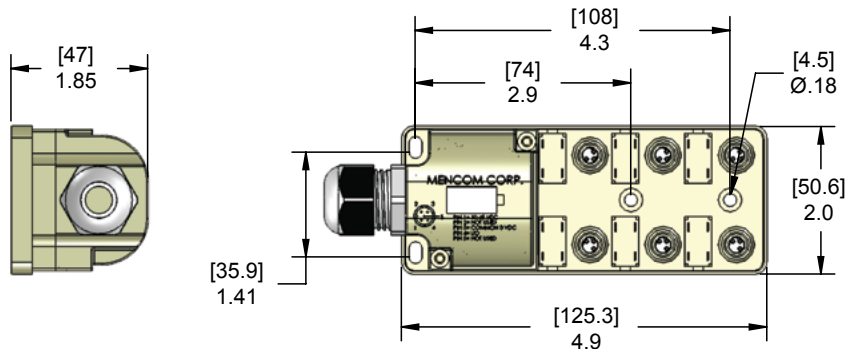

Specifications:

Ratings:	3 A per Connector 8 A per Block	Inserts:	Polyamide
Voltage:	Without LEDs: 0-60 VDC Max With LEDs: 48 VDC Max in accordance with LED Configuration	Port Coupling Nuts:	PBT
Body:	Polypropylene	O-Ring:	BUNA-N
		LED Lens:	Polycarbonate
		Contacts:	Copper Alloy with Gold Plating
		Marker Tags:	Polyamide (supplied on all units)