



JDC (M12) Junction Blocks

10 Port, 4 Pin JDC Junction blocks



MIN Receptacle | MIN Plug | M23 Receptacle | IP67 Protection Rating




Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	N/A	MIN Size III 19 Pole Male Receptacle	JDC-040-019-M000	JDC-04P-219-M000	JDC-04N-219-M000
	N/A	M23 19 Pole Male Receptacle	JDC-040-019-V000	JDC-04P-219-V000	JDC-04N-219-V000
	N/A	MIN Size III 19 Pole Male Plug with Male Thread	JDC-040-019-M003	JDC-04P-219-M003	JDC-04N-219-M003
	N/A	MIN Size III 19 Pole Male Plug with Male Thread	JDC-040-019-M**	JDC-04P-219-M**	JDC-04N-219-M**

** Lengths in meters. Standard Cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

JDC Junction Blocks

Q

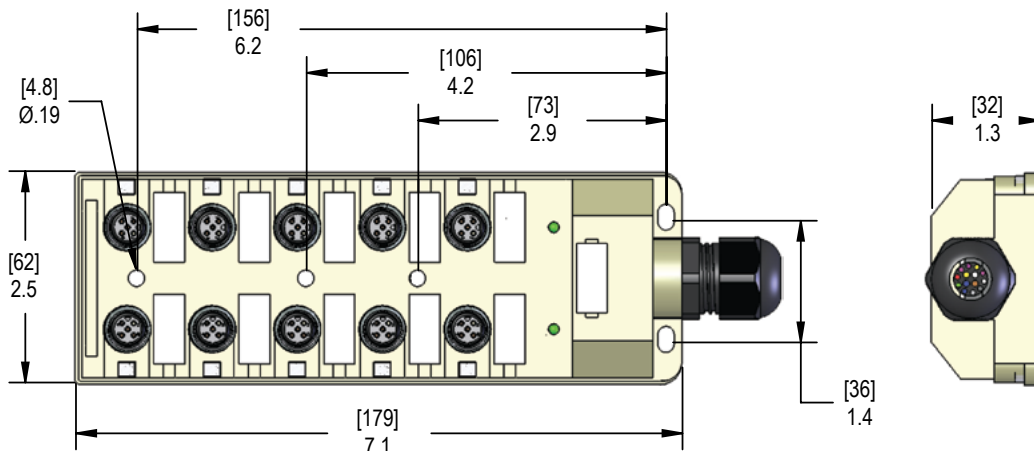

Specifications:

Ratings:	3 A per Connector 8 A per Block	Inserts:	Polyamide
Voltage:	Without LEDs: 0-150 Volt Max With LEDs: 48 VDC Max in accordance with LED Configuration	Port Coupling Nuts:	Nickel Plated Brass
Body:	Polypropylene	O-Ring:	BUNA-N
		LED Lens:	Polycarbonate
		Contacts:	Copper Alloy with Gold Plating
		Marker Tags:	Polyamide (supplied on all units)