

WIRING	
COLOR	PORT/PIN
BROWN	ALL PORTS, PIN 1 (+)
BROWN / WHITE	ALL PORTS, PIN 1 (+)
GREEN/YELLOW	ALL PORTS, PIN 5 (PE)
BLUE	ALL PORTS, PIN 3 (-)
WHITE	1 / 4
GREEN	2 / 4
YELLOW	3 / 4
GRAY	4 / 4
PINK	5 / 4
RED	6 / 4
BLACK	7 / 4
VIOLET	8 / 4
WHITE/PINK	9 / 4
PINK/BROWN	10 / 4
GRAY/PINK	1 / 2
RED/BLUE	2 / 2
WHITE/GREEN	3 / 2
BROWN/GREEN	4 / 2
WHITE/YELLOW	5 / 2
YELLOW/BROWN	6 / 2
WHITE/GRAY	7 / 2
GRAY/BROWN	8 / 2
WHITE/RED	9 / 2
BROWN/RED	10 / 2

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	1/2/2007	

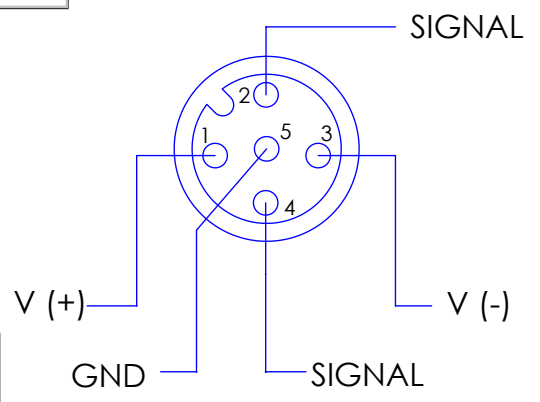
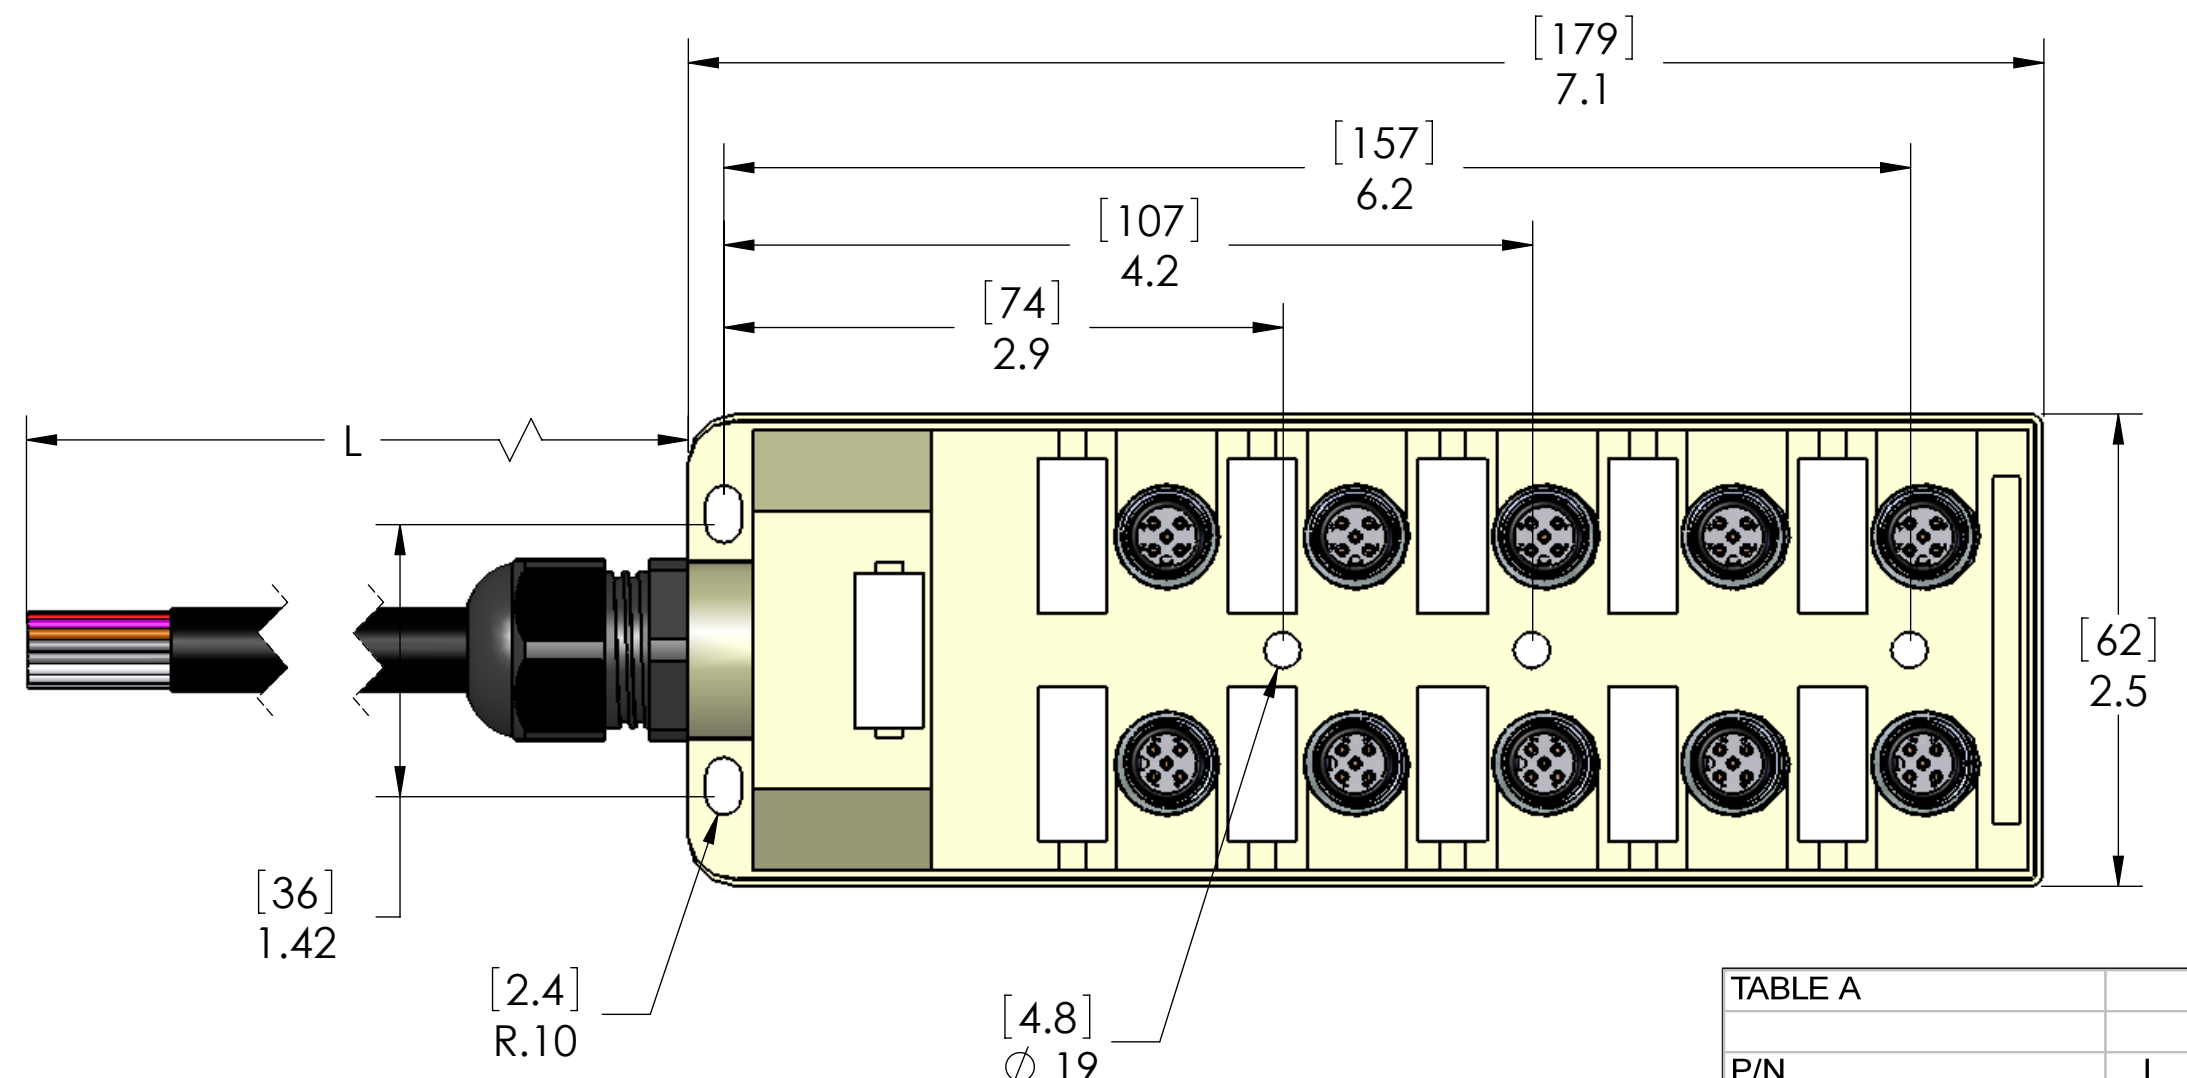


TABLE A	
P/N	L
JDC-050-024-C010	40"
JDC-050-024-C020	79"
JDC-050-024-C030	118"
JDC-050-024-C040	157"
JDC-050-024-C050	197"
JDC-050-024-C060	236"
JDC-050-024-C100	393"
JDC-050-024-C150	590"

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	30V MAX
AMPS:	4A PER PORT, 12A PER BLOCK

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	
DIMENSIONS ARE IN INCHES		DRAWN	BEM
TOLERANCES:		CHECKED	
FRACTIONAL $\pm 1/64$		ENG APPR.	
ANGULAR: MACH $\pm 5^\circ$ BEND $\pm 5^\circ$		MFG APPR.	
TWO PLACE DECIMAL $\pm .01$		Q.A.	
THREE PLACE DECIMAL $\pm .004$		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
<b>B</b>	JDC-050-024-CZZ	<b>A</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1