





# JDC (M12) Junction Blocks

10 Port, 5 Pin JDC Junction blocks




Cable | D-Sub | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	N/A	Black PUR AWM With Foil Shield 24 AWG Drain Wire <b>4 x 18 AWG</b> <b>24 x 22 AWG</b> 12.4mm OD	JDC-050-024-C**	JDC-05P-224-C**	JDC-05N-224-C**
	N/A	Gray PVC With Foil Shield 20 AWG Drain Wire <b>21 x 24 AWG</b> <b>4 x 20 AWG</b>	JDC-050-025-D**	JDC-05P-225-D**	JDC-05N-225-D**

\*\* Lengths in meters. Standard cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

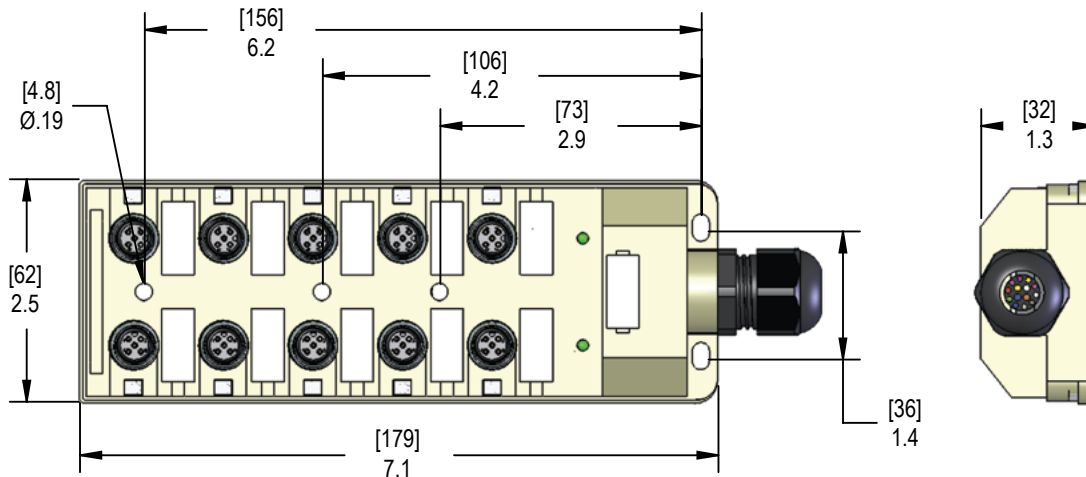

JDC Junction Blocks

Q

### Specifications:

Ratings:	3 A per Connector 8 A per Block	Inserts:	Polyamide
Voltage:	Without LEDs: 0-150 Volt Max With LEDs: 48 VDC Max in accordance with LED Configuration	Port Coupling Nuts:	Nickel Plated Brass
Body:	Polypropylene	O-Ring:	BUNA-N
		LED Lens:	Polycarbonate
		Contacts:	Copper Alloy with Gold Plating
		Marker Tags:	Polyamide (supplied on all units)