
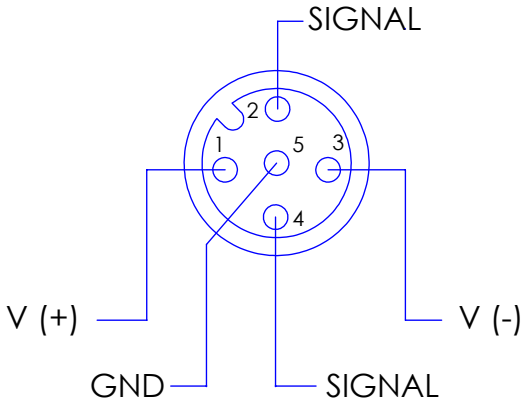
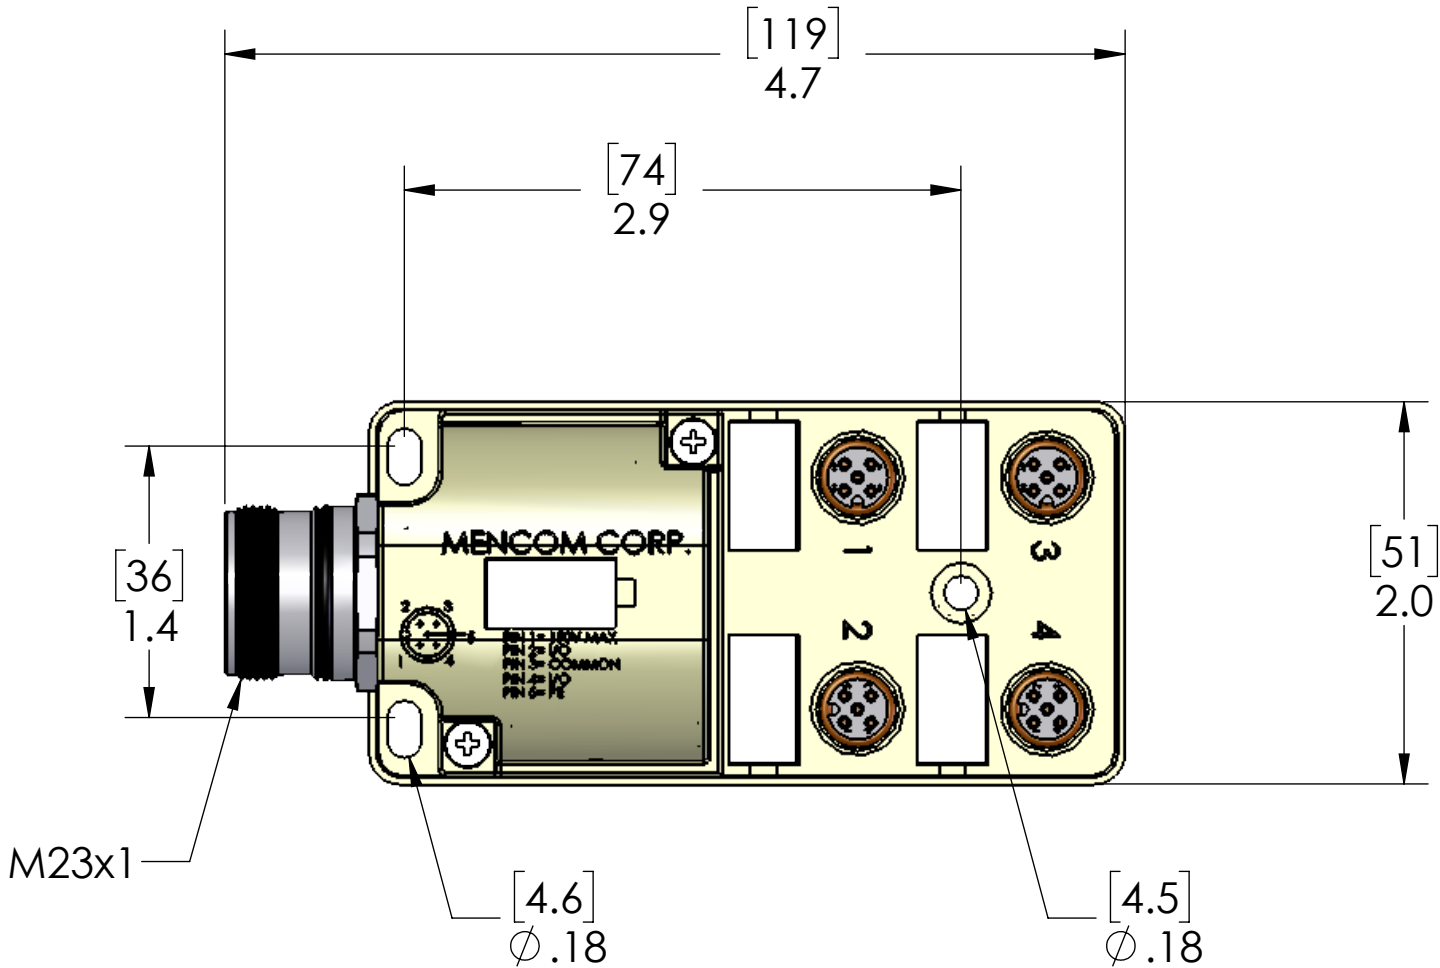


WIRING	
FUNCTION	MCV PIN
V+ (ALL PORTS PIN 1)	19
V- (ALL PORTS PIN 3)	6
GROUND (ALL PORTS PIN 5)	12
PORT 1 PIN 2	7
PORT 1 PIN 4	15
PORT 2 PIN 2	4
PORT 2 PIN 4	5
PORT 3 PIN 2	8
PORT 3 PIN 4	16
PORT 4 PIN 2	14
PORT 4 PIN 4	3

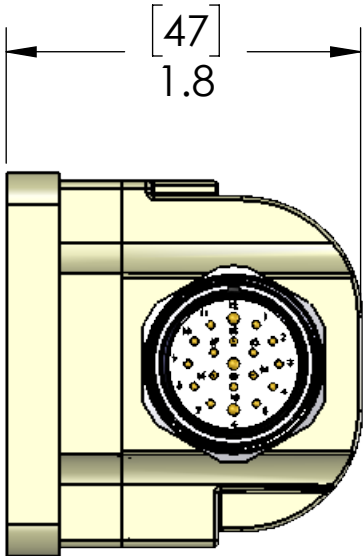

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
MCV BODY:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR & FPM
RATINGS:	
VOLTS:	150V MAX
AMPS:	3A PER PORT, 8A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	01/09/2018
	CHECKED BY	ADM
	CHECK DATE	01/09/2018
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 PRT 5 WR JBOX TO MCV-19MP		
SIZE B	DWG. NO. JDC-450-019-V000	REV A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1