



JDC (M12) Junction Blocks

4 Port, 5 Pin JDC Junction blocks




MIN Receptacle | MIN Plug | M23 Receptacle | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	N/A	MIN Size III 12 Pole Male Receptacle	JDC-450-012-M000	JDC-45P-212-M000	JDC-45N-212-M000
	N/A	MIN Size III 19 Pole Male Receptacle	JDC-450-019-M000	JDC-45P-219-M000	JDC-45N-219-M000
	N/A	M23 19 Pole Male Receptacle	JDC-450-019-V000	JDC-45P-219-V000	JDC-45N-219-V000
	N/A	MIN Size III 12 Pole Male Plug with Male Thread	JDC-450-012-M003	JDC-45P-212-M003	JDC-45N-212-M003
	N/A	MIN Size III 19 Pole Male Plug with Male Thread	JDC-450-019-M003	JDC-45P-219-M003	JDC-45N-219-M003
	N/A	MIN Size III 12 Pole Male Plug	JDC-450-012-M**	JDC-45P-212-M**	JDC-45N-212-M**
	N/A	MIN Size III 19 Pole Male Plug	JDC-450-019-M**	JDC-45P-219-M**	JDC-45N-219-M**

** Lengths in meters. Standard Cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

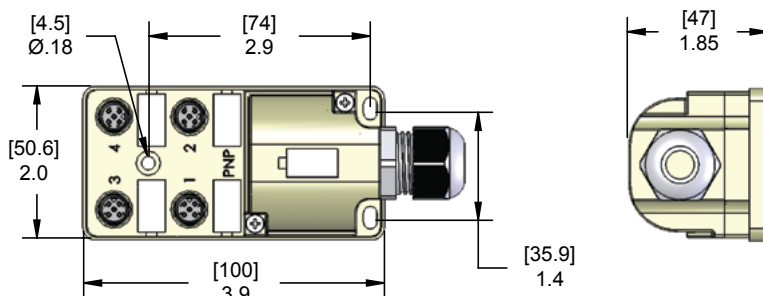

Specifications:

Ratings: 3 A per Connector
8 A per Block
Voltage: Without LEDs: 0-150 Volt Max
With LEDs: 48 VDC Max
in accordance with LED Configuration
Body: Polypropylene

Inserts: Polyamide
Port Coupling Nuts: PBT
O-Ring: BUNA-N
LED Lens: Polycarbonate
Contacts: Copper Alloy with Gold Plating
Marker Tags: Polyamide (supplied on all units)