





JDC (M12) Junction Blocks

4 Port, 5 Pin JDC Junction blocks




Straight Wired | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number
	UL Listed	Field Wireable 24 AWG - 16 AWG	JDC-4A0-017-F000
	UL Listed	Black PUR AWM With Foil Shield 22 AWG Drain Wire 3 x 18 AWG 4 x 22 AWG 10.9mm OD	JDC-4A0-017-C**

** Lengths in meters. Standard cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

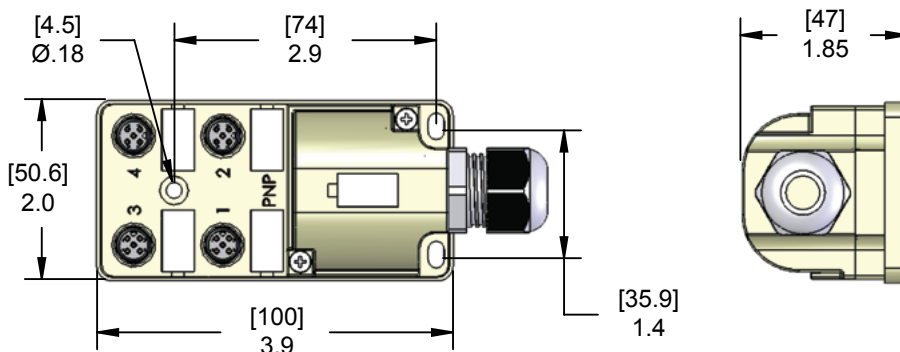

JDC Junction Blocks

Q

Specifications:

Ratings:	3 A per Connector 8 A per Block
Voltage:	Without LEDs: 0-150 Volt Max With LEDs: 48 VDC Max in accordance with LED Configuration
Body:	Polypropylene
Inserts:	Polyamide
Port Coupling Nuts:	PBT
O-Ring:	BUNA-N
LED Lens:	Polycarbonate
Contacts:	Copper Alloy with Gold Plating
Marker Tags:	Polyamide (supplied on all units)