
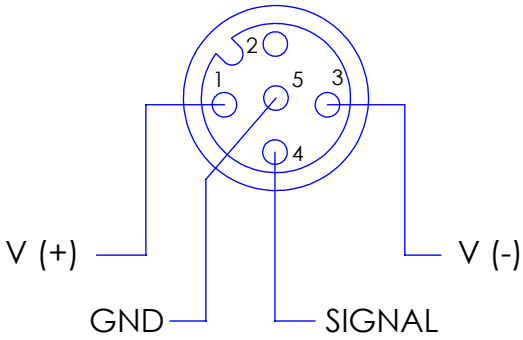
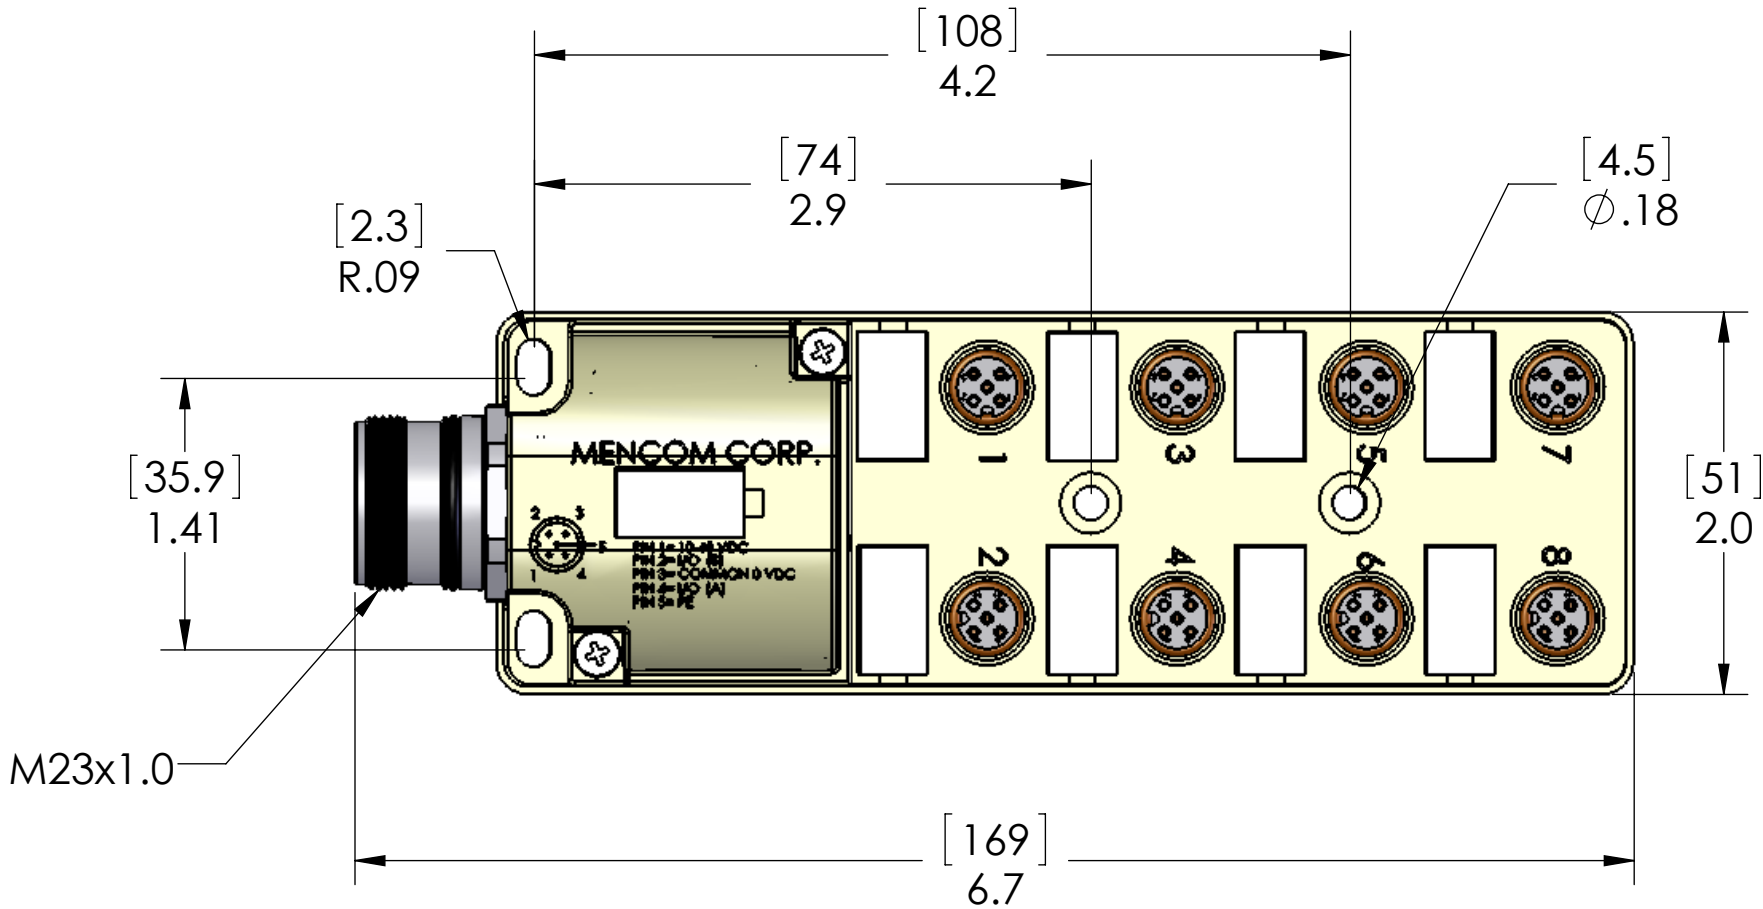


WIRING	
MCV PIN #	FUNCTION
11	V+ (ALL PORTS PIN 1)
9 & 10	V- (ALL PORTS PIN 3)
12	GND (ALL PORTS PIN 5)
1	PORT 1 PIN 4
2	PORT 2 PIN 4
3	PORT 3 PIN 4
4	PORT 4 PIN 4
5	PORT 5 PIN 4
6	PORT 6 PIN 4
7	PORT 7 PIN 4
8	PORT 8 PIN 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/20/2007	

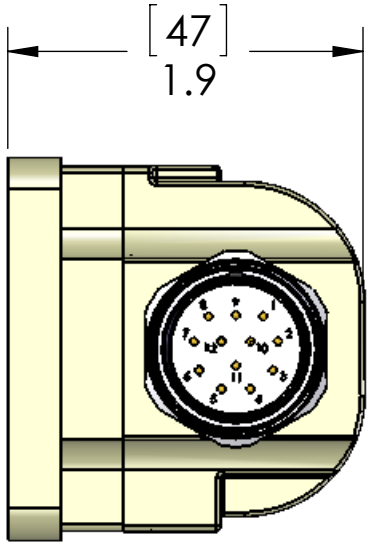

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
MCV HSG:	NICKEL PLATED BRASS
RATINGS:	
VOLTS:	120V MAX
AMPS:	3A PER PORT, 12A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.				
		MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
		FINISH			B	JDC-840-012-V000	A
		DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1