


MATERIALS:	
BLOCK HOUSING:	POLYPROPYLENE
PORT CONN INSERTS:	POLYAMIDE
PORT CONN HSG:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
OUTPUT CONN HSG:	ANODIZED ALUMINUM HSG
OUTPUT CONN INS.:	YELLOW PVC
O-RINGS:	NBR

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	1/20/2006	

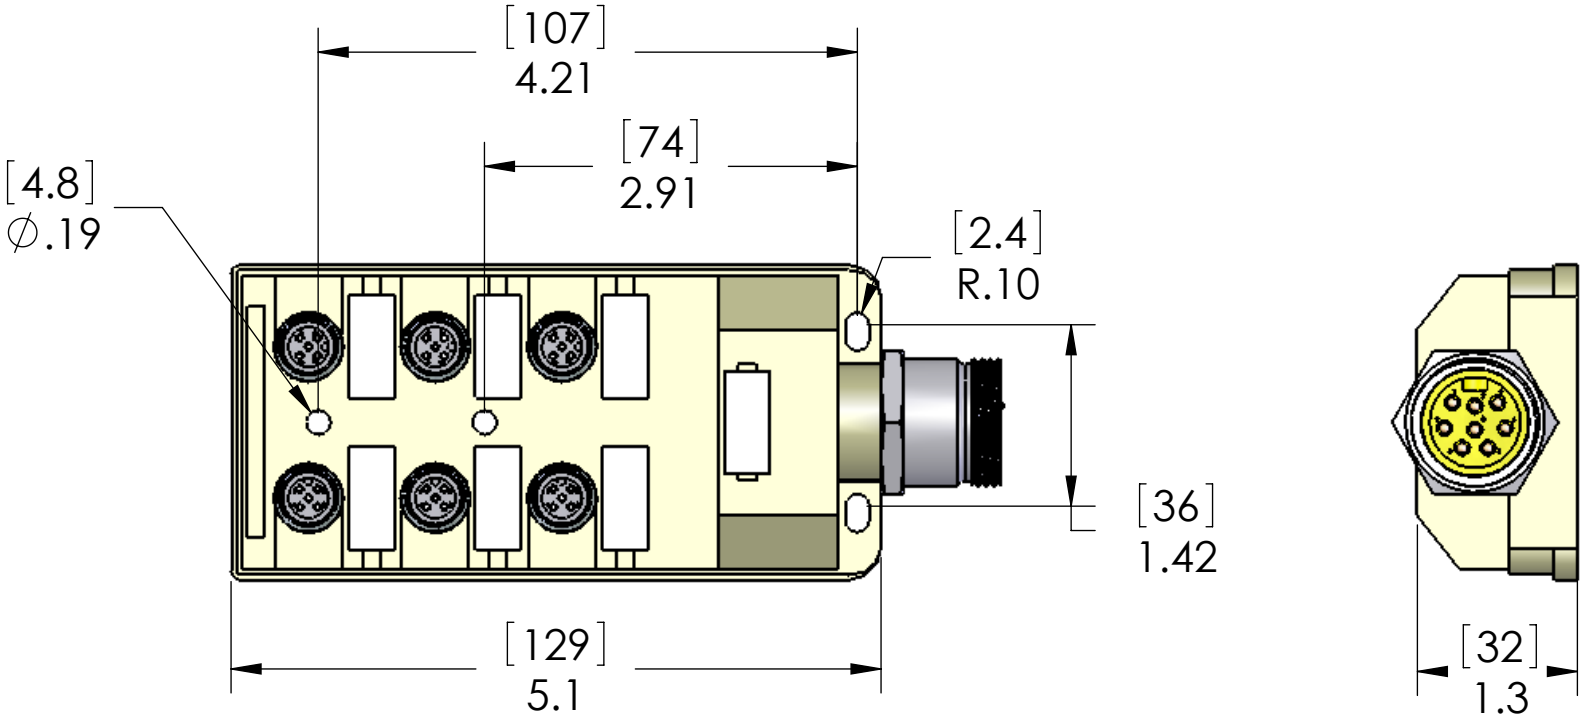

BLOCK RATED FOR 12A MAX WITH 4A PER PORT MAX
VOLTAGE: 120V MAX

MIN	
PIN #	JDC PORT / PIN
1	PORT 6 / PIN 4
2	PORT 5 / PIN 4
3	PORT 4 / PIN 4
4	PORT 3 / PIN 4
5	PORT 2 / PIN 4
6	PORT 1 / PIN 4
7	V -
8	V +

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

TEMP:	80°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION
	DRAWN	BEM	
	CHECKED		
	ENG APPR.		
	MFG APPR.		
MATERIAL	COMMENTS:		TITLE:
FINISH			
DO NOT SCALE DRAWING			

SIZE	DWG. NO.	REV
B	JDC-630-008-M000	A
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1