






JDC (M12) Junction Blocks

6 Port, 3 Pin JDC Junction blocks



MIN Receptacle | MIN Plug | IP67 Protection Rating




Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	N/A	MIN Size II 8 Pole Male Receptacle	JDC-630-008-M000	JDC-63P-008-M000	JDC-63N-008-M000
	N/A	MIN Size II 8 Pole Male Plug with Male Thread	JDC-630-008-M003	JDC-63P-208-M003	JDC-63N-208-M003
	N/A	MIN Size II 8 Pole Male Plug	JDC-630-008-M**	JDC-63P-208-M**	JDC-63N-208-M**

** Lengths in meters. Standard Cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

JDC Junction Blocks

Q

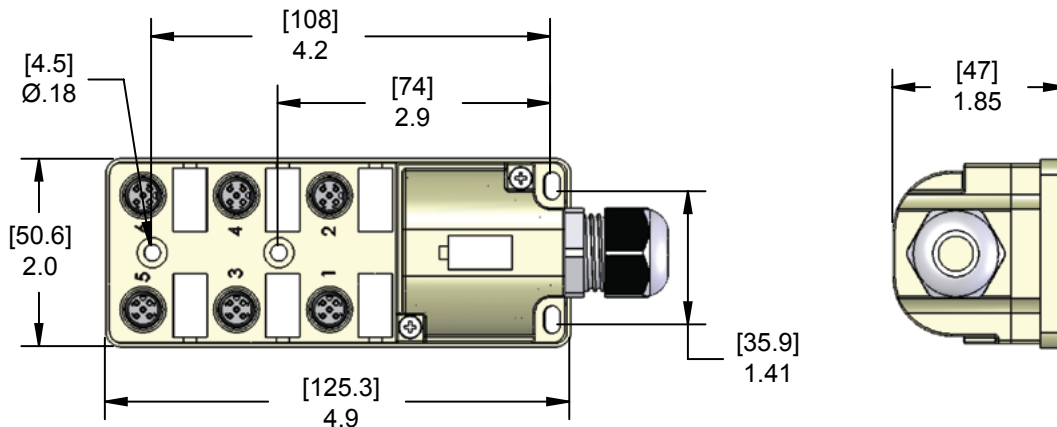

Specifications:

Ratings:	3 A per Connector 8 A per Block
Voltage:	Without LEDs: 0-150 Volt Max With LEDs: 48 VDC Max in accordance with LED Configuration
Body:	Polypropylene
Inserts:	Polyamide
Port Coupling Nuts:	PBT
O-Ring:	BUNA-N
LED Lens:	Polycarbonate
Contacts:	Copper Alloy with Gold Plating
Marker Tags:	Polyamide (supplied on all units)