


WIRING		
MIN CONN (INCOMING)	MDC CONN (PORT)	FUNCTION
1	1	DRAIN
2	2	V+
3	3	V-
4	4	CAN_H
5	5	CAN_L

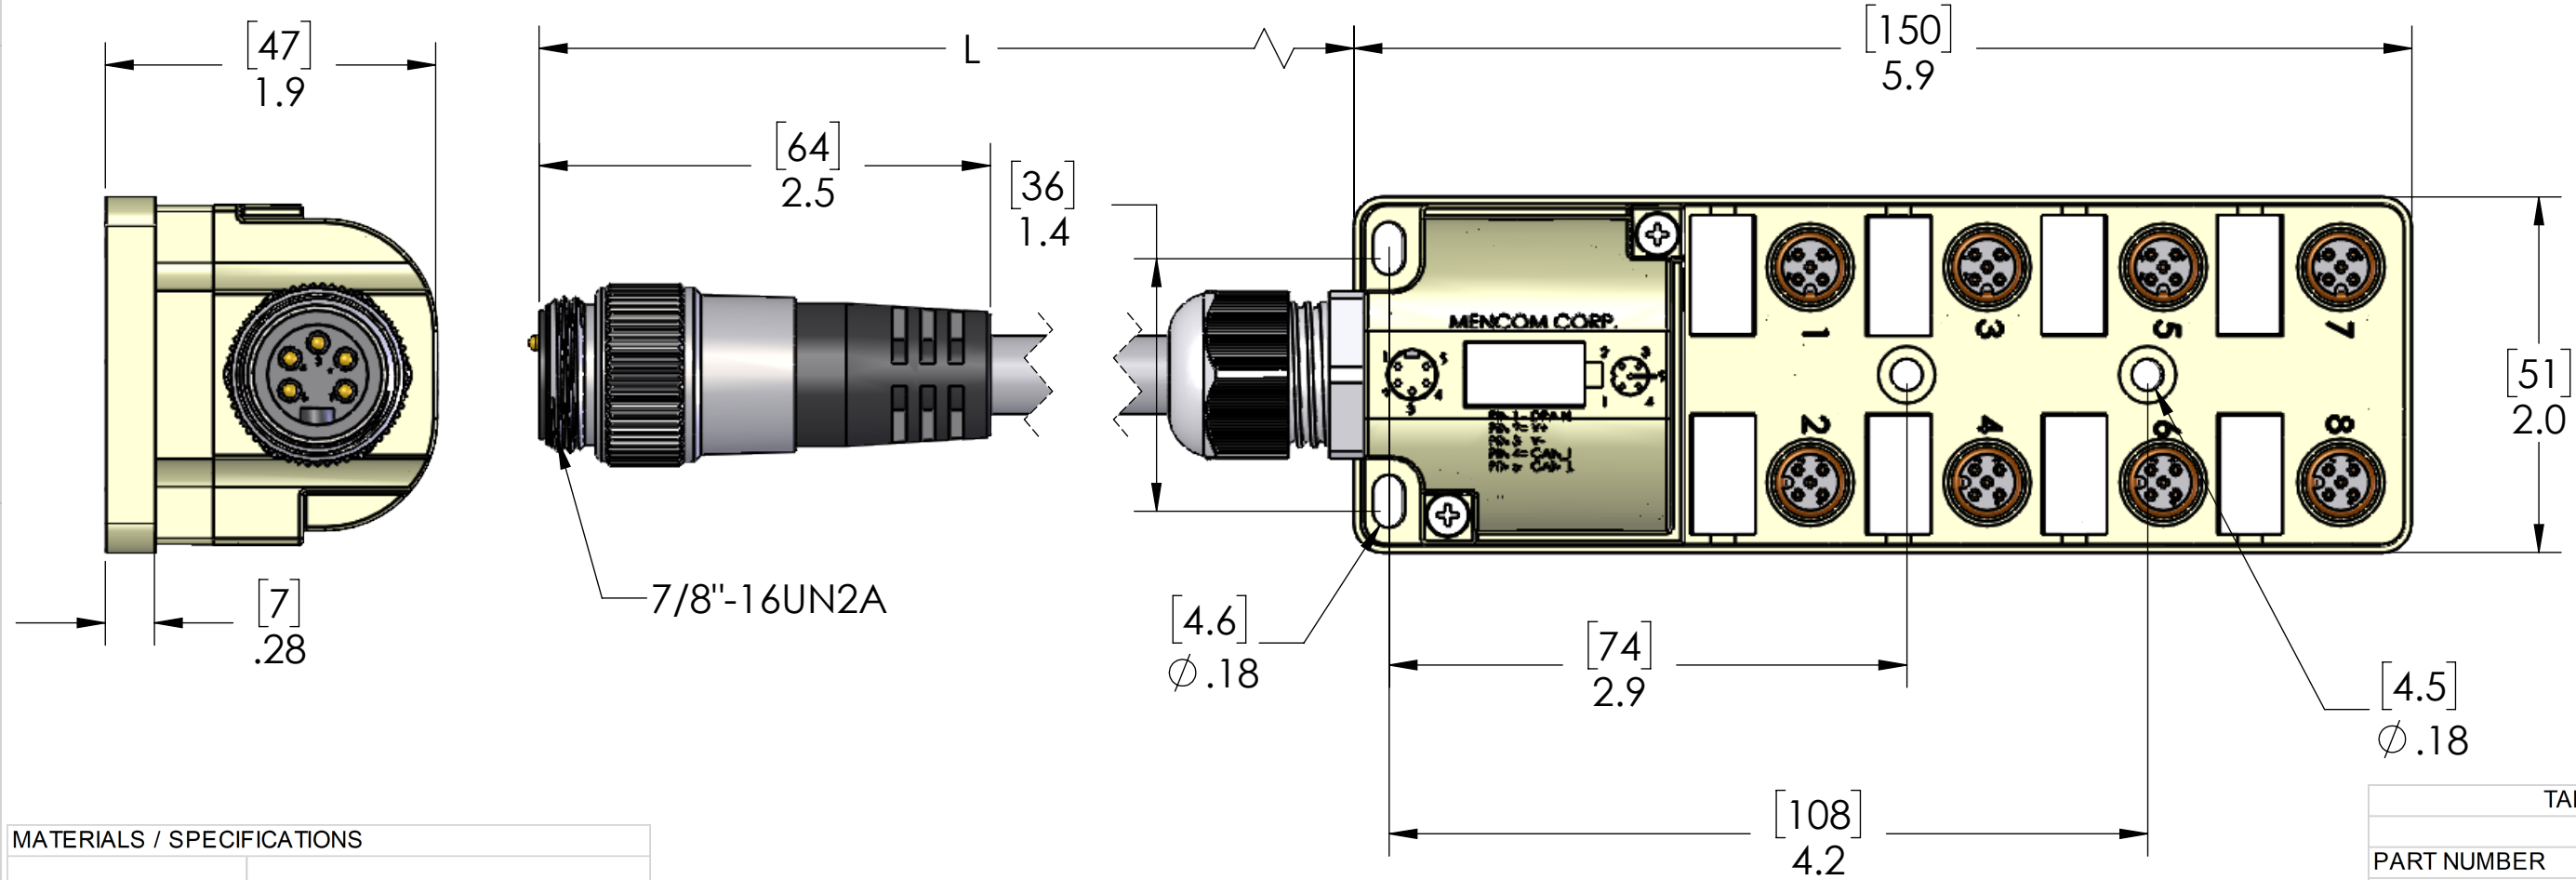

MATERIALS / SPECIFICATIONS	
BODY:	PBT
INSERTS:	POLYAMIDE
O-RINGS:	FPM
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	GRAY DEVICENET TRUNK CABLE
MIN SHELL:	NICKEL PLATED BRASS
MIN INSERT:	BLACK PVC
MIN OVERMOLD:	BLACK PVC
RATINGS:	
VOLTAGE	150V MAX
AMPERAGE	3A PER PORT, 8A PER BLOCK
CERTIFICATIONS:	
US:	UL LISTED
CANADA:	C-UL LISTED

TABLE A	
PART NUMBER	L
JDN-850-005-M003	12" [0.3M]
JDN-850-005-M010	40" [1M]
JDN-850-005-M020	80" [2M]
JDN-850-005-M050	197" [5M]
JDN-850-005-M100	393" [10M]

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	
	DRAWN DATE	04/22/2021
	CHECKED BY	ADM
	CHECK DATE	04/22/2021
MATERIAL FINISH DO NOT SCALE DRAWING	COMMENTS:	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	JDN-850-005-MZZ	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1