

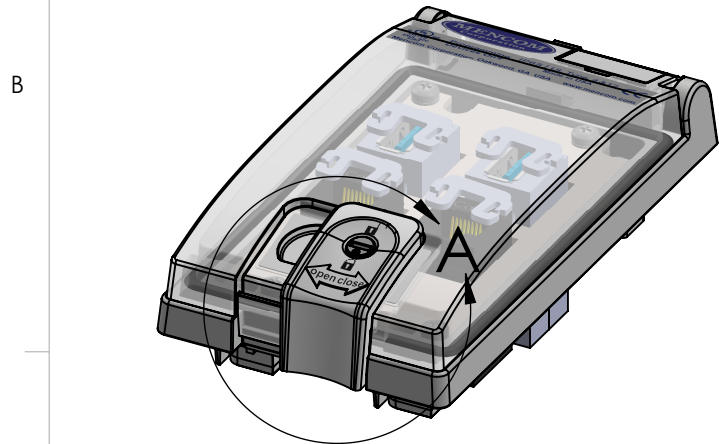


PANEL CUTOUT

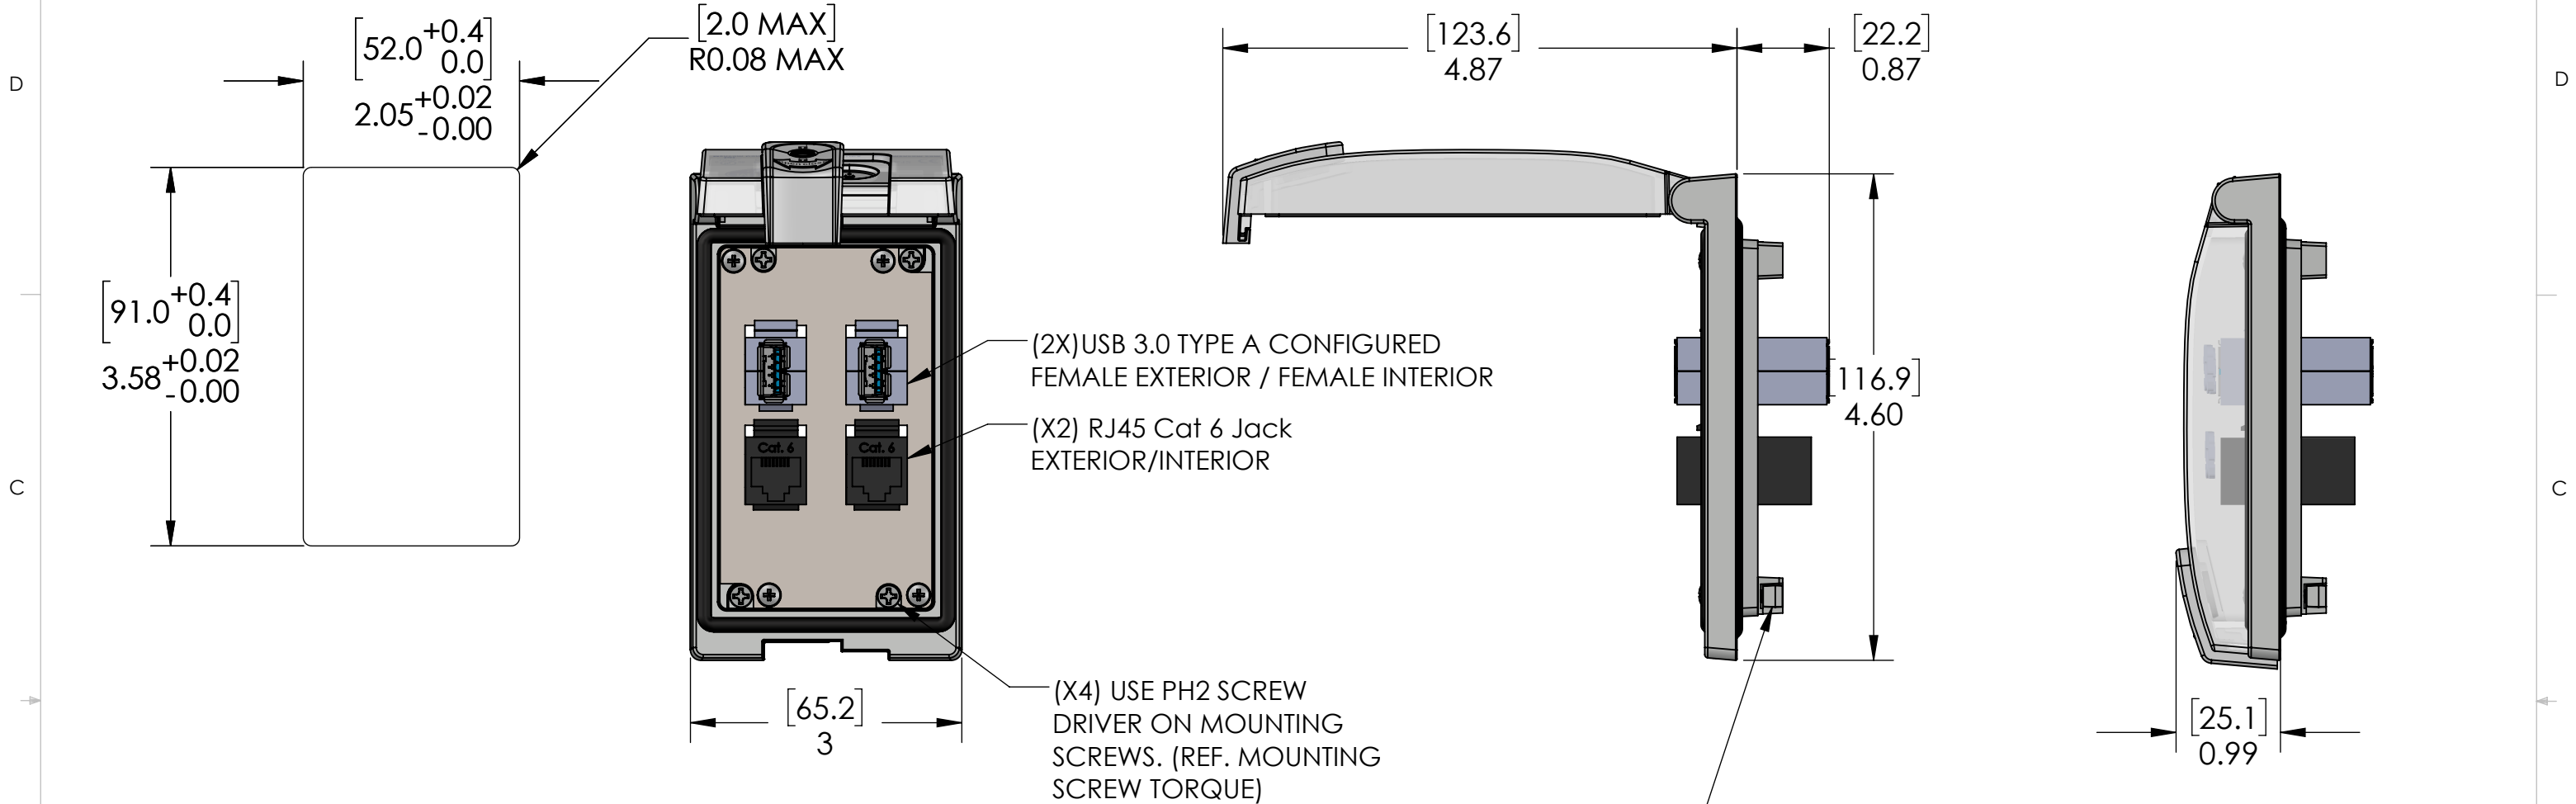

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

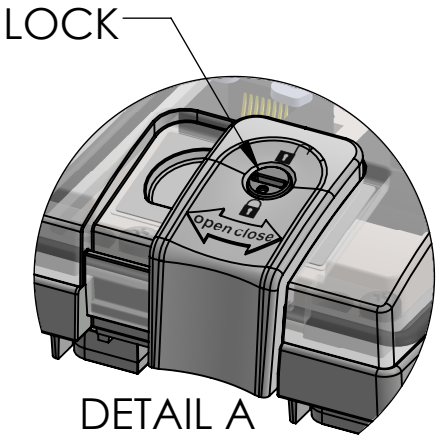

DETAIL A
SCALE 1 : 1

ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!



These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS		UNLESS OTHERWISE SPECIFIED:	DRAWN BY		MENCOM CORPORATION		
BODY:	NICKEL PLATED ZINC		DRAWN DATE				
GASKETS:	PUR FIPG		CHECKED BY				
FRONT COVER:	POLYCARBONATE		CHECK DATE				
LATCH & LOCK:	PBT						
OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))					TITLE: 2 RJ45; 2 USB-AA; LP1		
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.							
		MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
		FINISH			B	LP1-2RJ45-2USB-AFAF	B
		DO NOT SCALE DRAWING			SCALE: 2:3		WEIGHT: