
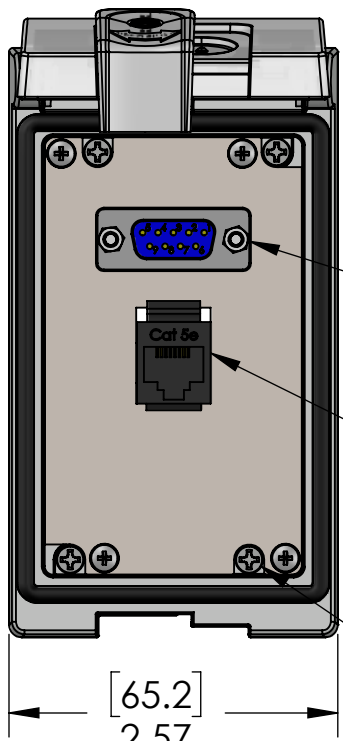


PANEL CUTOUT

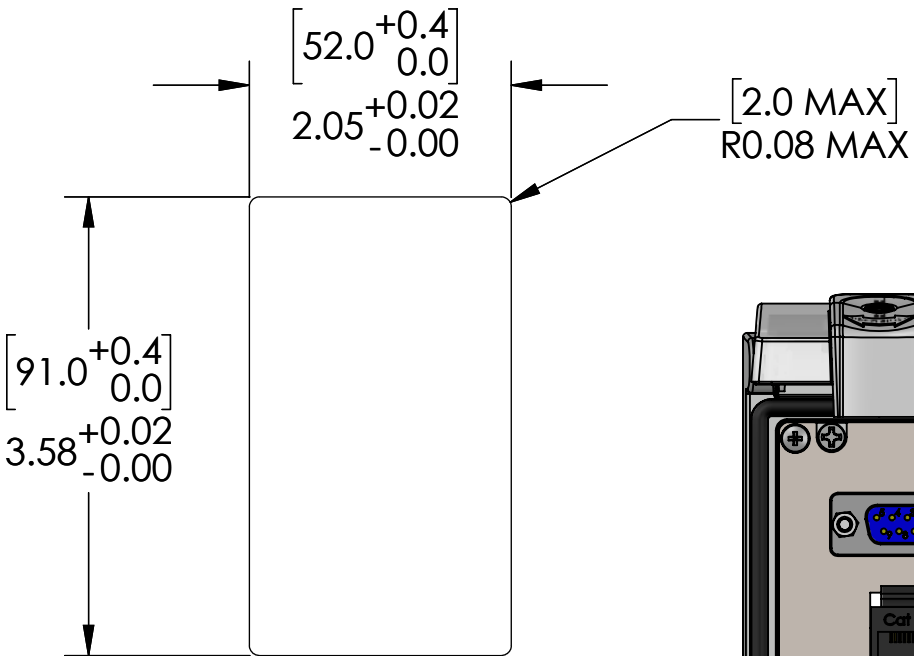

D-SUB CONFIGURED
FEMALE EXTERIOR /
MALE INTERIOR

RJ45 Cat 5e Jack
EXTERIOR/INTERIOR




(X4) USE PH2 SCREW
DRIVER ON MOUNTING
SCREWS. (REF. MOUNTING
SCREW TORQUE)

ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING


TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!

HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

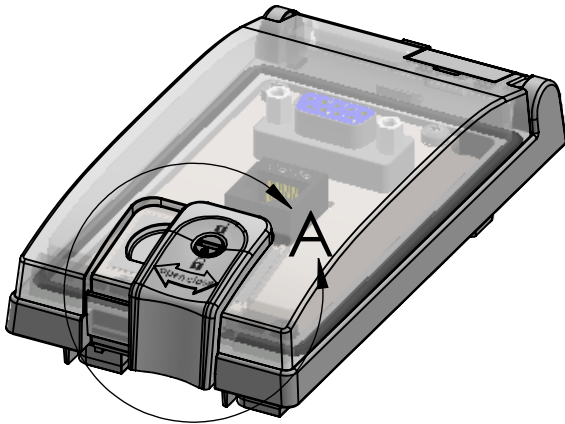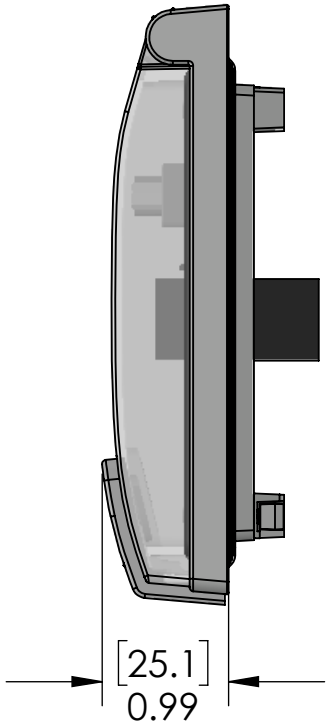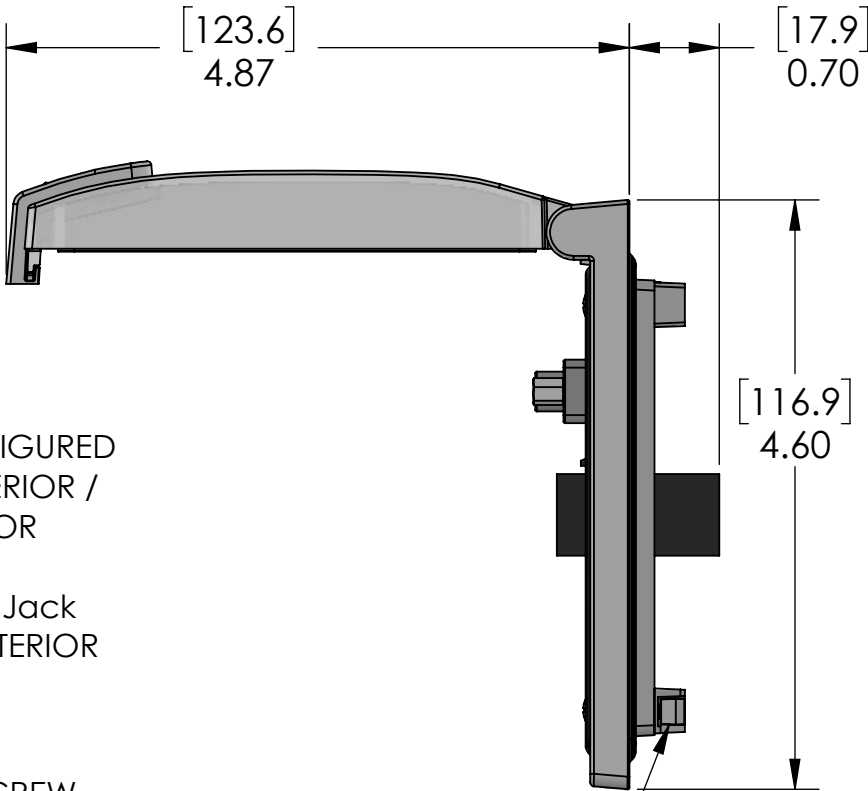

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

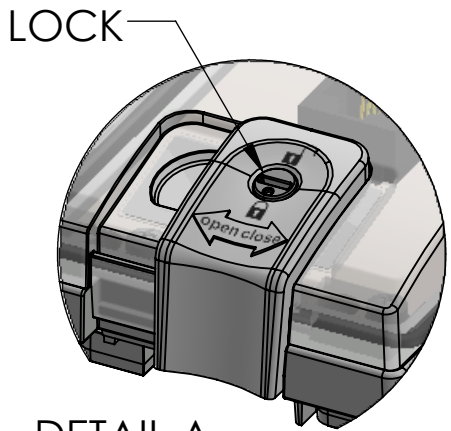

DETAIL A
SCALE 1 : 1



These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS			
NEMA/UL EN 60529:	4, 12	IP65	
PANEL THICKNESS:	5.0mm	max	
MOUNTING SCREW TORQUE:	0.8N-m		
MENCOM CORPORATION			
TITLE: DB9; RJ45; LP1			
SIZE	DWG. NO.	REV	
B	LP1-DB9-RJ45	A	
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1	