



PANEL CUTOUT

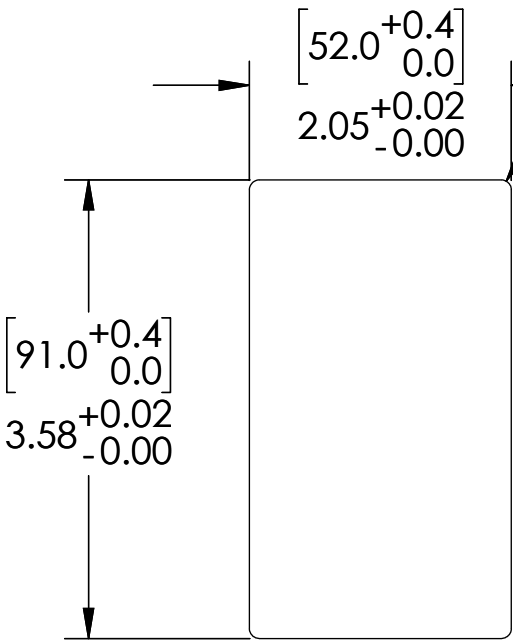

[2.0 MAX]
R0.08 MAX



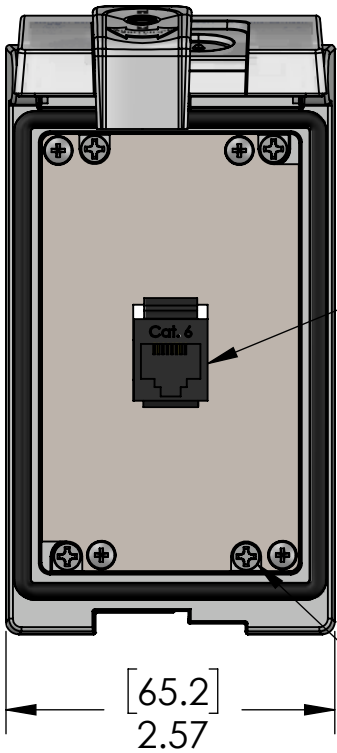


RJ45 Cat 6 Jack
EXTERIOR/INTERIOR

(X4) USE PH2 SCREW
DRIVER ON MOUNTING
SCREWS. (REF. MOUNTING
SCREW TORQUE)


ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!

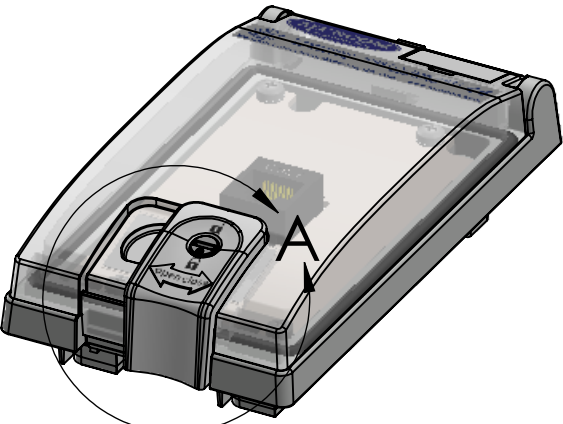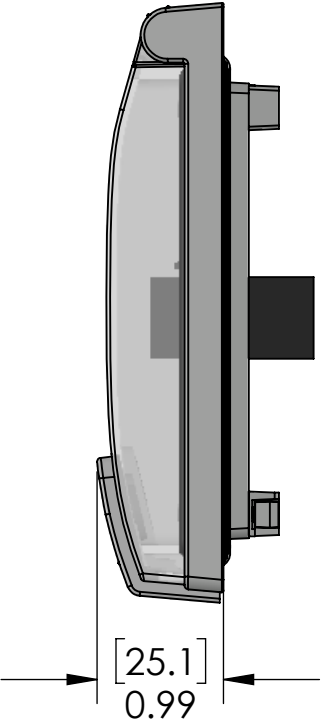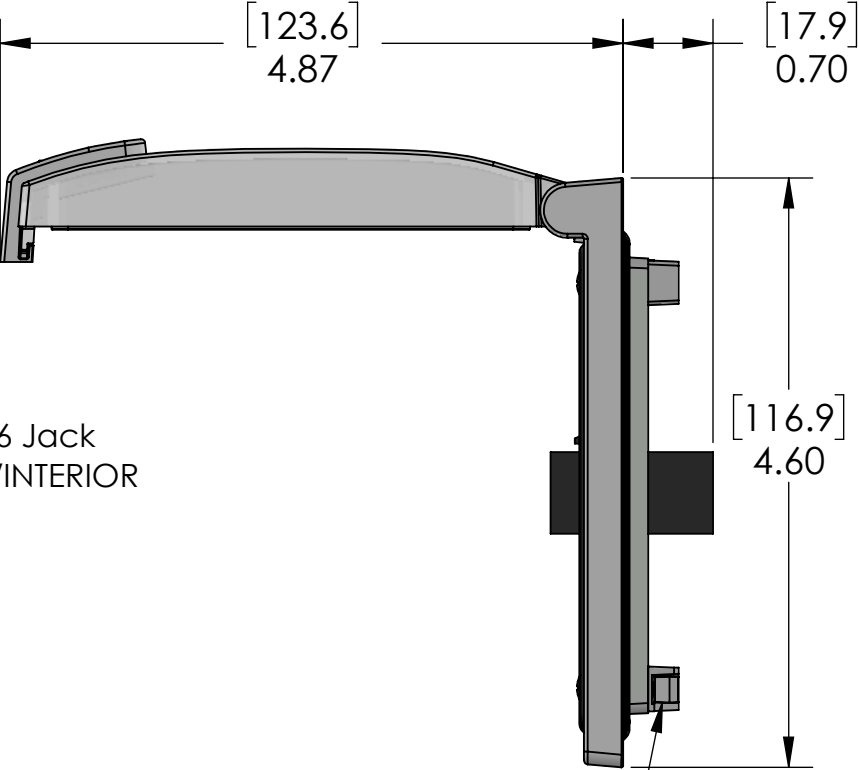

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

LOCK

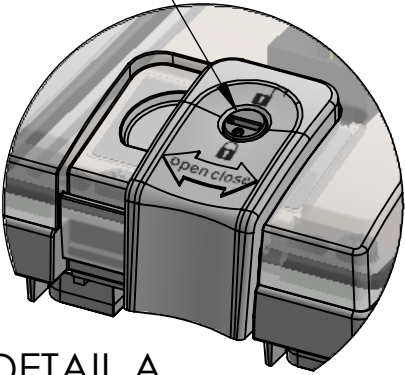

DETAIL A
SCALE 1 : 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING



These devices shall be mounted on enclosures having adequate strength and
thickness and with adequate spacing provided. Seal rating is based on
mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS				
NEMA/UL EN 60529:			4, 12 IP65	
PANEL THICKNESS:			5.0mm max	
MOUNTING SCREW TORQUE:			0.8N-m	
DRAWN BY	DG	MENCOM CORPORATION		
DRAWN DATE	01/04/2019			
CHECKED BY	DCG			
CHECK DATE	01/04/2019			
COMMENTS:		TITLE: RJ45; LP1		
		SIZE	DWG. NO.	REV
		B	LP1-RJ45	C
		SCALE: 2:3	WEIGHT:	SHEET 1 OF 1