


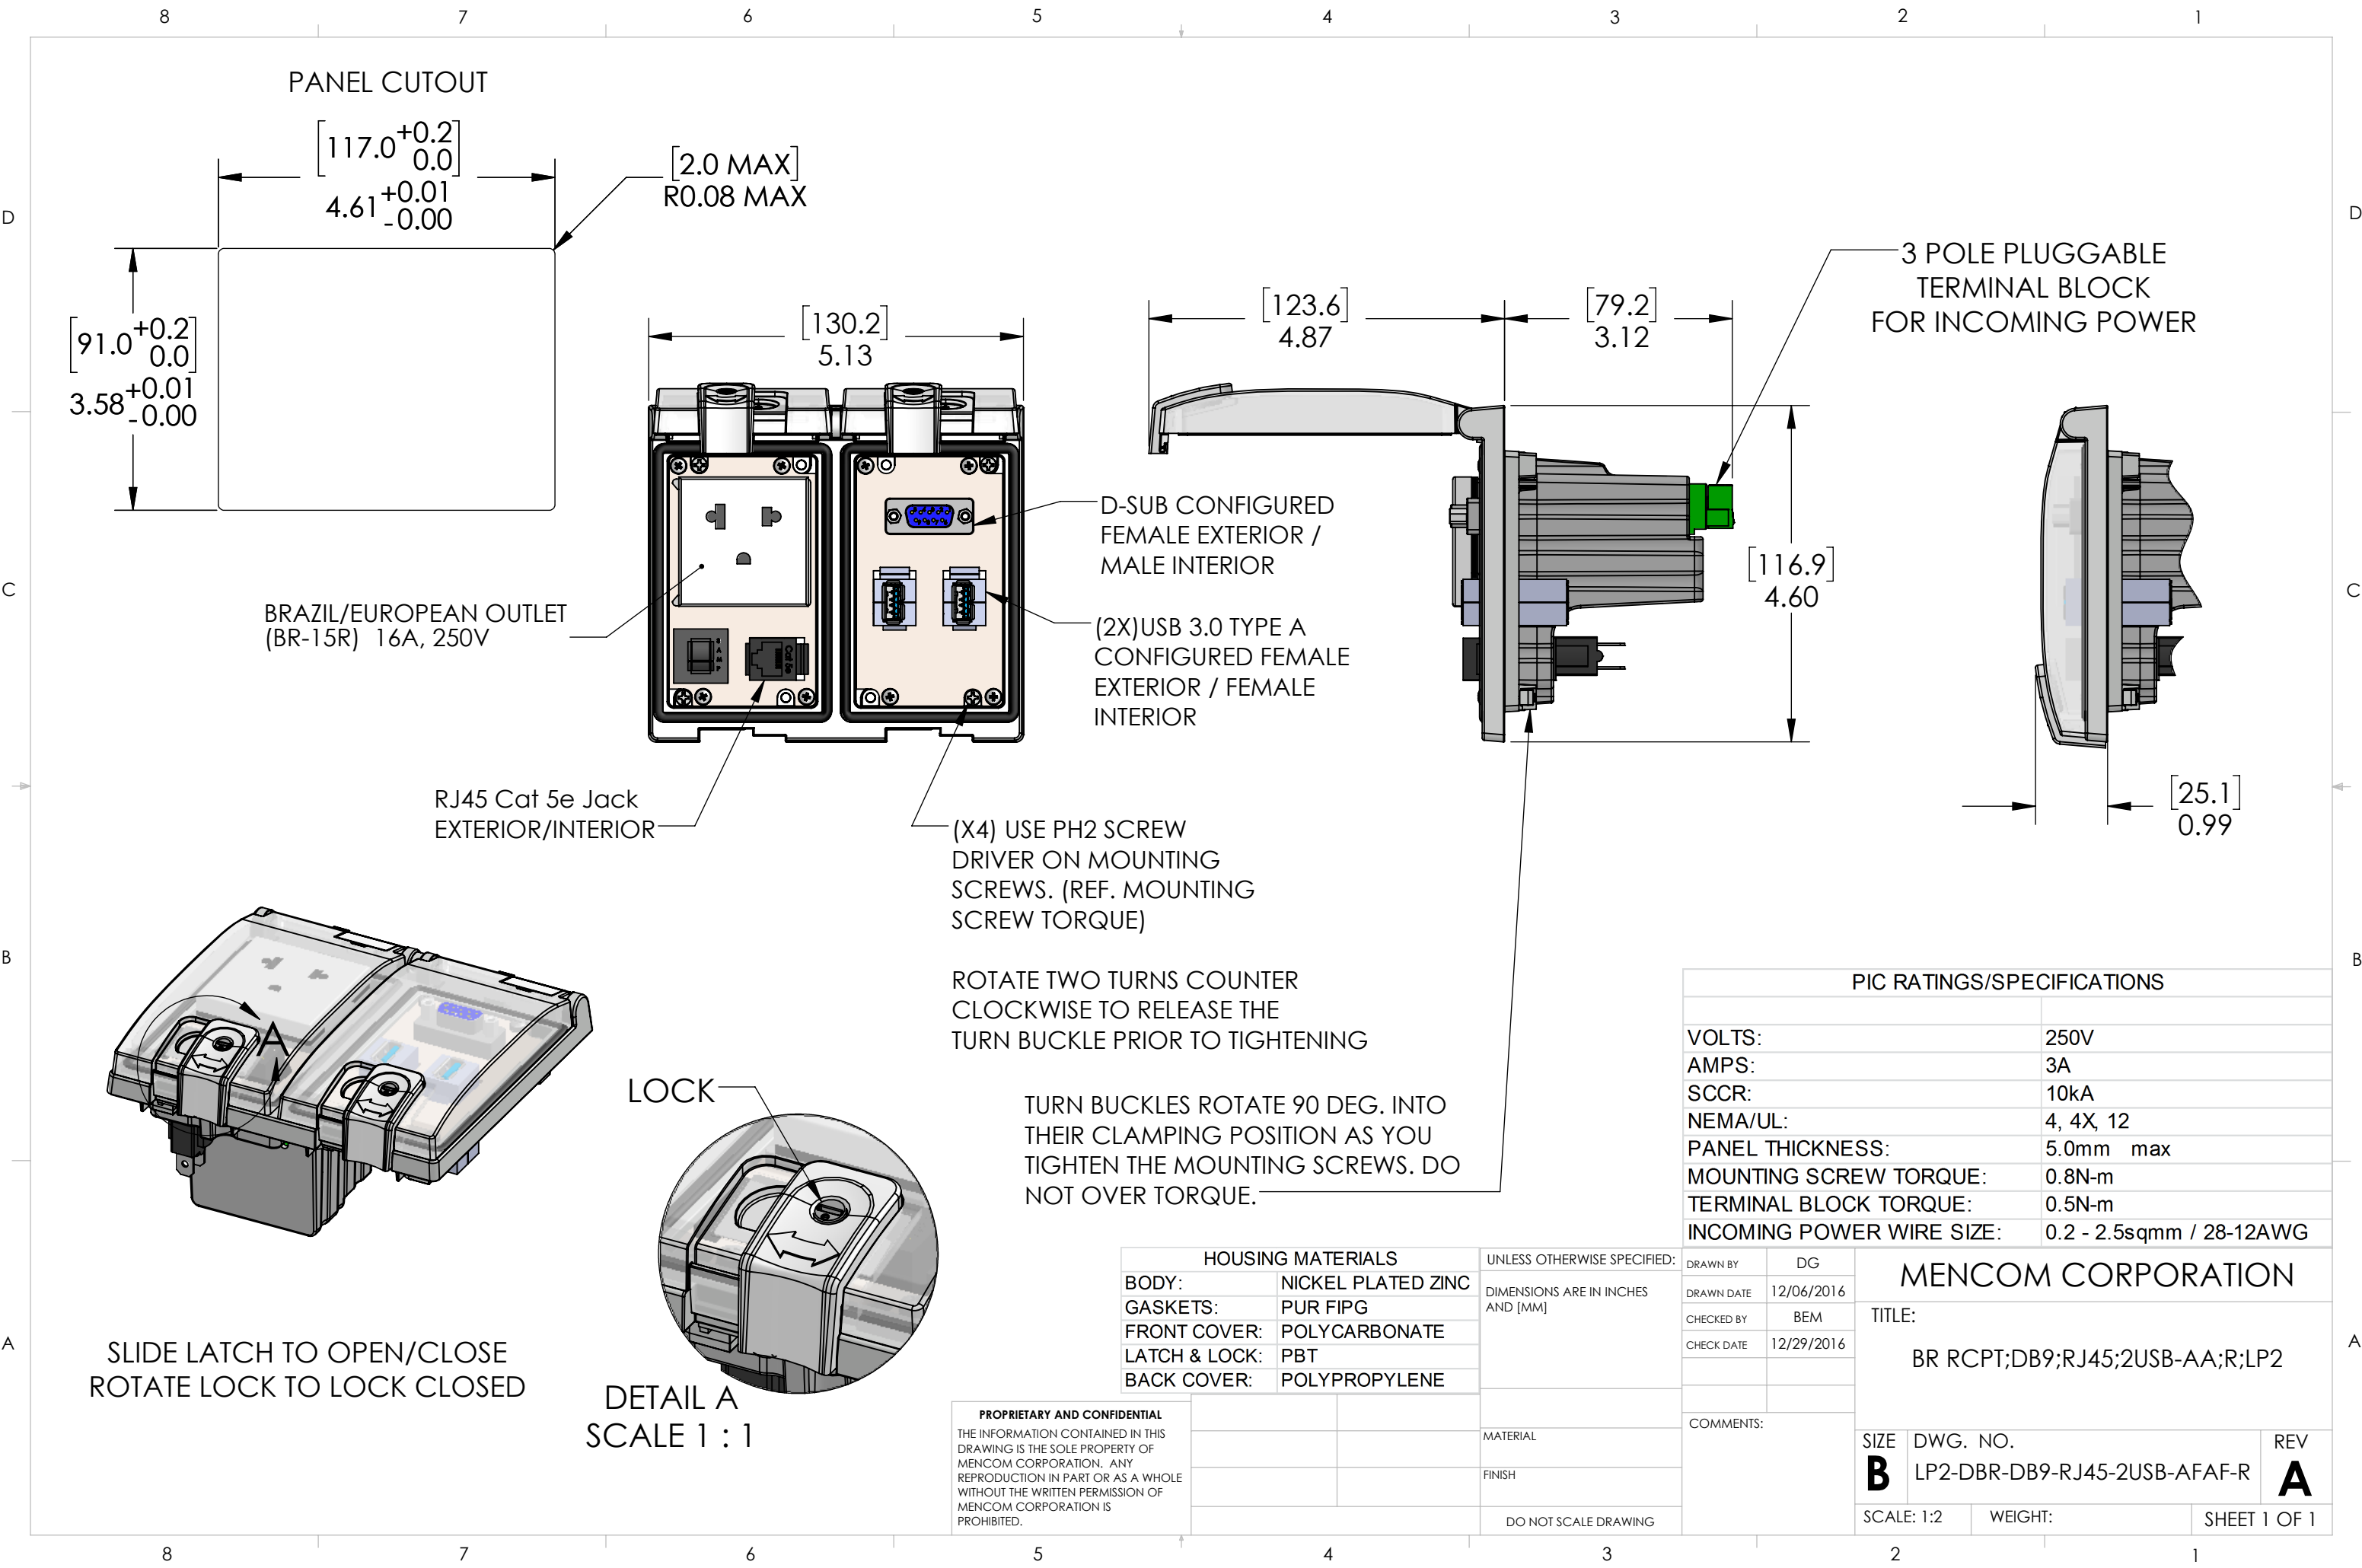

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V
AMPS:	3A
SCCR:	10kA
NEMA/UL:	4, 4X, 12
PANEL THICKNESS:	5.0mm max
MOUNTING SCREW TORQUE:	0.8N-m
TERMINAL BLOCK TORQUE:	0.5N-m
INCOMING POWER WIRE SIZE:	0.2 - 2.5sqmm / 28-12AWG

HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT
BACK COVER:	POLYPROPYLENE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	DG
DRAWN DATE	12/06/2016
CHECKED BY	BEM
CHECK DATE	12/29/2016

MENCOM CORPORATION	
TITLE:	
BR RCPT;DB9;RJ45;2USB-AA;R;LP2	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

COMMENTS:	
-----------	--

SIZE	DWG. NO.	REV
B	LP2-DBR-DB9-RJ45-2USB-AFAF-R	A
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1