

FEMALE	WIRING	MALE
PIN #		PIN #
1	----	1
2	----	2
3	----	3

D

D

C

C




B

B

A

A

MATERIALS	
BODY:	YELLOW PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	YELLOW PUR
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

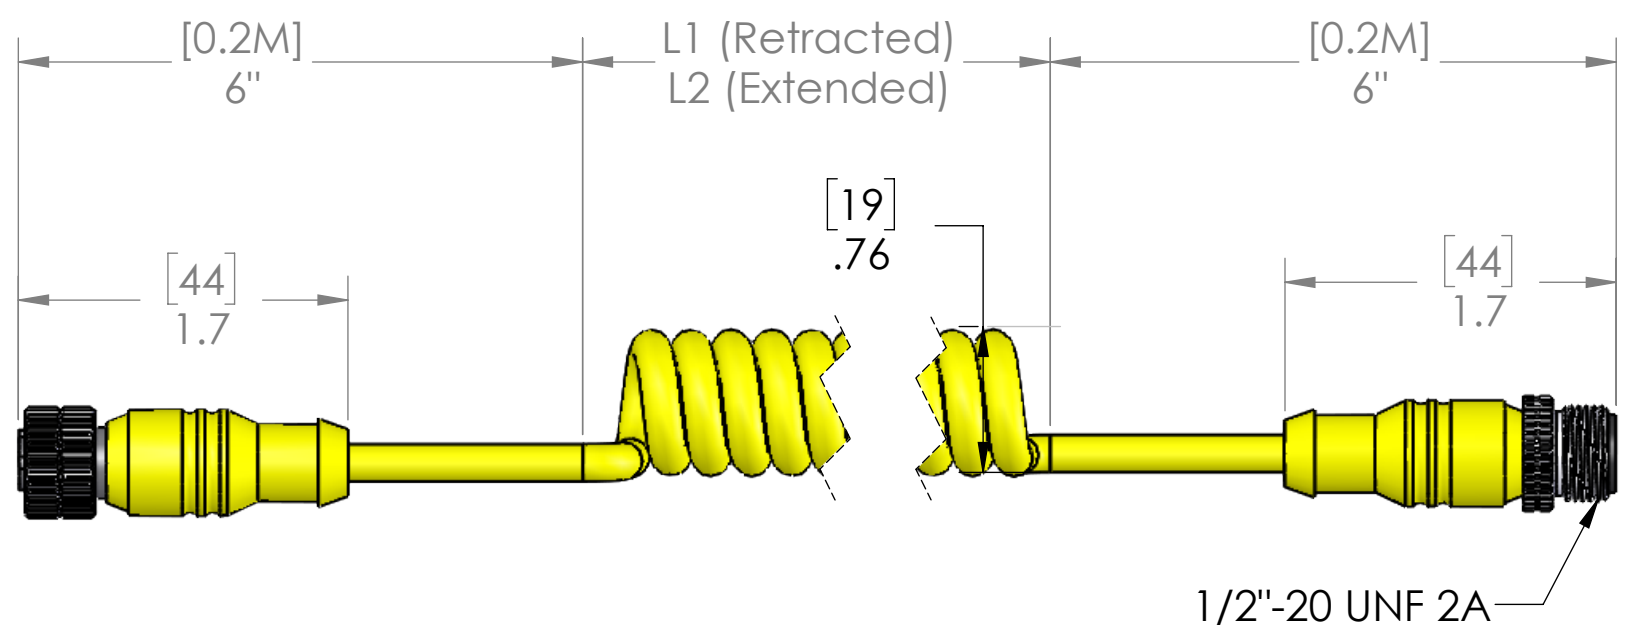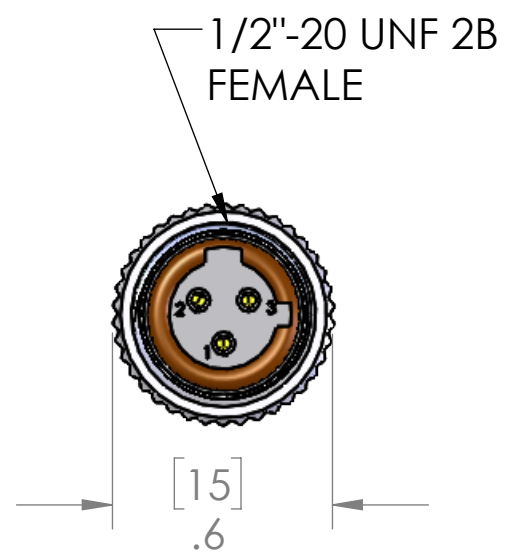

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES AND [MM]
 MATERIAL
 FINISH
 DO NOT SCALE DRAWING

P/N	L1	L2
MACPQ-3MFP-0.8M	6" [0.15m]	30" [0.76m]
MENCOM CORPORATION TITLE: SIZE DWG. NO. REV B MACPQ-3MFP-ZZ B SCALE: 1:1 WEIGHT: SHEET 1 OF 1		

DRAWN BY	JJH
DRAWN DATE	08/07/2023
CHECKED BY	JJH
CHECK DATE	08/08/2023
COMMENTS:	

8

7

6

5

4

3

2

1