


FEM		MAL
PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
6	-----	6
7	-----	7
8	-----	8
9	-----	9
10	-----	10
11	-----	11
12	-----	12

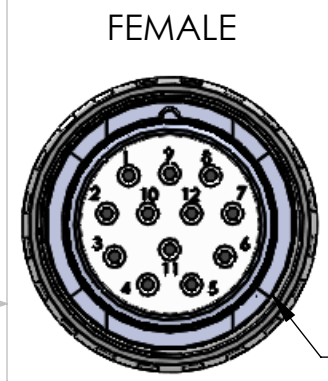

M23x1
FEMALE
THREAD
(Both ends)

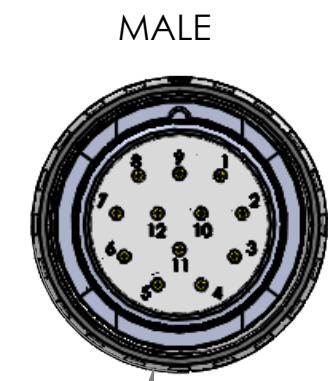
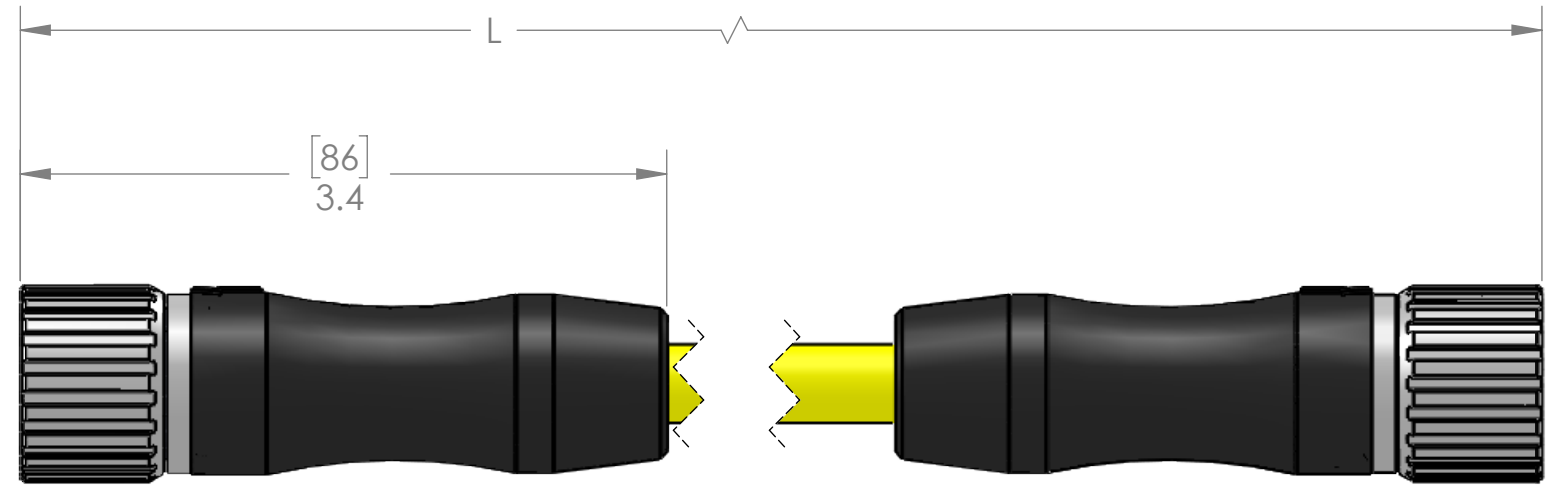


TABLE A		
P/N	L	STD?
MCV-12MFPX-1M	40" [1m]	YES
MCV-12MFPX-2M	79" [2m]	YES
MCV-12MFPX-3M	118" [3m]	NO
MCV-12MFPX-4M	157" [4m]	NO
MCV-12MFPX-5M	197" [5m]	YES
MCV-12MFPX-6M	236" [6m]	NO
MCV-12MFPX-8M	315" [8m]	NO
MCV-12MFPX-10M	393" [10m]	YES
MCV-12MFPX-15M	590" [15m]	YES
MCV-12MFPX-20M	786" [20m]	NO
MCV-12MFPX-25M	983" [25m]	NO
MCV-12MFPX-50M	1965" [50m]	NO

LENGTHS THAT ARE NOT LISTED AS STANDARD MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	PBT
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	6A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	
DRAWN BY	ADM
DRAWN DATE	08/31/2023
CHECKED BY	JJH
CHECK DATE	09/07/2023
COMMENTS:	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE: 12 PL 18AWG MCV M-F EXT		
SIZE	DWG. NO.	REV
B	MCV-12MFPX-ZZ	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1