

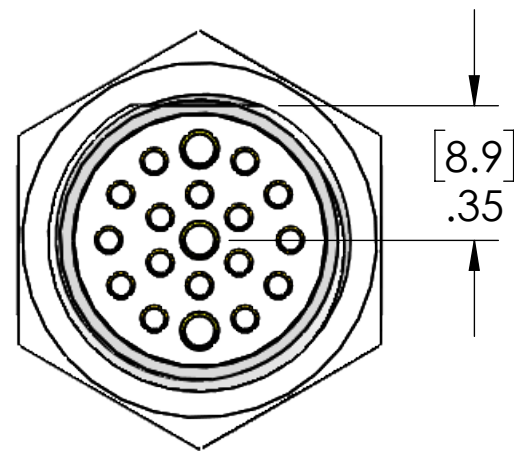
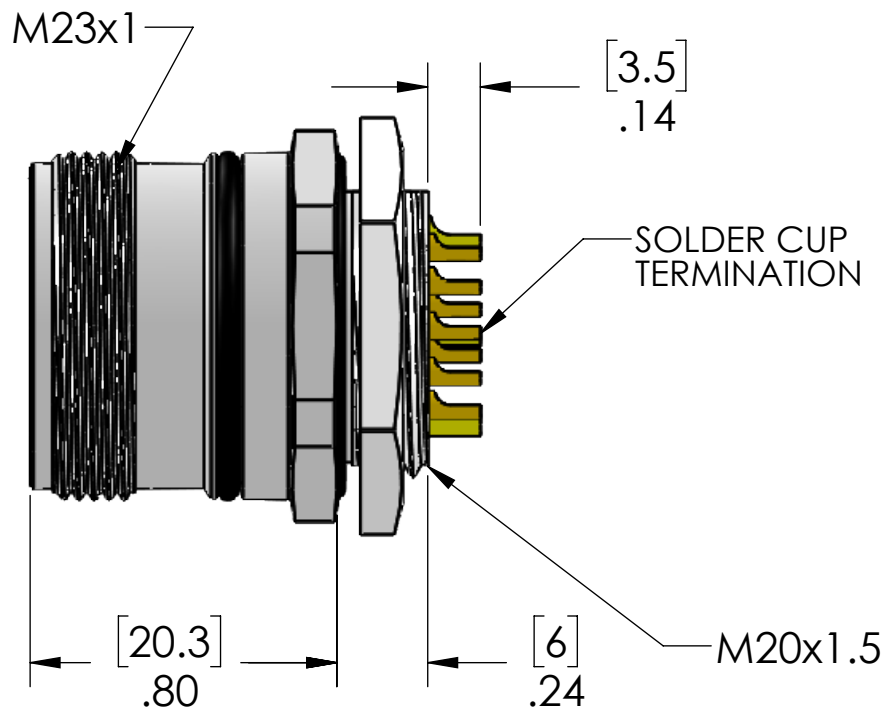
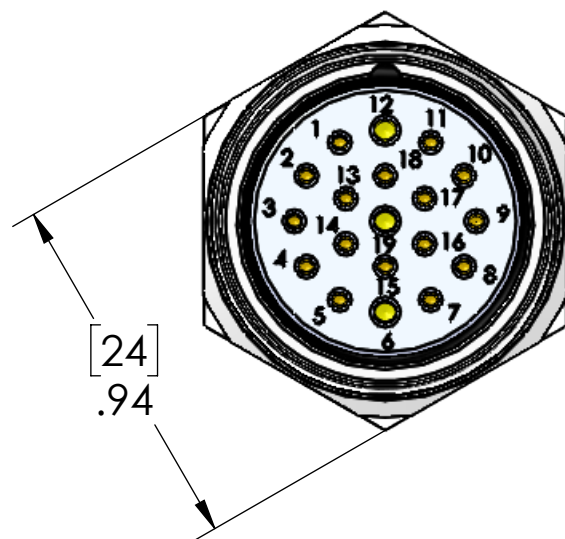


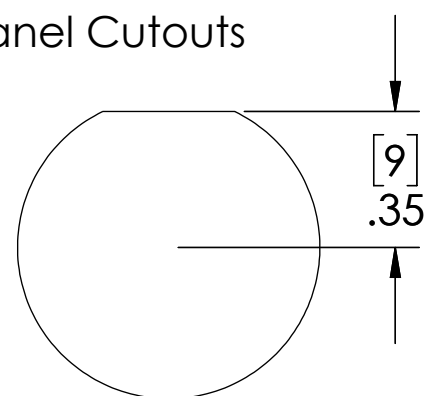

Recommended Panel Cutouts



(Anti-Rotational)

MATERIALS:	
SHELL:	NICKEL PLATED BRASS
INSERT:	PBT
CONTACTS:	GOLD PLATED COPPER ALLOY
LOCKNUT:	NICKEL PLATED BRASS
O-RINGS:	NBR
RATINGS:	
VOLTAGE:	150V
AMPERAGE:	10A (PINS 6 & 19), 1A (ALL OTHERS)
TEMPERATURE:	GOLD PLATED COPPER ALLOY
LOCKNUT:	-40°C to +105°C

NOTE: AMPERAGE RATING
BASED ON 18AWG WIRES [1.0 sqmm]
FOR PINS 6 & 19 AND 22AWG [0.34sqmm]
FOR OTHERS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	150V
AMPS	10A/1A
TEMP	-40°C to 105°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	GO
	DRAWN DATE	08/05/2020
	CHECKED BY	JJH
	CHECK DATE	08/05/2020
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
19 PL FEMALE MCV W/M20		
SIZE	DWG. NO.	REV
B	MCV-19FR-M20-SC	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1