

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	3/28/2016	BEM

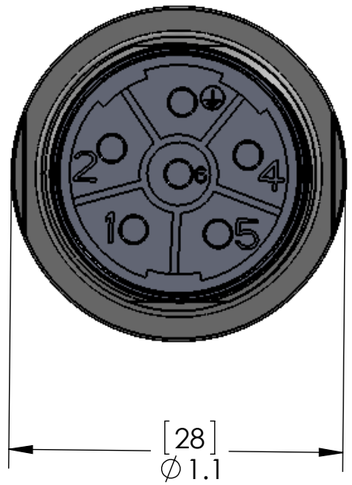

[28]
Ø1.1

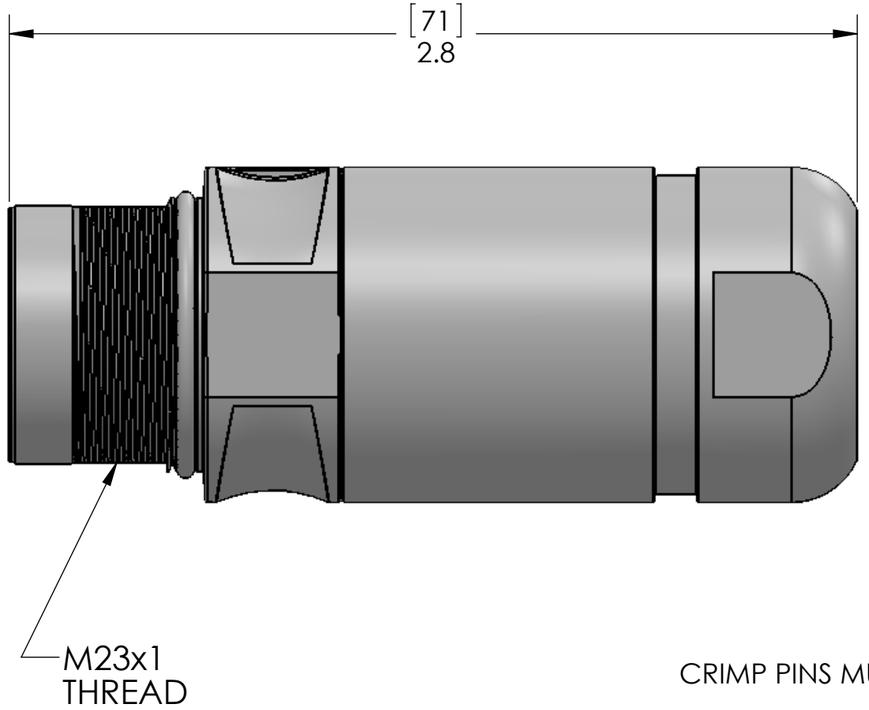

CRIMP PINS MUST BE ORDERED SEPARATELY

WIRE AWG	PART NUMBER
12	MCVH-MR-PIN-12
14 - 16	MCVH-MR-PIN-16
18 - 20	MCVH-MR-PIN-20
22 - 24	MCVH-MR-PIN-24

MATERIALS:	
BODY:	NICKEL PLATED BRASS
SEALS:	FPM
GLAND:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	PA 66
RATINGS:	
VOLTS:	630V max
AMPS:	30A max
TEMP:	-40°C (static) - +125°C
WIRE AWG:	14AWG - 24AWG
CABLE DIA.:	0.295 - 0.551" [7.5-14mm]

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/64
ANGULAR: MACH ±5° BEND ±5°
TWO PLACE DECIMAL ±.01
THREE PLACE DECIMAL ±.004

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	JJH
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MCVH-6MPM-FW-CC	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1