



MCV (M23) Series Receptacles

6, 7 & 12 Conductor M23 Series Receptacles, 16/18AWG






Rear Mount Receptacles | M2.5 & M3.0 Tapped Hole | IP69 Rating

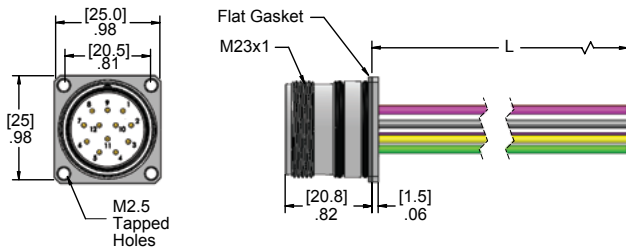


6 & 7 pole are not UL listed.

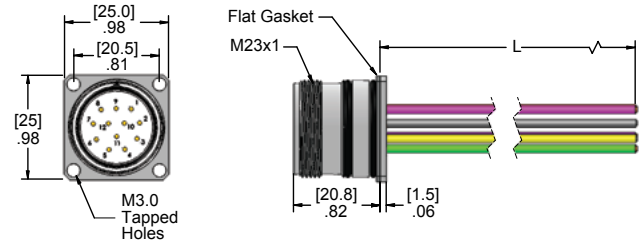
E
M23 Series

# of Poles	Male Faceview	Color Code	Wire AWG Rating	Tapped Hole Size	Male Receptacles	Female Receptacles
6	 M23 x 1	1. White 4. Orange 2. Red 5. Black 3. Green/Yellow 6. Blue	12 AWG 600V 8A	M2.5	MCV-6MR-**-RM25	MCV-6FR-**-RM25
				M3.0	MCV-6MR-**-RM30	MCV-6FR-**-RM30
7	 M23 x 1	1. White/Black 5. Orange 2. Black 6. Blue 3. White 7. Green/Yellow 4. Red	16 AWG 600V 8A	M2.5	MCV-7MR-**-RM25	MCV-7FR-**-RM25
				M3.0	MCV-7MR-**-RM30	MCV-7FR-**-RM30
12	 M23 x 1	1. Brown 7. Gray 2. Brown/White 8. Pink 3. Blue 9. Red 4. White 10. Black 5. Green 11. Violet 6. Yellow 12. Green/Yellow	18 AWG 300V 6A	M2.5	MCV-12MR-**-RM25	MCV-12FR-**-RM25
				M3.0	MCV-12MR-**-RM30	MCV-12FR-**-RM30

** Length in meters. 0.3m leads are standard. Longer lead lengths are available, please consult the factory for part numbers.



Male Receptacle



Female Receptacle

Specifications:

Shell: Nickel Plated Brass
 Insulator: PBT
 Contacts: Copper Alloy with Gold Plating
 O-Ring: NBR
 Temperature: -40°C to 105°C (-40°F to +221°F)