


PIN #	COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK
5	NOT USED

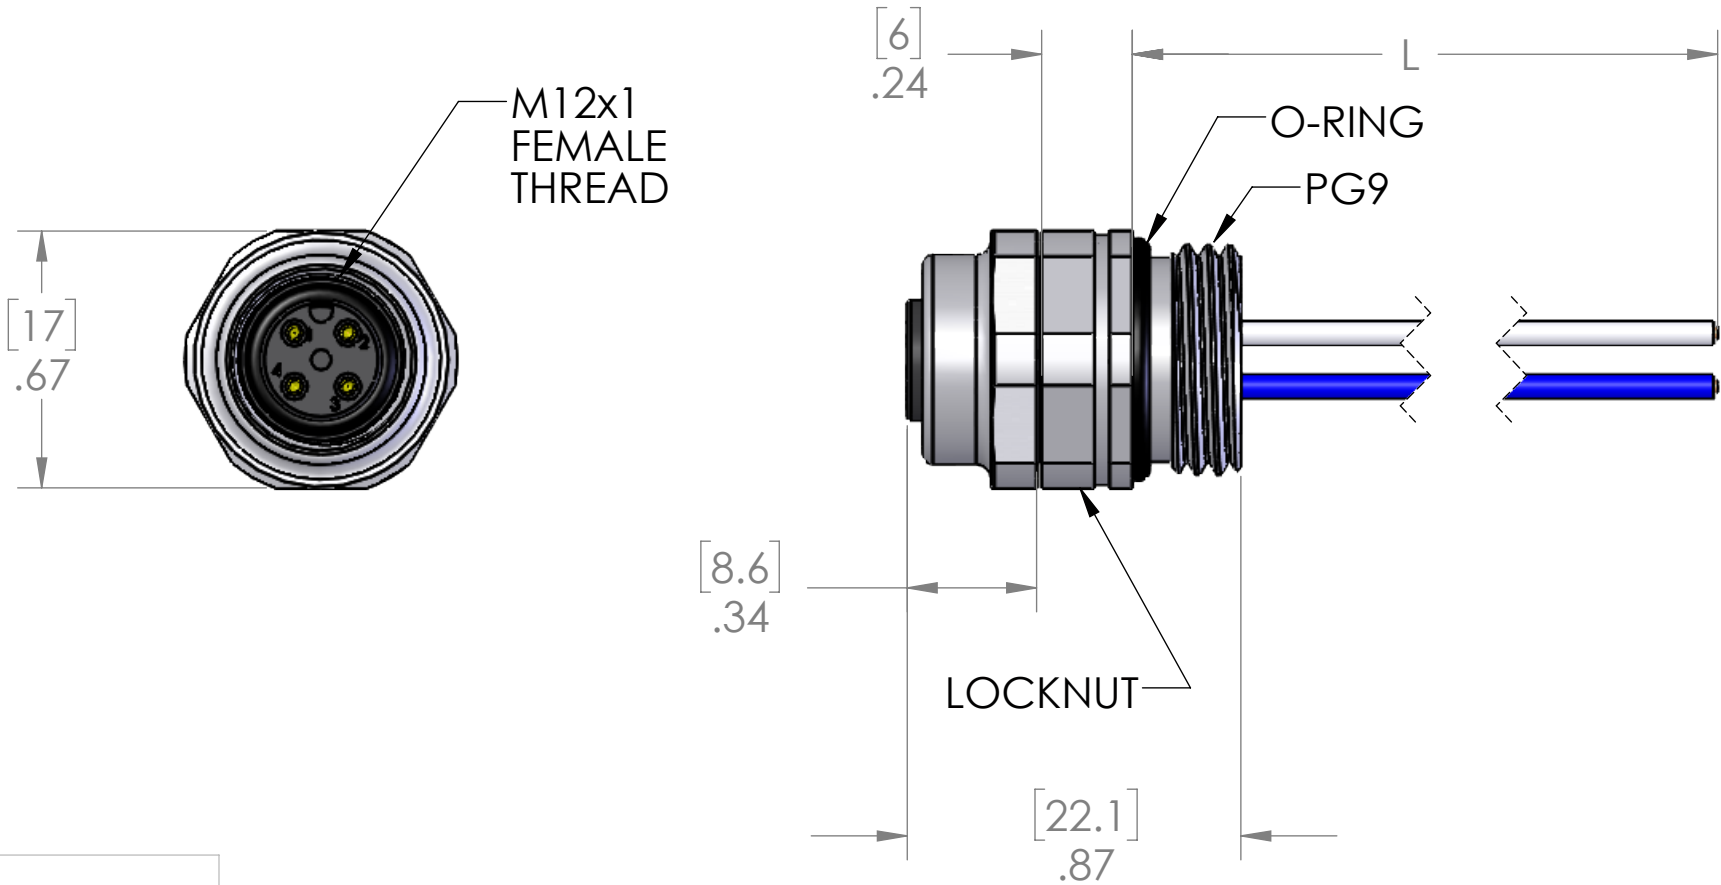

These receptacles are designed for thread mount applications that require keyway orientation. Connector is to be threaded into a Pg9 threaded opening and after positioning the keyway, the locknut is tightened down onto the panel or device

MATERIALS	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	POLYAMIDE
O-RING:	NBR AND FPM
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	06/30/2023
	CHECKED BY	JJH
	CHECK DATE	07/06/2023
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

MENCOM CORPORATION		
TITLE:		
4 POLE FEM RECP FRNT LCK		
SIZE	DWG. NO.	REV
B	MDC-4FR-FLPG9-ZZ	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1