


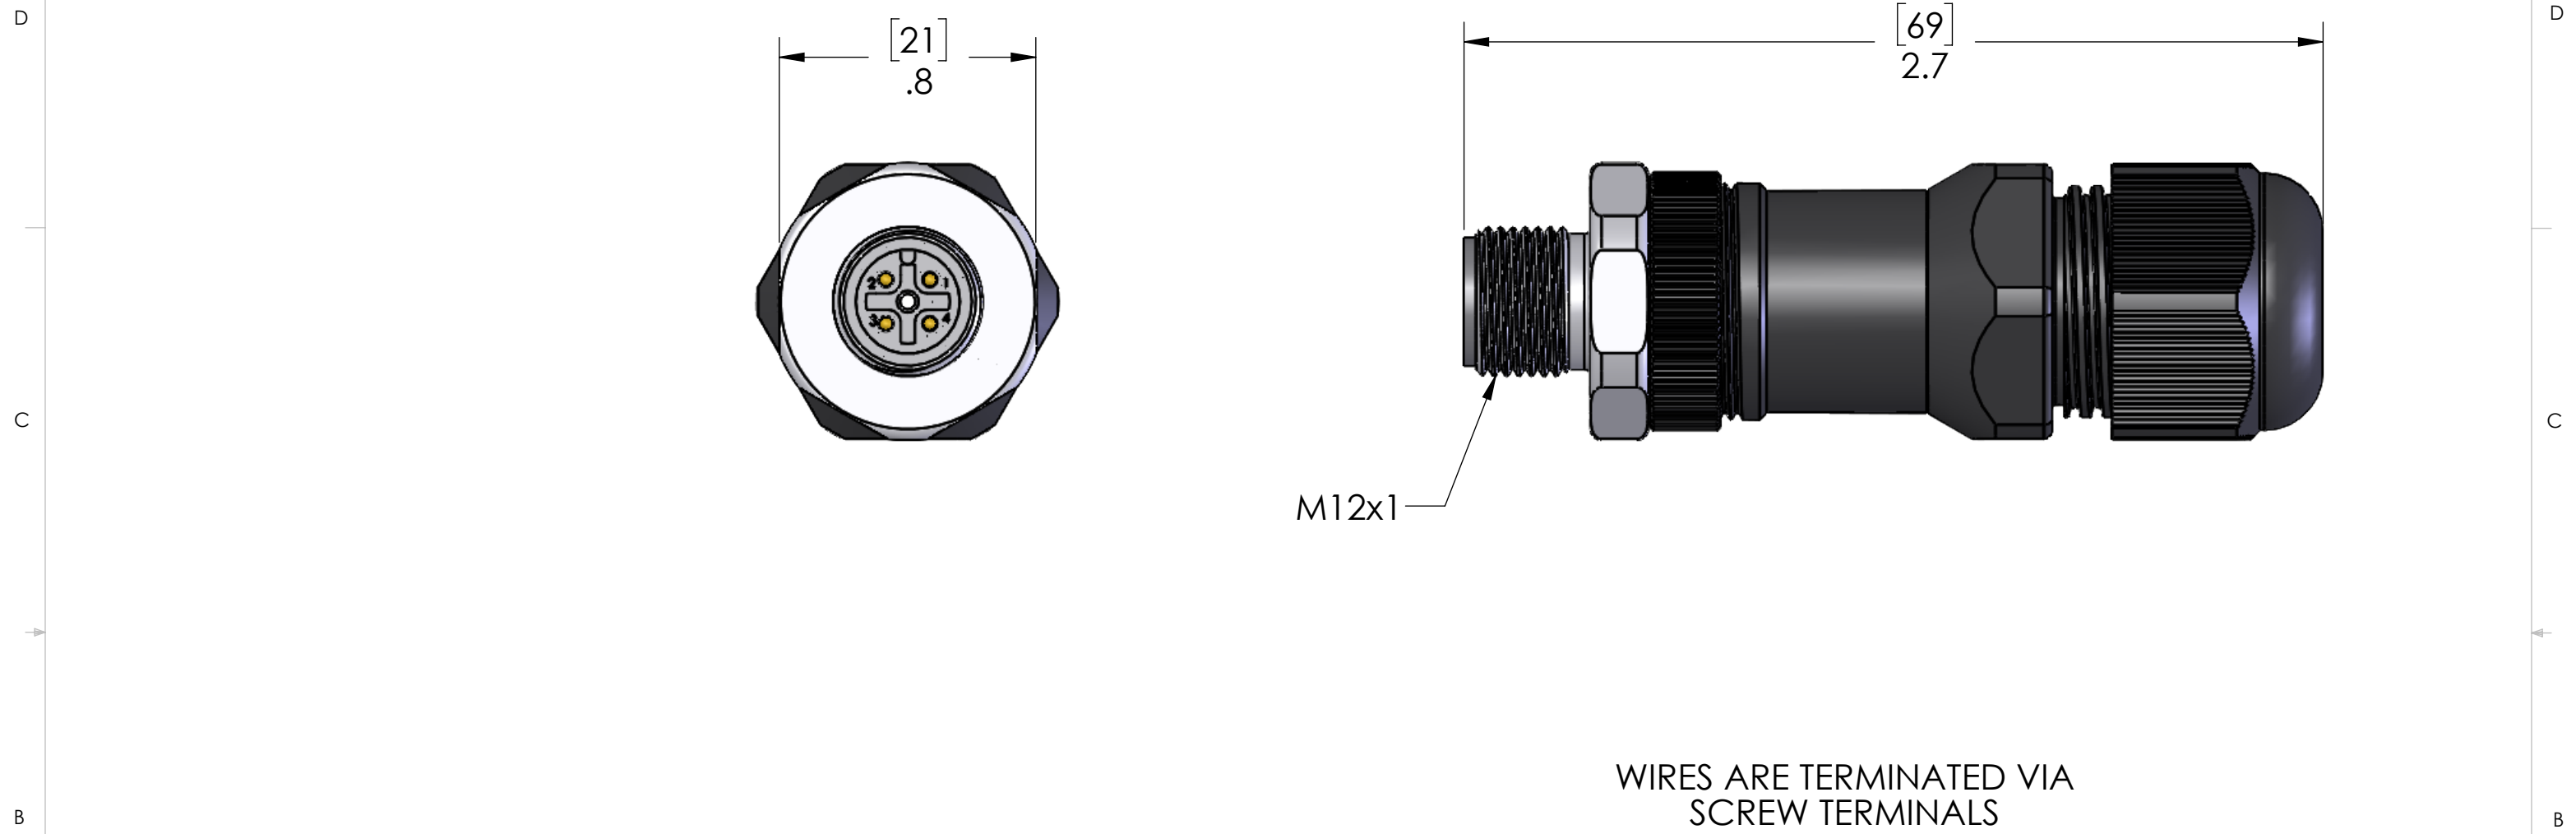

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	STAINLESS STEEL
INSERT:	POLYAMIDE
SEALS:	NBR
GLAND SEAL	NBR
SPECIFICATIONS:	
RATED CURRENT (A)	4A MAX
RATED VOLTAGE (V)	250V MAX
MAX WIRE SIZE:	18AWG
MIN WIRE SIZE:	24AWG
CABLE GRIP RANGE:	.197 - .393" (5mm - 10mm)
TEMP RATING:	-13°F - 185°F [-25°C - 85°C]
PROTECTION:	NEMA 1, 3, 4, 6P IEC IP67

Voltage rating is 250V or the rating of the cable, whichever is less.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	GO	MENCOM CORPORATION		
	DRAWN DATE	11/05/2020			
	CHECKED BY	GO	TITLE:		
	CHECK DATE	11/06/2020			
MATERIAL	COMMENTS:		4 POLE MALE M12 FIELD WIREABLE CONNECTOR		
FINISH			SIZE	DWG. NO.	REV
DO NOT SCALE DRAWING			B	MDC-4MP-FW11-SS	A
			SCALE: 2:1	WEIGHT:	SHEET 1 OF 1