
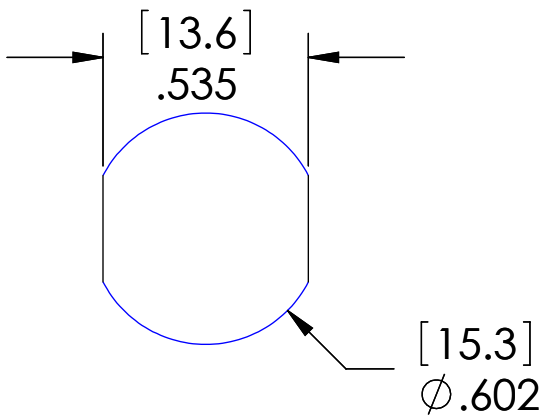


PIN #	COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK

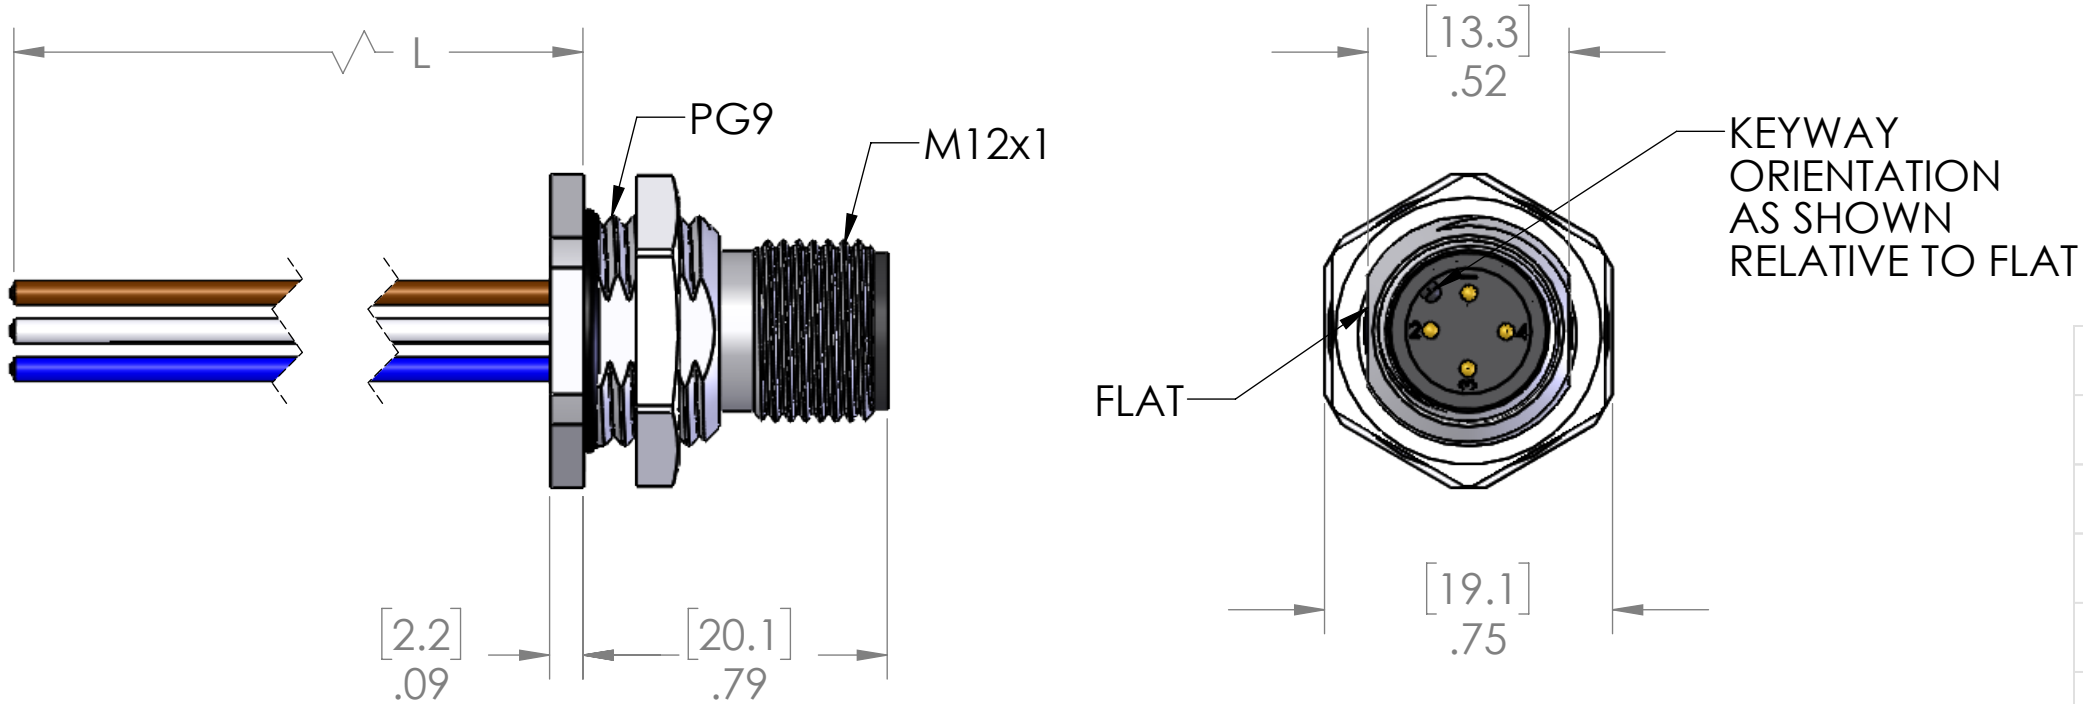

RECOMMENDED
MOUNTING
HOLE

MAXIMUM PANEL THICKNESS: 3.5mm

MATERIALS	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	POLYAMIDE
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L
MDC-4MR-BM	12" [0.3m]
MDC-4MR-BM-0.5M	20" [0.5m]
MDC-4MR-BM-0.6M	24" [0.6m]
MDC-4MR-BM-1M	40" [1m]
MDC-4MR-BM-2M	79" [2m]
MDC-4MR-BM-3M	118" [3m]
MDC-4MR-BM-4M	157" [4m]
MDC-4MR-BM-5M	197" [5m]
MDC-4MR-BM-10M	393" [10m]

OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM	MENCOM CORPORATION		
	DRAWN DATE	07/17/2023			
	CHECKED BY	JJH	TITLE: 4 PL MDC BK MT ML RECP		
	CHECK DATE	07/17/2023			
			SIZE DWG. NO. REV B MDC-4MR-BM-ZZ B SCALE: 2:1 WEIGHT: SHEET 1 OF 1		
MATERIAL	COMMENTS:				
FINISH					
DO NOT SCALE DRAWING					

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C