
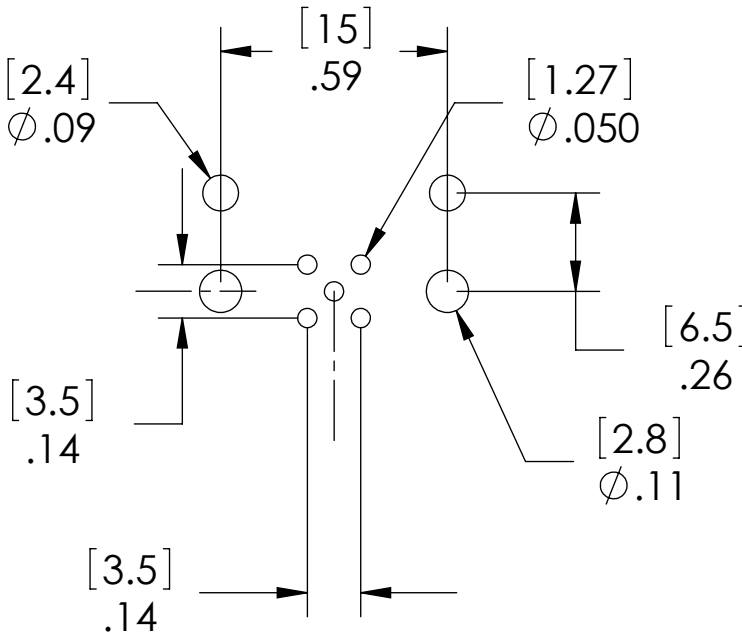
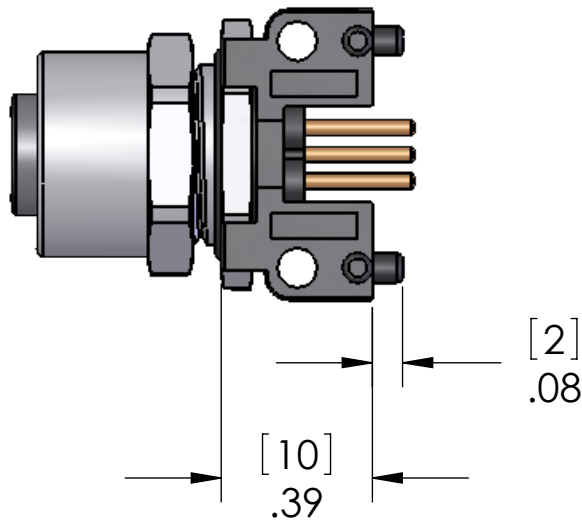
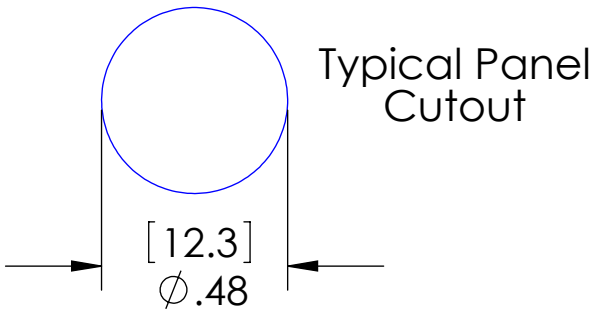
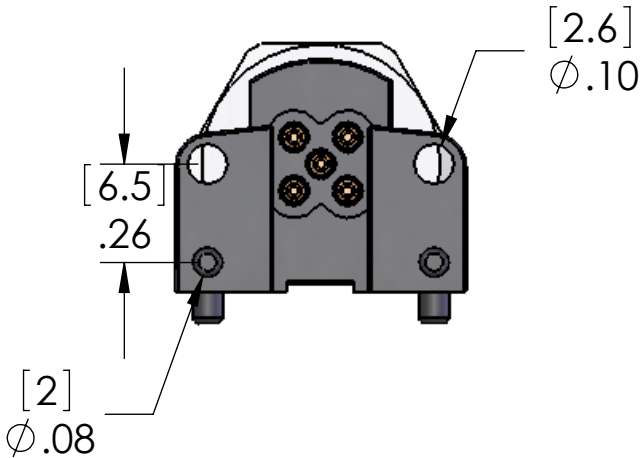
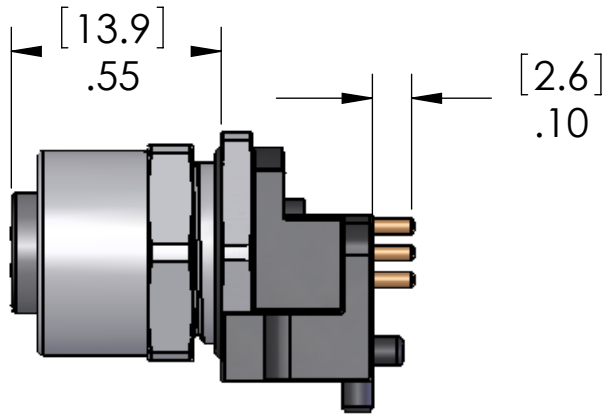


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Redrawn in SW	3/18/2008	

Recommended MAX Panel Thickness: 0.12" [3mm]
Recommended PCB thickness: 0.63" [1.6mm]

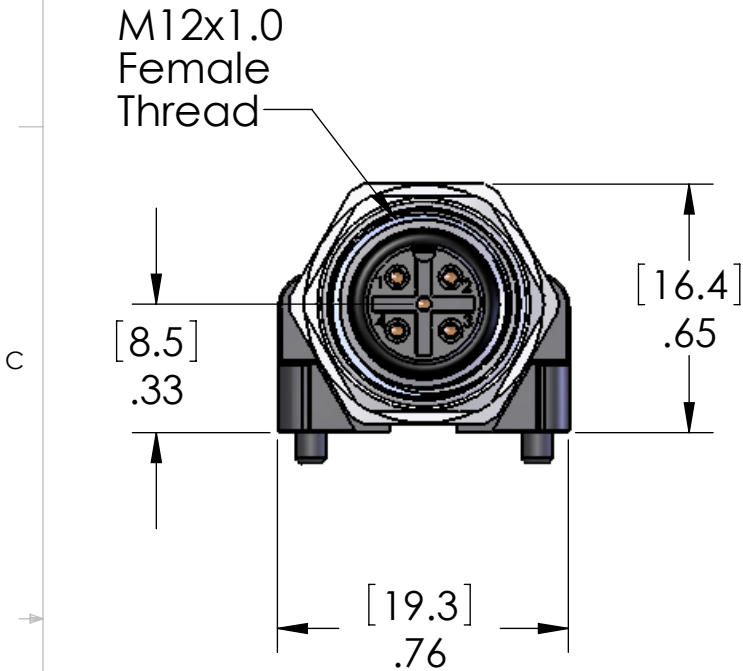

MATERIALS:	
BODY:	POLYAMIDE
METAL HDWR:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RING:	BUNA-N
RATINGS:	
VOLTAGE:	250V
AMPERAGE:	4A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	BEM	TITLE:
		CHECKED		5 Pole Micro-DC pcb mt fem. (A - Coded)
		ENG APPR.		
		MFG APPR.		
		Q.A.		
MATERIAL		COMMENTS:		SIZE
FINISH				DWG. NO.
DO NOT SCALE DRAWING				REV
				A
		SCALE: 2:1	WEIGHT:	SHEET 1 OF 1