
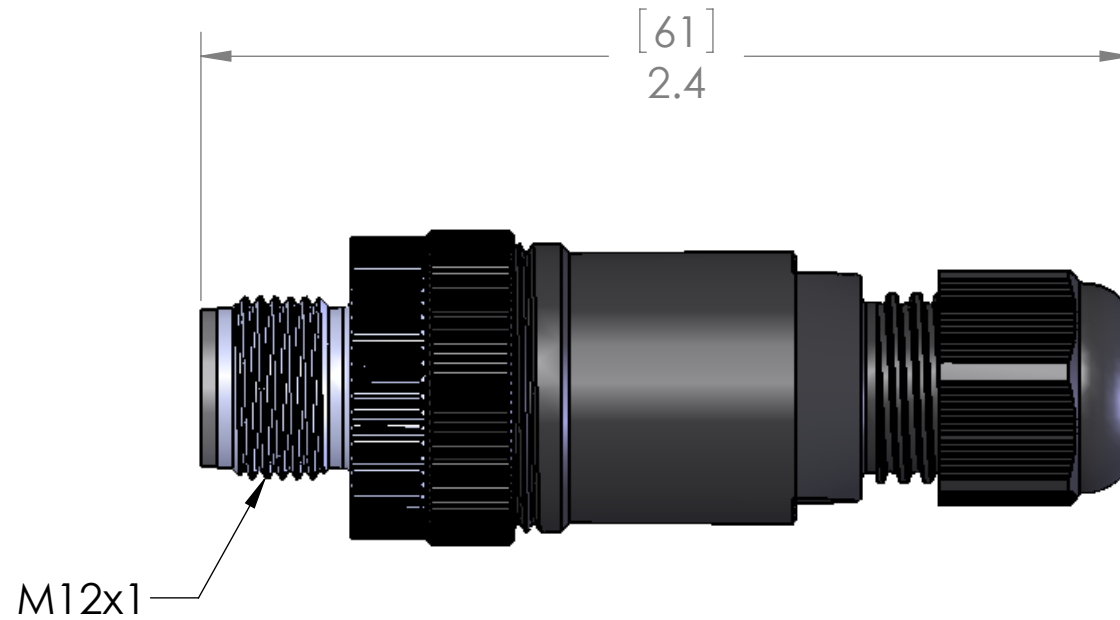


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	1/18/2005	
B	UL & SPEC CHANGES	11/10/2014	JJH

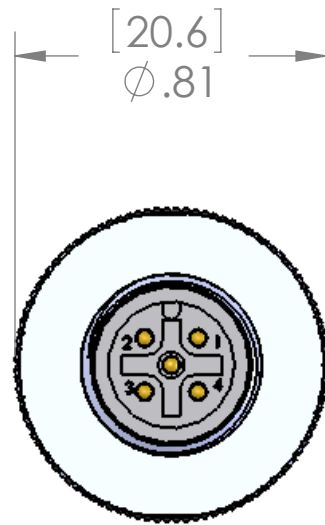

MATERIALS:	
BODY:	POLYAMIDE
COUPLING:	NICKEL PLATED ZINC
CONTACTS:	GOLD PLATED COPPER ALLOY
GROMMET:	NBR
O-RING:	NBR
SPECIFICATIONS:	
WIRE RANGE:	18-24AWG [1.0 - 0.25sqmm]
CABLE RANGE:	0.118 - 0.255 [3.0 - 6.5mm]
CONNECTION:	SCREW TERMINALS
VOLTS:	125V
AMPS:	4A
SEAL:	IP67
TEMP RANGE:	STATIC: -40°C - +100°C
	DYNAMIC: -20°C -+100°C

All connections made via Screw Terminals.

APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION						
			DRAWN	BEM						TITLE:	
			CHECKED								
			ENG APPR.								
			MFG APPR.								
		Q.A.									
		MATERIAL	COMMENTS:	SIZE							
				FINISH	DWG. NO.					REV	
					B MDC-5MP-FW07					B	
		DO NOT SCALE DRAWING				SCALE: 2:1		WEIGHT:		SHEET 1 OF 1	