


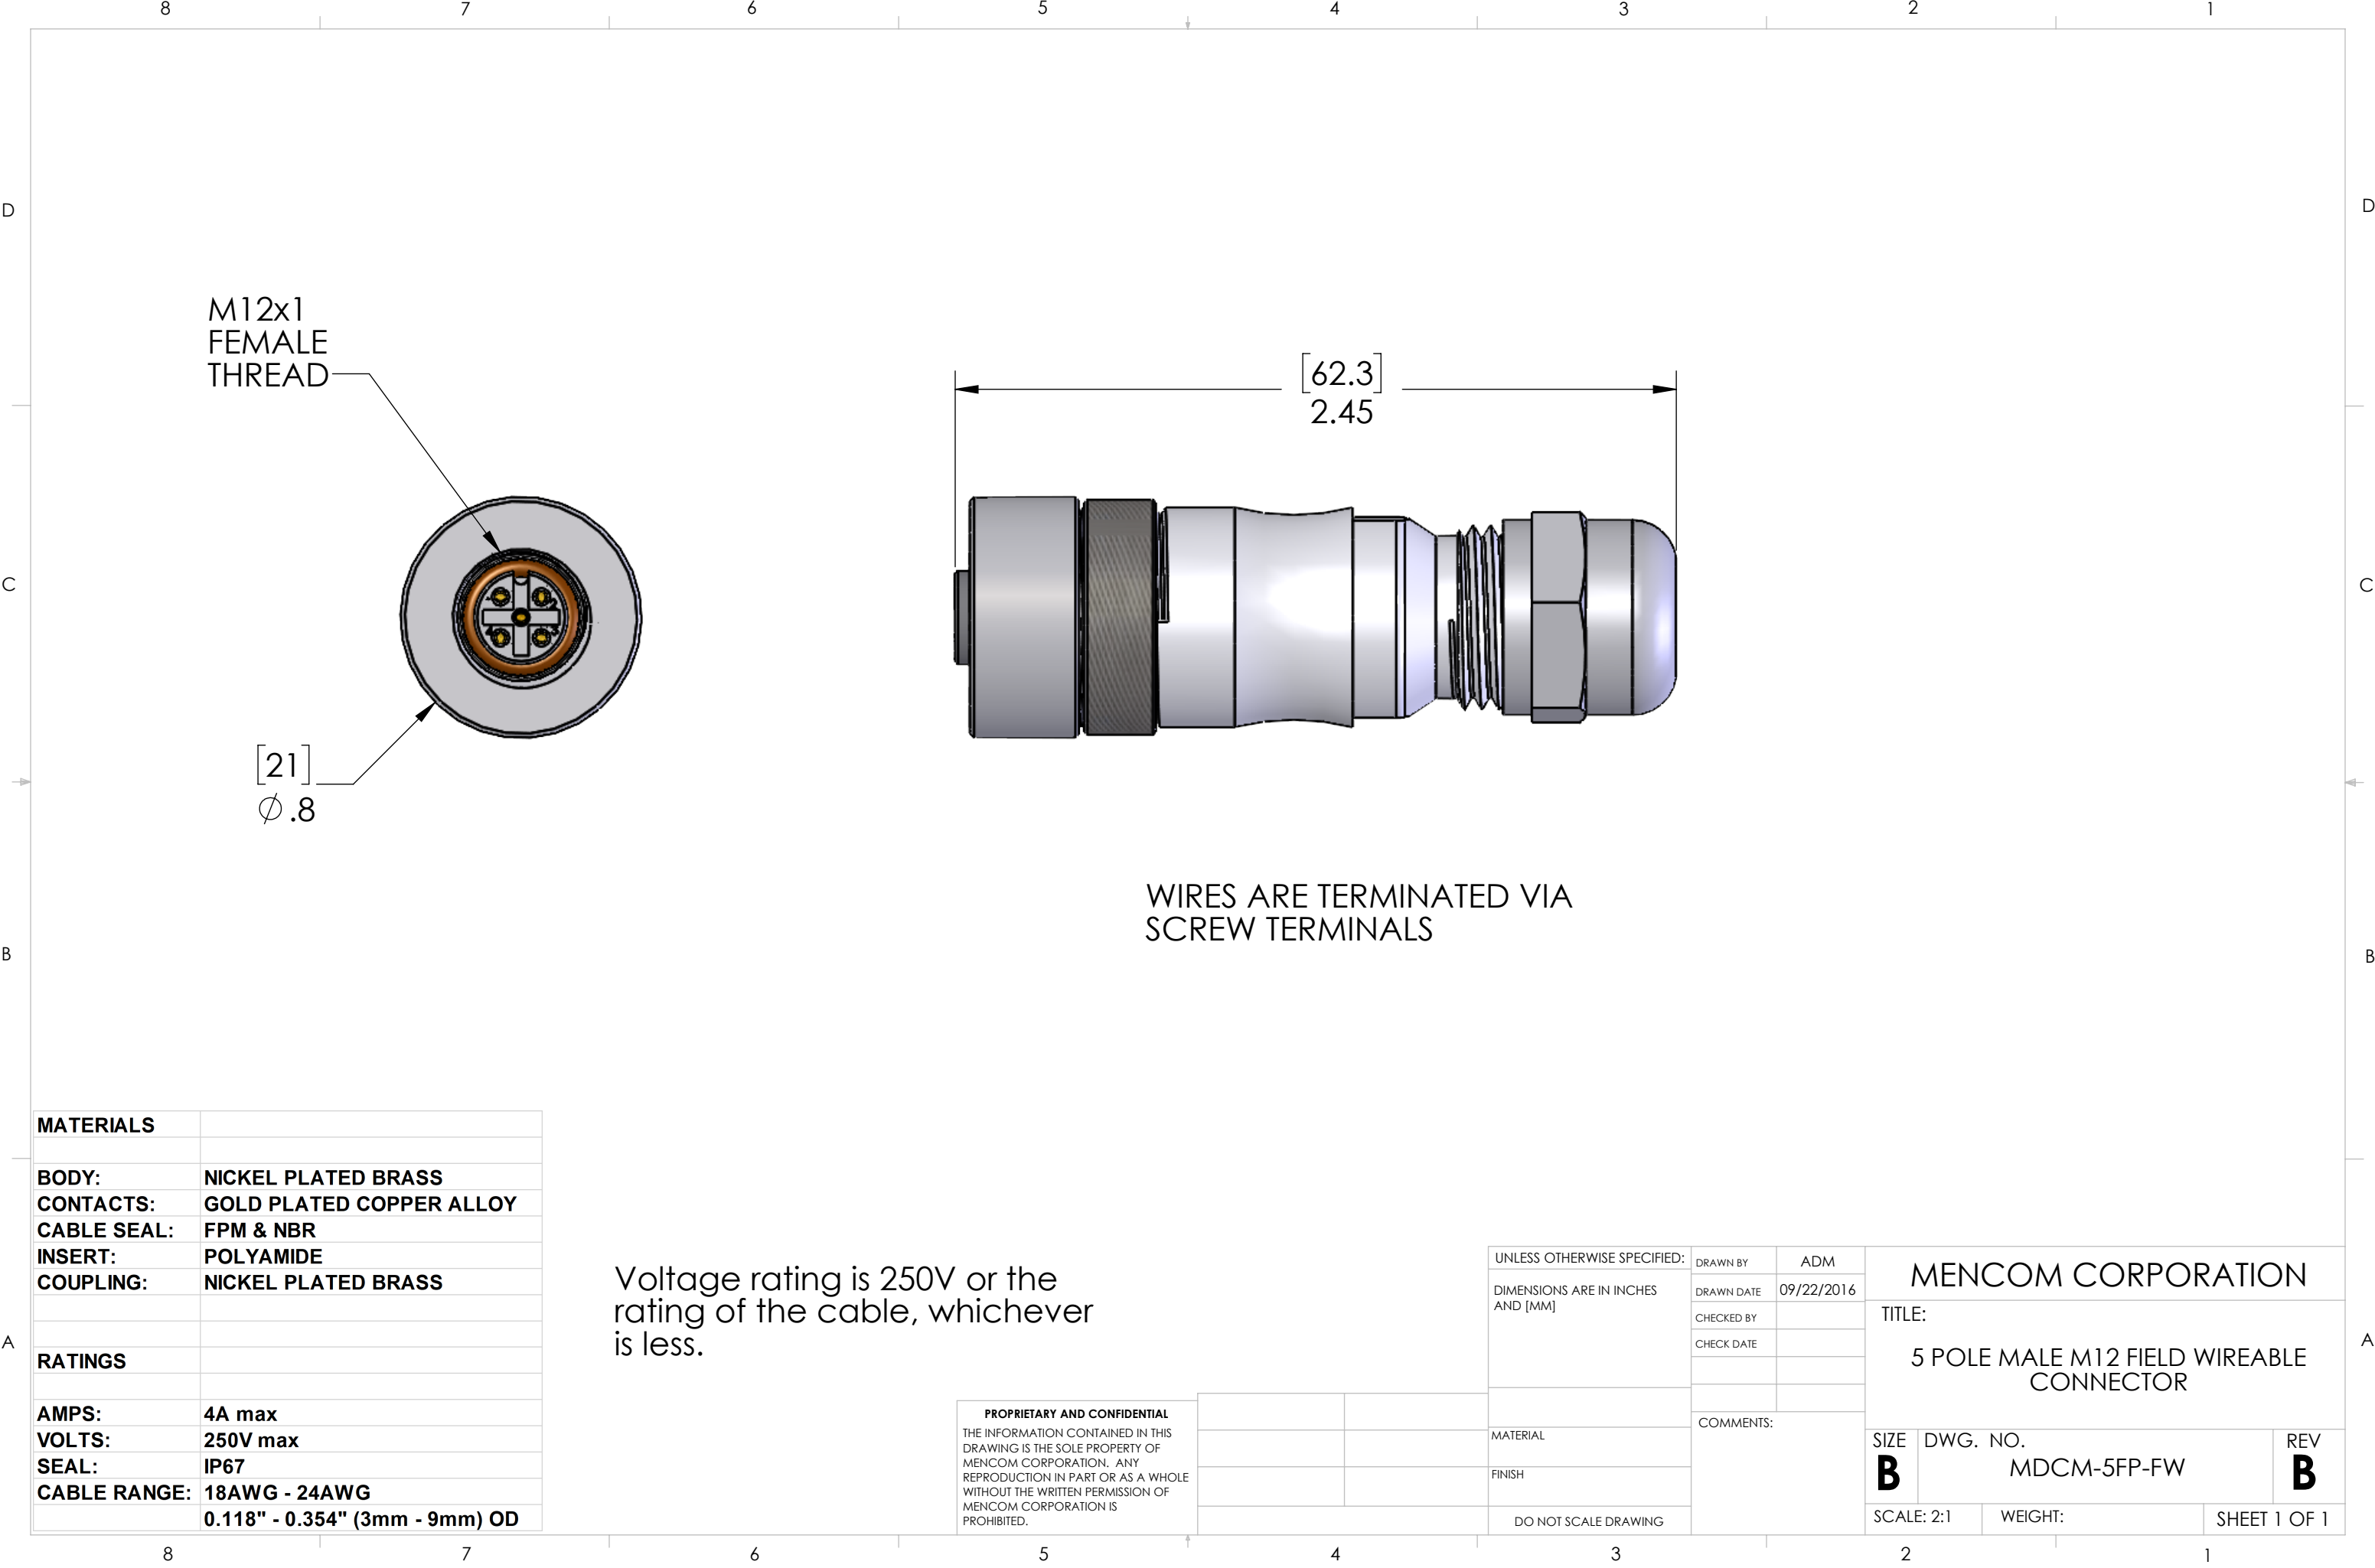

M12x1
FEMALE
THREAD

[21]
Ø.8

[62.3]
2.45

WIRES ARE TERMINATED VIA
SCREW TERMINALS

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	FPM & NBR
INSERT:	POLYAMIDE
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	4A max
VOLTS:	250V max
SEAL:	IP67
CABLE RANGE:	18AWG - 24AWG
	0.118" - 0.354" (3mm - 9mm) OD

Voltage rating is 250V or the
rating of the cable, whichever
is less.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM	MENCOM CORPORATION		
	DRAWN DATE	09/22/2016			
	CHECKED BY				
	CHECK DATE				
			TITLE: 5 POLE MALE M12 FIELD WIREABLE CONNECTOR		
MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
FINISH			B	MDCM-5FP-FW	B
DO NOT SCALE DRAWING			SCALE: 2:1	WEIGHT:	SHEET 1 OF 1