


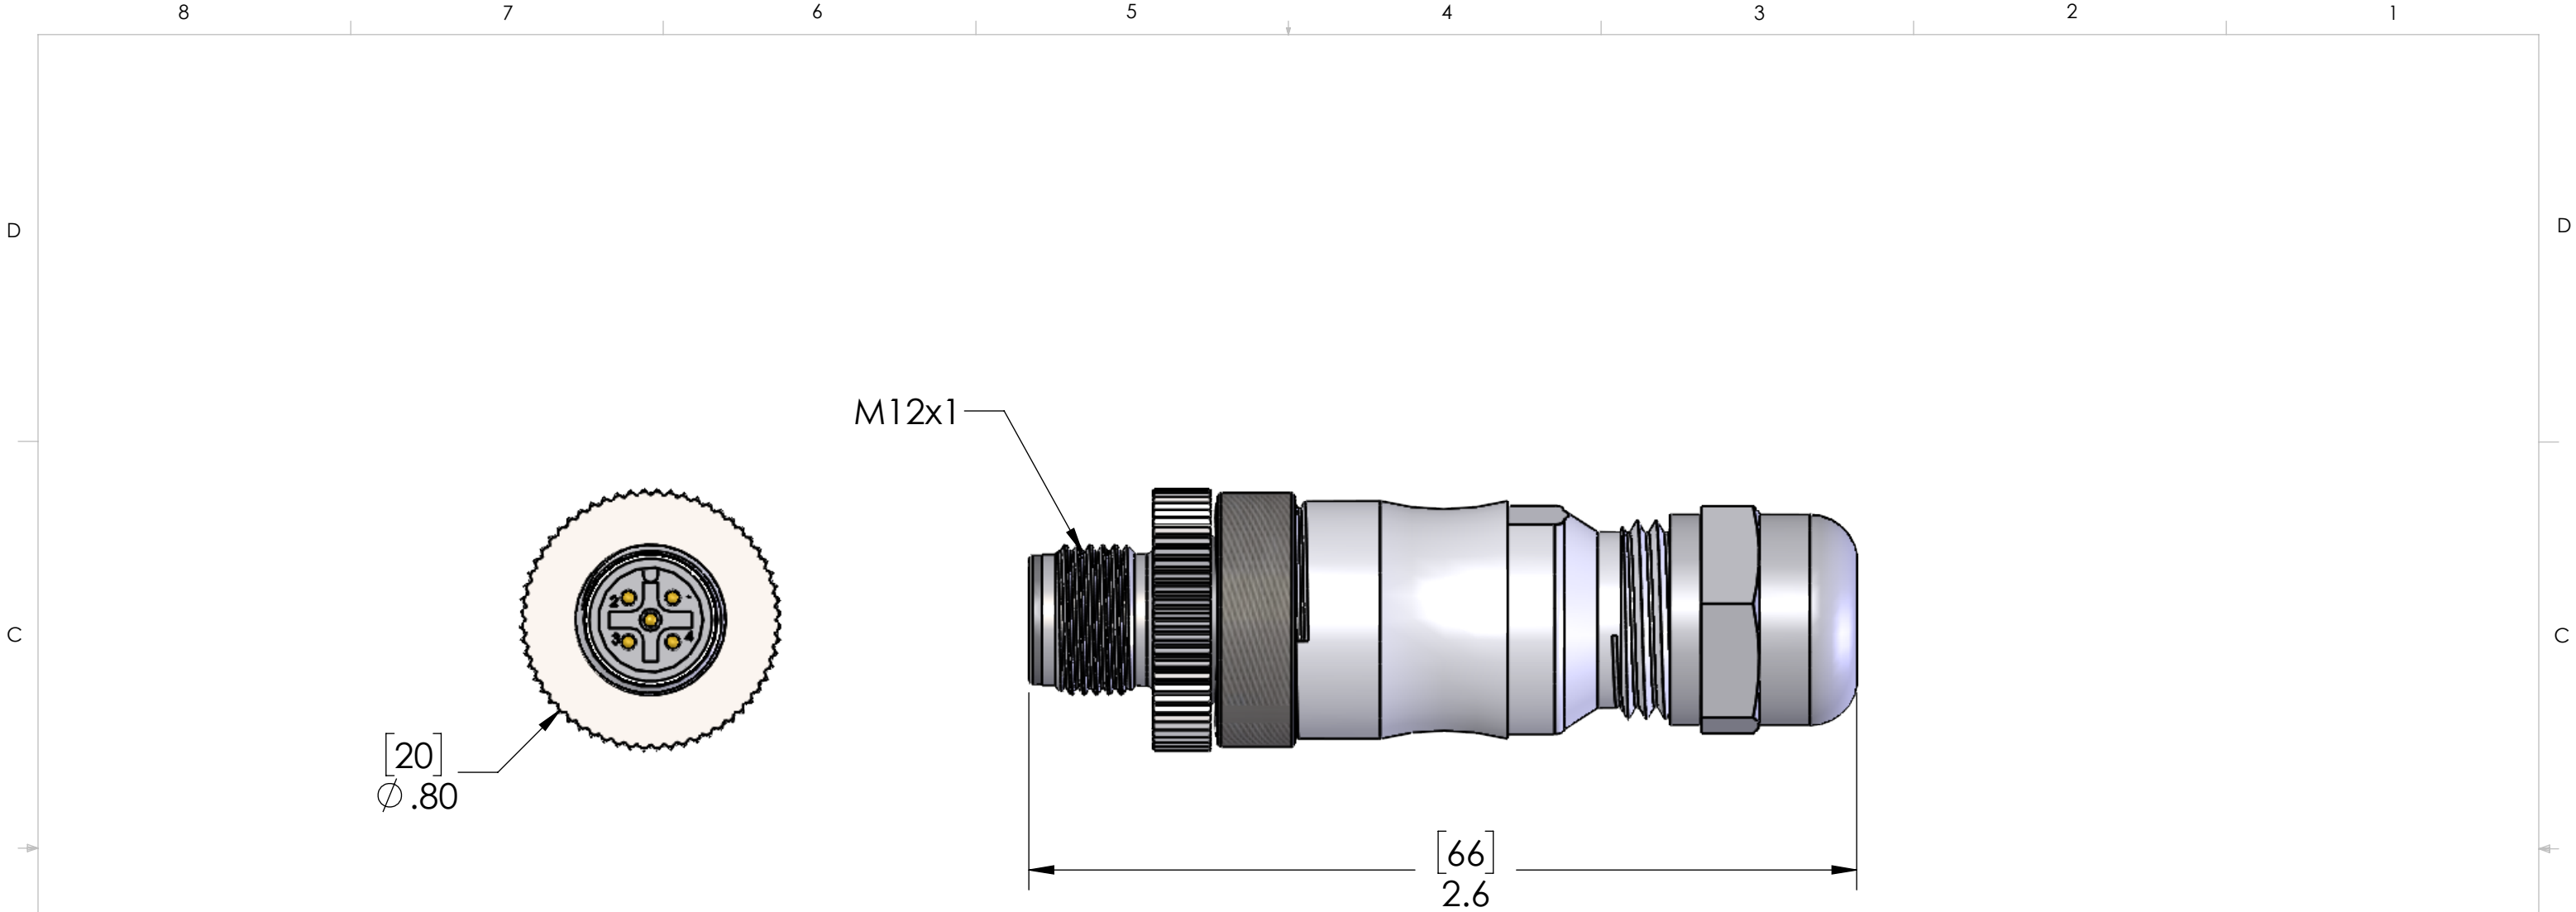

MATERIALS:	
BODY:	NICKEL PLATED BRASS
COUPLING:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
GROMMET:	NBR
GROMMET HOLDER:	NYLON
O-RING:	NBR
SPECIFICATIONS:	
WIRE RANGE:	18-24AWG [1.0 - 0.25sqmm]
CABLE RANGE:	0.118 - 0.355" [3.0 - 9.0mm]
CONNECTION:	SCREW TERMINALS
VOLTS:	250V max
AMPS:	4A
SEAL:	IP67
TEMP RANGE:	STATIC: -40°C - +100°C
	DYNAMIC: -20°C -+100°C

WIRES ARE TERMINATED VIA
SCREW TERMINALS

Voltage rating is 250V or the
rating of the cable, whichever
is less.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	250V MAX
AMPS	4A MAX
TEMP:	-25°C-85°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	07/02/2020
	CHECKED BY	ADM
	CHECK DATE	07/02/2020
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
5 POLE MALE M12 FIELD WIREABLE CONNECTOR		
SIZE	DWG. NO.	REV
B	MDCM-5MP-FW	C
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1