


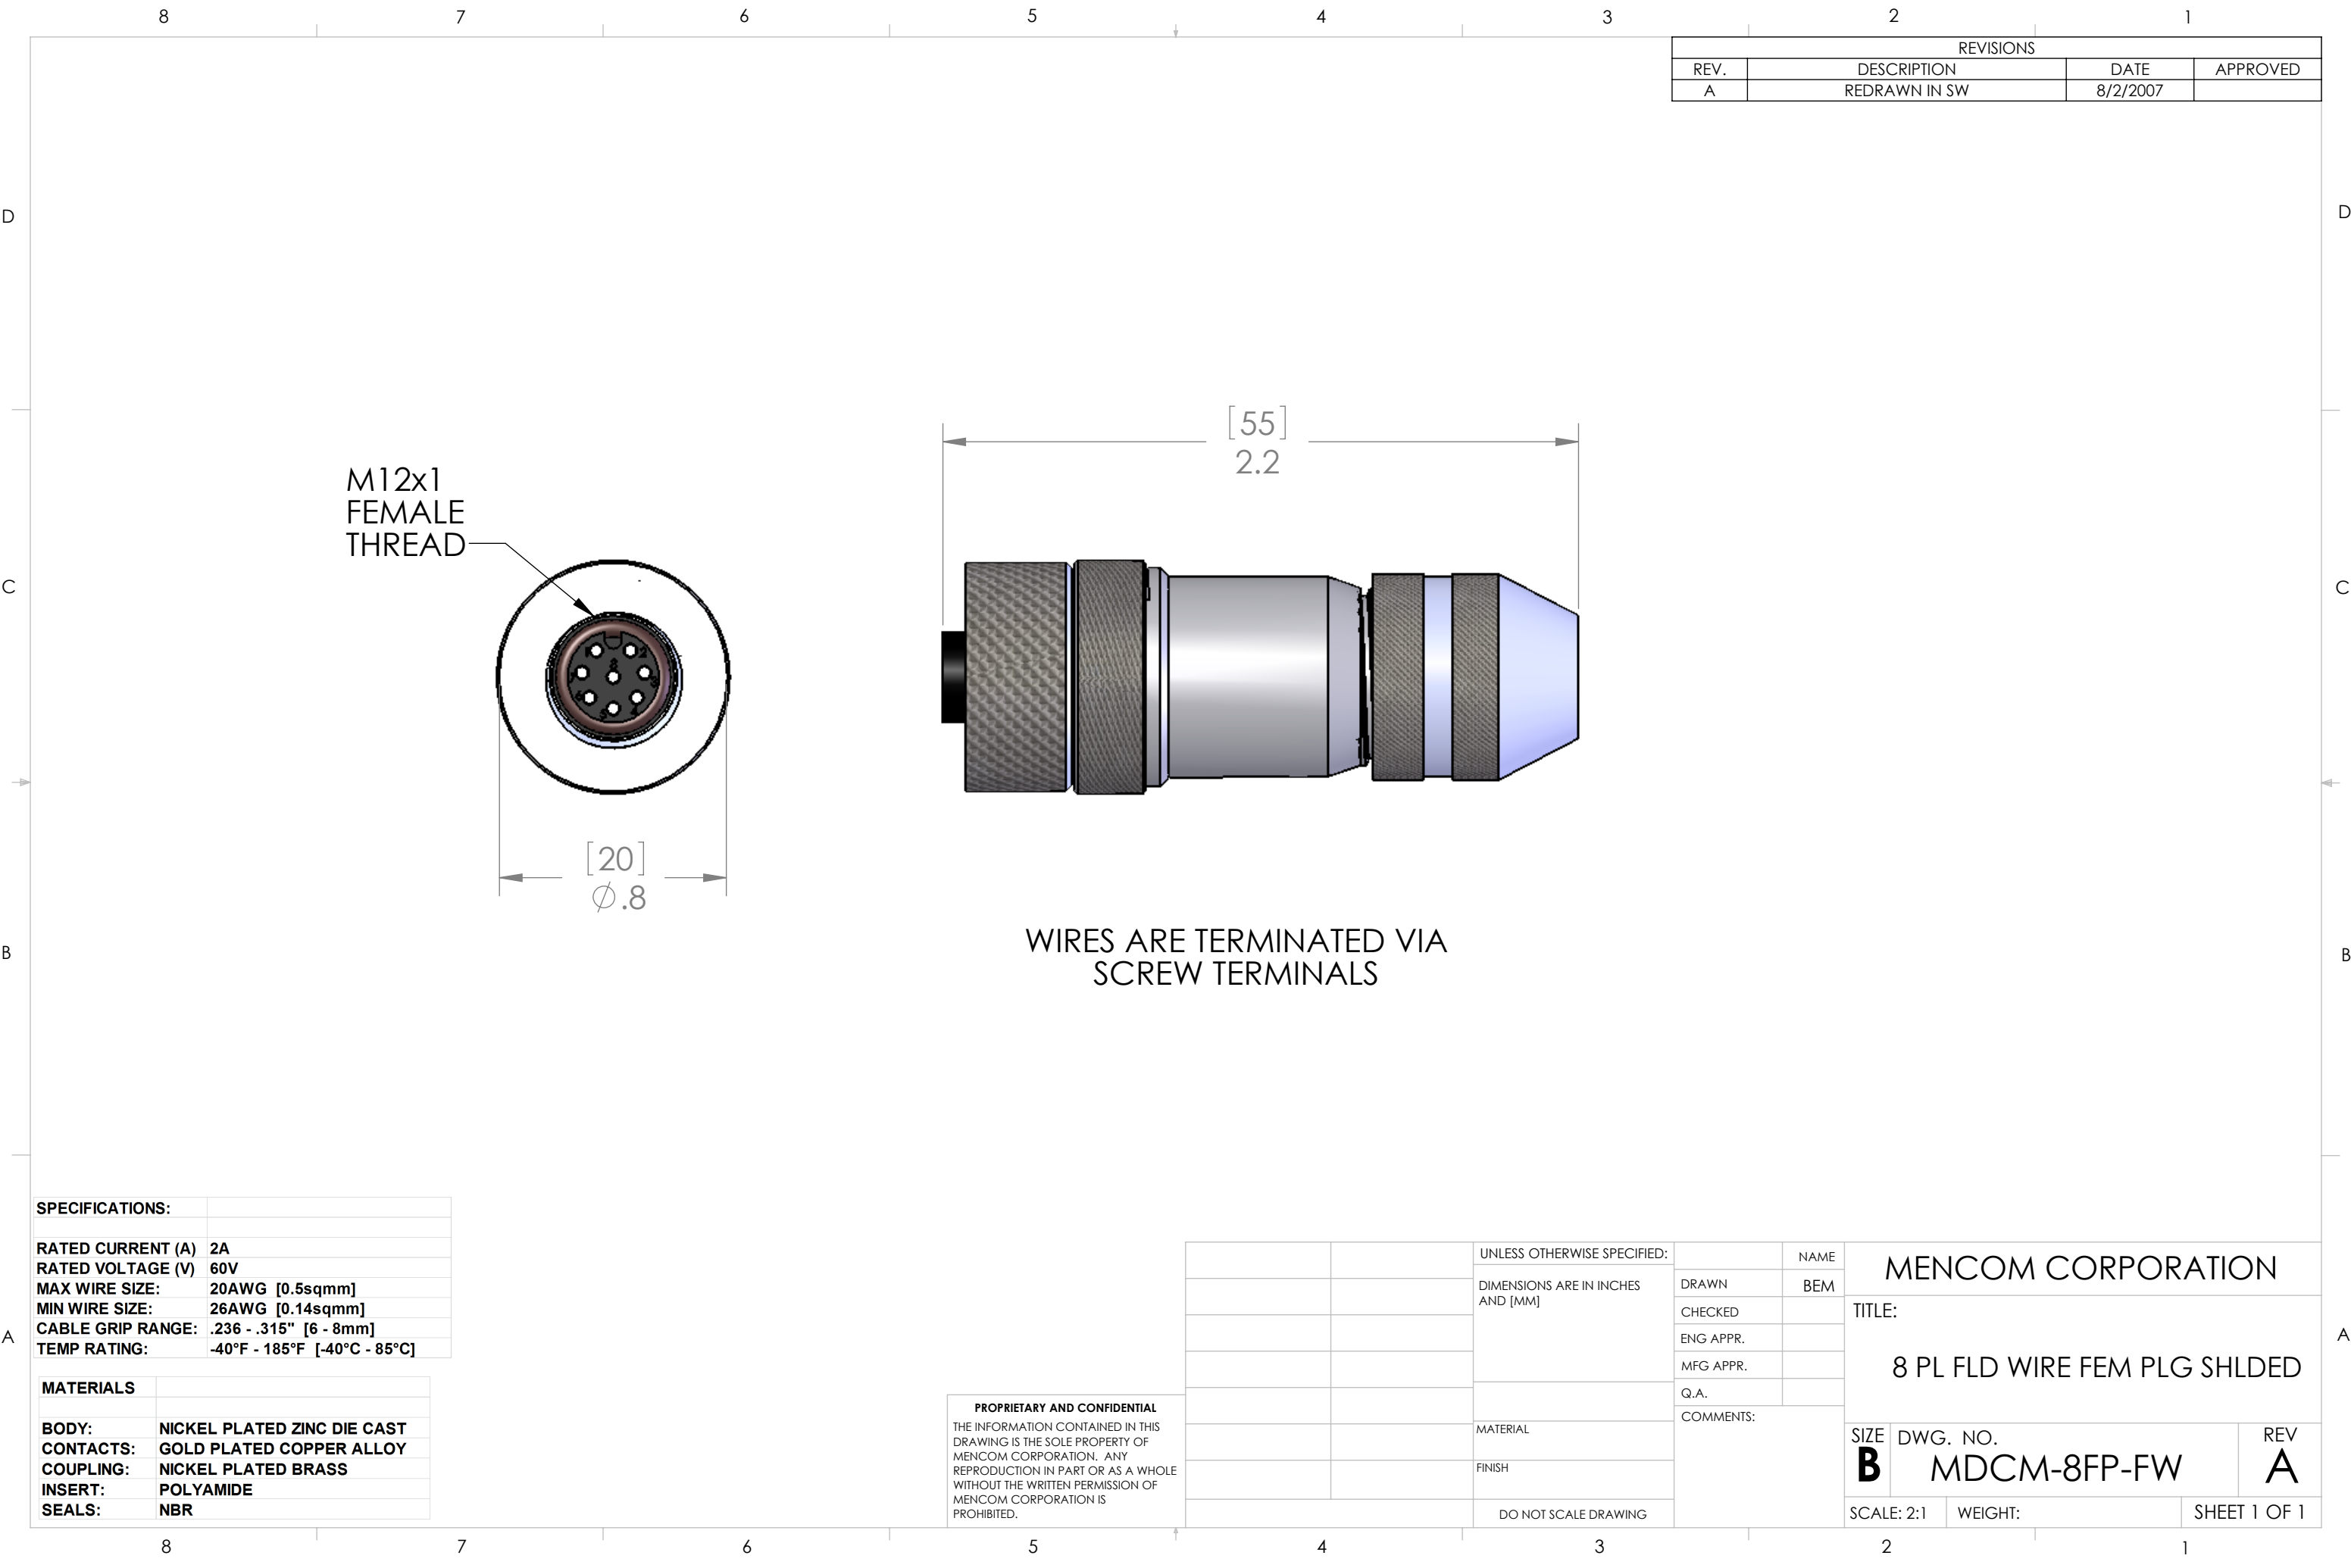

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/2/2007	

M12x1
FEMALE
THREAD

[.55]
2.2

[.20]
Ø.8

WIRES ARE TERMINATED VIA
SCREW TERMINALS

SPECIFICATIONS:	
RATED CURRENT (A)	2A
RATED VOLTAGE (V)	60V
MAX WIRE SIZE:	20AWG [0.5sqmm]
MIN WIRE SIZE:	26AWG [0.14sqmm]
CABLE GRIP RANGE:	.236 - .315" [6 - 8mm]
TEMP RATING:	-40°F - 185°F [-40°C - 85°C]

MATERIALS	
BODY:	NICKEL PLATED ZINC DIE CAST
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
SEALS:	NBR

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION		
			DRAWN	BEM	TITLE: 8 PL FLD WIRE FEM PLG SHLDED		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.		SIZE B		
		COMMENTS:		DWG. NO. MDCM-8FP-FW			
		MATERIAL			REV A		
		FINISH					
		DO NOT SCALE DRAWING			SCALE: 2:1	WEIGHT:	SHEET 1 OF 1